a Implemented finite-state scheduling

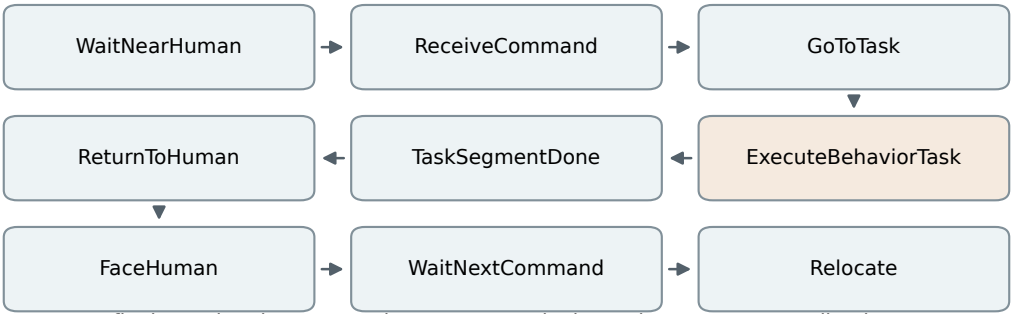

Non-final round: Relocate → WaitNearHuman. Final round: FaceHuman → AllTasksDone.

b ExecuteBehaviorTask: two controller modes

Dataset construction	Policy rollout
BEHAVIOR simulator-state / action replay	π0.5 client → action clamp → env.step

Surrounding human-facing and transition phases remain scripted.

c Recorded data to the diagnostic benchmark

Replayed demonstrations and policy rollouts are separate evidence sources.