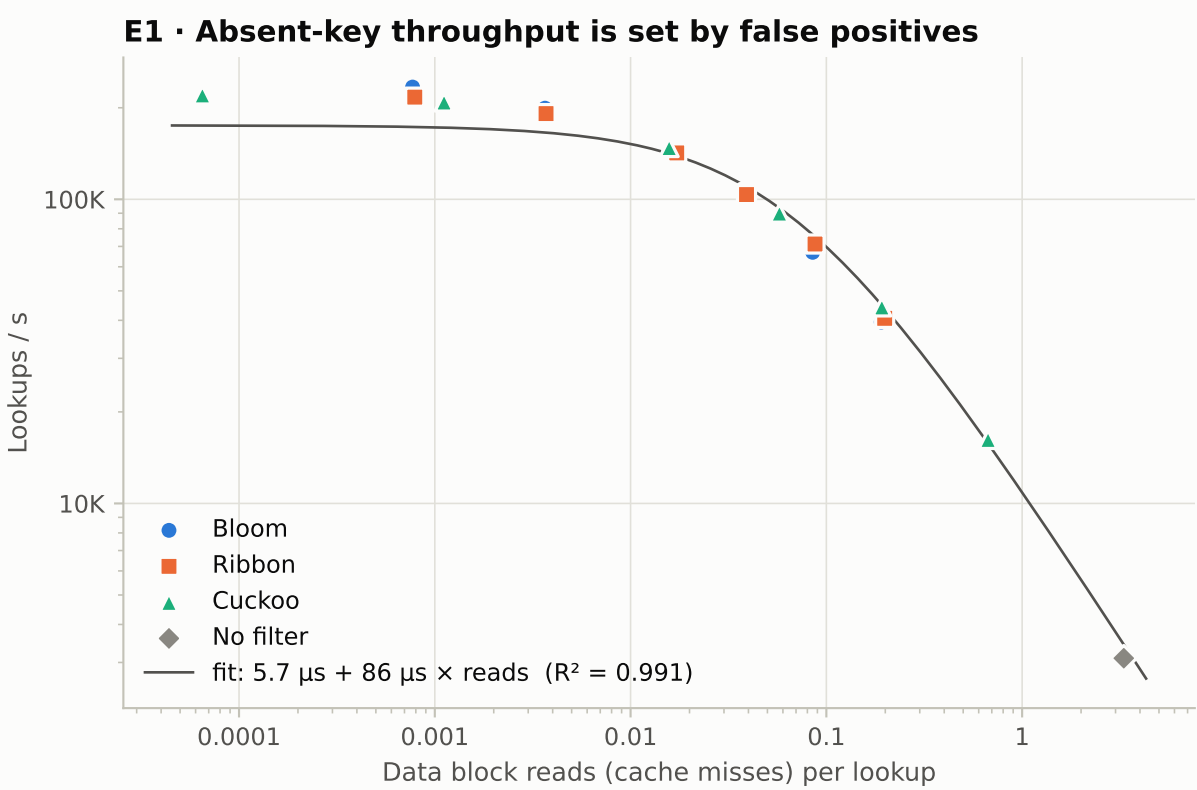
E1 · Absent-key throughput is set by false positives
Lookups / s
100K
10K
Bloom
Ribbon
Cuckoo
No filter
fit: 5.7 µs + 86 µs × reads (R² = 0.991)
0.0001
0.001
0.01
0.1
1
Data block reads (cache misses) per lookup