SCRUM-51: Basic app setup

Trong Tin Nguyen | Sprint 1 | 3 November 2026

Goal: create a working starting structure for React and FastAPI, with installation instructions and a basic connection.

1. Project structure

React is the screen the analyst uses. FastAPI is the Python backend. They are in the same repository, under src/frontend and src/backend.

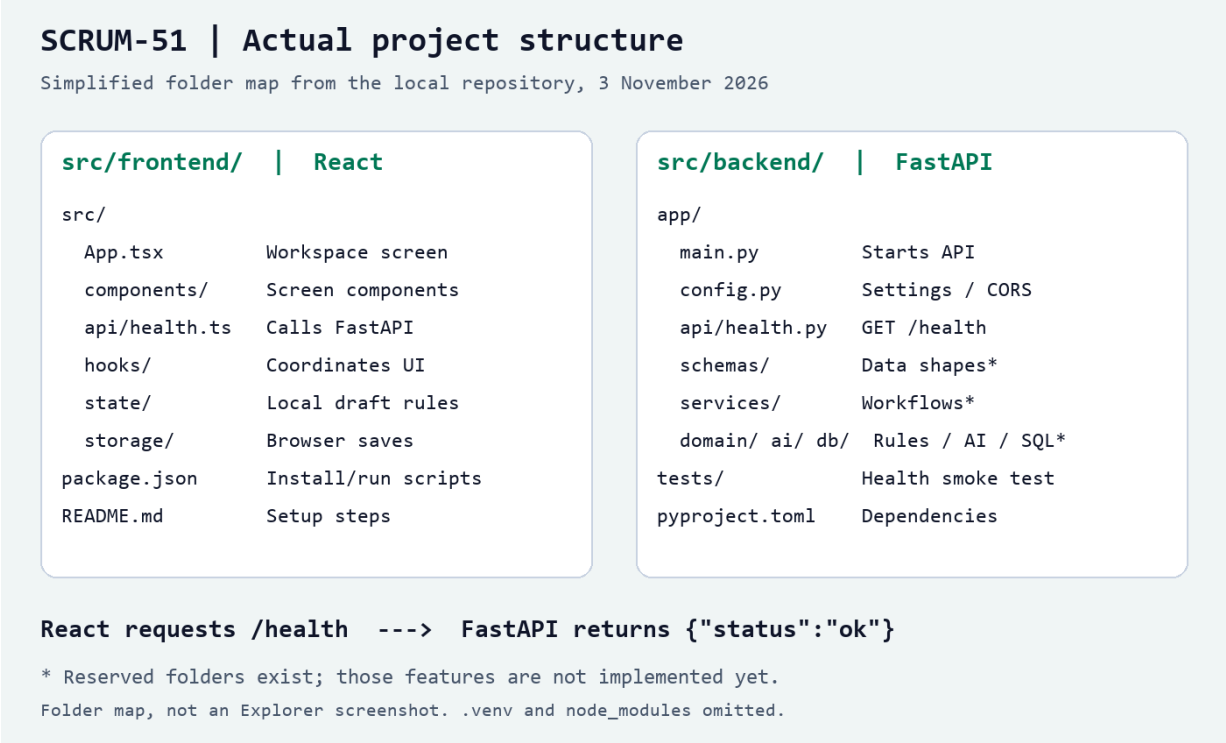


Figure 1. A simplified map of the actual local folders. Starred backend folders are reserved for future features. The setup instructions and dependency files let teammates install and start each app.

Repository: lucianle1024/COS40005. Branch: feat/tin-frontend-workbench.

Setup: src/frontend/README.md and src/backend/README.md.

Prepared with ChatGPT/Codex assistance. Screenshots show the real app; the map summarises verified folders. Checks were run by Codex.

2. Working connection

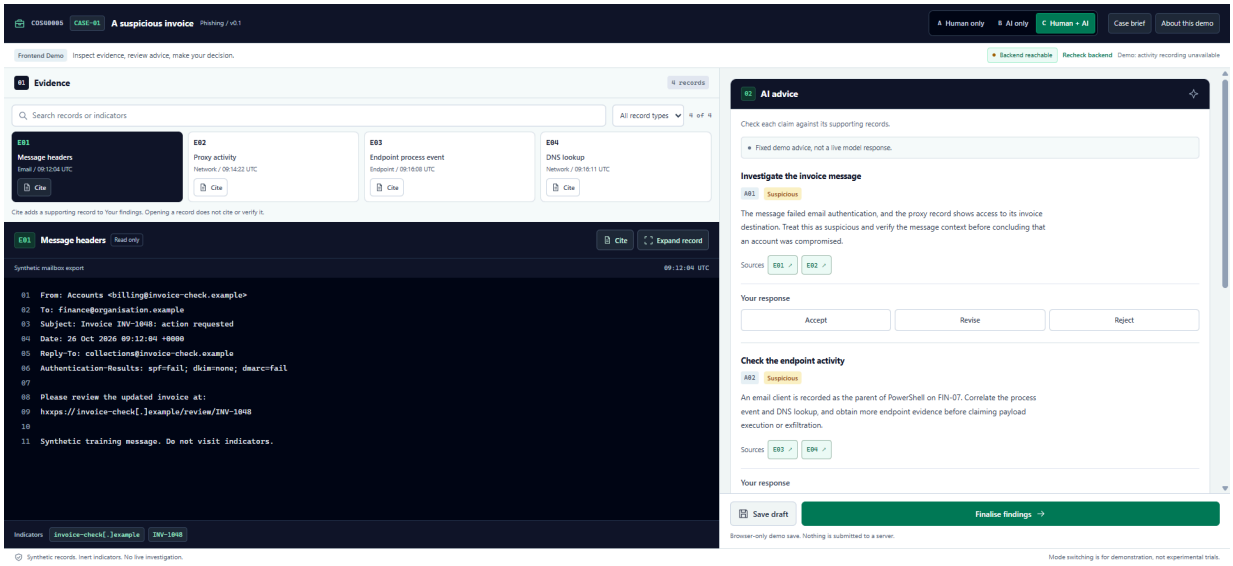


Figure 2. Screenshot of the running React app. The Backend reachable indicator appears at the top right.



Close-up of the actual status indicator.

React sends GET /health to FastAPI. FastAPI returns {"status":"ok"}, so React shows Backend reachable. A failed request shows Backend unavailable and can be retried.

Checks completed

- Frontend: 56 tests passed; formatting, types and production build passed.
- Backend: 1 health/API test passed.
- Connection: a real browser request returned HTTP 200 and the app showed Backend reachable.

Task boundary

This task sets up the basic app. Real case loading, AI calls, server saves and activity recording are later tasks. The visible case and AI advice still use demo data.

Before marking Done

Confirm or add dedicated linting; formatting and type checks already pass. Commit and push the new files for team review.