

Navigation_loop_Animation

Design Description

flying

Navigation_loop_Animation: Design Description

flying

Publication date 07-Nov-2016 13:48:12

Copyright © 2016

For Internal Distribution Only

Table of Contents

1. Model Version	1
2. Root System	2
2.1. Blocks	2
2.1.1. Parameters	2
2.1.2. Block Execution Order	12
3. Subsystems	16
3.1. Axes to VR Axes	17
3.1.1. Blocks	17
3.2. Axis Angle Vector	20
3.2.1. Blocks	20
3.3. Dynamic model	24
3.3.1. Blocks	24
3.4. Euler to VR	40
3.4.1. Blocks	40
3.5. PD controller	44
3.5.1. Blocks	44
3.6. pitch_dot_dot	63
3.6.1. Blocks	63
3.7. Position controller	70
3.7.1. Blocks	70
3.8. property	88
3.8.1. Blocks	88
3.9. q0	94
3.9.1. Blocks	94
3.10. q1	99
3.10.1. Blocks	99
3.11. q2	104
3.11.1. Blocks	104
3.12. q3	109
3.12.1. Blocks	109
3.13. Quaternion Multiplication (Pitch & Yaw)	114
3.13.1. Blocks	114
3.14. Quaternion Normalization	116
3.14.1. Blocks	116
3.15. Quaternion Normalization1	119
3.15.1. Blocks	120
3.16. Quaternion Normalization2	123
3.16.1. Blocks	123
3.17. roll_dot_dot	127
3.17.1. Blocks	127
3.18. x_dot_dot	134
3.18.1. Blocks	134
3.19. y_dot_dot	140
3.19.1. Blocks	140
3.20. yaw_dot_dot	146
3.20.1. Blocks	147
3.21. z_dot_dot	152
3.21.1. Blocks	152
4. System Design Variables	158
4.1. Design Variable Summary	158
4.2. Design Variable Details	158

5. Requirements Traceability	162
6. System Model Configuration	163
7. Glossary	177
8. About this Report	178
8.1. Report Overview	178
8.2. Root System Description	178
8.3. Subsystem Descriptions	179
8.4. State Chart Descriptions	179

List of Figures

2.1. Navigation_loop_Animation	2
3.1. Navigation_loop_Animation/Axes to VR Axes	17
3.2. Navigation_loop_Animation/Euler to VR/Axis Angle Vector	20
3.3. Navigation_loop_Animation/Dynamic model	24
3.4. Navigation_loop_Animation/Euler to VR	40
3.5. Navigation_loop_Animation/PD controller	44
3.6. Navigation_loop_Animation/Dynamic model/pitch_dot_dot	63
3.7. Navigation_loop_Animation/Position controller	70
3.8. Navigation_loop_Animation/property	88
3.9. Navigation_loop_Animation/Euler to VR/Quaternion Multiplication (Pitch & Yaw)/q0	94
3.10. Navigation_loop_Animation/Euler to VR/Quaternion Multiplication (Pitch & Yaw)/q1	99
3.11. Navigation_loop_Animation/Euler to VR/Quaternion Multiplication (Pitch & Yaw)/q2	104
3.12. Navigation_loop_Animation/Euler to VR/Quaternion Multiplication (Pitch & Yaw)/q3	109
3.13. Navigation_loop_Animation/Euler to VR/Quaternion Multiplication (Pitch & Yaw)	114
3.14. Navigation_loop_Animation/Euler to VR/Quaternion Normalization	116
3.15. Navigation_loop_Animation/Euler to VR/Quaternion Normalization1	119
3.16. Navigation_loop_Animation/Euler to VR/Quaternion Normalization2	123
3.17. Navigation_loop_Animation/Dynamic model/roll_dot_dot	127
3.18. Navigation_loop_Animation/Dynamic model/x_dot_dot	134
3.19. Navigation_loop_Animation/Dynamic model/y_dot_dot	140
3.20. Navigation_loop_Animation/Dynamic model/yaw_dot_dot	146
3.21. Navigation_loop_Animation/Dynamic model/z_dot_dot	152

List of Tables

2.1. "Gain" Parameters	2
2.2. "Gain1" Parameters	3
2.3. "Gain2" Parameters	3
2.4. "Gain3" Parameters	4
2.5. "Gain4" Parameters	4
2.6. "Gain5" Parameters	5
2.7. "Gain6" Parameters	5
2.8. "Integrator" Parameters	6
2.9. "Integrator1" Parameters	6
2.10. "Mux1" Parameters	7
2.11. "Mux2" Parameters	7
2.12. "Mux3" Parameters	7
2.13. "Mux4" Parameters	8
2.14. "Mux5" Parameters	8
2.15. "Mux6" Parameters	8
2.16. "Mux7" Parameters	8
2.17. "Mux8" Parameters	8
2.18. "Saturation" Parameters	9
2.19. "Saturation1" Parameters	9
2.20. "VR Sink" Parameters	10
2.21. "X_desired" Parameters	10
2.22. "Y_desired" Parameters	10
2.23. "yaw_desired" Parameters	11
2.24. "Z_desired" Parameters	11
3.1. "Demux" Parameters	17
3.2. "Mux" Parameters	17
3.3. "rad-->deg" Parameters	17
3.4. "rad-->deg1" Parameters	18
3.5. "Xe" Parameters	18
3.6. "Xe VR" Parameters	19
3.7. "2" Parameters	20
3.8. "Concatenate" Parameters	21
3.9. "Demux" Parameters	21
3.10. "e0" Parameters	21
3.11. "e0_norm" Parameters	21
3.12. "Product" Parameters	22
3.13. "Trigonometric Function" Parameters	23
3.14. "Trigonometric Function2" Parameters	23
3.15. "Arm_length" Parameters	24
3.16. "I_xx" Parameters	25
3.17. "I_yy" Parameters	25
3.18. "I_zz" Parameters	25
3.19. "Integrator" Parameters	26
3.20. "Integrator1" Parameters	26
3.21. "Integrator2" Parameters	27
3.22. "Integrator3" Parameters	27
3.23. "Integrator4" Parameters	28
3.24. "Integrator5" Parameters	28
3.25. "Integrator6" Parameters	29
3.26. "Integrator7" Parameters	29
3.27. "Integrator8" Parameters	30

3.28. "Integrator9" Parameters	30
3.29. "m" Parameters	31
3.30. MATLAB Function Function Properties	31
3.31. MATLAB Function Argument Summary	31
3.32. MATLAB Function Supporting Functions	32
3.33. "pitch" Parameters	32
3.34. "pitch_dot" Parameters	33
3.35. "roll" Parameters	33
3.36. "roll_dot" Parameters	34
3.37. "u1" Parameters	35
3.38. "u2" Parameters	35
3.39. "u3" Parameters	35
3.40. "u4" Parameters	36
3.41. "X_dot " Parameters	36
3.42. "Y_dot" Parameters	37
3.43. "yaw" Parameters	37
3.44. "yaw_dot" Parameters	38
3.45. "Z" Parameters	39
3.46. "Z_dot" Parameters	39
3.47. "Axis Angle" Parameters	40
3.48. "Demux" Parameters	41
3.49. "Euler Angles" Parameters	41
3.50. "Mux" Parameters	42
3.51. "Mux1" Parameters	42
3.52. "Mux2" Parameters	42
3.53. "Vr Pitch Axes" Parameters	42
3.54. "Vr Roll Axes" Parameters	43
3.55. "Vr Yaw Axes" Parameters	43
3.56. "Add2" Parameters	44
3.57. "Add4" Parameters	45
3.58. "Add5" Parameters	46
3.59. "Add6" Parameters	46
3.60. "Add7" Parameters	47
3.61. "Constant1" Parameters	47
3.62. "cos Phi" Parameters	48
3.63. "cos Theta" Parameters	48
3.64. "Divide" Parameters	48
3.65. "ePhi" Parameters	49
3.66. "ePsi" Parameters	49
3.67. "eTheta" Parameters	50
3.68. "ez" Parameters	51
3.69. "kdp" Parameters	51
3.70. "kdps" Parameters	52
3.71. "kdt" Parameters	52
3.72. "kdz" Parameters	53
3.73. "kpp" Parameters	53
3.74. "kp ps" Parameters	54
3.75. "kpt" Parameters	54
3.76. "kpz" Parameters	55
3.77. "m" Parameters	55
3.78. "Phi" Parameters	56
3.79. "Phi desired" Parameters	56
3.80. "Phi_dot" Parameters	57
3.81. "Product" Parameters	57

3.82. "Psi" Parameters	58
3.83. "Psi desired" Parameters	58
3.84. "Psi_dot " Parameters	58
3.85. "Theta" Parameters	59
3.86. "Theta desired" Parameters	59
3.87. "Theta_dot" Parameters	59
3.88. "U1" Parameters	60
3.89. "U2" Parameters	60
3.90. "U3" Parameters	61
3.91. "U4" Parameters	61
3.92. "Z" Parameters	62
3.93. "Z desired" Parameters	62
3.94. "Z_dot" Parameters	63
3.95. "Add3" Parameters	63
3.96. "Add6" Parameters	64
3.97. "Divide4" Parameters	65
3.98. "In1" Parameters	65
3.99. "In2" Parameters	65
3.100. "In3" Parameters	66
3.101. "In4" Parameters	66
3.102. "In5" Parameters	66
3.103. "In6" Parameters	67
3.104. "In7" Parameters	67
3.105. "Out1" Parameters	67
3.106. "Product12" Parameters	68
3.107. "Product13" Parameters	69
3.108. "Product9" Parameters	69
3.109. "Derivative" Parameters	70
3.110. "Derivative1" Parameters	70
3.111. "Derivative2" Parameters	71
3.112. "Derivative3" Parameters	71
3.113. "Derivative4" Parameters	71
3.114. "Derivative5" Parameters	71
3.115. "Fcn" Parameters	72
3.116. "Fcn1" Parameters	72
3.117. "Gain" Parameters	72
3.118. "Gain1" Parameters	73
3.119. "Gain2" Parameters	73
3.120. "Gain3" Parameters	74
3.121. "Gain4" Parameters	74
3.122. "Gain5" Parameters	75
3.123. "Gain6" Parameters	75
3.124. "Gain7" Parameters	76
3.125. "Integrator" Parameters	76
3.126. "Integrator1" Parameters	77
3.127. "phi_desired" Parameters	77
3.128. "Product4" Parameters	78
3.129. "Product5" Parameters	79
3.130. "Product6" Parameters	79
3.131. "Product7" Parameters	80
3.132. "Subtract" Parameters	80
3.133. "Subtract1" Parameters	81
3.134. "Subtract2" Parameters	81
3.135. "Subtract3" Parameters	82

3.136. "Subtract4" Parameters	83
3.137. "Subtract5" Parameters	83
3.138. "Subtract6" Parameters	84
3.139. "Subtract7" Parameters	84
3.140. "theta_desired" Parameters	85
3.141. "x" Parameters	86
3.142. "x_desired" Parameters	86
3.143. "y" Parameters	86
3.144. "y_desired" Parameters	87
3.145. "yaw_desired" Parameters	87
3.146. "Arm_length " Parameters	88
3.147. "Arm_length_" Parameters	89
3.148. "I_xx" Parameters	89
3.149. "I_yy" Parameters	90
3.150. "I_zz" Parameters	91
3.151. "ineretia_yy" Parameters	91
3.152. "inertia_xx" Parameters	92
3.153. "inertia_zz" Parameters	92
3.154. "m" Parameters	92
3.155. "mass" Parameters	93
3.156. "Demux" Parameters	94
3.157. "Demux1" Parameters	94
3.158. "Product" Parameters	95
3.159. "Product1" Parameters	95
3.160. "Product2" Parameters	96
3.161. "Product3" Parameters	96
3.162. "q" Parameters	97
3.163. "q0" Parameters	97
3.164. "r" Parameters	98
3.165. "Sum" Parameters	98
3.166. "Demux" Parameters	99
3.167. "Demux1" Parameters	99
3.168. "Product" Parameters	100
3.169. "Product1" Parameters	100
3.170. "Product2" Parameters	101
3.171. "Product3" Parameters	101
3.172. "q" Parameters	102
3.173. "q1" Parameters	102
3.174. "r" Parameters	103
3.175. "Sum" Parameters	103
3.176. "Demux" Parameters	104
3.177. "Demux1" Parameters	105
3.178. "Product" Parameters	105
3.179. "Product1" Parameters	105
3.180. "Product2" Parameters	106
3.181. "Product3" Parameters	106
3.182. "q" Parameters	107
3.183. "q2" Parameters	107
3.184. "r" Parameters	108
3.185. "Sum" Parameters	108
3.186. "Demux" Parameters	109
3.187. "Demux1" Parameters	110
3.188. "Product" Parameters	110
3.189. "Product1" Parameters	110

3.190. "Product2" Parameters	111
3.191. "Product3" Parameters	111
3.192. "q" Parameters	112
3.193. "q3" Parameters	112
3.194. "r" Parameters	113
3.195. "Sum" Parameters	113
3.196. "Mux" Parameters	114
3.197. "q" Parameters	115
3.198. "q*r" Parameters	115
3.199. "r" Parameters	116
3.200. "1/2" Parameters	116
3.201. "Concatenate" Parameters	117
3.202. "Demux" Parameters	117
3.203. "e0" Parameters	117
3.204. "e0_norm" Parameters	118
3.205. "Product" Parameters	118
3.206. "Trigonometric Function" Parameters	119
3.207. "Trigonometric Function1" Parameters	119
3.208. "1/2" Parameters	120
3.209. "Concatenate" Parameters	120
3.210. "Demux" Parameters	120
3.211. "e0" Parameters	121
3.212. "e0_norm" Parameters	121
3.213. "Product" Parameters	122
3.214. "Trigonometric Function" Parameters	122
3.215. "Trigonometric Function1" Parameters	122
3.216. "1/2" Parameters	123
3.217. "Concatenate" Parameters	124
3.218. "Demux" Parameters	124
3.219. "e0" Parameters	124
3.220. "e0_norm" Parameters	124
3.221. "Product" Parameters	125
3.222. "Trigonometric Function" Parameters	126
3.223. "Trigonometric Function1" Parameters	126
3.224. "Add2" Parameters	127
3.225. "Add5" Parameters	128
3.226. "Divide3" Parameters	128
3.227. "In1" Parameters	129
3.228. "In2" Parameters	129
3.229. "In3" Parameters	130
3.230. "In4" Parameters	130
3.231. "In5" Parameters	130
3.232. "In6" Parameters	131
3.233. "In7" Parameters	131
3.234. "Out1" Parameters	131
3.235. "Product10" Parameters	132
3.236. "Product11" Parameters	133
3.237. "Product8" Parameters	133
3.238. "Add" Parameters	134
3.239. "Divide" Parameters	135
3.240. "In1" Parameters	135
3.241. "In2" Parameters	136
3.242. "In3" Parameters	136
3.243. "In4" Parameters	136

3.244. "In5" Parameters	137
3.245. "In6" Parameters	137
3.246. "In7" Parameters	137
3.247. "Out1" Parameters	138
3.248. "Product1" Parameters	138
3.249. "Product2" Parameters	139
3.250. "Product3" Parameters	139
3.251. "Add1" Parameters	140
3.252. "Divide1" Parameters	141
3.253. "In1" Parameters	141
3.254. "In2" Parameters	142
3.255. "In3" Parameters	142
3.256. "In4" Parameters	142
3.257. "In5" Parameters	143
3.258. "In6" Parameters	143
3.259. "In7" Parameters	143
3.260. "Out1" Parameters	144
3.261. "Product5" Parameters	144
3.262. "Product6" Parameters	145
3.263. "Product7" Parameters	146
3.264. "Add7" Parameters	147
3.265. "Add8" Parameters	147
3.266. "Divide5" Parameters	148
3.267. "In1" Parameters	148
3.268. "In2" Parameters	149
3.269. "In3" Parameters	149
3.270. "In4" Parameters	149
3.271. "In5" Parameters	150
3.272. "In6" Parameters	150
3.273. "Out1" Parameters	150
3.274. "Product14" Parameters	151
3.275. "Product15" Parameters	152
3.276. "Add4" Parameters	153
3.277. "Divide2" Parameters	153
3.278. "In1" Parameters	154
3.279. "In2" Parameters	154
3.280. "In3" Parameters	154
3.281. "In4" Parameters	155
3.282. "Out1" Parameters	155
3.283. "Product" Parameters	156
3.284. "Product4" Parameters	156
3.285. "u5" Parameters	157
4.1. Design Variables	158
6.1. Navigation_loop_Animation Configuration Set	163
6.2. Navigation_loop_Animation Configuration Set.Components(1)	163
6.3. Navigation_loop_Animation Configuration Set.Components(2)	164
6.4. Navigation_loop_Animation Configuration Set.Components(3)	165
6.5. Navigation_loop_Animation Configuration Set.Components(4)	166
6.6. Navigation_loop_Animation Configuration Set.Components(5)	169
6.7. Navigation_loop_Animation Configuration Set.Components(6)	170
6.8. Navigation_loop_Animation Configuration Set.Components(7)	170
6.9. Navigation_loop_Animation Configuration Set.Components(8)	171
6.10. Navigation_loop_Animation Configuration Set.Components(8).Components(1)	173
6.11. Navigation_loop_Animation Configuration Set.Components(8).Components(2)	174

Chapter 1. Model Version

Version: 1.118

Last modified: Tue Oct 11 13:37:08 2016


Checksum: 3275595123 1541746514 2974388674 182425802

Chapter 2. Root System

Table of Contents

2.1. Blocks	2
2.1.1. Parameters	2
2.1.2. Block Execution Order	12

Figure 2.1. Navigation_loop_Animation

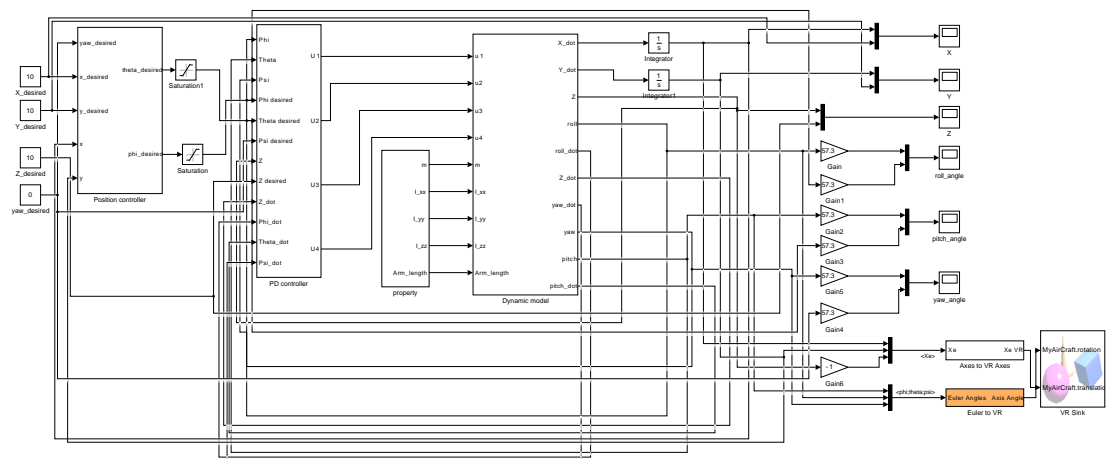

2.1. Blocks

2.1.1. Parameters

2.1.1.1. "Gain" (Gain)

Table 2.1. "Gain" Parameters

Parameter	Value
Gain	57.3
Multiplication	Element-wise($K \cdot u$)
Parameter minimum	[]
Parameter maximum	[]
Parameter data type	Inherit: Inherit via internal rule
Output minimum	[]
Output maximum	[]
Output data type	Inherit: Inherit via internal rule
Lock output data type setting against changes by the fixed-point tools	off

Parameter	Value
Integer rounding mode	Floor
Saturate on integer overflow	off
Sample time (-1 for inherited)	-1

2.1.1.2. "Gain1" (Gain)

Table 2.2. "Gain1" Parameters

Parameter	Value
Gain	57.3
Multiplication	Element-wise($K \cdot u$)
Parameter minimum	[]
Parameter maximum	[]
Parameter data type	Inherit: Inherit via internal rule
Output minimum	[]
Output maximum	[]
Output data type	Inherit: Inherit via internal rule
Lock output data type setting against changes by the fixed-point tools	off
Integer rounding mode	Floor
Saturate on integer overflow	off
Sample time (-1 for inherited)	-1

2.1.1.3. "Gain2" (Gain)

Table 2.3. "Gain2" Parameters

Parameter	Value
Gain	57.3
Multiplication	Element-wise($K \cdot u$)
Parameter minimum	[]
Parameter maximum	[]
Parameter data type	Inherit: Inherit via internal rule
Output minimum	[]
Output maximum	[]
Output data type	Inherit: Inherit via internal rule

Parameter	Value
Lock output data type setting against changes by the fixed-point tools	off
Integer rounding mode	Floor
Saturate on integer overflow	off
Sample time (-1 for inherited)	-1

2.1.1.4. "Gain3" (Gain)

Table 2.4. "Gain3" Parameters

Parameter	Value
Gain	57.3
Multiplication	Element-wise($K \cdot u$)
Parameter minimum	[]
Parameter maximum	[]
Parameter data type	Inherit: Inherit via internal rule
Output minimum	[]
Output maximum	[]
Output data type	Inherit: Inherit via internal rule
Lock output data type setting against changes by the fixed-point tools	off
Integer rounding mode	Floor
Saturate on integer overflow	off
Sample time (-1 for inherited)	-1

2.1.1.5. "Gain4" (Gain)

Table 2.5. "Gain4" Parameters

Parameter	Value
Gain	57.3
Multiplication	Element-wise($K \cdot u$)
Parameter minimum	[]
Parameter maximum	[]
Parameter data type	Inherit: Inherit via internal rule

Parameter	Value
Output minimum	[]
Output maximum	[]
Output data type	Inherit: Inherit via internal rule
Lock output data type setting against changes by the fixed-point tools	off
Integer rounding mode	Floor
Saturate on integer overflow	off
Sample time (-1 for inherited)	-1

2.1.1.6. "Gain5" (Gain)

Table 2.6. "Gain5" Parameters

Parameter	Value
Gain	57.3
Multiplication	Element-wise($K.*u$)
Parameter minimum	[]
Parameter maximum	[]
Parameter data type	Inherit: Inherit via internal rule
Output minimum	[]
Output maximum	[]
Output data type	Inherit: Inherit via internal rule
Lock output data type setting against changes by the fixed-point tools	off
Integer rounding mode	Floor
Saturate on integer overflow	off
Sample time (-1 for inherited)	-1

2.1.1.7. "Gain6" (Gain)

Table 2.7. "Gain6" Parameters

Parameter	Value
Gain	-1
Multiplication	Element-wise($K.*u$)

Parameter	Value
Parameter minimum	[]
Parameter maximum	[]
Parameter data type	Inherit: Inherit via internal rule
Output minimum	[]
Output maximum	[]
Output data type	Inherit: Inherit via internal rule
Lock output data type setting against changes by the fixed-point tools	off
Integer rounding mode	Floor
Saturate on integer overflow	off
Sample time (-1 for inherited)	-1

2.1.1.8. "Integrator" (Integrator)

Table 2.8. "Integrator" Parameters

Parameter	Value
External reset	none
Initial condition source	internal
Initial condition	0
Limit output	off
Upper saturation limit	inf
Lower saturation limit	-inf
Show saturation port	off
Show state port	off
Ignore limit and reset when linearizing	off
Enable zero-crossing detection	on
State Name (e.g., 'position')	"

2.1.1.9. "Integrator1" (Integrator)

Table 2.9. "Integrator1" Parameters

Parameter	Value
External reset	none

Parameter	Value
Initial condition source	internal
Initial condition	0
Limit output	off
Upper saturation limit	inf
Lower saturation limit	-inf
Show saturation port	off
Show state port	off
Ignore limit and reset when linearizing	off
Enable zero-crossing detection	on
State Name (e.g., 'position')	"

2.1.1.10. "Mux1" (Mux)

Table 2.10. "Mux1" Parameters

Parameter	Value
Number of inputs	2
Display option	bar

2.1.1.11. "Mux2" (Mux)

Table 2.11. "Mux2" Parameters

Parameter	Value
Number of inputs	2
Display option	bar

2.1.1.12. "Mux3" (Mux)

Table 2.12. "Mux3" Parameters

Parameter	Value
Number of inputs	2
Display option	bar

2.1.1.13. "Mux4" (Mux)

Table 2.13. "Mux4" Parameters

Parameter	Value
Number of inputs	3
Display option	bar

2.1.1.14. "Mux5" (Mux)

Table 2.14. "Mux5" Parameters

Parameter	Value
Number of inputs	3
Display option	bar

2.1.1.15. "Mux6" (Mux)

Table 2.15. "Mux6" Parameters

Parameter	Value
Number of inputs	2
Display option	bar

2.1.1.16. "Mux7" (Mux)

Table 2.16. "Mux7" Parameters

Parameter	Value
Number of inputs	2
Display option	bar

2.1.1.17. "Mux8" (Mux)

Table 2.17. "Mux8" Parameters

Parameter	Value
Number of inputs	2
Display option	bar

2.1.1.18. "Saturation" (Saturate)

Table 2.18. "Saturation" Parameters

Parameter	Value
Upper limit	35/57.3
Lower limit	-35/57.3
Treat as gain when linearizing	on
Enable zero-crossing detection	on
Sample time (-1 for inherited)	-1
Output minimum	[]
Output maximum	[]
Output data type	Inherit: Same as input
Lock output data type setting against changes by the fixed-point tools	off
Integer rounding mode	Floor

2.1.1.19. "Saturation1" (Saturate)

Table 2.19. "Saturation1" Parameters

Parameter	Value
Upper limit	35/57.3
Lower limit	-35/57.3
Treat as gain when linearizing	on
Enable zero-crossing detection	on
Sample time (-1 for inherited)	-1
Output minimum	[]
Output maximum	[]
Output data type	Inherit: Same as input
Lock output data type setting against changes by the fixed-point tools	off
Integer rounding mode	Floor

2.1.1.20. "VR Sink" (S-Function)

Table 2.20. "VR Sink" Parameters

Parameter	Value
Sample Time	0.1
View	on
Remote View	on
Fields Written	MyAirCraft.rotation.4.1.1.double#MyAirCraft.translation.3.1.1.double
World File Name	rollTst.wrl
AutoView	off
Video Dimensions	[]
Allow Variable Size	off

2.1.1.21. "X_desired" (Constant)

Table 2.21. "X_desired" Parameters

Parameter	Value
Constant value	10
Interpret vector parameters as 1-D	on
Output minimum	[]
Output maximum	[]
Output data type	Inherit: Inherit from 'Constant value'
Lock output data type setting against changes by the fixed-point tools	off
Sample time	inf
Frame period	inf

2.1.1.22. "Y_desired" (Constant)

Table 2.22. "Y_desired" Parameters

Parameter	Value
Constant value	10
Interpret vector parameters as 1-D	on
Output minimum	[]
Output maximum	[]

Parameter	Value
Output data type	Inherit: Inherit from 'Constant value'
Lock output data type setting against changes by the fixed-point tools	off
Sample time	inf
Frame period	inf

2.1.1.23. "yaw_desired" (Constant)

Table 2.23. "yaw_desired" Parameters

Parameter	Value
Constant value	0
Interpret vector parameters as 1-D	on
Output minimum	[]
Output maximum	[]
Output data type	Inherit: Inherit from 'Constant value'
Lock output data type setting against changes by the fixed-point tools	off
Sample time	inf
Frame period	inf

2.1.1.24. "Z_desired" (Constant)

Table 2.24. "Z_desired" Parameters

Parameter	Value
Constant value	10
Interpret vector parameters as 1-D	on
Output minimum	[]
Output maximum	[]
Output data type	Inherit: Inherit from 'Constant value'
Lock output data type setting against changes by the fixed-point tools	off
Sample time	inf
Frame period	inf

2.1.2. Block Execution Order

1. Integrator4 [28] (Integrator)
2. 1/2 [116] (Gain)
3. Trigonometric Function1 [119] (Trigonometry)
4. Trigonometric Function [119] (Trigonometry)
5. Vr Roll Axes [43] (Constant)
6. Product [118] (Product)
7. Concatenate [117] (Concatenate)
8. Integrator5 [28] (Integrator)
9. 1/2 [123] (Gain)
10. Trigonometric Function1 [126] (Trigonometry)
11. Trigonometric Function [125] (Trigonometry)
12. Vr Yaw Axes [43] (Constant)
13. Product [125] (Product)
14. Concatenate [124] (Concatenate)
15. Integrator3 [27] (Integrator)
16. 1/2 [120] (Gain)
17. Trigonometric Function1 [122] (Trigonometry)
18. Trigonometric Function [122] (Trigonometry)
19. Vr Pitch Axes [42] (Constant)
20. Product [122] (Product)
21. Concatenate [120] (Concatenate)
22. Product [100] (Product)
23. Product1 [100] (Product)
24. Product2 [101] (Product)
25. Product3 [101] (Product)
26. Sum [103] (Sum)
27. Product (Product)
28. Product [94] (Product)
29. Product1 [95] (Product)
30. Product2 [96] (Product)
31. Product3 [96] (Product)
32. Sum [98] (Sum)
33. Product1 (Product)
34. Product [110] (Product)
35. Product1 [110] (Product)
36. Product2 [111] (Product)
37. Product3 [111] (Product)
38. Sum [113] (Sum)
39. Product2 (Product)
40. Product [105] (Product)
41. Product1 [105] (Product)
42. Product2 [106] (Product)
43. Product3 [106] (Product)
44. Sum [108] (Sum)
45. Product3 (Product)
46. Sum (Sum)
47. Product (Product)
48. Product1 (Product)
49. Product2 (Product)
50. Product3 (Product)
51. Sum (Sum)

52. Product (Product)
53. Product1 (Product)
54. Product2 (Product)
55. Product3 (Product)
56. Sum (Sum)
57. Product (Product)
58. Product1 (Product)
59. Product2 (Product)
60. Product3 (Product)
61. Sum (Sum)
62. Trigonometric Function2 [23] (Trigonometry)
63. Trigonometric Function [22] (Trigonometry)
64. Product [22] (Product)
65. 2 [20] (Gain)
66. Concatenate [20] (Concatenate)
67. Integrator [6] (Integrator)
68. Integrator7 [29] (Integrator)
69. Gain6 [5] (Gain)
70. rad-->deg1 [18] (Gain)
71. Integrator1 [6] (Integrator)
72. rad-->deg [17] (Gain)
73. TmpSignal ConversionAtVR SinkInport2 (SignalConversion)
74. VR Sink [9] (S-Function)
75. X_desired [10] (Constant)
76. X [10] (Scope)
77. Y_desired [10] (Constant)
78. Y [10] (Scope)
79. Z_desired [11] (Constant)
80. Z [11] (Scope)
81. Gain2 [3] (Gain)
82. Derivative [70] (Derivative)
83. Derivative2 [71] (Derivative)
84. Derivative5 [71] (Derivative)
85. Subtract [80] (Sum)
86. Gain3 [74] (Gain)
87. Subtract5 [83] (Sum)
88. Gain2 [73] (Gain)
89. Integrator [76] (Integrator)
90. Gain6 [75] (Gain)
91. Subtract2 [81] (Sum)
92. yaw_desired [11] (Constant)
93. Fcn1 [72] (Fcn)
94. Product6 [79] (Product)
95. Derivative1 [70] (Derivative)
96. Derivative3 [71] (Derivative)
97. Derivative4 [71] (Derivative)
98. Subtract1 [81] (Sum)
99. Gain5 [75] (Gain)
100. Subtract4 [83] (Sum)
101. Gain4 [74] (Gain)
102. Integrator1 [77] (Integrator)
103. Gain7 [76] (Gain)
104. Subtract3 [82] (Sum)
105. Fcn [72] (Fcn)

- 106. Product7 [80] (Product)
- 107. Subtract6 [84] (Sum)
- 108. Gain1 [73] (Gain)
- 109. Saturation1 [9] (Saturate)
- 110. Gain3 [4] (Gain)
- 111. pitch_angle [8] (Scope)
- 112. Gain [2] (Gain)
- 113. Product5 [79] (Product)
- 114. Product4 [78] (Product)
- 115. Subtract7 [84] (Sum)
- 116. Gain [72] (Gain)
- 117. Saturation [8] (Saturate)
- 118. Gain1 [3] (Gain)
- 119. roll_angle [8] (Scope)
- 120. Gain5 [5] (Gain)
- 121. Gain4 [4] (Gain)
- 122. yaw_angle [11] (Scope)
- 123. Integrator [26] (Integrator)
- 124. Integrator1 [26] (Integrator)
- 125. Integrator2 [27] (Integrator)
- 126. Integrator6 [29] (Integrator)
- 127. Integrator8 [30] (Integrator)
- 128. Integrator9 [30] (Integrator)
- 129. *MATLAB Function*
 - 1. SFunction (S-Function)
- 130. eTheta [50] (Sum)
- 131. kpt [54] (Gain)
- 132. kdt [52] (Gain)
- 133. Add6 [46] (Sum)
- 134. Arm_length_ [89] (Constant)
- 135. Product13 [69] (Product)
- 136. Product9 [69] (Product)
- 137. ineretia_yy [91] (Constant)
- 138. inertia_zz [92] (Constant)
- 139. Add6 [64] (Sum)
- 140. Product12 [68] (Product)
- 141. Add3 [63] (Sum)
- 142. inertia_xx [92] (Constant)
- 143. Divide4 [64] (Product)
- 144. ePhi [49] (Sum)
- 145. kpp [53] (Gain)
- 146. kdp [51] (Gain)
- 147. Add5 [45] (Sum)
- 148. Product11 [132] (Product)
- 149. Product8 [133] (Product)
- 150. Add5 [128] (Sum)
- 151. Product10 [132] (Product)
- 152. Add2 [127] (Sum)
- 153. Divide3 [128] (Product)
- 154. Product1 [138] (Product)
- 155. Product2 [139] (Product)
- 156. Add [134] (Sum)
- 157. ez [50] (Sum)
- 158. kpz [55] (Gain)

- 159. kdz [53] (Gain)
- 160. Add4 [45] (Sum)
- 161. Constant1 [47] (Constant)
- 162. Add2 [44] (Sum)
- 163. m [55] (Gain)
- 164. cos Phi [48] (Trigonometry)
- 165. cos Theta [48] (Trigonometry)
- 166. Product [57] (Product)
- 167. Divide [48] (Product)
- 168. Product3 [139] (Product)
- 169. mass [93] (Constant)
- 170. Divide [135] (Product)
- 171. Product5 [144] (Product)
- 172. Product6 [145] (Product)
- 173. Add1 [140] (Sum)
- 174. Product7 [145] (Product)
- 175. Divide1 [141] (Product)
- 176. ePsi [49] (Sum)
- 177. kpps [54] (Gain)
- 178. kdps [52] (Gain)
- 179. Add7 [47] (Sum)
- 180. Product15 [152] (Product)
- 181. Add8 [147] (Sum)
- 182. Product14 [151] (Product)
- 183. Add7 [147] (Sum)
- 184. Divide5 [148] (Product)
- 185. u5 [157] (Constant)
- 186. Product4 [156] (Product)
- 187. Product [156] (Product)
- 188. Divide2 [153] (Product)
- 189. Add4 [152] (Sum)


Chapter 3. Subsystems

Table of Contents

3.1. Axes to VR Axes	17
3.1.1. Blocks	17
3.2. Axis Angle Vector	20
3.2.1. Blocks	20
3.3. Dynamic model	24
3.3.1. Blocks	24
3.4. Euler to VR	40
3.4.1. Blocks	40
3.5. PD controller	44
3.5.1. Blocks	44
3.6. pitch_dot_dot	63
3.6.1. Blocks	63
3.7. Position controller	70
3.7.1. Blocks	70
3.8. property	88
3.8.1. Blocks	88
3.9. q0	94
3.9.1. Blocks	94
3.10. q1	99
3.10.1. Blocks	99
3.11. q2	104
3.11.1. Blocks	104
3.12. q3	109
3.12.1. Blocks	109
3.13. Quaternion Multiplication (Pitch & Yaw)	114
3.13.1. Blocks	114
3.14. Quaternion Normalization	116
3.14.1. Blocks	116
3.15. Quaternion Normalization1	119
3.15.1. Blocks	120
3.16. Quaternion Normalization2	123
3.16.1. Blocks	123
3.17. roll_dot_dot	127
3.17.1. Blocks	127
3.18. x_dot_dot	134
3.18.1. Blocks	134
3.19. y_dot_dot	140
3.19.1. Blocks	140
3.20. yaw_dot_dot	146
3.20.1. Blocks	147
3.21. z_dot_dot	152
3.21.1. Blocks	152

3.1. Axes to VR Axes

Figure 3.1. Navigation_loop_Animation/Axes to VR Axes

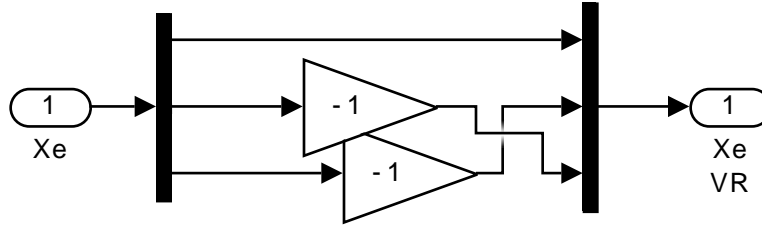

3.1.1. Blocks

3.1.1.1. Parameters

3.1.1.1.1. "Demux" (Demux)

Table 3.1. "Demux" Parameters

Parameter	Value
Number of outputs	3
Display option	none
Bus selection mode	off

3.1.1.1.2. "Mux" (Mux)

Table 3.2. "Mux" Parameters

Parameter	Value
Number of inputs	3
Display option	bar

3.1.1.1.3. "rad-->deg" (Gain)

Table 3.3. "rad-->deg" Parameters

Parameter	Value
Gain	-1
Multiplication	Element-wise(K.*u)
Parameter minimum	[]
Parameter maximum	[]

Parameter	Value
Parameter data type	Inherit: Same as input
Output minimum	[]
Output maximum	[]
Output data type	Inherit: Same as input
Lock output data type setting against changes by the fixed-point tools	off
Integer rounding mode	Floor
Saturate on integer overflow	on
Sample time (-1 for inherited)	-1

3.1.1.1.4. "rad-->deg1" (Gain)

Table 3.4. "rad-->deg1" Parameters

Parameter	Value
Gain	-1
Multiplication	Element-wise(K.*u)
Parameter minimum	[]
Parameter maximum	[]
Parameter data type	Inherit: Same as input
Output minimum	[]
Output maximum	[]
Output data type	Inherit: Same as input
Lock output data type setting against changes by the fixed-point tools	off
Integer rounding mode	Floor
Saturate on integer overflow	on
Sample time (-1 for inherited)	-1

3.1.1.1.5. "Xe" (Inport)

Table 3.5. "Xe" Parameters

Parameter	Value
Port number	1

Parameter	Value
Port dimensions (-1 for inherited)	-1
Sample time (-1 for inherited)	-1
Minimum	[]
Maximum	[]
Data type	Inherit: auto


3.1.1.1.6. "Xe VR" (Outport)

Table 3.6. "Xe VR" Parameters

Parameter	Value
Port number	1
Icon display	Port number
Minimum	[]
Maximum	[]
Data type	Inherit: auto
Lock output data type setting against changes by the fixed-point tools	off
Output as nonvirtual bus in parent model	off
Port dimensions (-1 for inherited)	-1
Variable-size signal	Inherit
Sample time (-1 for inherited)	-1
Source of initial output value	Dialog
Output when disabled	held
Initial output	[]

3.2. Axis Angle Vector

Figure 3.2. Navigation_loop_Animation/Euler to VR/Axis Angle Vector

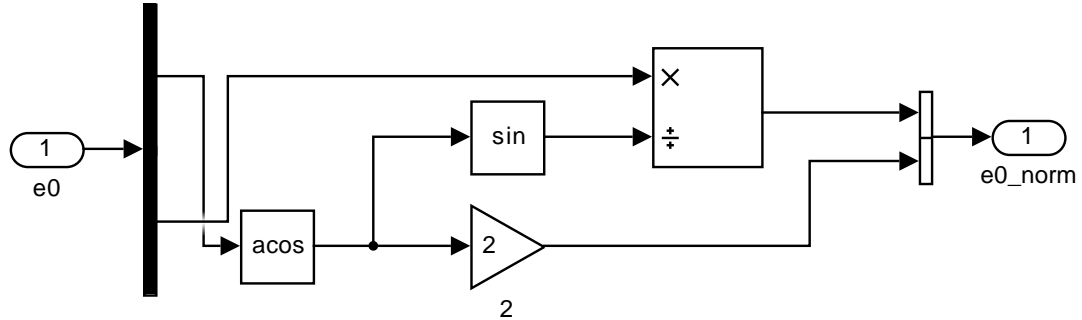

3.2.1. Blocks

3.2.1.1. Parameters

3.2.1.1.1. "2" (Gain)

Table 3.7. "2" Parameters

Parameter	Value
Gain	2
Multiplication	Element-wise($K \cdot u$)
Parameter minimum	[]
Parameter maximum	[]
Parameter data type	Inherit: Same as input
Output minimum	[]
Output maximum	[]
Output data type	Inherit: Same as input
Lock output data type setting against changes by the fixed-point tools	off
Integer rounding mode	Floor
Saturate on integer overflow	on
Sample time (-1 for inherited)	-1

3.2.1.1.2. "Concatenate" (Concatenate)**Table 3.8. "Concatenate" Parameters**

Parameter	Value
Number of inputs	2
Mode	Vector
Concatenate dimension	1

3.2.1.1.3. "Demux" (Demux)**Table 3.9. "Demux" Parameters**

Parameter	Value
Number of outputs	[1 3]
Display option	none
Bus selection mode	off

3.2.1.1.4. "e0" (Inport)**Table 3.10. "e0" Parameters**

Parameter	Value
Port number	1
Port dimensions (-1 for inherited)	-1
Sample time (-1 for inherited)	-1
Minimum	[]
Maximum	[]
Data type	Inherit: auto

3.2.1.1.5. "e0_norm" (Outport)**Table 3.11. "e0_norm" Parameters**

Parameter	Value
Port number	1
Icon display	Port number
Minimum	[]

Parameter	Value
Maximum	[]
Data type	Inherit: auto
Lock output data type setting against changes by the fixed-point tools	off
Output as nonvirtual bus in parent model	off
Port dimensions (-1 for inherited)	-1
Variable-size signal	Inherit
Sample time (-1 for inherited)	-1
Source of initial output value	Dialog
Output when disabled	held
Initial output	[]

3.2.1.1.6. "Product" (Product)

Table 3.12. "Product" Parameters

Parameter	Value
Number of inputs	*/
Multiplication	Element-wise(.*)
Multiply over	All dimensions
Dimension	1
Require all inputs to have the same data type	on
Output minimum	[]
Output maximum	[]
Output data type	Inherit: Same as first input
Lock output data type setting against changes by the fixed-point tools	off
Integer rounding mode	Floor
Saturate on integer overflow	on
Sample time (-1 for inherited)	-1

3.2.1.1.7. "Trigonometric Function" (Trigonometry)**Table 3.13. "Trigonometric Function" Parameters**


Parameter	Value
Function	sin
Approximation method	None
Number of iterations	11
Sample time (-1 for inherited)	-1

3.2.1.1.8. "Trigonometric Function2" (Trigonometry)**Table 3.14. "Trigonometric Function2" Parameters**

Parameter	Value
Function	acos
Approximation method	None
Number of iterations	11
Sample time (-1 for inherited)	-1

3.3. Dynamic model

Figure 3.3. Navigation_loop_Animation/Dynamic model

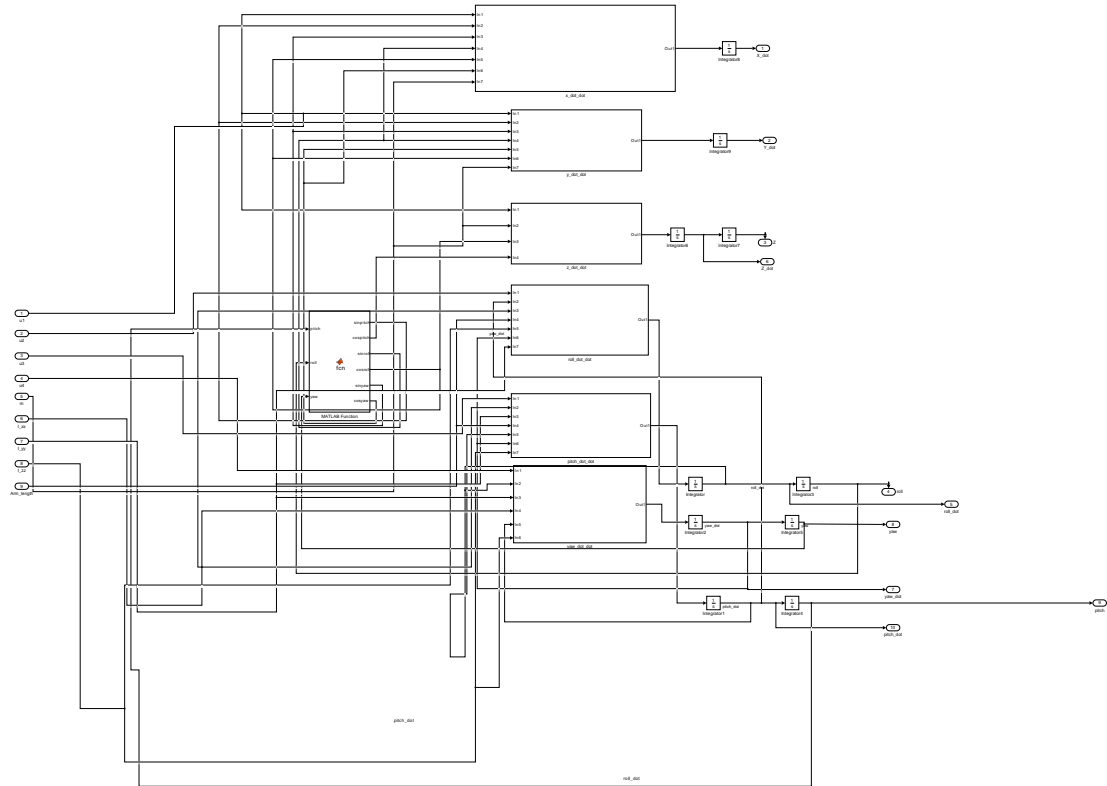

3.3.1. Blocks

3.3.1.1. Parameters

3.3.1.1.1. "Arm_length" (Inport)

Table 3.15. "Arm_length" Parameters

Parameter	Value
Port number	9
Port dimensions (-1 for inherited)	-1
Sample time (-1 for inherited)	-1
Minimum	[]
Maximum	[]
Data type	Inherit: auto

3.3.1.1.2. "I_xx" (Inport)**Table 3.16. "I_xx" Parameters**

Parameter	Value
Port number	6
Port dimensions (-1 for inherited)	-1
Sample time (-1 for inherited)	-1
Minimum	[]
Maximum	[]
Data type	Inherit: auto

3.3.1.1.3. "I_yy" (Inport)**Table 3.17. "I_yy" Parameters**

Parameter	Value
Port number	7
Port dimensions (-1 for inherited)	-1
Sample time (-1 for inherited)	-1
Minimum	[]
Maximum	[]
Data type	Inherit: auto

3.3.1.1.4. "I_zz" (Inport)**Table 3.18. "I_zz" Parameters**

Parameter	Value
Port number	8
Port dimensions (-1 for inherited)	-1
Sample time (-1 for inherited)	-1
Minimum	[]

Parameter	Value
Maximum	[]
Data type	Inherit: auto

3.3.1.1.5. "Integrator" (Integrator)

Table 3.19. "Integrator" Parameters

Parameter	Value
External reset	none
Initial condition source	internal
Initial condition	0
Limit output	off
Upper saturation limit	inf
Lower saturation limit	-inf
Show saturation port	off
Show state port	off
Ignore limit and reset when linearizing	off
Enable zero-crossing detection	on
State Name (e.g., 'position')	"

3.3.1.1.6. "Integrator1" (Integrator)

Table 3.20. "Integrator1" Parameters

Parameter	Value
External reset	none
Initial condition source	internal
Initial condition	0
Limit output	off
Upper saturation limit	inf
Lower saturation limit	-inf
Show saturation port	off
Show state port	off
Ignore limit and reset when linearizing	off

Parameter	Value
Enable zero-crossing detection	on
State Name (e.g., 'position')	"

3.3.1.1.7. "Integrator2" (Integrator)

Table 3.21. "Integrator2" Parameters

Parameter	Value
External reset	none
Initial condition source	internal
Initial condition	0
Limit output	off
Upper saturation limit	inf
Lower saturation limit	-inf
Show saturation port	off
Show state port	off
Ignore limit and reset when linearizing	off
Enable zero-crossing detection	on
State Name (e.g., 'position')	"

3.3.1.1.8. "Integrator3" (Integrator)

Table 3.22. "Integrator3" Parameters

Parameter	Value
External reset	none
Initial condition source	internal
Initial condition	0
Limit output	off
Upper saturation limit	inf
Lower saturation limit	-inf
Show saturation port	off
Show state port	off
Ignore limit and reset when linearizing	off

Parameter	Value
Enable zero-crossing detection	on
State Name (e.g., 'position')	"

3.3.1.1.9. "Integrator4" (Integrator)

Table 3.23. "Integrator4" Parameters

Parameter	Value
External reset	none
Initial condition source	internal
Initial condition	0
Limit output	off
Upper saturation limit	inf
Lower saturation limit	-inf
Show saturation port	off
Show state port	off
Ignore limit and reset when linearizing	off
Enable zero-crossing detection	on
State Name (e.g., 'position')	"

3.3.1.1.10. "Integrator5" (Integrator)

Table 3.24. "Integrator5" Parameters

Parameter	Value
External reset	none
Initial condition source	internal
Initial condition	0
Limit output	off
Upper saturation limit	inf
Lower saturation limit	-inf
Show saturation port	off
Show state port	off
Ignore limit and reset when linearizing	off

Parameter	Value
Enable zero-crossing detection	on
State Name (e.g., 'position')	"

3.3.1.1.11. "Integrator6" (Integrator)

Table 3.25. "Integrator6" Parameters

Parameter	Value
External reset	none
Initial condition source	internal
Initial condition	0
Limit output	off
Upper saturation limit	inf
Lower saturation limit	-inf
Show saturation port	off
Show state port	off
Ignore limit and reset when linearizing	off
Enable zero-crossing detection	on
State Name (e.g., 'position')	"

3.3.1.1.12. "Integrator7" (Integrator)

Table 3.26. "Integrator7" Parameters

Parameter	Value
External reset	none
Initial condition source	internal
Initial condition	0
Limit output	off
Upper saturation limit	inf
Lower saturation limit	-inf
Show saturation port	off
Show state port	off
Ignore limit and reset when linearizing	off

Parameter	Value
Enable zero-crossing detection	on
State Name (e.g., 'position')	"

3.3.1.1.13. "Integrator8" (Integrator)

Table 3.27. "Integrator8" Parameters

Parameter	Value
External reset	none
Initial condition source	internal
Initial condition	0
Limit output	off
Upper saturation limit	inf
Lower saturation limit	-inf
Show saturation port	off
Show state port	off
Ignore limit and reset when linearizing	off
Enable zero-crossing detection	on
State Name (e.g., 'position')	"

3.3.1.1.14. "Integrator9" (Integrator)

Table 3.28. "Integrator9" Parameters

Parameter	Value
External reset	none
Initial condition source	internal
Initial condition	0
Limit output	off
Upper saturation limit	inf
Lower saturation limit	-inf
Show saturation port	off
Show state port	off
Ignore limit and reset when linearizing	off

Parameter	Value
Enable zero-crossing detection	on
State Name (e.g., 'position')	"

3.3.1.1.15. "m" (Inport)

Table 3.29. "m" Parameters

Parameter	Value
Port number	5
Port dimensions (-1 for inherited)	-1
Sample time (-1 for inherited)	-1
Minimum	[]
Maximum	[]
Data type	Inherit: auto

3.3.1.1.16. "MATLAB Function" (MATLAB Function)

Table 3.30. MATLAB Function Function Properties

Property	Value
Update Method	INHERITED
Sample Time	
Support variable-size arrays	1
Saturate on integer overflow	1
Treat these inherited Simulink signal types as fi objects	Fixed-point
Input fi math	fimath(...)
Description	

Table 3.31. MATLAB Function Argument Summary

Name	Scope	Port	Data Type	Size
pitch	Input	1	double	1

Name	Scope	Port	Data Type	Size
sinpitch	Output	1	double	1
roll	Input	2	double	1
yaw	Input	3	double	1
cospitch	Output	2	double	1
sinroll	Output	3	double	1
cosroll	Output	4	double	1
sinyaw	Output	5	double	1
cosyaw	Output	6	double	1

MATLAB Function Function Script

```
function [sinpitch,cospitch,sinroll,cosroll,sinyaw,cosyaw]=
    fcn(pitch,roll,yaw)
sinpitch=sin(pitch);
cospitch=cos(pitch);
sinroll=sin(roll);
cosroll=cos(roll);
sinyaw=sin(yaw);
cosyaw=cos(yaw);
```

Table 3.32. MATLAB Function Supporting Functions

Function	Defined By	Path
cos	MATLAB	
sin	MATLAB	

3.3.1.1.17. "pitch" (Outport)

Table 3.33. "pitch" Parameters

Parameter	Value
Port number	9
Icon display	Port number
Minimum	[]
Maximum	[]
Data type	Inherit: auto
Lock output data type setting against changes by the fixed-point tools	off
Output as nonvirtual bus in parent model	off
Port dimensions (-1 for inherited)	-1

Parameter	Value
Variable-size signal	Inherit
Sample time (-1 for inherited)	-1
Source of initial output value	Dialog
Output when disabled	held
Initial output	[]

3.3.1.1.18. "pitch_dot" (Outport)

Table 3.34. "pitch_dot" Parameters

Parameter	Value
Port number	10
Icon display	Port number
Minimum	[]
Maximum	[]
Data type	Inherit: auto
Lock output data type setting against changes by the fixed-point tools	off
Output as nonvirtual bus in parent model	off
Port dimensions (-1 for inherited)	-1
Variable-size signal	Inherit
Sample time (-1 for inherited)	-1
Source of initial output value	Dialog
Output when disabled	held
Initial output	[]

3.3.1.1.19. "roll" (Outport)

Table 3.35. "roll" Parameters

Parameter	Value
Port number	4

Parameter	Value
Icon display	Port number
Minimum	[]
Maximum	[]
Data type	Inherit: auto
Lock output data type setting against changes by the fixed-point tools	off
Output as nonvirtual bus in parent model	off
Port dimensions (-1 for inherited)	-1
Variable-size signal	Inherit
Sample time (-1 for inherited)	-1
Source of initial output value	Dialog
Output when disabled	held
Initial output	[]

3.3.1.1.20. "roll_dot" (Outport)

Table 3.36. "roll_dot" Parameters

Parameter	Value
Port number	5
Icon display	Port number
Minimum	[]
Maximum	[]
Data type	Inherit: auto
Lock output data type setting against changes by the fixed-point tools	off
Output as nonvirtual bus in parent model	off
Port dimensions (-1 for inherited)	-1
Variable-size signal	Inherit
Sample time (-1 for inherited)	-1
Source of initial output value	Dialog

Parameter	Value
Output when disabled	held
Initial output	[]

3.3.1.1.21. "u1" (Inport)

Table 3.37. "u1" Parameters

Parameter	Value
Port number	1
Port dimensions (-1 for inherited)	-1
Sample time (-1 for inherited)	-1
Minimum	[]
Maximum	[]
Data type	Inherit: auto

3.3.1.1.22. "u2" (Inport)

Table 3.38. "u2" Parameters

Parameter	Value
Port number	2
Port dimensions (-1 for inherited)	-1
Sample time (-1 for inherited)	-1
Minimum	[]
Maximum	[]
Data type	Inherit: auto

3.3.1.1.23. "u3" (Inport)

Table 3.39. "u3" Parameters

Parameter	Value
Port number	3

Parameter	Value
Port dimensions (-1 for inherited)	-1
Sample time (-1 for inherited)	-1
Minimum	[]
Maximum	[]
Data type	Inherit: auto

3.3.1.1.24. "u4" (Inport)

Table 3.40. "u4" Parameters

Parameter	Value
Port number	4
Port dimensions (-1 for inherited)	-1
Sample time (-1 for inherited)	-1
Minimum	[]
Maximum	[]
Data type	Inherit: auto

3.3.1.1.25. "X_dot " (Outport)

Table 3.41. "X_dot " Parameters

Parameter	Value
Port number	1
Icon display	Port number
Minimum	[]
Maximum	[]
Data type	Inherit: auto
Lock output data type setting against changes by the fixed-point tools	off
Output as nonvirtual bus in parent model	off
Port dimensions (-1 for inherited)	-1

Parameter	Value
Variable-size signal	Inherit
Sample time (-1 for inherited)	-1
Source of initial output value	Dialog
Output when disabled	held
Initial output	[]

3.3.1.1.26. "Y_dot" (Outport)

Table 3.42. "Y_dot" Parameters

Parameter	Value
Port number	2
Icon display	Port number
Minimum	[]
Maximum	[]
Data type	Inherit: auto
Lock output data type setting against changes by the fixed-point tools	off
Output as nonvirtual bus in parent model	off
Port dimensions (-1 for inherited)	-1
Variable-size signal	Inherit
Sample time (-1 for inherited)	-1
Source of initial output value	Dialog
Output when disabled	held
Initial output	[]

3.3.1.1.27. "yaw" (Outport)

Table 3.43. "yaw" Parameters

Parameter	Value
Port number	8
Icon display	Port number

Parameter	Value
Minimum	[]
Maximum	[]
Data type	Inherit: auto
Lock output data type setting against changes by the fixed-point tools	off
Output as nonvirtual bus in parent model	off
Port dimensions (-1 for inherited)	-1
Variable-size signal	Inherit
Sample time (-1 for inherited)	-1
Source of initial output value	Dialog
Output when disabled	held
Initial output	[]

3.3.1.1.28. "yaw_dot" (Outport)

Table 3.44. "yaw_dot" Parameters

Parameter	Value
Port number	7
Icon display	Port number
Minimum	[]
Maximum	[]
Data type	Inherit: auto
Lock output data type setting against changes by the fixed-point tools	off
Output as nonvirtual bus in parent model	off
Port dimensions (-1 for inherited)	-1
Variable-size signal	Inherit
Sample time (-1 for inherited)	-1
Source of initial output value	Dialog
Output when disabled	held

Parameter	Value
Initial output	[]

3.3.1.1.29. "Z" (Outport)

Table 3.45. "Z" Parameters

Parameter	Value
Port number	3
Icon display	Port number
Minimum	[]
Maximum	[]
Data type	Inherit: auto
Lock output data type setting against changes by the fixed-point tools	off
Output as nonvirtual bus in parent model	off
Port dimensions (-1 for inherited)	-1
Variable-size signal	Inherit
Sample time (-1 for inherited)	-1
Source of initial output value	Dialog
Output when disabled	held
Initial output	[]

3.3.1.1.30. "Z_dot" (Outport)


Table 3.46. "Z_dot" Parameters

Parameter	Value
Port number	6
Icon display	Port number
Minimum	[]
Maximum	[]
Data type	Inherit: auto
Lock output data type setting against changes by the fixed-point tools	off

Parameter	Value
Output as nonvirtual bus in parent model	off
Port dimensions (-1 for inherited)	-1
Variable-size signal	Inherit
Sample time (-1 for inherited)	-1
Source of initial output value	Dialog
Output when disabled	held
Initial output	[]

3.4. Euler to VR

Figure 3.4. Navigation_loop_Animation/Euler to VR

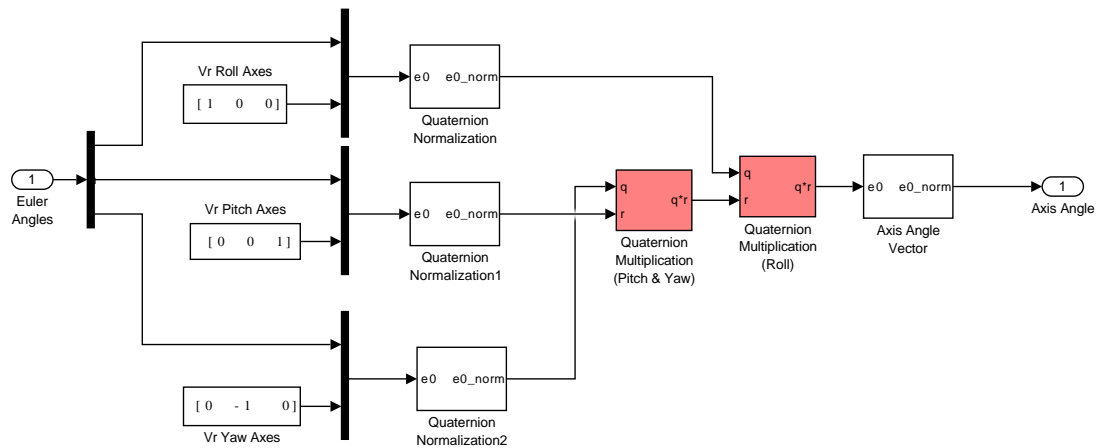

3.4.1. Blocks

3.4.1.1. Parameters

3.4.1.1.1. "Axis Angle" (Outport)

Table 3.47. "Axis Angle" Parameters

Parameter	Value
Port number	1
Icon display	Port number

Parameter	Value
Minimum	[]
Maximum	[]
Data type	Inherit: auto
Lock output data type setting against changes by the fixed-point tools	off
Output as nonvirtual bus in parent model	off
Port dimensions (-1 for inherited)	-1
Variable-size signal	Inherit
Sample time (-1 for inherited)	-1
Source of initial output value	Dialog
Output when disabled	held
Initial output	[]

3.4.1.1.2. "Demux" (Demux)

Table 3.48. "Demux" Parameters

Parameter	Value
Number of outputs	3
Display option	none
Bus selection mode	off

3.4.1.1.3. "Euler Angles" (Inport)

Table 3.49. "Euler Angles" Parameters

Parameter	Value
Port number	1
Port dimensions (-1 for inherited)	-1
Sample time (-1 for inherited)	-1
Minimum	[]
Maximum	[]

Parameter	Value
Data type	Inherit: auto

3.4.1.1.4. "Mux" (Mux)

Table 3.50. "Mux" Parameters

Parameter	Value
Number of inputs	2
Display option	bar

3.4.1.1.5. "Mux1" (Mux)

Table 3.51. "Mux1" Parameters

Parameter	Value
Number of inputs	2
Display option	bar

3.4.1.1.6. "Mux2" (Mux)

Table 3.52. "Mux2" Parameters

Parameter	Value
Number of inputs	2
Display option	bar

3.4.1.1.7. "Vr Pitch Axes" (Constant)

Table 3.53. "Vr Pitch Axes" Parameters

Parameter	Value
Constant value	[0 0 1]
Interpret vector parameters as 1-D	on
Output minimum	[]
Output maximum	[]

Parameter	Value
Output data type	Inherit: Inherit from 'Constant value'
Lock output data type setting against changes by the fixed-point tools	off
Sample time	inf
Frame period	inf

3.4.1.1.8. "Vr Roll Axes" (Constant)

Table 3.54. "Vr Roll Axes" Parameters

Parameter	Value
Constant value	[1 0 0]
Interpret vector parameters as 1-D	on
Output minimum	[]
Output maximum	[]
Output data type	Inherit: Inherit from 'Constant value'
Lock output data type setting against changes by the fixed-point tools	off
Sample time	inf
Frame period	inf


3.4.1.1.9. "Vr Yaw Axes" (Constant)

Table 3.55. "Vr Yaw Axes" Parameters

Parameter	Value
Constant value	[0 -1 0]
Interpret vector parameters as 1-D	on
Output minimum	[]
Output maximum	[]
Output data type	Inherit: Inherit from 'Constant value'
Lock output data type setting against changes by the fixed-point tools	off
Sample time	inf
Frame period	inf

3.5. PD controller

Figure 3.5. Navigation_loop_Animation/PD controller

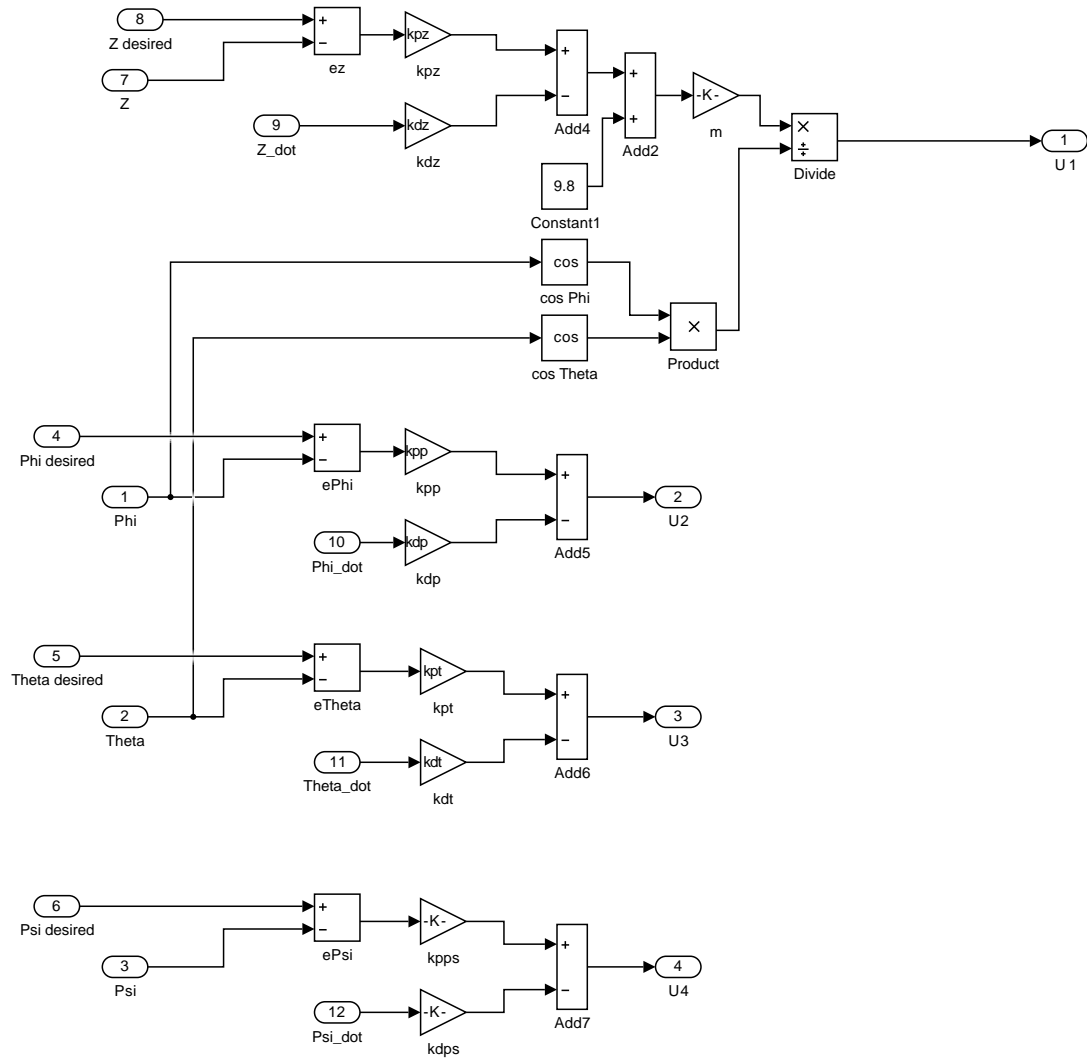

3.5.1. Blocks

3.5.1.1. Parameters

3.5.1.1.1. "Add2" (Sum)

Table 3.56. "Add2" Parameters

Parameter	Value
Icon shape	rectangular
List of signs	++

Parameter	Value
Sum over	All dimensions
Dimension	1
Require all inputs to have the same data type	off
Accumulator data type	Inherit: Inherit via internal rule
Output minimum	[]
Output maximum	[]
Output data type	Inherit: Inherit via internal rule
Lock data type settings against changes by the fixed-point tools	off
Integer rounding mode	Floor
Saturate on integer overflow	off
Sample time (-1 for inherited)	-1

3.5.1.1.2. "Add4" (Sum)

Table 3.57. "Add4" Parameters

Parameter	Value
Icon shape	rectangular
List of signs	+ -
Sum over	All dimensions
Dimension	1
Require all inputs to have the same data type	off
Accumulator data type	Inherit: Inherit via internal rule
Output minimum	[]
Output maximum	[]
Output data type	Inherit: Inherit via internal rule
Lock data type settings against changes by the fixed-point tools	off
Integer rounding mode	Floor
Saturate on integer overflow	off
Sample time (-1 for inherited)	-1

3.5.1.1.3. "Add5" (Sum)**Table 3.58. "Add5" Parameters**

Parameter	Value
Icon shape	rectangular
List of signs	+ -
Sum over	All dimensions
Dimension	1
Require all inputs to have the same data type	off
Accumulator data type	Inherit: Inherit via internal rule
Output minimum	[]
Output maximum	[]
Output data type	Inherit: Inherit via internal rule
Lock data type settings against changes by the fixed-point tools	off
Integer rounding mode	Floor
Saturate on integer overflow	off
Sample time (-1 for inherited)	-1

3.5.1.1.4. "Add6" (Sum)**Table 3.59. "Add6" Parameters**

Parameter	Value
Icon shape	rectangular
List of signs	+ -
Sum over	All dimensions
Dimension	1
Require all inputs to have the same data type	off
Accumulator data type	Inherit: Inherit via internal rule
Output minimum	[]
Output maximum	[]
Output data type	Inherit: Inherit via internal rule
Lock data type settings against changes by the fixed-point tools	off
Integer rounding mode	Floor

Parameter	Value
Saturate on integer overflow	off
Sample time (-1 for inherited)	-1

3.5.1.1.5. "Add7" (Sum)

Table 3.60. "Add7" Parameters

Parameter	Value
Icon shape	rectangular
List of signs	+ -
Sum over	All dimensions
Dimension	1
Require all inputs to have the same data type	off
Accumulator data type	Inherit: Inherit via internal rule
Output minimum	[]
Output maximum	[]
Output data type	Inherit: Inherit via internal rule
Lock data type settings against changes by the fixed-point tools	off
Integer rounding mode	Floor
Saturate on integer overflow	off
Sample time (-1 for inherited)	-1

3.5.1.1.6. "Constant1" (Constant)

Table 3.61. "Constant1" Parameters

Parameter	Value
Constant value	9.8
Interpret vector parameters as 1-D	on
Output minimum	[]
Output maximum	[]
Output data type	Inherit: Inherit from 'Constant value'

Parameter	Value
Lock output data type setting against changes by the fixed-point tools	off
Sample time	inf
Frame period	inf

3.5.1.1.7. "cos Phi" (Trigonometry)

Table 3.62. "cos Phi" Parameters

Parameter	Value
Function	cos
Approximation method	None
Number of iterations	11
Sample time (-1 for inherited)	-1

3.5.1.1.8. "cos Theta" (Trigonometry)

Table 3.63. "cos Theta" Parameters

Parameter	Value
Function	cos
Approximation method	None
Number of iterations	11
Sample time (-1 for inherited)	-1

3.5.1.1.9. "Divide" (Product)

Table 3.64. "Divide" Parameters

Parameter	Value
Number of inputs	*/
Multiplication	Element-wise(.*)
Multiply over	All dimensions
Dimension	1
Require all inputs to have the same data type	off
Output minimum	[]
Output maximum	[]

Parameter	Value
Output data type	Inherit: Inherit via internal rule
Lock output data type setting against changes by the fixed-point tools	off
Integer rounding mode	Floor
Saturate on integer overflow	off
Sample time (-1 for inherited)	-1

3.5.1.1.10. "ePhi" (Sum)

Table 3.65. "ePhi" Parameters

Parameter	Value
Icon shape	rectangular
List of signs	+ -
Sum over	All dimensions
Dimension	1
Require all inputs to have the same data type	off
Accumulator data type	Inherit: Inherit via internal rule
Output minimum	[]
Output maximum	[]
Output data type	Inherit: Inherit via internal rule
Lock data type settings against changes by the fixed-point tools	off
Integer rounding mode	Floor
Saturate on integer overflow	off
Sample time (-1 for inherited)	-1

3.5.1.1.11. "ePsi" (Sum)

Table 3.66. "ePsi" Parameters

Parameter	Value
Icon shape	rectangular
List of signs	+ -

Parameter	Value
Sum over	All dimensions
Dimension	1
Require all inputs to have the same data type	off
Accumulator data type	Inherit: Inherit via internal rule
Output minimum	[]
Output maximum	[]
Output data type	Inherit: Inherit via internal rule
Lock data type settings against changes by the fixed-point tools	off
Integer rounding mode	Floor
Saturate on integer overflow	off
Sample time (-1 for inherited)	-1

3.5.1.1.12. "eTheta" (Sum)

Table 3.67. "eTheta" Parameters

Parameter	Value
Icon shape	rectangular
List of signs	+ -
Sum over	All dimensions
Dimension	1
Require all inputs to have the same data type	off
Accumulator data type	Inherit: Inherit via internal rule
Output minimum	[]
Output maximum	[]
Output data type	Inherit: Inherit via internal rule
Lock data type settings against changes by the fixed-point tools	off
Integer rounding mode	Floor
Saturate on integer overflow	off
Sample time (-1 for inherited)	-1

3.5.1.1.13. "ez" (Sum)**Table 3.68. "ez" Parameters**

Parameter	Value
Icon shape	rectangular
List of signs	+ -
Sum over	All dimensions
Dimension	1
Require all inputs to have the same data type	off
Accumulator data type	Inherit: Inherit via internal rule
Output minimum	[]
Output maximum	[]
Output data type	Inherit: Inherit via internal rule
Lock data type settings against changes by the fixed-point tools	off
Integer rounding mode	Floor
Saturate on integer overflow	off
Sample time (-1 for inherited)	-1

3.5.1.1.14. "kdp" (Gain)**Table 3.69. "kdp" Parameters**

Parameter	Value
Gain	kdp
Multiplication	Element-wise($K \cdot u$)
Parameter minimum	[]
Parameter maximum	[]
Parameter data type	Inherit: Inherit via internal rule
Output minimum	[]
Output maximum	[]
Output data type	Inherit: Inherit via internal rule
Lock output data type setting against changes by the fixed-point tools	off
Integer rounding mode	Floor
Saturate on integer overflow	off

Parameter	Value
Sample time (-1 for inherited)	-1

3.5.1.1.15. "kdps" (Gain)

Table 3.70. "kdps" Parameters

Parameter	Value
Gain	kdps
Multiplication	Element-wise($K \cdot u$)
Parameter minimum	[]
Parameter maximum	[]
Parameter data type	Inherit: Inherit via internal rule
Output minimum	[]
Output maximum	[]
Output data type	Inherit: Inherit via internal rule
Lock output data type setting against changes by the fixed-point tools	off
Integer rounding mode	Floor
Saturate on integer overflow	off
Sample time (-1 for inherited)	-1

3.5.1.1.16. "kdt" (Gain)

Table 3.71. "kdt" Parameters

Parameter	Value
Gain	kdt
Multiplication	Element-wise($K \cdot u$)
Parameter minimum	[]
Parameter maximum	[]
Parameter data type	Inherit: Inherit via internal rule
Output minimum	[]
Output maximum	[]
Output data type	Inherit: Inherit via internal rule
Lock output data type setting against changes by the fixed-point tools	off

Parameter	Value
Integer rounding mode	Floor
Saturate on integer overflow	off
Sample time (-1 for inherited)	-1

3.5.1.1.17. "kdz" (Gain)

Table 3.72. "kdz" Parameters

Parameter	Value
Gain	kdz
Multiplication	Element-wise($K.*u$)
Parameter minimum	[]
Parameter maximum	[]
Parameter data type	Inherit: Inherit via internal rule
Output minimum	[]
Output maximum	[]
Output data type	Inherit: Inherit via internal rule
Lock output data type setting against changes by the fixed-point tools	off
Integer rounding mode	Floor
Saturate on integer overflow	off
Sample time (-1 for inherited)	-1

3.5.1.1.18. "kpp" (Gain)

Table 3.73. "kpp" Parameters

Parameter	Value
Gain	kpp
Multiplication	Element-wise($K.*u$)
Parameter minimum	[]
Parameter maximum	[]
Parameter data type	Inherit: Inherit via internal rule
Output minimum	[]
Output maximum	[]

Parameter	Value
Output data type	Inherit: Inherit via internal rule
Lock output data type setting against changes by the fixed-point tools	off
Integer rounding mode	Floor
Saturate on integer overflow	off
Sample time (-1 for inherited)	-1

3.5.1.1.19. "kpps" (Gain)

Table 3.74. "kpps" Parameters

Parameter	Value
Gain	kpps
Multiplication	Element-wise($K \cdot u$)
Parameter minimum	[]
Parameter maximum	[]
Parameter data type	Inherit: Inherit via internal rule
Output minimum	[]
Output maximum	[]
Output data type	Inherit: Inherit via internal rule
Lock output data type setting against changes by the fixed-point tools	off
Integer rounding mode	Floor
Saturate on integer overflow	off
Sample time (-1 for inherited)	-1

3.5.1.1.20. "kpt" (Gain)

Table 3.75. "kpt" Parameters

Parameter	Value
Gain	kpt
Multiplication	Element-wise($K \cdot u$)
Parameter minimum	[]
Parameter maximum	[]

Parameter	Value
Parameter data type	Inherit: Inherit via internal rule
Output minimum	[]
Output maximum	[]
Output data type	Inherit: Inherit via internal rule
Lock output data type setting against changes by the fixed-point tools	off
Integer rounding mode	Floor
Saturate on integer overflow	off
Sample time (-1 for inherited)	-1

3.5.1.1.21. "kpz" (Gain)

Table 3.76. "kpz" Parameters

Parameter	Value
Gain	kpz
Multiplication	Element-wise(K.*u)
Parameter minimum	[]
Parameter maximum	[]
Parameter data type	Inherit: Inherit via internal rule
Output minimum	[]
Output maximum	[]
Output data type	Inherit: Inherit via internal rule
Lock output data type setting against changes by the fixed-point tools	off
Integer rounding mode	Floor
Saturate on integer overflow	off
Sample time (-1 for inherited)	-1

3.5.1.1.22. "m" (Gain)

Table 3.77. "m" Parameters

Parameter	Value
Gain	1.17

Parameter	Value
Multiplication	Element-wise($K.*u$)
Parameter minimum	[]
Parameter maximum	[]
Parameter data type	Inherit: Inherit via internal rule
Output minimum	[]
Output maximum	[]
Output data type	Inherit: Inherit via internal rule
Lock output data type setting against changes by the fixed-point tools	off
Integer rounding mode	Floor
Saturate on integer overflow	off
Sample time (-1 for inherited)	-1

3.5.1.1.23. "Phi" (Inport)

Table 3.78. "Phi" Parameters

Parameter	Value
Port number	1
Port dimensions (-1 for inherited)	-1
Sample time (-1 for inherited)	-1
Minimum	[]
Maximum	[]
Data type	Inherit: auto

3.5.1.1.24. "Phi desired" (Inport)

Table 3.79. "Phi desired" Parameters

Parameter	Value
Port number	4
Port dimensions (-1 for inherited)	-1
Sample time (-1 for inherited)	-1
Minimum	[]

Parameter	Value
Maximum	[]
Data type	Inherit: auto

3.5.1.1.25. "Phi_dot" (Inport)

Table 3.80. "Phi_dot" Parameters

Parameter	Value
Port number	10
Port dimensions (-1 for inherited)	-1
Sample time (-1 for inherited)	-1
Minimum	[]
Maximum	[]
Data type	Inherit: auto

3.5.1.1.26. "Product" (Product)

Table 3.81. "Product" Parameters

Parameter	Value
Number of inputs	2
Multiplication	Element-wise(.*)
Multiply over	All dimensions
Dimension	1
Require all inputs to have the same data type	off
Output minimum	[]
Output maximum	[]
Output data type	Inherit: Inherit via internal rule
Lock output data type setting against changes by the fixed-point tools	off
Integer rounding mode	Zero
Saturate on integer overflow	off
Sample time (-1 for inherited)	-1

3.5.1.1.27. "Psi" (Inport)**Table 3.82. "Psi" Parameters**

Parameter	Value
Port number	3
Port dimensions (-1 for inherited)	-1
Sample time (-1 for inherited)	-1
Minimum	[]
Maximum	[]
Data type	Inherit: auto

3.5.1.1.28. "Psi desired" (Inport)**Table 3.83. "Psi desired" Parameters**

Parameter	Value
Port number	6
Port dimensions (-1 for inherited)	-1
Sample time (-1 for inherited)	-1
Minimum	[]
Maximum	[]
Data type	Inherit: auto

3.5.1.1.29. "Psi_dot " (Inport)**Table 3.84. "Psi_dot " Parameters**

Parameter	Value
Port number	12
Port dimensions (-1 for inherited)	-1
Sample time (-1 for inherited)	-1
Minimum	[]
Maximum	[]
Data type	Inherit: auto

3.5.1.1.30. "Theta" (Inport)**Table 3.85. "Theta" Parameters**

Parameter	Value
Port number	2
Port dimensions (-1 for inherited)	-1
Sample time (-1 for inherited)	-1
Minimum	[]
Maximum	[]
Data type	Inherit: auto

3.5.1.1.31. "Theta desired" (Inport)**Table 3.86. "Theta desired" Parameters**

Parameter	Value
Port number	5
Port dimensions (-1 for inherited)	-1
Sample time (-1 for inherited)	-1
Minimum	[]
Maximum	[]
Data type	Inherit: auto

3.5.1.1.32. "Theta_dot" (Inport)**Table 3.87. "Theta_dot" Parameters**

Parameter	Value
Port number	11
Port dimensions (-1 for inherited)	-1
Sample time (-1 for inherited)	-1
Minimum	[]
Maximum	[]
Data type	Inherit: auto

3.5.1.1.33. "U1" (Outport)**Table 3.88. "U1" Parameters**

Parameter	Value
Port number	1
Icon display	Port number
Minimum	[]
Maximum	[]
Data type	Inherit: auto
Lock output data type setting against changes by the fixed-point tools	off
Output as nonvirtual bus in parent model	off
Port dimensions (-1 for inherited)	-1
Variable-size signal	Inherit
Sample time (-1 for inherited)	-1
Source of initial output value	Dialog
Output when disabled	held
Initial output	[]

3.5.1.1.34. "U2" (Outport)**Table 3.89. "U2" Parameters**

Parameter	Value
Port number	2
Icon display	Port number
Minimum	[]
Maximum	[]
Data type	Inherit: auto
Lock output data type setting against changes by the fixed-point tools	off
Output as nonvirtual bus in parent model	off
Port dimensions (-1 for inherited)	-1
Variable-size signal	Inherit

Parameter	Value
Sample time (-1 for inherited)	-1
Source of initial output value	Dialog
Output when disabled	held
Initial output	[]

3.5.1.1.35. "U3" (Outport)

Table 3.90. "U3" Parameters

Parameter	Value
Port number	3
Icon display	Port number
Minimum	[]
Maximum	[]
Data type	Inherit: auto
Lock output data type setting against changes by the fixed-point tools	off
Output as nonvirtual bus in parent model	off
Port dimensions (-1 for inherited)	-1
Variable-size signal	Inherit
Sample time (-1 for inherited)	-1
Source of initial output value	Dialog
Output when disabled	held
Initial output	[]

3.5.1.1.36. "U4" (Outport)

Table 3.91. "U4" Parameters

Parameter	Value
Port number	4
Icon display	Port number
Minimum	[]
Maximum	[]

Parameter	Value
Data type	Inherit: auto
Lock output data type setting against changes by the fixed-point tools	off
Output as nonvirtual bus in parent model	off
Port dimensions (-1 for inherited)	-1
Variable-size signal	Inherit
Sample time (-1 for inherited)	-1
Source of initial output value	Dialog
Output when disabled	held
Initial output	[]

3.5.1.1.37. "Z" (Inport)

Table 3.92. "Z" Parameters

Parameter	Value
Port number	7
Port dimensions (-1 for inherited)	-1
Sample time (-1 for inherited)	-1
Minimum	[]
Maximum	[]
Data type	Inherit: auto

3.5.1.1.38. "Z desired" (Inport)

Table 3.93. "Z desired" Parameters

Parameter	Value
Port number	8
Port dimensions (-1 for inherited)	-1
Sample time (-1 for inherited)	-1
Minimum	[]
Maximum	[]

Parameter	Value
Data type	Inherit: auto


3.5.1.1.39. "Z_dot" (Inport)

Table 3.94. "Z_dot" Parameters

Parameter	Value
Port number	9
Port dimensions (-1 for inherited)	-1
Sample time (-1 for inherited)	-1
Minimum	[]
Maximum	[]
Data type	Inherit: auto

3.6. pitch_dot_dot

Figure 3.6. Navigation_loop_Animation/Dynamic model/pitch_dot_dot

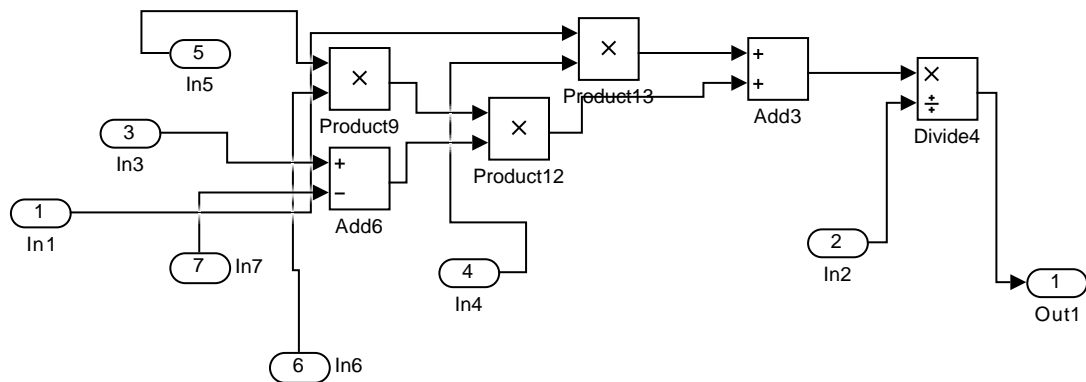

3.6.1. Blocks

3.6.1.1. Parameters

3.6.1.1.1. "Add3" (Sum)

Table 3.95. "Add3" Parameters

Parameter	Value
Icon shape	rectangular
List of signs	++

Parameter	Value
Sum over	All dimensions
Dimension	1
Require all inputs to have the same data type	off
Accumulator data type	Inherit: Inherit via internal rule
Output minimum	[]
Output maximum	[]
Output data type	Inherit: Inherit via internal rule
Lock data type settings against changes by the fixed-point tools	off
Integer rounding mode	Floor
Saturate on integer overflow	off
Sample time (-1 for inherited)	-1

3.6.1.1.2. "Add6" (Sum)

Table 3.96. "Add6" Parameters

Parameter	Value
Icon shape	rectangular
List of signs	+ -
Sum over	All dimensions
Dimension	1
Require all inputs to have the same data type	off
Accumulator data type	Inherit: Inherit via internal rule
Output minimum	[]
Output maximum	[]
Output data type	Inherit: Inherit via internal rule
Lock data type settings against changes by the fixed-point tools	off
Integer rounding mode	Floor
Saturate on integer overflow	off
Sample time (-1 for inherited)	-1

3.6.1.1.3. "Divide4" (Product)

Table 3.97. "Divide4" Parameters

Parameter	Value
Number of inputs	*/
Multiplication	Element-wise(.*)
Multiply over	All dimensions
Dimension	1
Require all inputs to have the same data type	off
Output minimum	[]
Output maximum	[]
Output data type	Inherit: Inherit via internal rule
Lock output data type setting against changes by the fixed-point tools	off
Integer rounding mode	Floor
Saturate on integer overflow	off
Sample time (-1 for inherited)	-1

3.6.1.1.4. "In1" (Inport)

Table 3.98. "In1" Parameters

Parameter	Value
Port number	1
Port dimensions (-1 for inherited)	-1
Sample time (-1 for inherited)	-1
Minimum	[]
Maximum	[]
Data type	Inherit: auto

3.6.1.1.5. "In2" (Inport)

Table 3.99. "In2" Parameters

Parameter	Value
Port number	2

Parameter	Value
Port dimensions (-1 for inherited)	-1
Sample time (-1 for inherited)	-1
Minimum	[]
Maximum	[]
Data type	Inherit: auto

3.6.1.1.6. "In3" (Inport)

Table 3.100. "In3" Parameters

Parameter	Value
Port number	3
Port dimensions (-1 for inherited)	-1
Sample time (-1 for inherited)	-1
Minimum	[]
Maximum	[]
Data type	Inherit: auto

3.6.1.1.7. "In4" (Inport)

Table 3.101. "In4" Parameters

Parameter	Value
Port number	4
Port dimensions (-1 for inherited)	-1
Sample time (-1 for inherited)	-1
Minimum	[]
Maximum	[]
Data type	Inherit: auto

3.6.1.1.8. "In5" (Inport)

Table 3.102. "In5" Parameters

Parameter	Value
Port number	5

Parameter	Value
Port dimensions (-1 for inherited)	-1
Sample time (-1 for inherited)	-1
Minimum	[]
Maximum	[]
Data type	Inherit: auto

3.6.1.1.9. "In6" (Inport)

Table 3.103. "In6" Parameters

Parameter	Value
Port number	6
Port dimensions (-1 for inherited)	-1
Sample time (-1 for inherited)	-1
Minimum	[]
Maximum	[]
Data type	Inherit: auto

3.6.1.1.10. "In7" (Inport)

Table 3.104. "In7" Parameters

Parameter	Value
Port number	7
Port dimensions (-1 for inherited)	-1
Sample time (-1 for inherited)	-1
Minimum	[]
Maximum	[]
Data type	Inherit: auto

3.6.1.1.11. "Out1" (Outport)

Table 3.105. "Out1" Parameters

Parameter	Value
Port number	1

Parameter	Value
Icon display	Port number
Minimum	[]
Maximum	[]
Data type	Inherit: auto
Lock output data type setting against changes by the fixed-point tools	off
Output as nonvirtual bus in parent model	off
Port dimensions (-1 for inherited)	-1
Variable-size signal	Inherit
Sample time (-1 for inherited)	-1
Source of initial output value	Dialog
Output when disabled	held
Initial output	[]

3.6.1.1.12. "Product12" (Product)

Table 3.106. "Product12" Parameters

Parameter	Value
Number of inputs	2
Multiplication	Element-wise(.*)
Multiply over	All dimensions
Dimension	1
Require all inputs to have the same data type	off
Output minimum	[]
Output maximum	[]
Output data type	Inherit: Inherit via internal rule
Lock output data type setting against changes by the fixed-point tools	off
Integer rounding mode	Floor
Saturate on integer overflow	off
Sample time (-1 for inherited)	-1

3.6.1.1.13. "Product13" (Product)

Table 3.107. "Product13" Parameters

Parameter	Value
Number of inputs	2
Multiplication	Element-wise(.*)
Multiply over	All dimensions
Dimension	1
Require all inputs to have the same data type	off
Output minimum	[]
Output maximum	[]
Output data type	Inherit: Inherit via internal rule
Lock output data type setting against changes by the fixed-point tools	off
Integer rounding mode	Floor
Saturate on integer overflow	off
Sample time (-1 for inherited)	-1

3.6.1.1.14. "Product9" (Product)


Table 3.108. "Product9" Parameters

Parameter	Value
Number of inputs	2
Multiplication	Element-wise(.*)
Multiply over	All dimensions
Dimension	1
Require all inputs to have the same data type	off
Output minimum	[]
Output maximum	[]
Output data type	Inherit: Inherit via internal rule
Lock output data type setting against changes by the fixed-point tools	off
Integer rounding mode	Floor

Parameter	Value
Saturate on integer overflow	off
Sample time (-1 for inherited)	-1

3.7. Position controller

Figure 3.7. Navigation_loop_Animation/Position controller

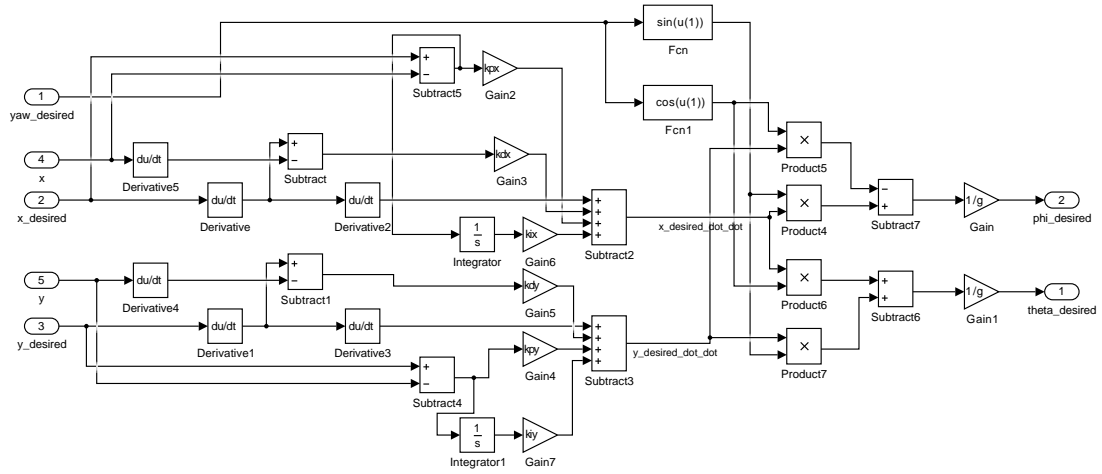

3.7.1. Blocks

3.7.1.1. Parameters

3.7.1.1.1. "Derivative" (Derivative)

Table 3.109. "Derivative" Parameters

Parameter	Value
Coefficient c in the transfer function approximation $s/(c*s + 1)$ used for linearization	inf

3.7.1.1.2. "Derivative1" (Derivative)

Table 3.110. "Derivative1" Parameters

Parameter	Value
Coefficient c in the transfer function approxi-	inf

Parameter	Value
on $s/(c*s + 1)$ used for linearization	

3.7.1.1.3. "Derivative2" (Derivative)

Table 3.111. "Derivative2" Parameters

Parameter	Value
Coefficient c in the transfer function approximation $s/(c*s + 1)$ used for linearization	inf

3.7.1.1.4. "Derivative3" (Derivative)

Table 3.112. "Derivative3" Parameters

Parameter	Value
Coefficient c in the transfer function approximation $s/(c*s + 1)$ used for linearization	inf

3.7.1.1.5. "Derivative4" (Derivative)

Table 3.113. "Derivative4" Parameters

Parameter	Value
Coefficient c in the transfer function approximation $s/(c*s + 1)$ used for linearization	inf

3.7.1.1.6. "Derivative5" (Derivative)

Table 3.114. "Derivative5" Parameters

Parameter	Value
Coefficient c in the transfer function approximi-	inf

Parameter	Value
on $s/(c*s + 1)$ used for linearization	

3.7.1.1.7. "Fcn" (Fcn)

Table 3.115. "Fcn" Parameters

Parameter	Value
Expression	$\sin(u(1))$
Sample time (-1 for inherited)	-1

3.7.1.1.8. "Fcn1" (Fcn)

Table 3.116. "Fcn1" Parameters

Parameter	Value
Expression	$\cos(u(1))$
Sample time (-1 for inherited)	-1

3.7.1.1.9. "Gain" (Gain)

Table 3.117. "Gain" Parameters

Parameter	Value
Gain	$1/g$
Multiplication	Element-wise($K.*u$)
Parameter minimum	\square
Parameter maximum	\square
Parameter data type	Inherit: Inherit via internal rule
Output minimum	\square
Output maximum	\square
Output data type	Inherit: Inherit via internal rule
Lock output data type setting against changes by the fixed-point tools	off
Integer rounding mode	Floor
Saturate on integer overflow	off

Parameter	Value
Sample time (-1 for inherited)	-1

3.7.1.1.10. "Gain1" (Gain)

Table 3.118. "Gain1" Parameters

Parameter	Value
Gain	1/g
Multiplication	Element-wise($K.*u$)
Parameter minimum	[]
Parameter maximum	[]
Parameter data type	Inherit: Inherit via internal rule
Output minimum	[]
Output maximum	[]
Output data type	Inherit: Inherit via internal rule
Lock output data type setting against changes by the fixed-point tools	off
Integer rounding mode	Floor
Saturate on integer overflow	off
Sample time (-1 for inherited)	-1

3.7.1.1.11. "Gain2" (Gain)

Table 3.119. "Gain2" Parameters

Parameter	Value
Gain	kpx
Multiplication	Element-wise($K.*u$)
Parameter minimum	[]
Parameter maximum	[]
Parameter data type	Inherit: Inherit via internal rule
Output minimum	[]
Output maximum	[]
Output data type	Inherit: Inherit via internal rule
Lock output data type setting against changes by the fixed-point tools	off

Parameter	Value
Integer rounding mode	Floor
Saturate on integer overflow	off
Sample time (-1 for inherited)	-1

3.7.1.1.12. "Gain3" (Gain)

Table 3.120. "Gain3" Parameters

Parameter	Value
Gain	kdx
Multiplication	Element-wise($K \cdot u$)
Parameter minimum	[]
Parameter maximum	[]
Parameter data type	Inherit: Inherit via internal rule
Output minimum	[]
Output maximum	[]
Output data type	Inherit: Inherit via internal rule
Lock output data type setting against changes by the fixed-point tools	off
Integer rounding mode	Floor
Saturate on integer overflow	off
Sample time (-1 for inherited)	-1

3.7.1.1.13. "Gain4" (Gain)

Table 3.121. "Gain4" Parameters

Parameter	Value
Gain	kpy
Multiplication	Element-wise($K \cdot u$)
Parameter minimum	[]
Parameter maximum	[]
Parameter data type	Inherit: Inherit via internal rule
Output minimum	[]
Output maximum	[]

Parameter	Value
Output data type	Inherit: Inherit via internal rule
Lock output data type setting against changes by the fixed-point tools	off
Integer rounding mode	Floor
Saturate on integer overflow	off
Sample time (-1 for inherited)	-1

3.7.1.1.14. "Gain5" (Gain)

Table 3.122. "Gain5" Parameters

Parameter	Value
Gain	kdy
Multiplication	Element-wise(K.*u)
Parameter minimum	[]
Parameter maximum	[]
Parameter data type	Inherit: Inherit via internal rule
Output minimum	[]
Output maximum	[]
Output data type	Inherit: Inherit via internal rule
Lock output data type setting against changes by the fixed-point tools	off
Integer rounding mode	Floor
Saturate on integer overflow	off
Sample time (-1 for inherited)	-1

3.7.1.1.15. "Gain6" (Gain)

Table 3.123. "Gain6" Parameters

Parameter	Value
Gain	kix
Multiplication	Element-wise(K.*u)
Parameter minimum	[]
Parameter maximum	[]

Parameter	Value
Parameter data type	Inherit: Inherit via internal rule
Output minimum	[]
Output maximum	[]
Output data type	Inherit: Inherit via internal rule
Lock output data type setting against changes by the fixed-point tools	off
Integer rounding mode	Floor
Saturate on integer overflow	off
Sample time (-1 for inherited)	-1

3.7.1.1.16. "Gain7" (Gain)

Table 3.124. "Gain7" Parameters

Parameter	Value
Gain	kiy
Multiplication	Element-wise(K.*u)
Parameter minimum	[]
Parameter maximum	[]
Parameter data type	Inherit: Inherit via internal rule
Output minimum	[]
Output maximum	[]
Output data type	Inherit: Inherit via internal rule
Lock output data type setting against changes by the fixed-point tools	off
Integer rounding mode	Floor
Saturate on integer overflow	off
Sample time (-1 for inherited)	-1

3.7.1.1.17. "Integrator" (Integrator)

Table 3.125. "Integrator" Parameters

Parameter	Value
External reset	none

Parameter	Value
Initial condition source	internal
Initial condition	0
Limit output	off
Upper saturation limit	inf
Lower saturation limit	-inf
Show saturation port	off
Show state port	off
Ignore limit and reset when linearizing	off
Enable zero-crossing detection	on
State Name (e.g., 'position')	"

3.7.1.1.18. "Integrator1" (Integrator)

Table 3.126. "Integrator1" Parameters

Parameter	Value
External reset	none
Initial condition source	internal
Initial condition	0
Limit output	off
Upper saturation limit	inf
Lower saturation limit	-inf
Show saturation port	off
Show state port	off
Ignore limit and reset when linearizing	off
Enable zero-crossing detection	on
State Name (e.g., 'position')	"

3.7.1.1.19. "phi_desired" (Outport)

Table 3.127. "phi_desired" Parameters

Parameter	Value
Port number	2

Parameter	Value
Icon display	Port number
Minimum	[]
Maximum	[]
Data type	Inherit: auto
Lock output data type setting against changes by the fixed-point tools	off
Output as nonvirtual bus in parent model	off
Port dimensions (-1 for inherited)	-1
Variable-size signal	Inherit
Sample time (-1 for inherited)	-1
Source of initial output value	Dialog
Output when disabled	held
Initial output	[]

3.7.1.1.20. "Product4" (Product)

Table 3.128. "Product4" Parameters

Parameter	Value
Number of inputs	2
Multiplication	Element-wise(.*)
Multiply over	All dimensions
Dimension	1
Require all inputs to have the same data type	off
Output minimum	[]
Output maximum	[]
Output data type	Inherit: Inherit via internal rule
Lock output data type setting against changes by the fixed-point tools	off
Integer rounding mode	Floor
Saturate on integer overflow	off
Sample time (-1 for inherited)	-1

3.7.1.1.21. "Product5" (Product)

Table 3.129. "Product5" Parameters

Parameter	Value
Number of inputs	2
Multiplication	Element-wise(.*)
Multiply over	All dimensions
Dimension	1
Require all inputs to have the same data type	off
Output minimum	[]
Output maximum	[]
Output data type	Inherit: Inherit via internal rule
Lock output data type setting against changes by the fixed-point tools	off
Integer rounding mode	Floor
Saturate on integer overflow	off
Sample time (-1 for inherited)	-1

3.7.1.1.22. "Product6" (Product)

Table 3.130. "Product6" Parameters

Parameter	Value
Number of inputs	2
Multiplication	Element-wise(.*)
Multiply over	All dimensions
Dimension	1
Require all inputs to have the same data type	off
Output minimum	[]
Output maximum	[]
Output data type	Inherit: Inherit via internal rule
Lock output data type setting against changes by the fixed-point tools	off
Integer rounding mode	Floor

Parameter	Value
Saturate on integer overflow	off
Sample time (-1 for inherited)	-1

3.7.1.1.23. "Product7" (Product)

Table 3.131. "Product7" Parameters

Parameter	Value
Number of inputs	2
Multiplication	Element-wise(.*)
Multiply over	All dimensions
Dimension	1
Require all inputs to have the same data type	off
Output minimum	[]
Output maximum	[]
Output data type	Inherit: Inherit via internal rule
Lock output data type setting against changes by the fixed-point tools	off
Integer rounding mode	Floor
Saturate on integer overflow	off
Sample time (-1 for inherited)	-1

3.7.1.1.24. "Subtract" (Sum)

Table 3.132. "Subtract" Parameters

Parameter	Value
Icon shape	rectangular
List of signs	+ -
Sum over	All dimensions
Dimension	1
Require all inputs to have the same data type	off
Accumulator data type	Inherit: Inherit via internal rule
Output minimum	[]

Parameter	Value
Output maximum	[]
Output data type	Inherit: Inherit via internal rule
Lock data type settings against changes by the fixed-point tools	off
Integer rounding mode	Floor
Saturate on integer overflow	off
Sample time (-1 for inherited)	-1

3.7.1.1.25. "Subtract1" (Sum)

Table 3.133. "Subtract1" Parameters

Parameter	Value
Icon shape	rectangular
List of signs	+ -
Sum over	All dimensions
Dimension	1
Require all inputs to have the same data type	off
Accumulator data type	Inherit: Inherit via internal rule
Output minimum	[]
Output maximum	[]
Output data type	Inherit: Inherit via internal rule
Lock data type settings against changes by the fixed-point tools	off
Integer rounding mode	Floor
Saturate on integer overflow	off
Sample time (-1 for inherited)	-1

3.7.1.1.26. "Subtract2" (Sum)

Table 3.134. "Subtract2" Parameters

Parameter	Value
Icon shape	rectangular

Parameter	Value
List of signs	++++
Sum over	All dimensions
Dimension	1
Require all inputs to have the same data type	off
Accumulator data type	Inherit: Inherit via internal rule
Output minimum	[]
Output maximum	[]
Output data type	Inherit: Inherit via internal rule
Lock data type settings against changes by the fixed-point tools	off
Integer rounding mode	Floor
Saturate on integer overflow	off
Sample time (-1 for inherited)	-1

3.7.1.1.27. "Subtract3" (Sum)

Table 3.135. "Subtract3" Parameters

Parameter	Value
Icon shape	rectangular
List of signs	++++
Sum over	All dimensions
Dimension	1
Require all inputs to have the same data type	off
Accumulator data type	Inherit: Inherit via internal rule
Output minimum	[]
Output maximum	[]
Output data type	Inherit: Inherit via internal rule
Lock data type settings against changes by the fixed-point tools	off
Integer rounding mode	Floor
Saturate on integer overflow	off
Sample time (-1 for inherited)	-1

3.7.1.1.28. "Subtract4" (Sum)**Table 3.136. "Subtract4" Parameters**

Parameter	Value
Icon shape	rectangular
List of signs	+ -
Sum over	All dimensions
Dimension	1
Require all inputs to have the same data type	off
Accumulator data type	Inherit: Inherit via internal rule
Output minimum	[]
Output maximum	[]
Output data type	Inherit: Inherit via internal rule
Lock data type settings against changes by the fixed-point tools	off
Integer rounding mode	Floor
Saturate on integer overflow	off
Sample time (-1 for inherited)	-1

3.7.1.1.29. "Subtract5" (Sum)**Table 3.137. "Subtract5" Parameters**

Parameter	Value
Icon shape	rectangular
List of signs	+ -
Sum over	All dimensions
Dimension	1
Require all inputs to have the same data type	off
Accumulator data type	Inherit: Inherit via internal rule
Output minimum	[]
Output maximum	[]
Output data type	Inherit: Inherit via internal rule
Lock data type settings against changes by the fixed-point tools	off

Parameter	Value
Integer rounding mode	Floor
Saturate on integer overflow	off
Sample time (-1 for inherited)	-1

3.7.1.1.30. "Subtract6" (Sum)

Table 3.138. "Subtract6" Parameters

Parameter	Value
Icon shape	rectangular
List of signs	++
Sum over	All dimensions
Dimension	1
Require all inputs to have the same data type	off
Accumulator data type	Inherit: Inherit via internal rule
Output minimum	[]
Output maximum	[]
Output data type	Inherit: Inherit via internal rule
Lock data type settings against changes by the fixed-point tools	off
Integer rounding mode	Floor
Saturate on integer overflow	off
Sample time (-1 for inherited)	-1

3.7.1.1.31. "Subtract7" (Sum)

Table 3.139. "Subtract7" Parameters

Parameter	Value
Icon shape	rectangular
List of signs	-+
Sum over	All dimensions
Dimension	1

Parameter	Value
Require all inputs to have the same data type	off
Accumulator data type	Inherit: Inherit via internal rule
Output minimum	[]
Output maximum	[]
Output data type	Inherit: Inherit via internal rule
Lock data type settings against changes by the fixed-point tools	off
Integer rounding mode	Floor
Saturate on integer overflow	off
Sample time (-1 for inherited)	-1

3.7.1.1.32. "theta_desired" (Outport)

Table 3.140. "theta_desired" Parameters

Parameter	Value
Port number	1
Icon display	Port number
Minimum	[]
Maximum	[]
Data type	Inherit: auto
Lock output data type setting against changes by the fixed-point tools	off
Output as nonvirtual bus in parent model	off
Port dimensions (-1 for inherited)	-1
Variable-size signal	Inherit
Sample time (-1 for inherited)	-1
Source of initial output value	Dialog
Output when disabled	held
Initial output	[]

3.7.1.1.33. "x" (Inport)**Table 3.141. "x" Parameters**

Parameter	Value
Port number	4
Port dimensions (-1 for inherited)	-1
Sample time (-1 for inherited)	-1
Minimum	[]
Maximum	[]
Data type	Inherit: auto

3.7.1.1.34. "x_desired" (Inport)**Table 3.142. "x_desired" Parameters**

Parameter	Value
Port number	2
Port dimensions (-1 for inherited)	-1
Sample time (-1 for inherited)	-1
Minimum	[]
Maximum	[]
Data type	Inherit: auto

3.7.1.1.35. "y" (Inport)**Table 3.143. "y" Parameters**

Parameter	Value
Port number	5
Port dimensions (-1 for inherited)	-1
Sample time (-1 for inherited)	-1
Minimum	[]
Maximum	[]

Parameter	Value
Data type	Inherit: auto

3.7.1.1.36. "y_desired" (Inport)

Table 3.144. "y_desired" Parameters

Parameter	Value
Port number	3
Port dimensions (-1 for inherited)	-1
Sample time (-1 for inherited)	-1
Minimum	[]
Maximum	[]
Data type	Inherit: auto


3.7.1.1.37. "yaw_desired" (Inport)

Table 3.145. "yaw_desired" Parameters

Parameter	Value
Port number	1
Port dimensions (-1 for inherited)	-1
Sample time (-1 for inherited)	-1
Minimum	[]
Maximum	[]
Data type	Inherit: auto

3.8. property

Figure 3.8. Navigation_loop_Animation/property

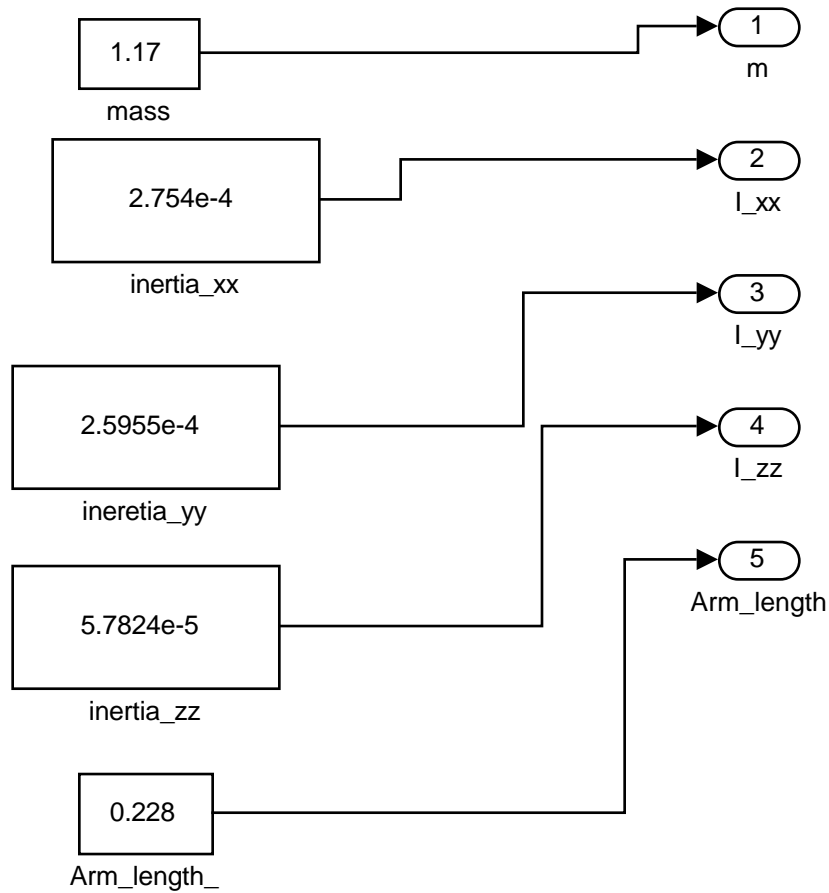

3.8.1. Blocks

3.8.1.1. Parameters

3.8.1.1.1. "Arm_length " (Outport)

Table 3.146. "Arm_length " Parameters

Parameter	Value
Port number	5
Icon display	Port number
Minimum	[]
Maximum	[]
Data type	Inherit: auto

Parameter	Value
Lock output data type setting against changes by the fixed-point tools	off
Output as nonvirtual bus in parent model	off
Port dimensions (-1 for inherited)	-1
Variable-size signal	Inherit
Sample time (-1 for inherited)	-1
Source of initial output value	Dialog
Output when disabled	held
Initial output	[]

3.8.1.1.2. "Arm_length_" (Constant)

Table 3.147. "Arm_length_" Parameters

Parameter	Value
Constant value	0.228
Interpret vector parameters as 1-D	on
Output minimum	[]
Output maximum	[]
Output data type	Inherit: Inherit from 'Constant value'
Lock output data type setting against changes by the fixed-point tools	off
Sample time	inf
Frame period	inf

3.8.1.1.3. "I_xx" (Outport)

Table 3.148. "I_xx" Parameters

Parameter	Value
Port number	2
Icon display	Port number
Minimum	[]

Parameter	Value
Maximum	[]
Data type	Inherit: auto
Lock output data type setting against changes by the fixed-point tools	off
Output as nonvirtual bus in parent model	off
Port dimensions (-1 for inherited)	-1
Variable-size signal	Inherit
Sample time (-1 for inherited)	-1
Source of initial output value	Dialog
Output when disabled	held
Initial output	[]

3.8.1.1.4. "I_yy" (Outport)

Table 3.149. "I_yy" Parameters

Parameter	Value
Port number	3
Icon display	Port number
Minimum	[]
Maximum	[]
Data type	Inherit: auto
Lock output data type setting against changes by the fixed-point tools	off
Output as nonvirtual bus in parent model	off
Port dimensions (-1 for inherited)	-1
Variable-size signal	Inherit
Sample time (-1 for inherited)	-1
Source of initial output value	Dialog
Output when disabled	held
Initial output	[]

3.8.1.1.5. "I_zz" (Outport)

Table 3.150. "I_zz" Parameters

Parameter	Value
Port number	4
Icon display	Port number
Minimum	[]
Maximum	[]
Data type	Inherit: auto
Lock output data type setting against changes by the fixed-point tools	off
Output as nonvirtual bus in parent model	off
Port dimensions (-1 for inherited)	-1
Variable-size signal	Inherit
Sample time (-1 for inherited)	-1
Source of initial output value	Dialog
Output when disabled	held
Initial output	[]

3.8.1.1.6. "ineretia_yy" (Constant)

Table 3.151. "ineretia_yy" Parameters

Parameter	Value
Constant value	2.5955e-4
Interpret vector parameters as 1-D	on
Output minimum	[]
Output maximum	[]
Output data type	Inherit: Inherit from 'Constant value'
Lock output data type setting against changes by the fixed-point tools	off
Sample time	inf
Frame period	inf

3.8.1.1.7. "inertia_xx" (Constant)

Table 3.152. "inertia_xx" Parameters

Parameter	Value
Constant value	2.754e-4
Interpret vector parameters as 1-D	on
Output minimum	[]
Output maximum	[]
Output data type	Inherit: Inherit from 'Constant value'
Lock output data type setting against changes by the fixed-point tools	off
Sample time	inf
Frame period	inf

3.8.1.1.8. "inertia_zz" (Constant)

Table 3.153. "inertia_zz" Parameters

Parameter	Value
Constant value	5.7824e-5
Interpret vector parameters as 1-D	on
Output minimum	[]
Output maximum	[]
Output data type	Inherit: Inherit from 'Constant value'
Lock output data type setting against changes by the fixed-point tools	off
Sample time	inf
Frame period	inf

3.8.1.1.9. "m" (Outport)

Table 3.154. "m" Parameters

Parameter	Value
Port number	1

Parameter	Value
Icon display	Port number
Minimum	[]
Maximum	[]
Data type	Inherit: auto
Lock output data type setting against changes by the fixed-point tools	off
Output as nonvirtual bus in parent model	off
Port dimensions (-1 for inherited)	-1
Variable-size signal	Inherit
Sample time (-1 for inherited)	-1
Source of initial output value	Dialog
Output when disabled	held
Initial output	[]


3.8.1.1.10. "mass" (Constant)

Table 3.155. "mass" Parameters

Parameter	Value
Constant value	1.17
Interpret vector parameters as 1-D	on
Output minimum	[]
Output maximum	[]
Output data type	Inherit: Inherit from 'Constant value'
Lock output data type setting against changes by the fixed-point tools	off
Sample time	inf
Frame period	inf

3.9. q0

Figure 3.9. Navigation_loop_Animation/Euler to VR/Quaternion Multiplication (Pitch & Yaw)/q0

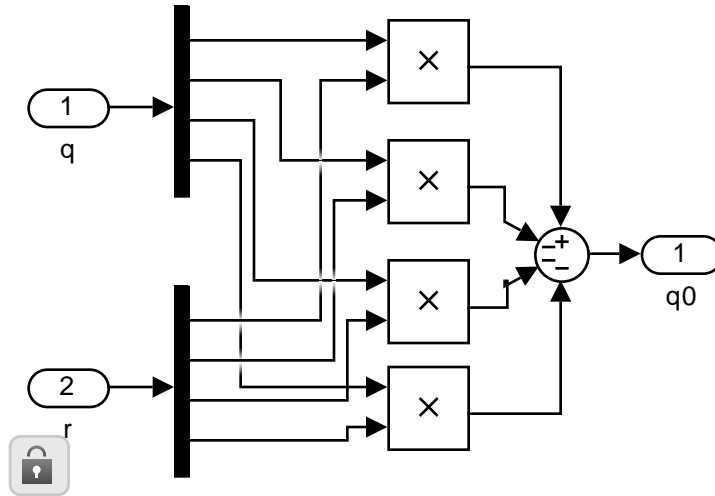

3.9.1. Blocks

3.9.1.1. Parameters

3.9.1.1.1. "Demux" (Demux)

Table 3.156. "Demux" Parameters

Parameter	Value
Number of outputs	4
Display option	bar
Bus selection mode	off

3.9.1.1.2. "Demux1" (Demux)

Table 3.157. "Demux1" Parameters

Parameter	Value
Number of outputs	4
Display option	bar
Bus selection mode	off

3.9.1.1.3. "Product" (Product)**Table 3.158. "Product" Parameters**

Parameter	Value
Number of inputs	2
Multiplication	Element-wise(.*)
Multiply over	All dimensions
Dimension	1
Require all inputs to have the same data type	off
Output minimum	[]
Output maximum	[]
Output data type	Inherit: Inherit via internal rule
Lock output data type setting against changes by the fixed-point tools	off
Integer rounding mode	Zero
Saturate on integer overflow	off
Sample time (-1 for inherited)	-1

3.9.1.1.4. "Product1" (Product)**Table 3.159. "Product1" Parameters**

Parameter	Value
Number of inputs	2
Multiplication	Element-wise(.*)
Multiply over	All dimensions
Dimension	1
Require all inputs to have the same data type	off
Output minimum	[]
Output maximum	[]
Output data type	Inherit: Inherit via internal rule
Lock output data type setting against changes by the fixed-point tools	off
Integer rounding mode	Zero
Saturate on integer overflow	off

Parameter	Value
Sample time (-1 for inherited)	-1

3.9.1.1.5. "Product2" (Product)

Table 3.160. "Product2" Parameters

Parameter	Value
Number of inputs	2
Multiplication	Element-wise(.*)
Multiply over	All dimensions
Dimension	1
Require all inputs to have the same data type	off
Output minimum	[]
Output maximum	[]
Output data type	Inherit: Inherit via internal rule
Lock output data type setting against changes by the fixed-point tools	off
Integer rounding mode	Zero
Saturate on integer overflow	off
Sample time (-1 for inherited)	-1

3.9.1.1.6. "Product3" (Product)

Table 3.161. "Product3" Parameters

Parameter	Value
Number of inputs	2
Multiplication	Element-wise(.*)
Multiply over	All dimensions
Dimension	1
Require all inputs to have the same data type	off
Output minimum	[]
Output maximum	[]
Output data type	Inherit: Inherit via internal rule

Parameter	Value
Lock output data type setting against changes by the fixed-point tools	off
Integer rounding mode	Zero
Saturate on integer overflow	off
Sample time (-1 for inherited)	-1

3.9.1.1.7. "q" (Inport)

Table 3.162. "q" Parameters

Parameter	Value
Port number	1
Port dimensions (-1 for inherited)	-1
Sample time (-1 for inherited)	-1
Minimum	[]
Maximum	[]
Data type	Inherit: auto

3.9.1.1.8. "q0" (Outport)

Table 3.163. "q0" Parameters

Parameter	Value
Port number	1
Icon display	Port number
Minimum	[]
Maximum	[]
Data type	Inherit: auto
Lock output data type setting against changes by the fixed-point tools	off
Output as nonvirtual bus in parent model	off
Port dimensions (-1 for inherited)	-1
Variable-size signal	Inherit

Parameter	Value
Sample time (-1 for inherited)	-1
Source of initial output value	Dialog
Output when disabled	held
Initial output	[]

3.9.1.1.9. "r" (Inport)

Table 3.164. "r" Parameters

Parameter	Value
Port number	2
Port dimensions (-1 for inherited)	-1
Sample time (-1 for inherited)	-1
Minimum	[]
Maximum	[]
Data type	Inherit: auto

3.9.1.1.10. "Sum" (Sum)


Table 3.165. "Sum" Parameters

Parameter	Value
Icon shape	round
List of signs	+---
Sum over	All dimensions
Dimension	1
Require all inputs to have the same data type	off
Accumulator data type	Inherit: Inherit via internal rule
Output minimum	[]
Output maximum	[]
Output data type	Inherit: Inherit via internal rule
Lock data type settings against changes by the fixed-point tools	off
Integer rounding mode	Floor

Parameter	Value
Saturate on integer overflow	off
Sample time (-1 for inherited)	-1

3.10. q1

Figure 3.10. Navigation_loop_Animation/Euler to VR/Quaternion Multiplication (Pitch & Yaw)/q1

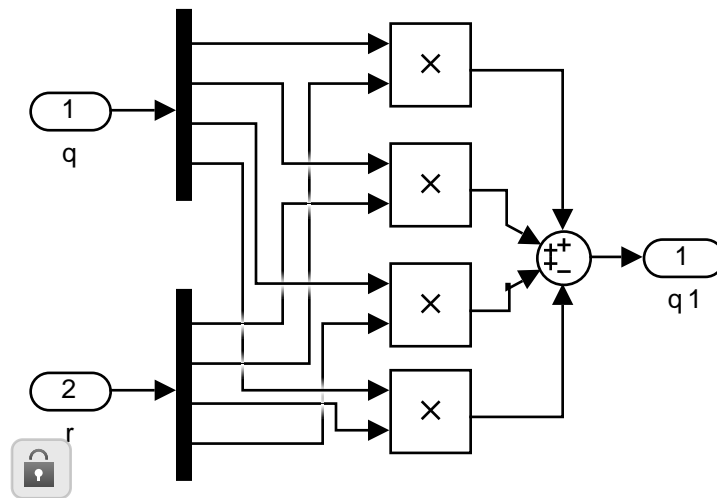

3.10.1. Blocks

3.10.1.1. Parameters

3.10.1.1.1. "Demux" (Demux)

Table 3.166. "Demux" Parameters

Parameter	Value
Number of outputs	4
Display option	bar
Bus selection mode	off

3.10.1.1.2. "Demux1" (Demux)

Table 3.167. "Demux1" Parameters

Parameter	Value
Number of outputs	4

Parameter	Value
Display option	bar
Bus selection mode	off

3.10.1.1.3. "Product" (Product)

Table 3.168. "Product" Parameters

Parameter	Value
Number of inputs	2
Multiplication	Element-wise(.*)
Multiply over	All dimensions
Dimension	1
Require all inputs to have the same data type	off
Output minimum	[]
Output maximum	[]
Output data type	Inherit: Inherit via internal rule
Lock output data type setting against changes by the fixed-point tools	off
Integer rounding mode	Zero
Saturate on integer overflow	off
Sample time (-1 for inherited)	-1

3.10.1.1.4. "Product1" (Product)

Table 3.169. "Product1" Parameters

Parameter	Value
Number of inputs	2
Multiplication	Element-wise(.*)
Multiply over	All dimensions
Dimension	1
Require all inputs to have the same data type	off
Output minimum	[]
Output maximum	[]
Output data type	Inherit: Inherit via internal rule

Parameter	Value
Lock output data type setting against changes by the fixed-point tools	off
Integer rounding mode	Zero
Saturate on integer overflow	off
Sample time (-1 for inherited)	-1

3.10.1.1.5. "Product2" (Product)

Table 3.170. "Product2" Parameters

Parameter	Value
Number of inputs	2
Multiplication	Element-wise(.*)
Multiply over	All dimensions
Dimension	1
Require all inputs to have the same data type	off
Output minimum	[]
Output maximum	[]
Output data type	Inherit: Inherit via internal rule
Lock output data type setting against changes by the fixed-point tools	off
Integer rounding mode	Zero
Saturate on integer overflow	off
Sample time (-1 for inherited)	-1

3.10.1.1.6. "Product3" (Product)

Table 3.171. "Product3" Parameters

Parameter	Value
Number of inputs	2
Multiplication	Element-wise(.*)
Multiply over	All dimensions
Dimension	1

Parameter	Value
Require all inputs to have the same data type	off
Output minimum	[]
Output maximum	[]
Output data type	Inherit: Inherit via internal rule
Lock output data type setting against changes by the fixed-point tools	off
Integer rounding mode	Zero
Saturate on integer overflow	off
Sample time (-1 for inherited)	-1

3.10.1.1.7. "q" (Inport)

Table 3.172. "q" Parameters

Parameter	Value
Port number	1
Port dimensions (-1 for inherited)	-1
Sample time (-1 for inherited)	-1
Minimum	[]
Maximum	[]
Data type	Inherit: auto

3.10.1.1.8. "q1" (Outport)

Table 3.173. "q1" Parameters

Parameter	Value
Port number	1
Icon display	Port number
Minimum	[]
Maximum	[]
Data type	Inherit: auto
Lock output data type setting against changes by the fixed-point tools	off

Parameter	Value
Output as nonvirtual bus in parent model	off
Port dimensions (-1 for inherited)	-1
Variable-size signal	Inherit
Sample time (-1 for inherited)	-1
Source of initial output value	Dialog
Output when disabled	held
Initial output	[]

3.10.1.1.9. "r" (Inport)

Table 3.174. "r" Parameters

Parameter	Value
Port number	2
Port dimensions (-1 for inherited)	-1
Sample time (-1 for inherited)	-1
Minimum	[]
Maximum	[]
Data type	Inherit: auto

3.10.1.1.10. "Sum" (Sum)


Table 3.175. "Sum" Parameters

Parameter	Value
Icon shape	round
List of signs	+++ -
Sum over	All dimensions
Dimension	1
Require all inputs to have the same data type	off
Accumulator data type	Inherit: Inherit via internal rule
Output minimum	[]
Output maximum	[]

Parameter	Value
Output data type	Inherit: Inherit via internal rule
Lock data type settings against changes by the fixed-point tools	off
Integer rounding mode	Floor
Saturate on integer overflow	off
Sample time (-1 for inherited)	-1

3.11. q2

Figure 3.11. Navigation_loop_Animation/Euler to VR/Quaternion Multiplication (Pitch & Yaw)/q2

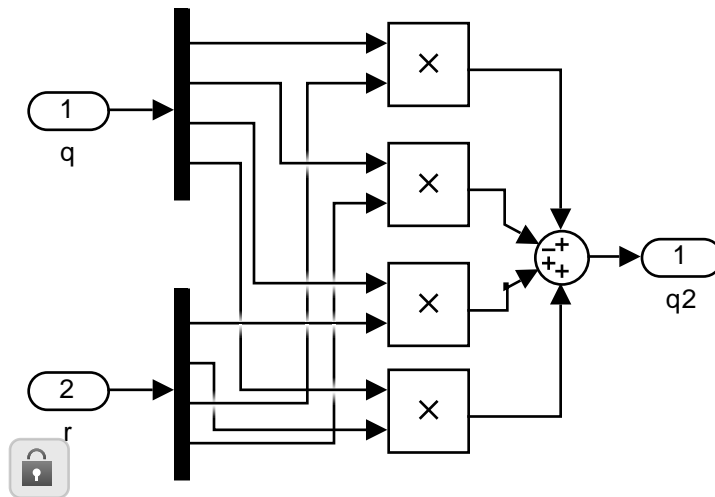

3.11.1. Blocks

3.11.1.1. Parameters

3.11.1.1.1. "Demux" (Demux)

Table 3.176. "Demux" Parameters

Parameter	Value
Number of outputs	4
Display option	bar
Bus selection mode	off

3.11.1.1.2. "Demux1" (Demux)**Table 3.177. "Demux1" Parameters**

Parameter	Value
Number of outputs	4
Display option	bar
Bus selection mode	off

3.11.1.1.3. "Product" (Product)**Table 3.178. "Product" Parameters**

Parameter	Value
Number of inputs	2
Multiplication	Element-wise(.*)
Multiply over	All dimensions
Dimension	1
Require all inputs to have the same data type	off
Output minimum	[]
Output maximum	[]
Output data type	Inherit: Inherit via internal rule
Lock output data type setting against changes by the fixed-point tools	off
Integer rounding mode	Zero
Saturate on integer overflow	off
Sample time (-1 for inherited)	-1

3.11.1.1.4. "Product1" (Product)**Table 3.179. "Product1" Parameters**

Parameter	Value
Number of inputs	2
Multiplication	Element-wise(.*)
Multiply over	All dimensions
Dimension	1
Require all inputs to have the same data type	off

Parameter	Value
Output minimum	[]
Output maximum	[]
Output data type	Inherit: Inherit via internal rule
Lock output data type setting against changes by the fixed-point tools	off
Integer rounding mode	Zero
Saturate on integer overflow	off
Sample time (-1 for inherited)	-1

3.11.1.1.5. "Product2" (Product)

Table 3.180. "Product2" Parameters

Parameter	Value
Number of inputs	2
Multiplication	Element-wise(.*)
Multiply over	All dimensions
Dimension	1
Require all inputs to have the same data type	off
Output minimum	[]
Output maximum	[]
Output data type	Inherit: Inherit via internal rule
Lock output data type setting against changes by the fixed-point tools	off
Integer rounding mode	Zero
Saturate on integer overflow	off
Sample time (-1 for inherited)	-1

3.11.1.1.6. "Product3" (Product)

Table 3.181. "Product3" Parameters

Parameter	Value
Number of inputs	2

Parameter	Value
Multiplication	Element-wise(.*)
Multiply over	All dimensions
Dimension	1
Require all inputs to have the same data type	off
Output minimum	[]
Output maximum	[]
Output data type	Inherit: Inherit via internal rule
Lock output data type setting against changes by the fixed-point tools	off
Integer rounding mode	Zero
Saturate on integer overflow	off
Sample time (-1 for inherited)	-1

3.11.1.1.7. "q" (Inport)

Table 3.182. "q" Parameters

Parameter	Value
Port number	1
Port dimensions (-1 for inherited)	-1
Sample time (-1 for inherited)	-1
Minimum	[]
Maximum	[]
Data type	Inherit: auto

3.11.1.1.8. "q2" (Outport)

Table 3.183. "q2" Parameters

Parameter	Value
Port number	1
Icon display	Port number
Minimum	[]
Maximum	[]
Data type	Inherit: auto

Parameter	Value
Lock output data type setting against changes by the fixed-point tools	off
Output as nonvirtual bus in parent model	off
Port dimensions (-1 for inherited)	-1
Variable-size signal	Inherit
Sample time (-1 for inherited)	-1
Source of initial output value	Dialog
Output when disabled	held
Initial output	[]

3.11.1.1.9. "r" (Inport)

Table 3.184. "r" Parameters

Parameter	Value
Port number	2
Port dimensions (-1 for inherited)	-1
Sample time (-1 for inherited)	-1
Minimum	[]
Maximum	[]
Data type	Inherit: auto

3.11.1.1.10. "Sum" (Sum)


Table 3.185. "Sum" Parameters

Parameter	Value
Icon shape	round
List of signs	+--+
Sum over	All dimensions
Dimension	1
Require all inputs to have the same data type	off
Accumulator data type	Inherit: Inherit via internal rule
Output minimum	[]

Parameter	Value
Output maximum	[]
Output data type	Inherit: Inherit via internal rule
Lock data type settings against changes by the fixed-point tools	off
Integer rounding mode	Floor
Saturate on integer overflow	off
Sample time (-1 for inherited)	-1

3.12. q3

Figure 3.12. Navigation_loop_Animation/Euler to VR/Quaternion Multiplication (Pitch & Yaw)/q3

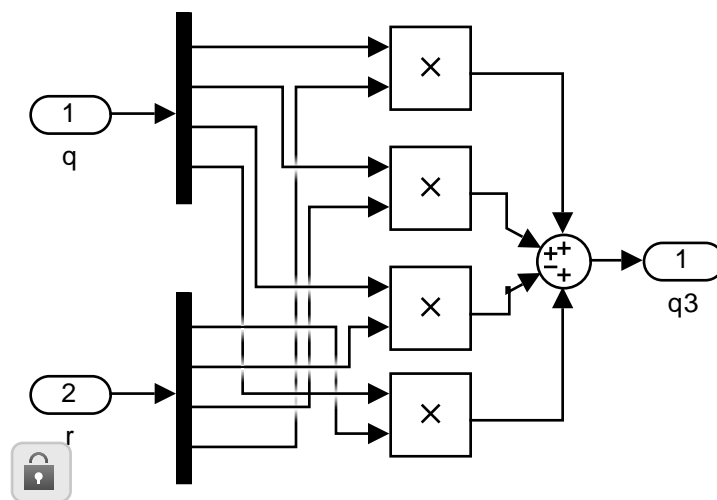

3.12.1. Blocks

3.12.1.1. Parameters

3.12.1.1.1. "Demux" (Demux)

Table 3.186. "Demux" Parameters

Parameter	Value
Number of outputs	4
Display option	bar
Bus selection mode	off

3.12.1.1.2. "Demux1" (Demux)**Table 3.187. "Demux1" Parameters**

Parameter	Value
Number of outputs	4
Display option	bar
Bus selection mode	off

3.12.1.1.3. "Product" (Product)**Table 3.188. "Product" Parameters**

Parameter	Value
Number of inputs	2
Multiplication	Element-wise(.*)
Multiply over	All dimensions
Dimension	1
Require all inputs to have the same data type	off
Output minimum	[]
Output maximum	[]
Output data type	Inherit: Inherit via internal rule
Lock output data type setting against changes by the fixed-point tools	off
Integer rounding mode	Zero
Saturate on integer overflow	off
Sample time (-1 for inherited)	-1

3.12.1.1.4. "Product1" (Product)**Table 3.189. "Product1" Parameters**

Parameter	Value
Number of inputs	2
Multiplication	Element-wise(.*)
Multiply over	All dimensions
Dimension	1
Require all inputs to have the same data type	off

Parameter	Value
Output minimum	[]
Output maximum	[]
Output data type	Inherit: Inherit via internal rule
Lock output data type setting against changes by the fixed-point tools	off
Integer rounding mode	Zero
Saturate on integer overflow	off
Sample time (-1 for inherited)	-1

3.12.1.1.5. "Product2" (Product)

Table 3.190. "Product2" Parameters

Parameter	Value
Number of inputs	2
Multiplication	Element-wise(.*)
Multiply over	All dimensions
Dimension	1
Require all inputs to have the same data type	off
Output minimum	[]
Output maximum	[]
Output data type	Inherit: Inherit via internal rule
Lock output data type setting against changes by the fixed-point tools	off
Integer rounding mode	Zero
Saturate on integer overflow	off
Sample time (-1 for inherited)	-1

3.12.1.1.6. "Product3" (Product)

Table 3.191. "Product3" Parameters

Parameter	Value
Number of inputs	2

Parameter	Value
Multiplication	Element-wise(.*)
Multiply over	All dimensions
Dimension	1
Require all inputs to have the same data type	off
Output minimum	[]
Output maximum	[]
Output data type	Inherit: Inherit via internal rule
Lock output data type setting against changes by the fixed-point tools	off
Integer rounding mode	Zero
Saturate on integer overflow	off
Sample time (-1 for inherited)	-1

3.12.1.1.7. "q" (Inport)

Table 3.192. "q" Parameters

Parameter	Value
Port number	1
Port dimensions (-1 for inherited)	-1
Sample time (-1 for inherited)	-1
Minimum	[]
Maximum	[]
Data type	Inherit: auto

3.12.1.1.8. "q3" (Outport)

Table 3.193. "q3" Parameters

Parameter	Value
Port number	1
Icon display	Port number
Minimum	[]
Maximum	[]
Data type	Inherit: auto

Parameter	Value
Lock output data type setting against changes by the fixed-point tools	off
Output as nonvirtual bus in parent model	off
Port dimensions (-1 for inherited)	-1
Variable-size signal	Inherit
Sample time (-1 for inherited)	-1
Source of initial output value	Dialog
Output when disabled	held
Initial output	[]

3.12.1.1.9. "r" (Inport)

Table 3.194. "r" Parameters

Parameter	Value
Port number	2
Port dimensions (-1 for inherited)	-1
Sample time (-1 for inherited)	-1
Minimum	[]
Maximum	[]
Data type	Inherit: auto

3.12.1.1.10. "Sum" (Sum)


Table 3.195. "Sum" Parameters

Parameter	Value
Icon shape	round
List of signs	+++
Sum over	All dimensions
Dimension	1
Require all inputs to have the same data type	off
Accumulator data type	Inherit: Inherit via internal rule
Output minimum	[]

Parameter	Value
Output maximum	[]
Output data type	Inherit: Inherit via internal rule
Lock data type settings against changes by the fixed-point tools	off
Integer rounding mode	Floor
Saturate on integer overflow	off
Sample time (-1 for inherited)	-1

3.13. Quaternion Multiplication (Pitch & Yaw)

Figure 3.13. Navigation_loop_Animation/Euler to VR/Quaternion Multiplication (Pitch & Yaw)

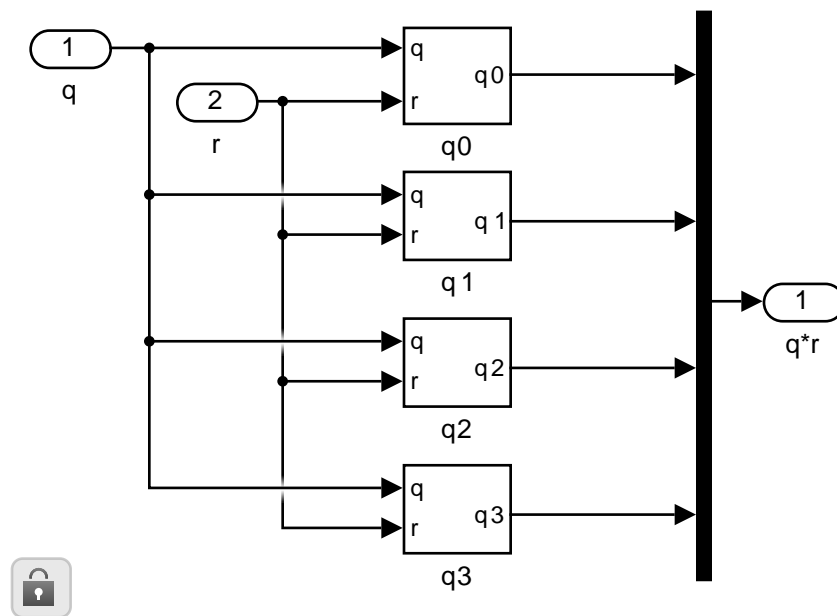

3.13.1. Blocks

3.13.1.1. Parameters

3.13.1.1.1. "Mux" (Mux)

Table 3.196. "Mux" Parameters

Parameter	Value
Number of inputs	4

Parameter	Value
Display option	bar

3.13.1.1.2. "q" (Inport)

Table 3.197. "q" Parameters

Parameter	Value
Port number	1
Port dimensions (-1 for inherited)	-1
Sample time (-1 for inherited)	-1
Minimum	[]
Maximum	[]
Data type	Inherit: auto

3.13.1.1.3. "q*r" (Outport)

Table 3.198. "q*r" Parameters

Parameter	Value
Port number	1
Icon display	Port number
Minimum	[]
Maximum	[]
Data type	Inherit: auto
Lock output data type setting against changes by the fixed-point tools	off
Output as nonvirtual bus in parent model	off
Port dimensions (-1 for inherited)	-1
Variable-size signal	Inherit
Sample time (-1 for inherited)	-1
Source of initial output value	Dialog
Output when disabled	held
Initial output	[]


3.13.1.1.4. "r" (Inport)

Table 3.199. "r" Parameters

Parameter	Value
Port number	2
Port dimensions (-1 for inherited)	-1
Sample time (-1 for inherited)	-1
Minimum	[]
Maximum	[]
Data type	Inherit: auto

3.14. Quaternion Normalization

Figure 3.14. Navigation_loop_Animation/Euler to VR/Quaternion Normalization

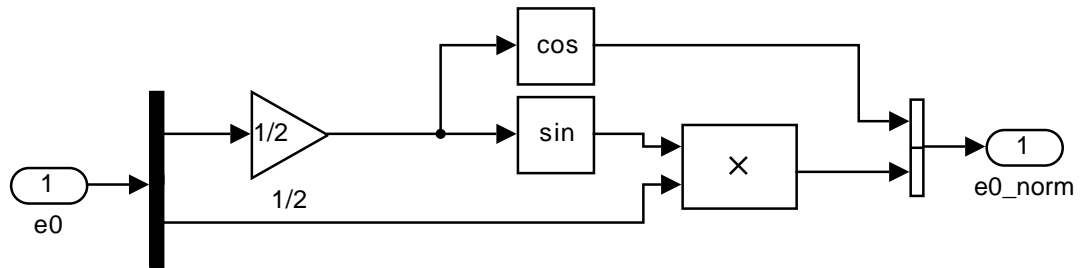

3.14.1. Blocks

3.14.1.1. Parameters

3.14.1.1.1. "1/2" (Gain)

Table 3.200. "1/2" Parameters

Parameter	Value
Gain	1/2
Multiplication	Element-wise(K.*u)
Parameter minimum	[]
Parameter maximum	[]
Parameter data type	Inherit: Same as input
Output minimum	[]
Output maximum	[]
Output data type	Inherit: Same as input

Parameter	Value
Lock output data type setting against changes by the fixed-point tools	off
Integer rounding mode	Floor
Saturate on integer overflow	on
Sample time (-1 for inherited)	-1

3.14.1.1.2. "Concatenate" (Concatenate)

Table 3.201. "Concatenate" Parameters

Parameter	Value
Number of inputs	2
Mode	Vector
Concatenate dimension	1

3.14.1.1.3. "Demux" (Demux)

Table 3.202. "Demux" Parameters

Parameter	Value
Number of outputs	[1 3]
Display option	none
Bus selection mode	off

3.14.1.1.4. "e0" (Inport)

Table 3.203. "e0" Parameters

Parameter	Value
Port number	1
Port dimensions (-1 for inherited)	-1
Sample time (-1 for inherited)	-1
Minimum	[]
Maximum	[]
Data type	Inherit: auto

3.14.1.1.5. "e0_norm" (Outport)

Table 3.204. "e0_norm" Parameters

Parameter	Value
Port number	1
Icon display	Port number
Minimum	[]
Maximum	[]
Data type	Inherit: auto
Lock output data type setting against changes by the fixed-point tools	off
Output as nonvirtual bus in parent model	off
Port dimensions (-1 for inherited)	-1
Variable-size signal	Inherit
Sample time (-1 for inherited)	-1
Source of initial output value	Dialog
Output when disabled	held
Initial output	[]

3.14.1.1.6. "Product" (Product)

Table 3.205. "Product" Parameters

Parameter	Value
Number of inputs	2
Multiplication	Element-wise(.*)
Multiply over	All dimensions
Dimension	1
Require all inputs to have the same data type	on
Output minimum	[]
Output maximum	[]
Output data type	Inherit: Same as first input
Lock output data type setting against changes by the fixed-point tools	off

Parameter	Value
Integer rounding mode	Floor
Saturate on integer overflow	on
Sample time (-1 for inherited)	-1

3.14.1.1.7. "Trigonometric Function" (Trigonometry)

Table 3.206. "Trigonometric Function" Parameters

Parameter	Value
Function	sin
Approximation method	None
Number of iterations	11
Sample time (-1 for inherited)	-1


3.14.1.1.8. "Trigonometric Function1" (Trigonometry)

Table 3.207. "Trigonometric Function1" Parameters

Parameter	Value
Function	cos
Approximation method	None
Number of iterations	11
Sample time (-1 for inherited)	-1

3.15. Quaternion Normalization1

Figure 3.15. Navigation_loop_Animation/Euler to VR/Quaternion Normalization1

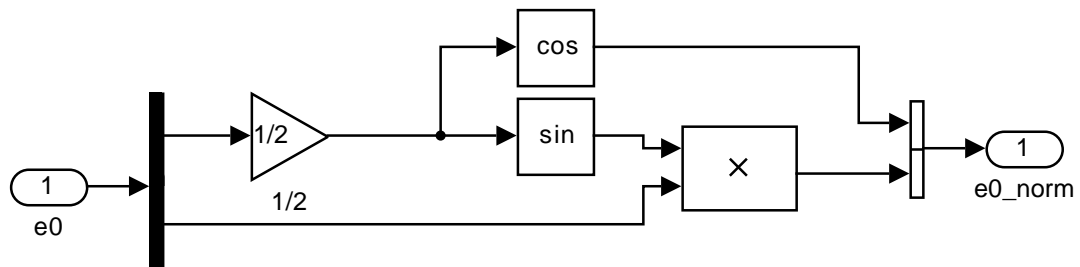

3.15.1. Blocks

3.15.1.1. Parameters

3.15.1.1.1. "1/2" (Gain)

Table 3.208. "1/2" Parameters

Parameter	Value
Gain	1/2
Multiplication	Element-wise($K \cdot u$)
Parameter minimum	[]
Parameter maximum	[]
Parameter data type	Inherit: Same as input
Output minimum	[]
Output maximum	[]
Output data type	Inherit: Same as input
Lock output data type setting against changes by the fixed-point tools	off
Integer rounding mode	Floor
Saturate on integer overflow	on
Sample time (-1 for inherited)	-1

3.15.1.1.2. "Concatenate" (Concatenate)

Table 3.209. "Concatenate" Parameters

Parameter	Value
Number of inputs	2
Mode	Vector
Concatenate dimension	1

3.15.1.1.3. "Demux" (Demux)

Table 3.210. "Demux" Parameters

Parameter	Value
Number of outputs	[1 3]

Parameter	Value
Display option	none
Bus selection mode	off

3.15.1.1.4. "e0" (Inport)

Table 3.211. "e0" Parameters

Parameter	Value
Port number	1
Port dimensions (-1 for inherited)	-1
Sample time (-1 for inherited)	-1
Minimum	[]
Maximum	[]
Data type	Inherit: auto

3.15.1.1.5. "e0_norm" (Outport)

Table 3.212. "e0_norm" Parameters

Parameter	Value
Port number	1
Icon display	Port number
Minimum	[]
Maximum	[]
Data type	Inherit: auto
Lock output data type setting against changes by the fixed-point tools	off
Output as nonvirtual bus in parent model	off
Port dimensions (-1 for inherited)	-1
Variable-size signal	Inherit
Sample time (-1 for inherited)	-1
Source of initial output value	Dialog
Output when disabled	held
Initial output	[]

3.15.1.1.6. "Product" (Product)

Table 3.213. "Product" Parameters

Parameter	Value
Number of inputs	2
Multiplication	Element-wise(.*)
Multiply over	All dimensions
Dimension	1
Require all inputs to have the same data type	on
Output minimum	[]
Output maximum	[]
Output data type	Inherit: Same as first input
Lock output data type setting against changes by the fixed-point tools	off
Integer rounding mode	Floor
Saturate on integer overflow	on
Sample time (-1 for inherited)	-1

3.15.1.1.7. "Trigonometric Function" (Trigonometry)

Table 3.214. "Trigonometric Function" Parameters

Parameter	Value
Function	sin
Approximation method	None
Number of iterations	11
Sample time (-1 for inherited)	-1

3.15.1.1.8. "Trigonometric Function1" (Trigonometry)


Table 3.215. "Trigonometric Function1" Parameters

Parameter	Value
Function	cos
Approximation method	None

Parameter	Value
Number of iterations	11
Sample time (-1 for inherited)	-1

3.16. Quaternion Normalization2

Figure 3.16. Navigation_loop_Animation/Euler to VR/Quaternion Normalization2

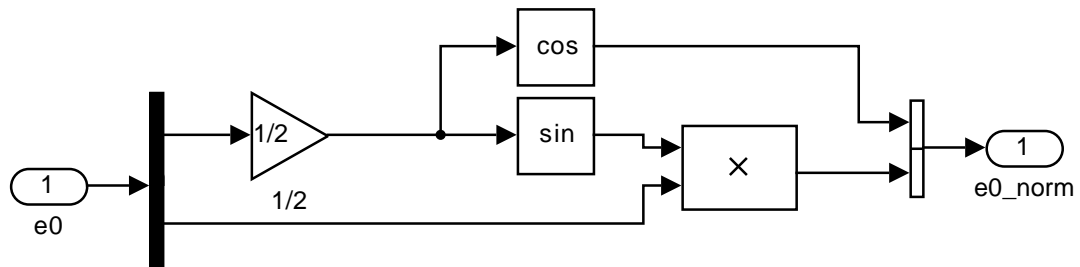

3.16.1. Blocks

3.16.1.1. Parameters

3.16.1.1.1. "1/2" (Gain)

Table 3.216. "1/2" Parameters

Parameter	Value
Gain	1/2
Multiplication	Element-wise(K.*u)
Parameter minimum	[]
Parameter maximum	[]
Parameter data type	Inherit: Same as input
Output minimum	[]
Output maximum	[]
Output data type	Inherit: Same as input
Lock output data type setting against changes by the fixed-point tools	off
Integer rounding mode	Floor
Saturate on integer overflow	on
Sample time (-1 for inherited)	-1

3.16.1.1.2. "Concatenate" (Concatenate)**Table 3.217. "Concatenate" Parameters**

Parameter	Value
Number of inputs	2
Mode	Vector
Concatenate dimension	1

3.16.1.1.3. "Demux" (Demux)**Table 3.218. "Demux" Parameters**

Parameter	Value
Number of outputs	[1 3]
Display option	none
Bus selection mode	off

3.16.1.1.4. "e0" (Inport)**Table 3.219. "e0" Parameters**

Parameter	Value
Port number	1
Port dimensions (-1 for inherited)	-1
Sample time (-1 for inherited)	-1
Minimum	[]
Maximum	[]
Data type	Inherit: auto

3.16.1.1.5. "e0_norm" (Outport)**Table 3.220. "e0_norm" Parameters**

Parameter	Value
Port number	1
Icon display	Port number

Parameter	Value
Minimum	[]
Maximum	[]
Data type	Inherit: auto
Lock output data type setting against changes by the fixed-point tools	off
Output as nonvirtual bus in parent model	off
Port dimensions (-1 for inherited)	-1
Variable-size signal	Inherit
Sample time (-1 for inherited)	-1
Source of initial output value	Dialog
Output when disabled	held
Initial output	[]

3.16.1.1.6. "Product" (Product)

Table 3.221. "Product" Parameters

Parameter	Value
Number of inputs	2
Multiplication	Element-wise(.*)
Multiply over	All dimensions
Dimension	1
Require all inputs to have the same data type	on
Output minimum	[]
Output maximum	[]
Output data type	Inherit: Same as first input
Lock output data type setting against changes by the fixed-point tools	off
Integer rounding mode	Floor
Saturate on integer overflow	on
Sample time (-1 for inherited)	-1

3.16.1.1.7. "Trigonometric Function" (Trigonometry)**Table 3.222. "Trigonometric Function" Parameters**


Parameter	Value
Function	sin
Approximation method	None
Number of iterations	11
Sample time (-1 for inherited)	-1

3.16.1.1.8. "Trigonometric Function1" (Trigonometry)**Table 3.223. "Trigonometric Function1" Parameters**

Parameter	Value
Function	cos
Approximation method	None
Number of iterations	11
Sample time (-1 for inherited)	-1

3.17. roll_dot_dot

Figure 3.17. Navigation_loop_Animation/Dynamic model/roll_dot_dot

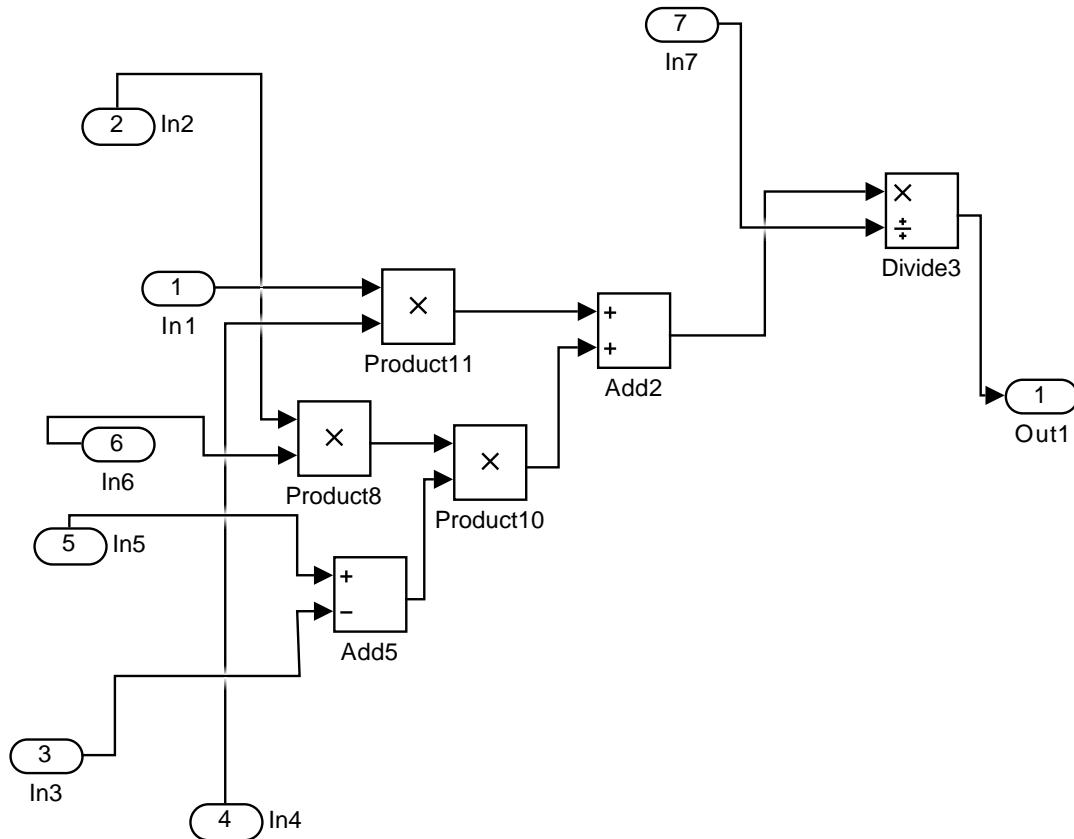

3.17.1. Blocks

3.17.1.1. Parameters

3.17.1.1.1. "Add2" (Sum)

Table 3.224. "Add2" Parameters

Parameter	Value
Icon shape	rectangular
List of signs	++
Sum over	All dimensions
Dimension	1
Require all inputs to have the same data type	off
Accumulator data type	Inherit: Inherit via internal rule

Parameter	Value
Output minimum	[]
Output maximum	[]
Output data type	Inherit: Inherit via internal rule
Lock data type settings against changes by the fixed-point tools	off
Integer rounding mode	Floor
Saturate on integer overflow	off
Sample time (-1 for inherited)	-1

3.17.1.1.2. "Add5" (Sum)

Table 3.225. "Add5" Parameters

Parameter	Value
Icon shape	rectangular
List of signs	+ -
Sum over	All dimensions
Dimension	1
Require all inputs to have the same data type	off
Accumulator data type	Inherit: Inherit via internal rule
Output minimum	[]
Output maximum	[]
Output data type	Inherit: Inherit via internal rule
Lock data type settings against changes by the fixed-point tools	off
Integer rounding mode	Floor
Saturate on integer overflow	off
Sample time (-1 for inherited)	-1

3.17.1.1.3. "Divide3" (Product)

Table 3.226. "Divide3" Parameters

Parameter	Value
Number of inputs	*/

Parameter	Value
Multiplication	Element-wise(.*)
Multiply over	All dimensions
Dimension	1
Require all inputs to have the same data type	off
Output minimum	[]
Output maximum	[]
Output data type	Inherit: Inherit via internal rule
Lock output data type setting against changes by the fixed-point tools	off
Integer rounding mode	Floor
Saturate on integer overflow	off
Sample time (-1 for inherited)	-1

3.17.1.1.4. "In1" (Inport)

Table 3.227. "In1" Parameters

Parameter	Value
Port number	1
Port dimensions (-1 for inherited)	-1
Sample time (-1 for inherited)	-1
Minimum	[]
Maximum	[]
Data type	Inherit: auto

3.17.1.1.5. "In2" (Inport)

Table 3.228. "In2" Parameters

Parameter	Value
Port number	2
Port dimensions (-1 for inherited)	-1
Sample time (-1 for inherited)	-1

Parameter	Value
Minimum	[]
Maximum	[]
Data type	Inherit: auto

3.17.1.1.6. "In3" (Inport)

Table 3.229. "In3" Parameters

Parameter	Value
Port number	3
Port dimensions (-1 for inherited)	-1
Sample time (-1 for inherited)	-1
Minimum	[]
Maximum	[]
Data type	Inherit: auto

3.17.1.1.7. "In4" (Inport)

Table 3.230. "In4" Parameters

Parameter	Value
Port number	4
Port dimensions (-1 for inherited)	-1
Sample time (-1 for inherited)	-1
Minimum	[]
Maximum	[]
Data type	Inherit: auto

3.17.1.1.8. "In5" (Inport)

Table 3.231. "In5" Parameters

Parameter	Value
Port number	5
Port dimensions (-1 for inherited)	-1

Parameter	Value
Sample time (-1 for inherited)	-1
Minimum	[]
Maximum	[]
Data type	Inherit: auto

3.17.1.1.9. "In6" (Inport)

Table 3.232. "In6" Parameters

Parameter	Value
Port number	6
Port dimensions (-1 for inherited)	-1
Sample time (-1 for inherited)	-1
Minimum	[]
Maximum	[]
Data type	Inherit: auto

3.17.1.1.10. "In7" (Inport)

Table 3.233. "In7" Parameters

Parameter	Value
Port number	7
Port dimensions (-1 for inherited)	-1
Sample time (-1 for inherited)	-1
Minimum	[]
Maximum	[]
Data type	Inherit: auto

3.17.1.1.11. "Out1" (Outport)

Table 3.234. "Out1" Parameters

Parameter	Value
Port number	1
Icon display	Port number

Parameter	Value
Minimum	[]
Maximum	[]
Data type	Inherit: auto
Lock output data type setting against changes by the fixed-point tools	off
Output as nonvirtual bus in parent model	off
Port dimensions (-1 for inherited)	-1
Variable-size signal	Inherit
Sample time (-1 for inherited)	-1
Source of initial output value	Dialog
Output when disabled	held
Initial output	[]

3.17.1.1.12. "Product10" (Product)

Table 3.235. "Product10" Parameters

Parameter	Value
Number of inputs	2
Multiplication	Element-wise(.*)
Multiply over	All dimensions
Dimension	1
Require all inputs to have the same data type	off
Output minimum	[]
Output maximum	[]
Output data type	Inherit: Inherit via internal rule
Lock output data type setting against changes by the fixed-point tools	off
Integer rounding mode	Floor
Saturate on integer overflow	off
Sample time (-1 for inherited)	-1

3.17.1.1.13. "Product11" (Product)**Table 3.236. "Product11" Parameters**

Parameter	Value
Number of inputs	2
Multiplication	Element-wise(.*)
Multiply over	All dimensions
Dimension	1
Require all inputs to have the same data type	off
Output minimum	[]
Output maximum	[]
Output data type	Inherit: Inherit via internal rule
Lock output data type setting against changes by the fixed-point tools	off
Integer rounding mode	Floor
Saturate on integer overflow	off
Sample time (-1 for inherited)	-1


3.17.1.1.14. "Product8" (Product)**Table 3.237. "Product8" Parameters**

Parameter	Value
Number of inputs	2
Multiplication	Element-wise(.*)
Multiply over	All dimensions
Dimension	1
Require all inputs to have the same data type	off
Output minimum	[]
Output maximum	[]
Output data type	Inherit: Inherit via internal rule
Lock output data type setting against changes by the fixed-point tools	off
Integer rounding mode	Floor
Saturate on integer overflow	off

Parameter	Value
Sample time (-1 for inherited)	-1

3.18. x_dot_dot

Figure 3.18. Navigation_loop_Animation/Dynamic model/x_dot_dot

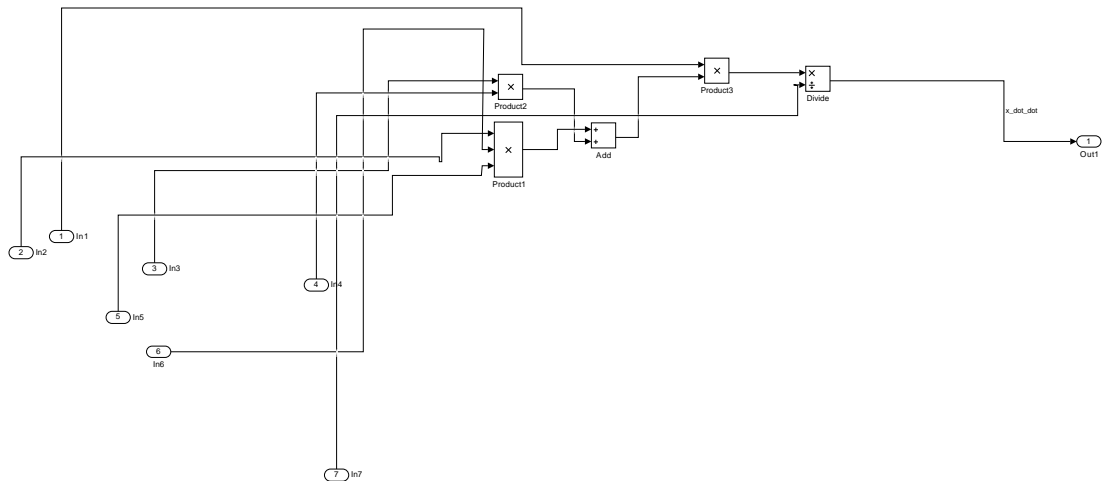

3.18.1. Blocks

3.18.1.1. Parameters

3.18.1.1.1. "Add" (Sum)

Table 3.238. "Add" Parameters

Parameter	Value
Icon shape	rectangular
List of signs	++
Sum over	All dimensions
Dimension	1
Require all inputs to have the same data type	off
Accumulator data type	Inherit: Inherit via internal rule
Output minimum	[]
Output maximum	[]
Output data type	Inherit: Inherit via internal rule
Lock data type settings against changes by the fixed-point tools	off

Parameter	Value
Integer rounding mode	Floor
Saturate on integer overflow	off
Sample time (-1 for inherited)	-1

3.18.1.1.2. "Divide" (Product)

Table 3.239. "Divide" Parameters

Parameter	Value
Number of inputs	*/
Multiplication	Element-wise(.*)
Multiply over	All dimensions
Dimension	1
Require all inputs to have the same data type	off
Output minimum	[]
Output maximum	[]
Output data type	Inherit: Inherit via internal rule
Lock output data type setting against changes by the fixed-point tools	off
Integer rounding mode	Floor
Saturate on integer overflow	off
Sample time (-1 for inherited)	-1

3.18.1.1.3. "In1" (Inport)

Table 3.240. "In1" Parameters

Parameter	Value
Port number	1
Port dimensions (-1 for inherited)	-1
Sample time (-1 for inherited)	-1
Minimum	[]
Maximum	[]
Data type	Inherit: auto

3.18.1.1.4. "In2" (Inport)**Table 3.241. "In2" Parameters**

Parameter	Value
Port number	2
Port dimensions (-1 for inherited)	-1
Sample time (-1 for inherited)	-1
Minimum	[]
Maximum	[]
Data type	Inherit: auto

3.18.1.1.5. "In3" (Inport)**Table 3.242. "In3" Parameters**

Parameter	Value
Port number	3
Port dimensions (-1 for inherited)	-1
Sample time (-1 for inherited)	-1
Minimum	[]
Maximum	[]
Data type	Inherit: auto

3.18.1.1.6. "In4" (Inport)**Table 3.243. "In4" Parameters**

Parameter	Value
Port number	4
Port dimensions (-1 for inherited)	-1
Sample time (-1 for inherited)	-1
Minimum	[]
Maximum	[]
Data type	Inherit: auto

3.18.1.1.7. "In5" (Inport)**Table 3.244. "In5" Parameters**

Parameter	Value
Port number	5
Port dimensions (-1 for inherited)	-1
Sample time (-1 for inherited)	-1
Minimum	[]
Maximum	[]
Data type	Inherit: auto

3.18.1.1.8. "In6" (Inport)**Table 3.245. "In6" Parameters**

Parameter	Value
Port number	6
Port dimensions (-1 for inherited)	-1
Sample time (-1 for inherited)	-1
Minimum	[]
Maximum	[]
Data type	Inherit: auto

3.18.1.1.9. "In7" (Inport)**Table 3.246. "In7" Parameters**

Parameter	Value
Port number	7
Port dimensions (-1 for inherited)	-1
Sample time (-1 for inherited)	-1
Minimum	[]
Maximum	[]
Data type	Inherit: auto

3.18.1.1.10. "Out1" (Outport)**Table 3.247. "Out1" Parameters**

Parameter	Value
Port number	1
Icon display	Port number
Minimum	[]
Maximum	[]
Data type	Inherit: auto
Lock output data type setting against changes by the fixed-point tools	off
Output as nonvirtual bus in parent model	off
Port dimensions (-1 for inherited)	-1
Variable-size signal	Inherit
Sample time (-1 for inherited)	-1
Source of initial output value	Dialog
Output when disabled	held
Initial output	[]

3.18.1.1.11. "Product1" (Product)**Table 3.248. "Product1" Parameters**

Parameter	Value
Number of inputs	3
Multiplication	Element-wise(.*)
Multiply over	All dimensions
Dimension	1
Require all inputs to have the same data type	off
Output minimum	[]
Output maximum	[]
Output data type	Inherit: Inherit via internal rule
Lock output data type setting against changes by the fixed-point tools	off
Integer rounding mode	Floor

Parameter	Value
Saturate on integer overflow	off
Sample time (-1 for inherited)	-1

3.18.1.1.12. "Product2" (Product)

Table 3.249. "Product2" Parameters

Parameter	Value
Number of inputs	2
Multiplication	Element-wise(.*)
Multiply over	All dimensions
Dimension	1
Require all inputs to have the same data type	off
Output minimum	[]
Output maximum	[]
Output data type	Inherit: Inherit via internal rule
Lock output data type setting against changes by the fixed-point tools	off
Integer rounding mode	Floor
Saturate on integer overflow	off
Sample time (-1 for inherited)	-1

3.18.1.1.13. "Product3" (Product)


Table 3.250. "Product3" Parameters

Parameter	Value
Number of inputs	2
Multiplication	Element-wise(.*)
Multiply over	All dimensions
Dimension	1
Require all inputs to have the same data type	off
Output minimum	[]
Output maximum	[]

Parameter	Value
Output data type	Inherit: Inherit via internal rule
Lock output data type setting against changes by the fixed-point tools	off
Integer rounding mode	Floor
Saturate on integer overflow	off
Sample time (-1 for inherited)	-1

3.19. y_dot_dot

Figure 3.19. Navigation_loop_Animation/Dynamic model/y_dot_dot

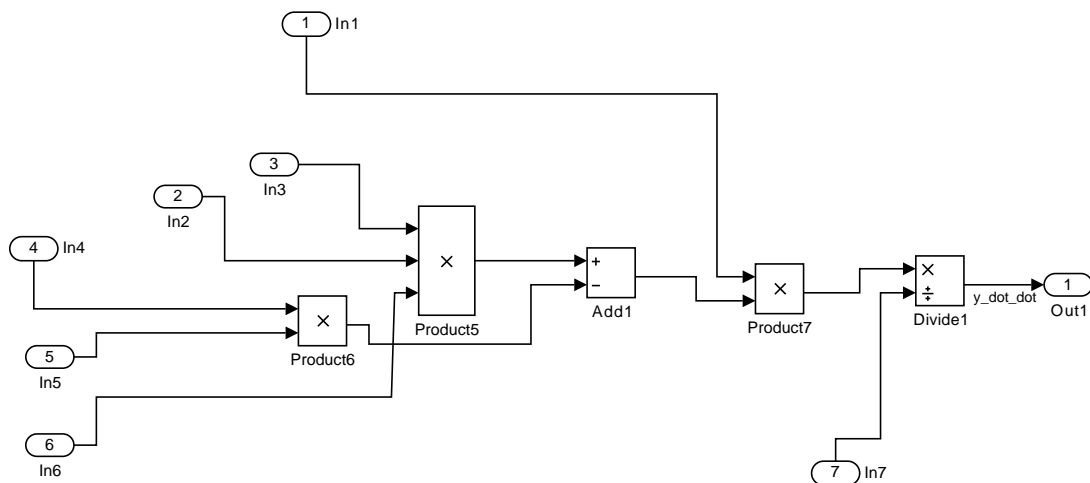

3.19.1. Blocks

3.19.1.1. Parameters

3.19.1.1.1. "Add1" (Sum)

Table 3.251. "Add1" Parameters

Parameter	Value
Icon shape	rectangular
List of signs	+ -
Sum over	All dimensions
Dimension	1
Require all inputs to have the same data type	off

Parameter	Value
Accumulator data type	Inherit: Inherit via internal rule
Output minimum	[]
Output maximum	[]
Output data type	Inherit: Inherit via internal rule
Lock data type settings against changes by the fixed-point tools	off
Integer rounding mode	Floor
Saturate on integer overflow	off
Sample time (-1 for inherited)	-1

3.19.1.1.2. "Divide1" (Product)

Table 3.252. "Divide1" Parameters

Parameter	Value
Number of inputs	*/
Multiplication	Element-wise(.*)
Multiply over	All dimensions
Dimension	1
Require all inputs to have the same data type	off
Output minimum	[]
Output maximum	[]
Output data type	Inherit: Inherit via internal rule
Lock output data type setting against changes by the fixed-point tools	off
Integer rounding mode	Floor
Saturate on integer overflow	off
Sample time (-1 for inherited)	-1

3.19.1.1.3. "In1" (Inport)

Table 3.253. "In1" Parameters

Parameter	Value
Port number	1

Parameter	Value
Port dimensions (-1 for inherited)	-1
Sample time (-1 for inherited)	-1
Minimum	[]
Maximum	[]
Data type	Inherit: auto

3.19.1.1.4. "In2" (Inport)

Table 3.254. "In2" Parameters

Parameter	Value
Port number	2
Port dimensions (-1 for inherited)	-1
Sample time (-1 for inherited)	-1
Minimum	[]
Maximum	[]
Data type	Inherit: auto

3.19.1.1.5. "In3" (Inport)

Table 3.255. "In3" Parameters

Parameter	Value
Port number	3
Port dimensions (-1 for inherited)	-1
Sample time (-1 for inherited)	-1
Minimum	[]
Maximum	[]
Data type	Inherit: auto

3.19.1.1.6. "In4" (Inport)

Table 3.256. "In4" Parameters

Parameter	Value
Port number	4

Parameter	Value
Port dimensions (-1 for inherited)	-1
Sample time (-1 for inherited)	-1
Minimum	[]
Maximum	[]
Data type	Inherit: auto

3.19.1.1.7. "In5" (Inport)

Table 3.257. "In5" Parameters

Parameter	Value
Port number	5
Port dimensions (-1 for inherited)	-1
Sample time (-1 for inherited)	-1
Minimum	[]
Maximum	[]
Data type	Inherit: auto

3.19.1.1.8. "In6" (Inport)

Table 3.258. "In6" Parameters

Parameter	Value
Port number	6
Port dimensions (-1 for inherited)	-1
Sample time (-1 for inherited)	-1
Minimum	[]
Maximum	[]
Data type	Inherit: auto

3.19.1.1.9. "In7" (Inport)

Table 3.259. "In7" Parameters

Parameter	Value
Port number	7

Parameter	Value
Port dimensions (-1 for inherited)	-1
Sample time (-1 for inherited)	-1
Minimum	[]
Maximum	[]
Data type	Inherit: auto

3.19.1.1.10. "Out1" (Output)

Table 3.260. "Out1" Parameters

Parameter	Value
Port number	1
Icon display	Port number
Minimum	[]
Maximum	[]
Data type	Inherit: auto
Lock output data type setting against changes by the fixed-point tools	off
Output as nonvirtual bus in parent model	off
Port dimensions (-1 for inherited)	-1
Variable-size signal	Inherit
Sample time (-1 for inherited)	-1
Source of initial output value	Dialog
Output when disabled	held
Initial output	[]

3.19.1.1.11. "Product5" (Product)

Table 3.261. "Product5" Parameters

Parameter	Value
Number of inputs	3

Parameter	Value
Multiplication	Element-wise(.*)
Multiply over	All dimensions
Dimension	1
Require all inputs to have the same data type	off
Output minimum	[]
Output maximum	[]
Output data type	Inherit: Inherit via internal rule
Lock output data type setting against changes by the fixed-point tools	off
Integer rounding mode	Floor
Saturate on integer overflow	off
Sample time (-1 for inherited)	-1

3.19.1.1.12. "Product6" (Product)

Table 3.262. "Product6" Parameters

Parameter	Value
Number of inputs	2
Multiplication	Element-wise(.*)
Multiply over	All dimensions
Dimension	1
Require all inputs to have the same data type	off
Output minimum	[]
Output maximum	[]
Output data type	Inherit: Inherit via internal rule
Lock output data type setting against changes by the fixed-point tools	off
Integer rounding mode	Floor
Saturate on integer overflow	off
Sample time (-1 for inherited)	-1


3.19.1.1.13. "Product7" (Product)

Table 3.263. "Product7" Parameters

Parameter	Value
Number of inputs	2
Multiplication	Element-wise(.*)
Multiply over	All dimensions
Dimension	1
Require all inputs to have the same data type	off
Output minimum	[]
Output maximum	[]
Output data type	Inherit: Inherit via internal rule
Lock output data type setting against changes by the fixed-point tools	off
Integer rounding mode	Floor
Saturate on integer overflow	off
Sample time (-1 for inherited)	-1

3.20. yaw_dot_dot

Figure 3.20. Navigation_loop_Animation/Dynamic model/yaw_dot_dot

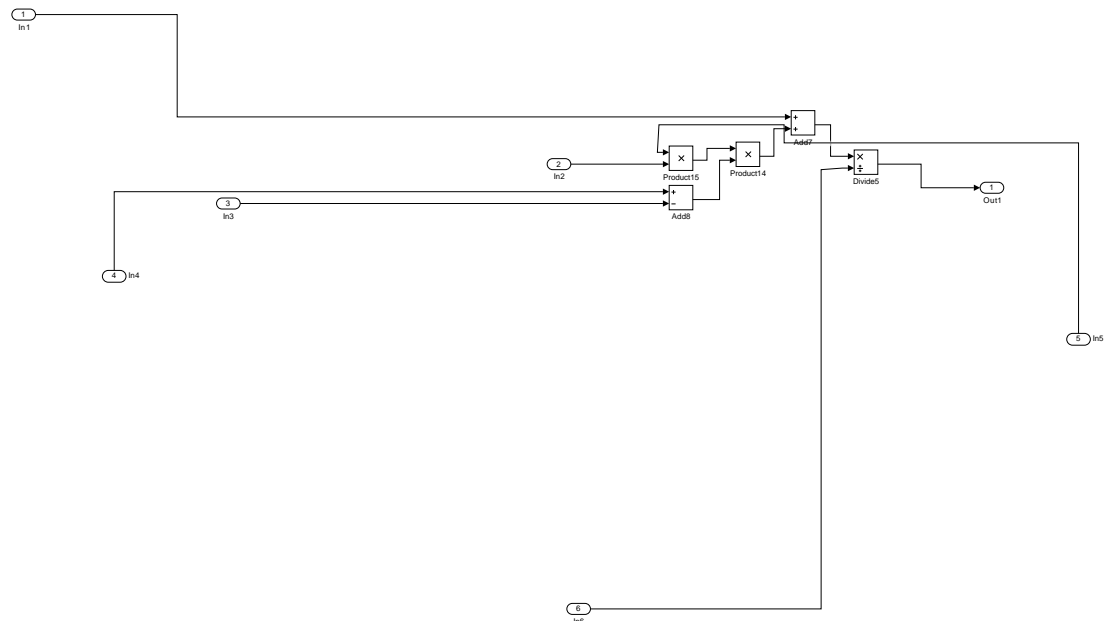

3.20.1. Blocks

3.20.1.1. Parameters

3.20.1.1.1. "Add7" (Sum)

Table 3.264. "Add7" Parameters

Parameter	Value
Icon shape	rectangular
List of signs	++
Sum over	All dimensions
Dimension	1
Require all inputs to have the same data type	off
Accumulator data type	Inherit: Inherit via internal rule
Output minimum	[]
Output maximum	[]
Output data type	Inherit: Inherit via internal rule
Lock data type settings against changes by the fixed-point tools	off
Integer rounding mode	Floor
Saturate on integer overflow	off
Sample time (-1 for inherited)	-1

3.20.1.1.2. "Add8" (Sum)

Table 3.265. "Add8" Parameters

Parameter	Value
Icon shape	rectangular
List of signs	+ -
Sum over	All dimensions
Dimension	1
Require all inputs to have the same data type	off
Accumulator data type	Inherit: Inherit via internal rule
Output minimum	[]
Output maximum	[]

Parameter	Value
Output data type	Inherit: Inherit via internal rule
Lock data type settings against changes by the fixed-point tools	off
Integer rounding mode	Floor
Saturate on integer overflow	off
Sample time (-1 for inherited)	-1

3.20.1.1.3. "Divide5" (Product)

Table 3.266. "Divide5" Parameters

Parameter	Value
Number of inputs	*/
Multiplication	Element-wise(.*)
Multiply over	All dimensions
Dimension	1
Require all inputs to have the same data type	off
Output minimum	[]
Output maximum	[]
Output data type	Inherit: Inherit via internal rule
Lock output data type setting against changes by the fixed-point tools	off
Integer rounding mode	Floor
Saturate on integer overflow	off
Sample time (-1 for inherited)	-1

3.20.1.1.4. "In1" (Inport)

Table 3.267. "In1" Parameters

Parameter	Value
Port number	1
Port dimensions (-1 for inherited)	-1

Parameter	Value
Sample time (-1 for inherited)	-1
Minimum	[]
Maximum	[]
Data type	Inherit: auto

3.20.1.1.5. "In2" (Inport)

Table 3.268. "In2" Parameters

Parameter	Value
Port number	2
Port dimensions (-1 for inherited)	-1
Sample time (-1 for inherited)	-1
Minimum	[]
Maximum	[]
Data type	Inherit: auto

3.20.1.1.6. "In3" (Inport)

Table 3.269. "In3" Parameters

Parameter	Value
Port number	3
Port dimensions (-1 for inherited)	-1
Sample time (-1 for inherited)	-1
Minimum	[]
Maximum	[]
Data type	Inherit: auto

3.20.1.1.7. "In4" (Inport)

Table 3.270. "In4" Parameters

Parameter	Value
Port number	4
Port dimensions (-1 for inherited)	-1

Parameter	Value
Sample time (-1 for inherited)	-1
Minimum	[]
Maximum	[]
Data type	Inherit: auto

3.20.1.1.8. "In5" (Inport)

Table 3.271. "In5" Parameters

Parameter	Value
Port number	5
Port dimensions (-1 for inherited)	-1
Sample time (-1 for inherited)	-1
Minimum	[]
Maximum	[]
Data type	Inherit: auto

3.20.1.1.9. "In6" (Inport)

Table 3.272. "In6" Parameters

Parameter	Value
Port number	6
Port dimensions (-1 for inherited)	-1
Sample time (-1 for inherited)	-1
Minimum	[]
Maximum	[]
Data type	Inherit: auto

3.20.1.1.10. "Out1" (Outport)

Table 3.273. "Out1" Parameters

Parameter	Value
Port number	1

Parameter	Value
Icon display	Port number
Minimum	[]
Maximum	[]
Data type	Inherit: auto
Lock output data type setting against changes by the fixed-point tools	off
Output as nonvirtual bus in parent model	off
Port dimensions (-1 for inherited)	-1
Variable-size signal	Inherit
Sample time (-1 for inherited)	-1
Source of initial output value	Dialog
Output when disabled	held
Initial output	[]

3.20.1.1.11. "Product14" (Product)

Table 3.274. "Product14" Parameters

Parameter	Value
Number of inputs	2
Multiplication	Element-wise(.*)
Multiply over	All dimensions
Dimension	1
Require all inputs to have the same data type	off
Output minimum	[]
Output maximum	[]
Output data type	Inherit: Inherit via internal rule
Lock output data type setting against changes by the fixed-point tools	off
Integer rounding mode	Floor
Saturate on integer overflow	off
Sample time (-1 for inherited)	-1


3.20.1.1.12. "Product15" (Product)

Table 3.275. "Product15" Parameters

Parameter	Value
Number of inputs	2
Multiplication	Element-wise(.*)
Multiply over	All dimensions
Dimension	1
Require all inputs to have the same data type	off
Output minimum	[]
Output maximum	[]
Output data type	Inherit: Inherit via internal rule
Lock output data type setting against changes by the fixed-point tools	off
Integer rounding mode	Floor
Saturate on integer overflow	off
Sample time (-1 for inherited)	-1

3.21. z_dot_dot

Figure 3.21. Navigation_loop_Animation/Dynamic model/z_dot_dot

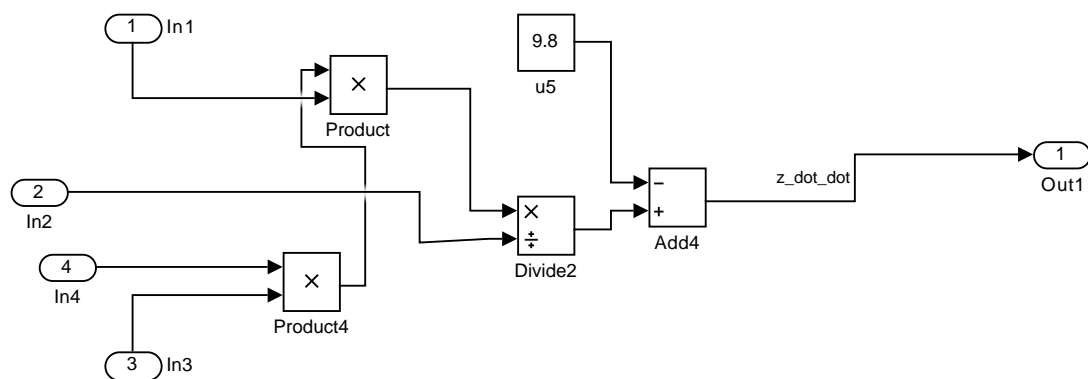

3.21.1. Blocks

3.21.1.1. Parameters

3.21.1.1.1. "Add4" (Sum)**Table 3.276. "Add4" Parameters**

Parameter	Value
Icon shape	rectangular
List of signs	--+
Sum over	All dimensions
Dimension	1
Require all inputs to have the same data type	off
Accumulator data type	Inherit: Inherit via internal rule
Output minimum	[]
Output maximum	[]
Output data type	Inherit: Inherit via internal rule
Lock data type settings against changes by the fixed-point tools	off
Integer rounding mode	Floor
Saturate on integer overflow	off
Sample time (-1 for inherited)	-1

3.21.1.1.2. "Divide2" (Product)**Table 3.277. "Divide2" Parameters**

Parameter	Value
Number of inputs	*/
Multiplication	Element-wise(.*)
Multiply over	All dimensions
Dimension	1
Require all inputs to have the same data type	off
Output minimum	[]
Output maximum	[]
Output data type	Inherit: Inherit via internal rule
Lock output data type setting against changes by the fixed-point tools	off
Integer rounding mode	Floor

Parameter	Value
Saturate on integer overflow	off
Sample time (-1 for inherited)	-1

3.21.1.1.3. "In1" (Inport)

Table 3.278. "In1" Parameters

Parameter	Value
Port number	1
Port dimensions (-1 for inherited)	-1
Sample time (-1 for inherited)	-1
Minimum	[]
Maximum	[]
Data type	Inherit: auto

3.21.1.1.4. "In2" (Inport)

Table 3.279. "In2" Parameters

Parameter	Value
Port number	2
Port dimensions (-1 for inherited)	-1
Sample time (-1 for inherited)	-1
Minimum	[]
Maximum	[]
Data type	Inherit: auto

3.21.1.1.5. "In3" (Inport)

Table 3.280. "In3" Parameters

Parameter	Value
Port number	3
Port dimensions (-1 for inherited)	-1

Parameter	Value
Sample time (-1 for inherited)	-1
Minimum	[]
Maximum	[]
Data type	Inherit: auto

3.21.1.1.6. "In4" (Inport)

Table 3.281. "In4" Parameters

Parameter	Value
Port number	4
Port dimensions (-1 for inherited)	-1
Sample time (-1 for inherited)	-1
Minimum	[]
Maximum	[]
Data type	Inherit: auto

3.21.1.1.7. "Out1" (Outport)

Table 3.282. "Out1" Parameters

Parameter	Value
Port number	1
Icon display	Port number
Minimum	[]
Maximum	[]
Data type	Inherit: auto
Lock output data type setting against changes by the fixed-point tools	off
Output as nonvirtual bus in parent model	off
Port dimensions (-1 for inherited)	-1
Variable-size signal	Inherit
Sample time (-1 for inherited)	-1

Parameter	Value
Source of initial output value	Dialog
Output when disabled	held
Initial output	[]

3.21.1.1.8. "Product" (Product)

Table 3.283. "Product" Parameters

Parameter	Value
Number of inputs	2
Multiplication	Element-wise(.*)
Multiply over	All dimensions
Dimension	1
Require all inputs to have the same data type	off
Output minimum	[]
Output maximum	[]
Output data type	Inherit: Inherit via internal rule
Lock output data type setting against changes by the fixed-point tools	off
Integer rounding mode	Floor
Saturate on integer overflow	off
Sample time (-1 for inherited)	-1

3.21.1.1.9. "Product4" (Product)

Table 3.284. "Product4" Parameters

Parameter	Value
Number of inputs	2
Multiplication	Element-wise(.*)
Multiply over	All dimensions
Dimension	1
Require all inputs to have the same data type	off
Output minimum	[]

Parameter	Value
Output maximum	[]
Output data type	Inherit: Inherit via internal rule
Lock output data type setting against changes by the fixed-point tools	off
Integer rounding mode	Floor
Saturate on integer overflow	off
Sample time (-1 for inherited)	-1

3.21.1.1.10. "u5" (Constant)

Table 3.285. "u5" Parameters

Parameter	Value
Constant value	9.8
Interpret vector parameters as 1-D	on
Output minimum	[]
Output maximum	[]
Output data type	Inherit: Inherit from 'Constant value'
Lock output data type setting against changes by the fixed-point tools	off
Sample time	inf
Frame period	inf

Chapter 4. System Design Variables

Table of Contents

4.1. Design Variable Summary	158
4.2. Design Variable Details	158

4.1. Design Variable Summary

Table 4.1. Design Variables

Variable Name	Parent Blocks	Size	Bytes	Class	Value
g	Gain [72] Gain1 [73]	1x1	8	double	9.8000
kdp	kdp [51]	1x1	8	double	0.4000
kdps	kdps [52]	1x1	8	double	0.4000
kdt	kdt [52]	1x1	8	double	0.4000
kdx	Gain3 [74]	1x1	8	double	0.5000
kdy	Gain5 [75]	1x1	8	double	0.5000
kdz	kdz [53]	1x1	8	double	20
kix	Gain6 [75]	1x1	8	double	0
kiy	Gain7 [76]	1x1	8	double	0
kpp	kpp [53]	1x1	8	double	0.8000
kpps	kpps [54]	1x1	8	double	1
kpt	kpt [54]	1x1	8	double	1.2000
kpx	Gain2 [73]	1x1	8	double	0.8000
kpy	Gain4 [74]	1x1	8	double	0.8000
kpz	kpz [55]	1x1	8	double	100

4.2. Design Variable Details

SampleTime. 0.1000

Used by Blocks:

- Navigation_loop_Animation/VR Sink [9]

Resolved in: mask workspace (Navigation_loop_Animation/VR Sink)

VideoDimensions. []

Used by Blocks:

- Navigation_loop_Animation/VR Sink [9]

Resolved in: mask workspace (Navigation_loop_Animation/VR Sink)

g. 9.8000

Used by Blocks:

- Navigation_loop_Animation/Position controller/Gain [72]
- Navigation_loop_Animation/Position controller/Gain1 [73]

Resolved in: base workspace

kdp. 0.4000

Used by Blocks:

- Navigation_loop_Animation/PD controller/kdp [51]

Resolved in: base workspace

kdps. 0.4000

Used by Blocks:

- Navigation_loop_Animation/PD controller/kdps [52]

Resolved in: base workspace

kdt. 0.4000

Used by Blocks:

- Navigation_loop_Animation/PD controller/kdt [52]

Resolved in: base workspace

kdx. 0.5000

Used by Blocks:

- Navigation_loop_Animation/Position controller/Gain3 [74]

Resolved in: base workspace

kdy. 0.5000

Used by Blocks:

- Navigation_loop_Animation/Position controller/Gain5 [75]

Resolved in: base workspace

kdz. 20

Used by Blocks:

- Navigation_loop_Animation/PD controller/kdz [53]

Resolved in: base workspace

kix. 0

Used by Blocks:

- Navigation_loop_Animation/Position controller/Gain6 [75]

Resolved in: base workspace

kiy. 0

Used by Blocks:

- Navigation_loop_Animation/Position controller/Gain7 [76]

Resolved in: base workspace

kpp. 0.8000

Used by Blocks:

- Navigation_loop_Animation/PD controller/kpp [53]

Resolved in: base workspace

kpps. 1

Used by Blocks:

- Navigation_loop_Animation/PD controller/kpps [54]

Resolved in: base workspace

kpt. 1.2000

Used by Blocks:

- Navigation_loop_Animation/PD controller/kpt [54]

Resolved in: base workspace

kpx. 0.8000

Used by Blocks:

- Navigation_loop_Animation/Position controller/Gain2 [73]

Resolved in: base workspace

kpy. 0.8000

Used by Blocks:

- Navigation_loop_Animation/Position controller/Gain4 [74]

Resolved in: base workspace

kpz. 100

Used by Blocks:

- Navigation_loop_Animation/PD controller/kpz [55]

Resolved in: base workspace

Chapter 5. Requirements Traceability

Navigation_loop_Animation does not contain requirements traceability links.

Chapter 6. System Model Configuration

Table 6.1. Navigation_loop_Animation Configuration Set

Property	Value
Description	
Components	[Navigation_loop_Animation Configuration Set.Components(1) [163], Navigation_loop_Animation Configuration Set.Components(2) [164], Navigation_loop_Animation Configuration Set.Components(3) [165], Navigation_loop_Animation Configuration Set.Components(4) [166], Navigation_loop_Animation Configuration Set.Components(5) [168], Navigation_loop_Animation Configuration Set.Components(6) [170], Navigation_loop_Animation Configuration Set.Components(7) [170], Navigation_loop_Animation Configuration Set.Components(8) [171]]
Name	Configuration
SimulationMode	normal

Table 6.2. Navigation_loop_Animation Configuration Set.Components [163](1)

Property	Value
Name	Solver
Description	
Components	
StartTime	0.0
StopTime	20
AbsTol	auto
FixedStep	auto
InitialStep	auto
MaxNumMinSteps	-1
MaxOrder	5
ZcThreshold	auto
ConsecutiveZCsStepRelTol	10*128*eps
MaxConsecutiveZCs	1000
ExtrapolationOrder	4
NumberNewtonIterations	1
MaxStep	auto
MinStep	auto
MaxConsecutiveMinStep	1
RelTol	1e-3

SolverMode	Auto
EnableConcurrentExecution	off
ConcurrentTasks	off
Solver	ode45
SolverName	ode45
SolverType	Variable-step
SolverJacobianMethodControl	auto
ShapePreserveControl	DisableAll
ZeroCrossControl	UseLocalSettings
ZeroCrossAlgorithm	Nonadaptive
SolverResetMethod	Fast
PositivePriorityOrder	off
AutoInsertRateTranBlk	off
SampleTimeConstraint	Unconstrained
InsertRTBMode	Whenever possible
SampleTimeProperty	

Table 6.3. Navigation_loop_Animation Configuration Set.Components [163](2)

Property	Value
Name	Data Import/Export
Description	
Components	
Decimation	1
ExternalInput	[t, u]
FinalStateName	xFinal
InitialState	xInitial
LimitDataPoints	on
MaxDataPoints	1000
LoadExternalInput	off
LoadInitialState	off
SaveFinalState	off
SaveCompleteFinalSimState	off
SaveFormat	Array
SignalLoggingSaveFormat	ModelDataLogs
SaveOutput	on
SaveState	off
SignalLogging	on
DSMLogging	on
InspectSignalLogs	off

VisualizeSimOutput	on
SaveTime	on
ReturnWorkspaceOutputs	off
StateSaveName	xout
TimeSaveName	tout
OutputSaveName	yout
SignalLoggingName	logsout
DSMLoggingName	dsmout
OutputOption	RefineOutputTimes
OutputTimes	[]
ReturnWorkspaceOutputsName	out
Refine	1

Table 6.4. Navigation_loop_Animation Configuration Set.Components [163](3)

Property	Value
Name	Optimization
Description	
Components	
BlockReduction	on
BooleanDataType	on
ConditionallyExecuteInputs	on
InlineParams	off
UseDivisionForNetSlopeComputation	off
UseFloatMulNetSlope	off
DefaultUnderspecifiedDataType	double
UseSpecifiedMinMax	off
InlineInvariantSignals	off
OptimizeBlockIOStorage	on
BufferReuse	on
GlobalBufferReuse	on
GlobalVariableUsage	None
StrengthReduction	off
AdvancedOptControl	
EnforceIntegerDowncast	on
ExpressionFolding	on
BooleansAsBitfields	off
BitfieldContainerType	uint_T
EnableMemcpy	on
MemcpyThreshold	64

PassReuseOutputArgsAs	Structure reference
PassReuseOutputArgsThreshold	12
FoldNonRolledExpr	on
LocalBlockOutputs	on
RollThreshold	5
StateBitsets	off
DataBitsets	off
ActiveStateOutputEnumStorageType	Native Integer
UseTempVars	off
ZeroExternalMemoryAtStartup	on
ZeroInternalMemoryAtStartup	on
InitFltsAndDblsToZero	off
NoFixptDivByZeroProtection	off
EfficientFloat2IntCast	off
EfficientMapNaN2IntZero	on
OptimizeModelRefInitCode	off
LifeSpan	inf
EvaledLifeSpan	Inf
MaxStackSize	Inherit from target
BufferReusableBoundary	on
SimCompilerOptimization	off
AccelVerboseBuild	off

Table 6.5. Navigation_loop_Animation Configuration Set.Components [163](4)

Property	Value
Name	Diagnostics
Description	
Components	
RTPrefix	error
ConsistencyChecking	none
ArrayBoundsChecking	none
SignalInfNanChecking	none
SignalRangeChecking	none
ReadBeforeWriteMsg	UseLocalSettings
WriteAfterWriteMsg	UseLocalSettings
WriteAfterReadMsg	UseLocalSettings
AlgebraicLoopMsg	warning
ArtificialAlgebraicLoopMsg	warning
SaveWithDisabledLinksMsg	warning

SaveWithParameterizedLinksMsg	warning
CheckSSInitialOutputMsg	on
UnderspecifiedInitializationDetection	Classic
MergeDetectMultiDrivingBlocksExec	none
CheckExecutionContextPreStartOutputMsg	off
CheckExecutionContextRuntimeOutputMsg	off
SignalResolutionControl	UseLocalSettings
BlockPriorityViolationMsg	warning
MinStepSizeMsg	warning
TimeAdjustmentMsg	none
MaxConsecutiveZCsMsg	error
MaskedZcDiagnostic	warning
IgnoredZcDiagnostic	warning
SolverPrmCheckMsg	warning
InheritedTsInSrcMsg	warning
DiscreteInheritContinuousMsg	warning
MultiTaskDSMMsg	error
MultiTaskCondExecSysMsg	error
MultiTaskRateTransMsg	error
SingleTaskRateTransMsg	none
TasksWithSamePriorityMsg	warning
SigSpecEnsureSampleTimeMsg	warning
CheckMatrixSingularityMsg	none
IntegerOverflowMsg	warning
Int32ToFloatConvMsg	warning
ParameterDowncastMsg	error
ParameterOverflowMsg	error
ParameterUnderflowMsg	none
ParameterPrecisionLossMsg	warning
ParameterTunabilityLossMsg	warning
FixptConstUnderflowMsg	none
FixptConstOverflowMsg	none
FixptConstPrecisionLossMsg	none
UnderSpecifiedDataTypeMsg	none
UnnecessaryDatatypeConvMsg	none
VectorMatrixConversionMsg	none
InvalidFcnCallConnMsg	error
FcnCallInpInsideContextMsg	UseLocalSettings
SignalLabelMismatchMsg	none

UnconnectedInputMsg	warning
UnconnectedOutputMsg	warning
UnconnectedLineMsg	warning
SFcnCompatibilityMsg	none
FrameProcessingCompatibilityMsg	error
UniqueDataStoreMsg	none
BusObjectLabelMismatch	warning
RootOutputRequireBusObject	warning
AssertControl	UseLocalSettings
Echo	
EnableOverflowDetection	off
ModelReferenceIOMsg	none
ModelReferenceVersionMismatchMessage	none
ModelReferenceIOMismatchMessage	none
ModelReferenceCSMismatchMessage	none
ModelReferenceSimTargetVerbose	off
UnknownTsInhSupMsg	warning
ModelReferenceDataLoggingMessage	warning
ModelReferenceSymbolNameMessage	warning
ModelReferenceExtraNoncontSigs	error
StateNameClashWarn	warning
SimStateInterfaceChecksumMismatchMsg	warning
SimStateOlderReleaseMsg	error
InitInArrayFormatMsg	warning
StrictBusMsg	ErrorLevel1
BusNameAdapt	WarnAndRepair
NonBusSignalsTreatedAsBus	none
SFUnusedDataAndEventsDiag	warning
SFUnexpectedBacktrackingDiag	warning
SFInvalidInputDataAccessInChartInitDiag	warning
SFNoUnconditionalDefaultTransitionDiag	warning
SFTransitionOutsideNaturalParentDiag	warning
SFUnconditionalTransitionShadowingDiag	warning
SFUndirectedBroadcastEventsDiag	warning
SFTransitionActionBeforeConditionDiag	warning
SFOutputUsedAsStateInMooreChartDiag	error
IntegerSaturationMsg	warning

Table 6.6. Navigation_loop_Animation Configuration Set.Components [163](5)

Property	Value
Name	Hardware Implementation
Description	
Components	
ProdBitPerChar	8
ProdBitPerShort	16
ProdBitPerInt	32
ProdBitPerLong	32
ProdBitPerLongLong	64
ProdBitPerFloat	32
ProdBitPerDouble	64
ProdBitPerPointer	32
ProdLargestAtomicInteger	Char
ProdLargestAtomicFloat	None
ProdIntDivRoundTo	Undefined
ProdEndianess	Unspecified
ProdWordSize	32
ProdShiftRightIntArith	on
ProdLongLongMode	off
ProdHWDeviceType	32-bit Generic
TargetBitPerChar	8
TargetBitPerShort	16
TargetBitPerInt	32
TargetBitPerLong	32
TargetBitPerLongLong	64
TargetBitPerFloat	32
TargetBitPerDouble	64
TargetBitPerPointer	32
TargetLargestAtomicInteger	Char
TargetLargestAtomicFloat	None
TargetShiftRightIntArith	on
TargetLongLongMode	off
TargetIntDivRoundTo	Undefined
TargetEndianess	Unspecified
TargetWordSize	32
TargetTypeEmulationWarnSuppressLevel	0
TargetPreprocMaxBitsSint	32
TargetPreprocMaxBitsUint	32

TargetHWDeviceType	Specified
TargetUnknown	off
ProdEqTarget	on

Table 6.7. Navigation_loop_Animation Configuration Set.Components [163](6)

Property	Value
Name	Model Referencing
Description	
Components	
UpdateModelReferenceTargets	IfOutOfDateOrStructuralChange
CheckModelReferenceTargetMessage	error
EnableParallelModelReferenceBuilds	off
ParallelModelReferenceErrorOnInvalidPool	on
ParallelModelReferenceMATLABWorkerInit	None
ModelReferenceNumInstancesAllowed	Multi
PropagateVarSize	Infer from blocks in model
ModelDependencies	
ModelReferencePassRootInputsByReference	on
ModelReferenceMinAlgLoopOccurrences	off
PropagateSignalLabelsOutOfModel	off
SupportModelReferenceSimTargetCustomCode	off

Table 6.8. Navigation_loop_Animation Configuration Set.Components [163](7)

Property	Value
Name	Simulation Target
Description	
Components	
SimCustomSourceCode	
SimCustomHeaderCode	
SimCustomInitializer	
SimCustomTerminator	
SimReservedNameArray	
SimUserSources	
SimUserIncludeDirs	
SimUserLibraries	
SFSimEnableDebug	off
SFSimOverflowDetection	on
SFSimEcho	on
SimBlas	on

SimCtrlC	on
SimExtrinsic	on
SimIntegrity	on
SimUseLocalCustomCode	off
SimParseCustomCode	on
SimBuildMode	sf_incremental_build
SimDataInitializer	
SimGenImportedTypeDefs	off

Table 6.9. Navigation_loop_Animation Configuration Set.Components [163](8)

Property	Value
Name	Code Generation
SystemTargetFile	grt.tlc
TLCOptions	
CodeGenDirectory	
GenCodeOnly	off
MakeCommand	make_rtw
GenerateMakefile	on
PackageGeneratedCodeAndArtifacts	off
PackageName	
TemplateMakefile	grt_default_tmf
PostCodeGenCommand	
Description	
GenerateReport	off
SaveLog	off
RTWVerbose	on
RetainRTWFile	off
ProfileTLC	off
TLCDebug	off
TLCCoverage	off
TLCAssert	off
ProcessScriptMode	Default
ConfigurationMode	Optimized
ProcessScript	
ConfigurationScript	
ConfigAtBuild	off
RTWUseLocalCustomCode	off
RTWUseSimCustomCode	off
CustomSourceCode	

CustomHeaderCode	
CustomInclude	
CustomSource	
CustomLibrary	
CustomInitializer	
CustomTerminator	
Toolchain	Automatically locate an installed toolchain
BuildConfiguration	Faster Builds
CustomToolchainOptions	
IncludeHyperlinkInReport	off
LaunchReport	off
PortableWordSizes	off
GenerateErtSFunction	off
CreateSILPILBlock	None
CodeExecutionProfiling	off
CodeExecutionProfileVariable	executionProfile
CodeProfilingSaveOptions	SummaryOnly
CodeProfilingInstrumentation	off
SILDebugging	off
TargetLang	C
IncludeERTFirstTime	off
GenerateTraceInfo	off
GenerateTraceReport	off
GenerateTraceReportSl	off
GenerateTraceReportSf	off
GenerateTraceReportEml	off
GenerateCodeInfo	off
GenerateWebview	off
GenerateCodeMetricsReport	off
GenerateCodeReplacementReport	off
RTWCompilerOptimization	off
ObjectivePriorities	
RTWCustomCompilerOptimizations	
CheckMdlBeforeBuild	Off
CustomRebuildMode	OnUpdate
DataInitializer	
Components	[Navigation_loop_Animation Configuration Set.Components(8).Components(1) [173], Navigation_loop_Animation Configuration Set.Components(8).Components(2) [174]]

Table 6.10. Navigation_loop_Animation Configuration
Set.Components(8).Components [172](1)

Property	Value
Name	Code Appearance
Description	
Components	
Comment	
ForceParamTrailComments	off
GenerateComments	on
CommentStyle	Auto
IgnoreCustomStorageClasses	on
IgnoreTestpoints	off
IncHierarchyInIds	off
MaxIdLength	31
PreserveName	off
PreserveNameWithParent	off
ShowEliminatedStatement	off
OperatorAnnotations	off
IncAutoGenComments	off
SimulinkDataObjDesc	off
SFDataObjDesc	off
MATLABFcnDesc	off
IncDataTypeInIds	off
PrefixModelToSubsysFcnNames	on
MangleLength	1
CustomSymbolStr	\$R\$N\$M
CustomSymbolStrGlobalVar	\$R\$N\$M
CustomSymbolStrType	\$N\$R\$M_T
CustomSymbolStrField	\$N\$M
CustomSymbolStrFcn	\$R\$N\$M\$F
CustomSymbolStrFcnArg	rt\$I\$N\$M
CustomSymbolStrBlkIO	rtb_\$N\$M
CustomSymbolStrTmpVar	\$N\$M
CustomSymbolStrMacro	\$R\$N\$M
CustomSymbolStrUtil	\$N\$C
CustomCommentsFcn	
DefineNamingRule	None
DefineNamingFcn	

ParamNamingRule	None
ParamNamingFcn	
SignalNamingRule	None
SignalNamingFcn	
InsertBlockDesc	off
InsertPolySpaceComments	off
SimulinkBlockComments	on
MATLABSourceComments	off
EnableCustomComments	off
InternalIdentifier	Shortened
InlinedPrmAccess	Literals
ReqsInCode	off
UseSimReservedNames	off
ReservedNameArray	

Table 6.11. Navigation_loop_Animation Configuration Set.Components(8).Components [172](2)

Property	Value
Name	Target
Description	
Components	
IsERTTarget	off
TargetFcnLib	ansi_tfl_table_tmw.mat
TargetLibSuffix	
TargetPreCompLibLocation	
GenFloatMathFcnCalls	NOT IN USE
TargetLangStandard	C89/C90 (ANSI)
TargetFunctionLibrary	NOT IN USE
CodeReplacementLibrary	None
UtilityFuncGeneration	Auto
ERTMultiwordTypeDef	System defined
ERTMultiwordLength	256
MultiwordLength	2048
GenerateFullHeader	on
InferredTypesCompatibility	off
GenerateSampleERTMain	off
GenerateTestInterfaces	off
ModelReferenceCompliant	on
ParMdlRefBuildCompliant	on

CompOptLevelCompliant	on
ConcurrentExecutionCompliant	on
IncludeMdlTerminateFcn	on
GeneratePreprocessorConditionals	Disable all
CombineOutputUpdateFcns	off
CombineSignalStateStructs	off
SuppressErrorStatus	off
ERTFirstTimeCompliant	off
IncludeFileDelimiter	Auto
ERTCustomFileBanners	off
SupportAbsoluteTime	on
LogVarNameModifier	rt_
MatFileLogging	on
MultiInstanceERTCode	off
CodeInterfacePackaging	Nonreusable function
SupportNonFinite	on
SupportComplex	on
PurelyIntegerCode	off
SupportContinuousTime	on
SupportNonInlinedSFcns	on
SupportVariableSizeSignals	off
ParenthesesLevel	Nominal
CastingMode	Nominal
GenerateClassInterface	off
ModelStepFunctionPrototypeControlCompliant	off
CPPClassGenCompliant	on
AutosarCompliant	off
GRTInterface	on
GenerateAllocFcn	off
UseToolchainInfoCompliant	on
GenerateSharedConstants	on
ExtMode	off
ExtModeStaticAlloc	off
ExtModeTesting	off
ExtModeStaticAllocSize	1000000
ExtModeTransport	0
ExtModeMexFile	ext_comm
ExtModeMexArgs	
ExtModeIntrfLevel	Level1

System Model Configuration

RTWCAPISignals	off
RTWCAPIParams	off
RTWCAPIStates	off
RTWCAPIRootIO	off
GenerateASAP2	off
MultiInstanceErrorCode	Error

Chapter 7. Glossary

Atomic Subsystem. A subsystem treated as a unit by an implementation of the design documented in this report. The implementation computes the outputs of all the blocks in the atomic subsystem before computing the next block in the parent system's block execution order (sorted list).

Block Diagram. A Simulink block diagram represents a set of simultaneous equations that relate a system or subsystem's inputs to its outputs as a function of time. Each block in the diagram represents an equation of the form $y = f(t, x, u)$ where t is the current time, u is a block input, y is a block output, and x is a system state (see the Simulink documentation for information on the functions represented by the various types of blocks that make up the diagram). Lines connecting the blocks represent dependencies among the blocks, i.e., inputs whose current values are the outputs of other blocks. An implementation of a design described in this document computes a root or atomic system's outputs at each time step by computing the outputs of the blocks in an order determined by block input/output dependencies.

Block Parameter. A variable that determines the output of a block along with its inputs, for example, the gain parameter of a Gain block.

Block Execution Order. The order in which Simulink evaluates blocks during simulation of a model. The block execution order determined by Simulink ensures that a block executes only after all blocks on whose outputs it depends are executed.

Checksum. A number that indicates whether different versions of a model or atomic subsystem differ functionally or only cosmetically. Different checksums for different versions of the same model or subsystem indicate that the versions differ functionally.

Design Variable. A symbolic (MATLAB) variable or expression used as the value of a block parameter. Design variables allow the behavior of the model to be altered by altering the value of the design variable.

Signal. A block output, so-called because block outputs typically vary with time.

Virtual Subsystem. A subsystem that is purely graphical, i.e., is intended to reduce the visual complexity of the block diagram of which it is a subsystem. An implementation of the design treats the blocks in the subsystem as part of the first nonvirtual ancestor of the virtual subsystem (see Atomic Subsystem).

Chapter 8. About this Report

Table of Contents

8.1. Report Overview	178
8.2. Root System Description	178
8.3. Subsystem Descriptions	179
8.4. State Chart Descriptions	179

8.1. Report Overview

This report describes the design of the Navigation_loop_Animation system. The report was generated automatically from a Simulink model used to validate the design. It contains the following sections:

Model Version. Specifies information about the version of the model from which this design description was generated. Includes the model checksum, a number that indicates whether different versions of the model differ functionally or only cosmetically. Different checksums for different versions indicate that the versions differ functionally.

Root System. Describes the design's root system.

Subsystems. Describes each of the design's subsystems.

Design Variables. Describes system design variables, i.e., MATLAB variables and expressions used as block parameter values.

System Model Configuration. Lists the configuration parameters, e.g., start and stop time, of the model used to simulate the system described by this report.

Requirements Traceability. Shows design requirements associated with elements of the design model. This section appears only if the design model contains requirements links.

Glossary. Defines Simulink terms used in this report.

8.2. Root System Description

This section describes a design's root system. It contains the following sections:

Diagram. Simulink block diagram that represents the algorithm used to compute the root system's outputs.

Description. Description of the root system. This section appears only if the model's root system has a Documentation property or a Doc block.

Interface. Name, data type, width, and other properties of the root system's input and output signals. The number of the block port that outputs the signal appears in angle brackets appended to the signal name. This section appears only if the root system has input or output ports.

Blocks. This section has two subsections:

- **Parameters.** Describes key parameters of blocks in the root system. This section also includes graphical and/or tabular representations of lookup table data used by lookup table blocks, i.e., blocks that use lookup tables to compute their outputs.

- **Block Execution Order.** Order in which blocks must be executed at each time step in order to ensure that each block's inputs are available when it executes.

State Charts. Describes state charts used in the root system. This section appears only if the root system contains Stateflow blocks.

8.3. Subsystem Descriptions

This section describes a design's subsystems. Each subsystem description contains the following sections:

Checksum. This section appears only if the subsystem is an atomic subsystem. The checksum indicates whether the version of the model subsystem used to generate this report differs functionally from other versions of the model subsystem. If two model checksums differ, the corresponding versions of the model differ functionally.

Diagram. Simulink block diagram that graphically represents the algorithm used to compute the subsystem's outputs.

Description. Description of the subsystem. This section appears only if the subsystem has a Documentation property or contains a Doc block.

Interface. Name, data type, width, and other properties of the subsystem's input and output signals. The number of the block port that outputs the signal appears in angle brackets appended to the signal name. This section appears only if the subsystem is atomic and has input or output ports.

Blocks. Blocks that this subsystem contains. This section has two subsections:

- **Parameters.** Key parameters of blocks in the subsystem. This section also includes graphical and/or tabular representations of lookup table data used by lookup table blocks, blocks that use lookup tables to compute their outputs.
- **Block Execution Order.** Order in which the subsystem's blocks must be executed at each time step in order to ensure that each block's inputs are available when the block executes. This section appears only if the subsystem is atomic. Note: in Acrobat(PDF) reports, the number in square brackets next to the block name is a hyperlink to the block parameter table. The number has no model significance.

State Charts. Describes state charts used in the subsystem. This section appears only if the root system contains Stateflow blocks.

8.4. State Chart Descriptions

This section describes the state machines used by Stateflow blocks to compute their outputs, i.e., Stateflow blocks. Each state machine description contains the following sections:

Chart. Diagram representing the state machine.

States. Describes the state machine's states. Each state description includes the state's diagram and diagrams and/or descriptions of graphical functions, Simulink functions, truth tables, and MATLAB functions parented by the state.

Transitions. Transitions between the state machine's states. Each transition description specifies the values of key transition properties. Appears only if a transition has properties that do not appear on the chart.

Junctions. Transition junctions. Each junction description specifies the values of key junction properties. Appears only if a junction has properties that do not appear on the chart.

Events. Events that trigger state transitions. Each event description specifies the values of key event properties.

Data. Data types and other properties of the Stateflow block's inputs, outputs, and other state machine data.

Targets. Executable implementations of the state machine used to compute the outputs of the corresponding Stateflow block.

MATLAB Supporting Functions. List of functions invoked by MATLAB functions defined in the chart.