


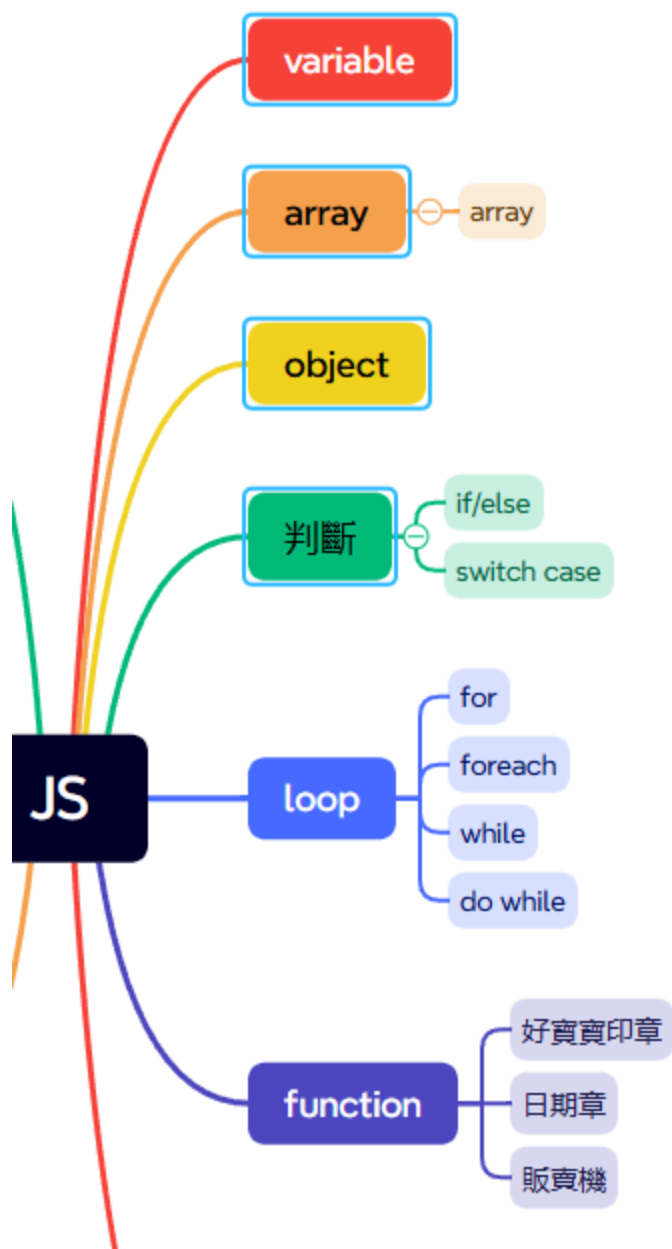

程式碼 貼到obsidan or 記事本

```
composer create-project "laravel/laravel:^12.0"
example-app
```

ls

```
User@1113-Teacher MINGW64 /c/xampp/htdocs/laravel
$ ls
example-app/

User@1113-Teacher MINGW64 /c/xampp/htdocs/laravel
$ cd example-app/

User@1113-Teacher MINGW64 /c/xampp/htdocs/laravel/example-app
$
```

The screenshot shows a terminal window on the left and a web browser on the right. The terminal displays the following commands and output:

```
INFO Running migration:
0001_01_01_000000_create...
0001_01_01_000001_create...
0001_01_01_000002_create...

User@1113-Teacher MINGW64
$ ls
example-app/

User@1113-Teacher MINGW64
$ cd example-app/

User@1113-Teacher MINGW64
$ php artisan serve

INFO Server running on [http://127.0.0.1:8000].

Press Ctrl+C to stop the server

2026-01-08 13:47:17 / ..... ~ 0.23ms
2026-01-08 13:47:17 /favicon.ico ..... ~ 0.09ms
```

The web browser on the right shows the Laravel welcome page at localhost:8000. The page contains the text "讓我們開始吧" (Let's get started) and "Laravel擁有極為豐富的生態系。我們建議從以下內容入手。" (Laravel has a very rich ecosystem. We recommend starting with the following content). It includes links for "閱讀 文檔" (Read the docs) and "觀看影片教學 Laracasts" (Watch video tutorials on Laracasts), and a button labeled "立即部署" (Deploy now).

composer create-project "laravel/laravel:^10.0"
example-app

composer create-project "laravel/laravel:^12.0"
test0108

XAMPP Control Panel v3.3.0

[Config](#)
[Netstat](#)
[Shell](#)

Module	PID(s)	Port(s)	Actions
Apache			Start Admin Config Logs
MySQL			Start Admin Config
FileZilla			Start Admin Config
Mercury			Start Admin Config
Tomcat			Start Admin Config

02:24:05 [Apache] Status change detected: running

02:24:25 [Apache] Attempting to stop Apache (PID: 6936)

02:24:25 [Apache] Attempting to stop Apache (PID: 2096)

02:24:25 [Apache] Status change detected: stopped

02:24:25 [mysql] Attempting to start MySQL app...

02:24:25 [mysql] Status change detected: running

Apache (httpd.conf)

Apache (httpd-ssl.conf)

Apache (httpd-xampp.conf)

PHP (php.ini)

phpMyAdmin (config.inc.php)

<Browse> [Apache]

<Browse> [PHP]

<Browse> [phpMyAdmin]

檔案 編輯 檢視

```
#
# This is the main Apache HTTP server configuration file. It contains
# configuration directives that give the server its instructions.
# See <URL:http://httpd.apache.org/docs/2.4/> for detailed information.
# In particular, see
# <URL:http://httpd.apache.org/docs/2.4/mod/directives.html>
# for a discussion of each configuration directive.
#
# Do NOT simply read the instructions in here without understanding
# what they do. They're here only as hints or reminders. If you are unsure
# consult the online docs. You have been warned.
#
# Configuration and logfile names: If the filenames you specify for many
# of the server's control files begin with "/" (or "drive:/" for Win32), the
# server will use that explicit path. If the filenames do *not* begin
# with "/", the value of ServerRoot is prepended -- so "logs/access_log"
# with ServerRoot set to "/usr/local/apache2" will be interpreted by the
# server as "/usr/local/apache2/logs/access_log", whereas "/logs/access_log"
# will be interpreted as '/logs/access_log'.
#
# NOTE: Where filenames are specified, you must use forward slashes
# instead of backslashes (e.g., "c:/apache" instead of "c:\apache").
```

documentRoot

取代

