

```
composer create-project "laravel/laravel:^10.0"
example-app
composer create-project "laravel/laravel:^12.0"
home0114
```

```
135 composer create-project "laravel/laravel:^12.0" home0114
136 ls
137 cd home0114
138 php artisan
139 php history
140 history
```

XAMPP

httpd.conf

```
DocumentRoot "C:\xampp\htdocs\laravel\home0114\public"
<Directory "C:\xampp\htdocs\laravel\home0114\public">
```

route web.php

```
routes > web.php > ...
1  <?php
2
3  use Illuminate\Support\Facades\Route;
4
5  Route::get('/', function () {
6      return view('welcome');
7  });
8
9  Route::get('/home0114', function () {
10     return view('home0114');
11 });
12
13
```

views

```
resources > views > home0114.blade.php > html > body
1  <!DOCTYPE html>
2  <html lang="en">
3  <head>
4      <meta charset="UTF-8">
5      <meta name="viewport" content="width=device-width, initial-scale=1.0">
6      <meta http-equiv="X-UA-Compatible" content="ie=edge">
7      <title>Document</title>
8  </head>
9  <body>
10     Hello Home0114 view
11 </body>
12 </html>
```

```
152  php artisan route:list
153  ls
154  cd ..
155  ls
156  php artisan
157  cd home0114/
158  history
```

Google

laravel helper



Common categories and examples include:

Laravel fo

顯示更多 ▾





Laravel

<https://laravel.com/docs/helpers> · 翻譯這個網頁

Helpers - Laravel 12.x - The PHP Framework For Web ...

Laravel includes a variety of global "helper" PHP functions. Many of these functions are used by the framework itself; however, you are free to use them in ...

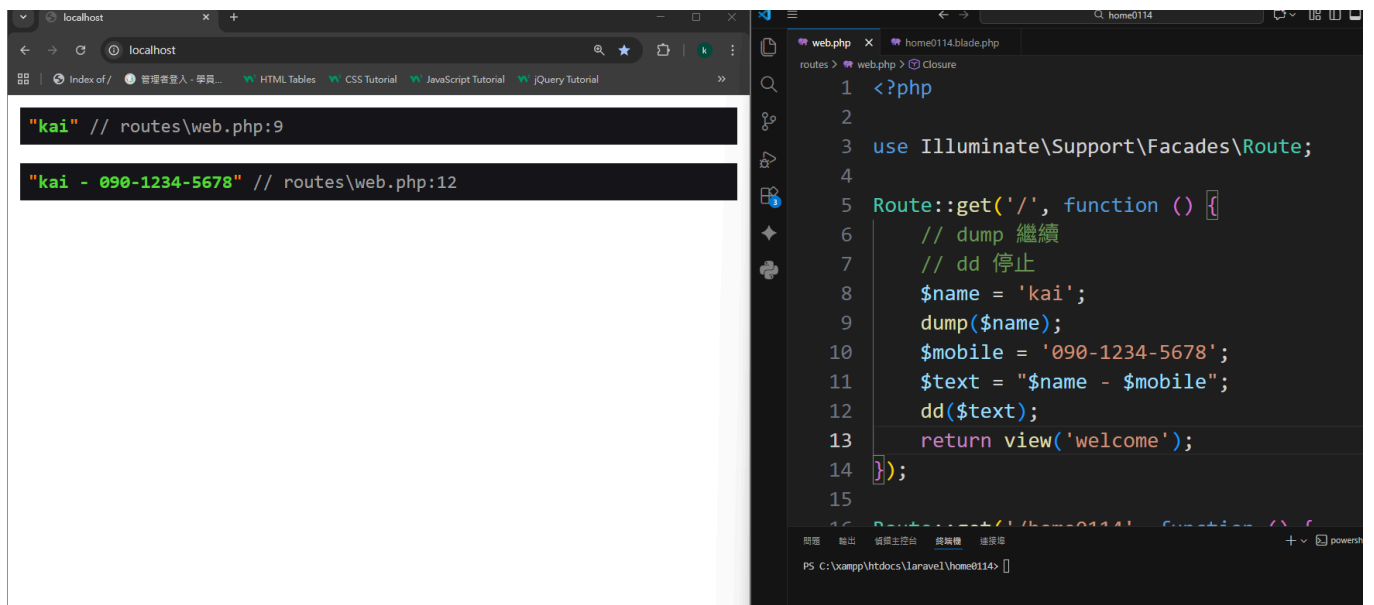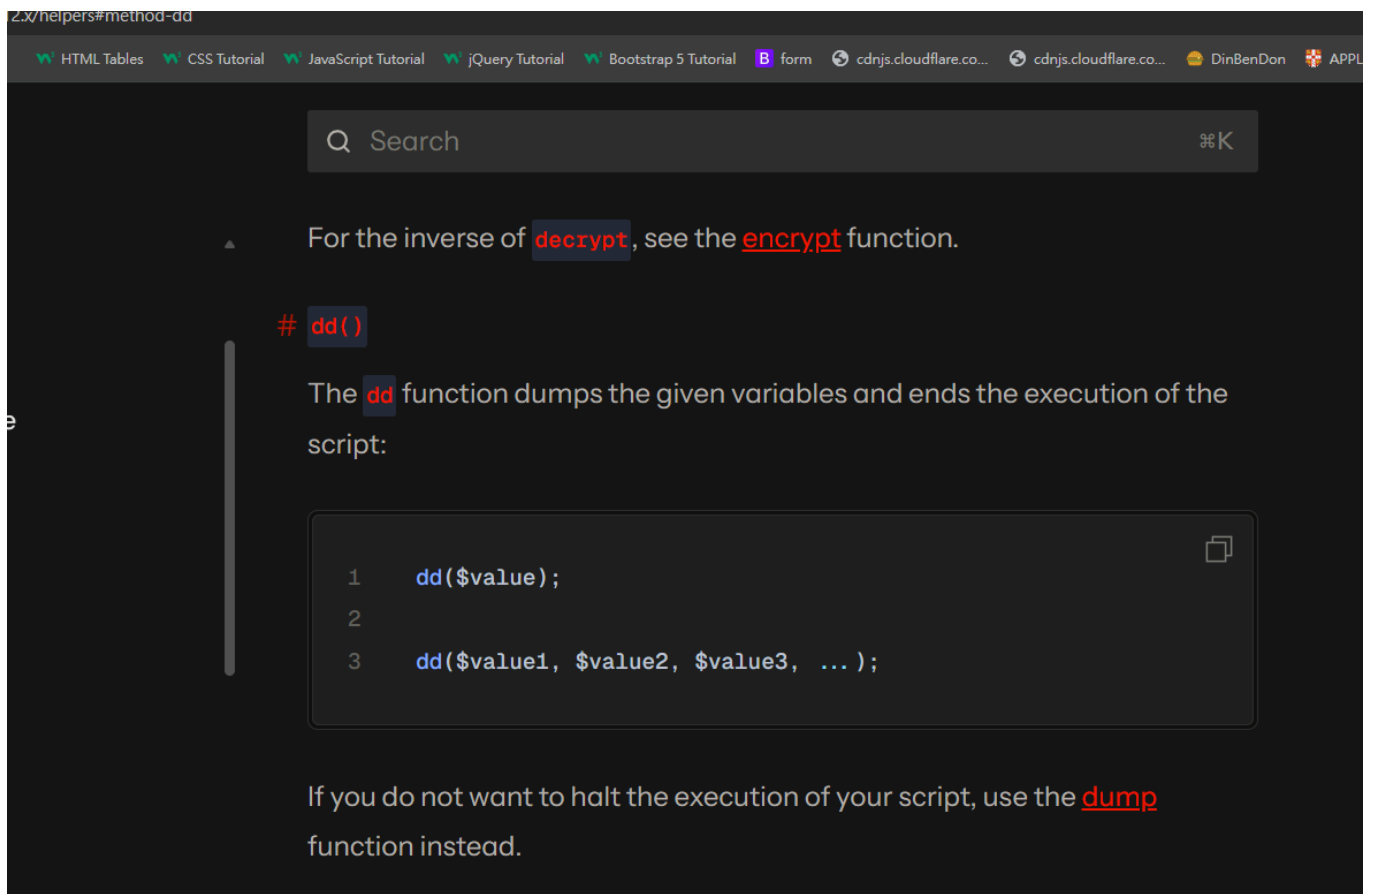




git clone

https://github.com/chengkk0910/laravel_20260114.

git

origin

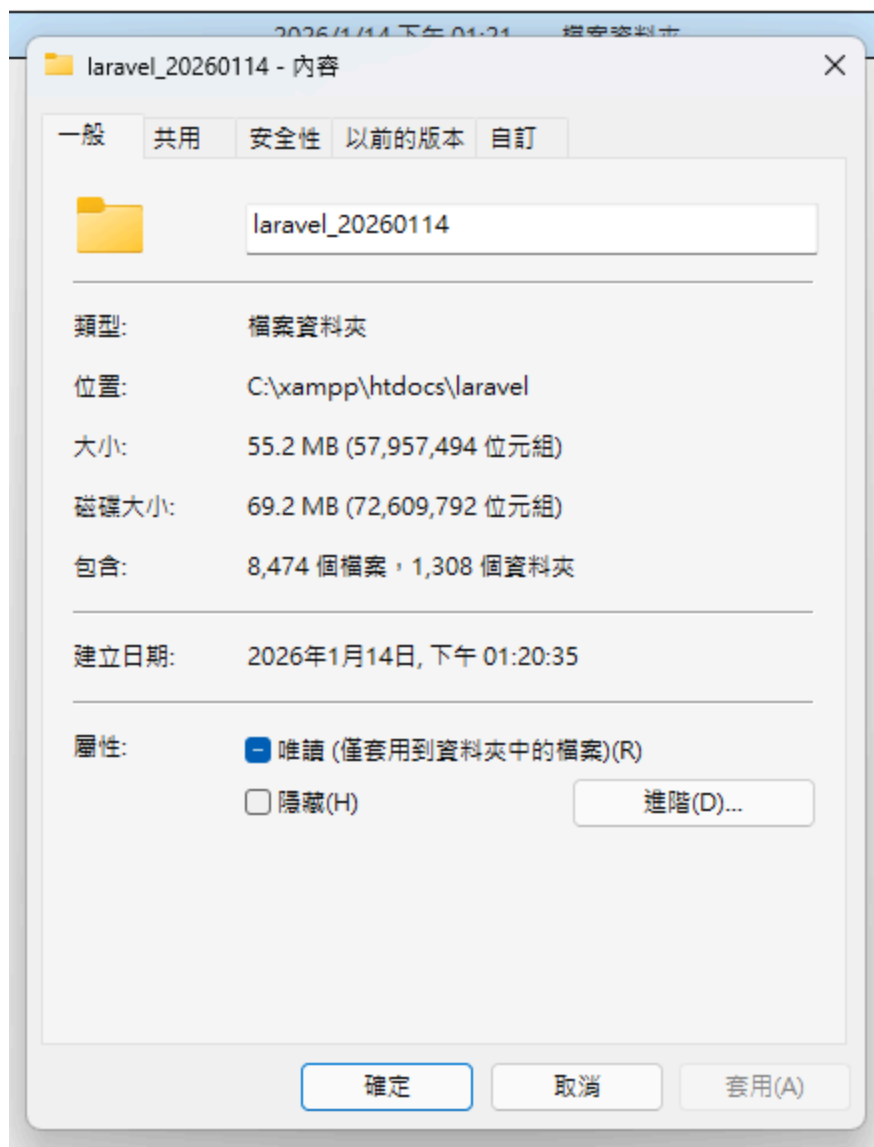

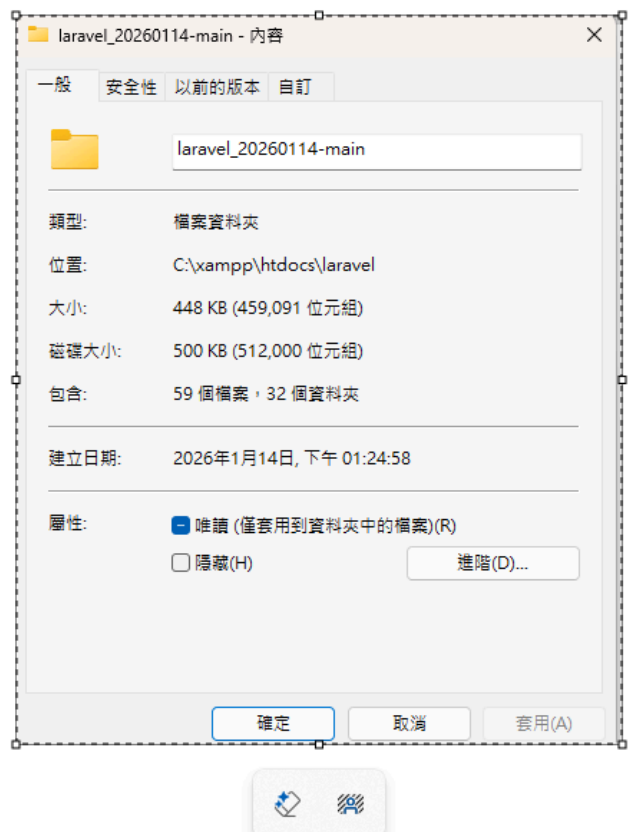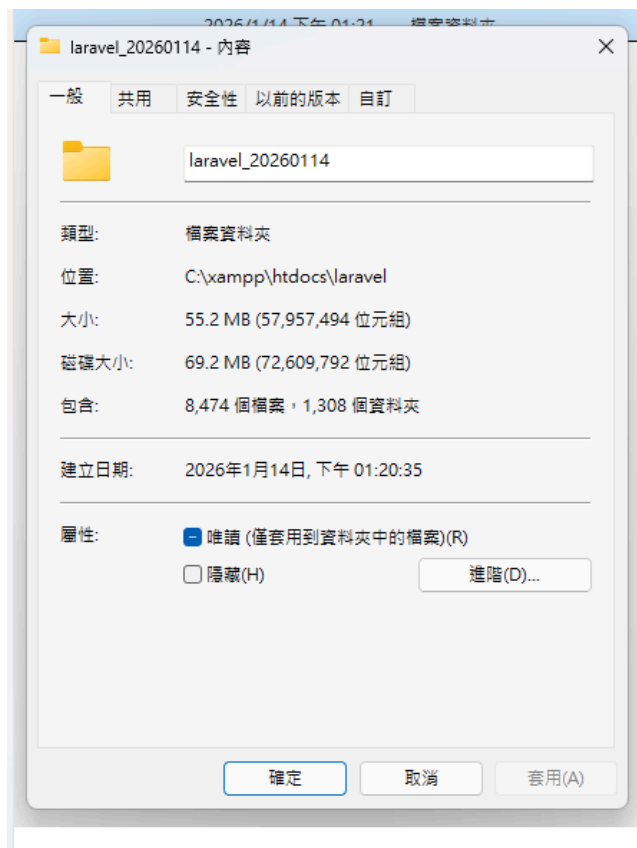

github 開新的 repository , readme 打勾

git clone

https://github.com/chengkk0910/laravel_20260114.git

將laravel project 內容 貼上

之後用viscode 開啟

git add .

git commit -m"laravel init"


git push

<https://stackoverflow.com/questions/38602321/cloning-laravel-project-from-github>


composer install

cp .env.example .env

php artisan key:generate

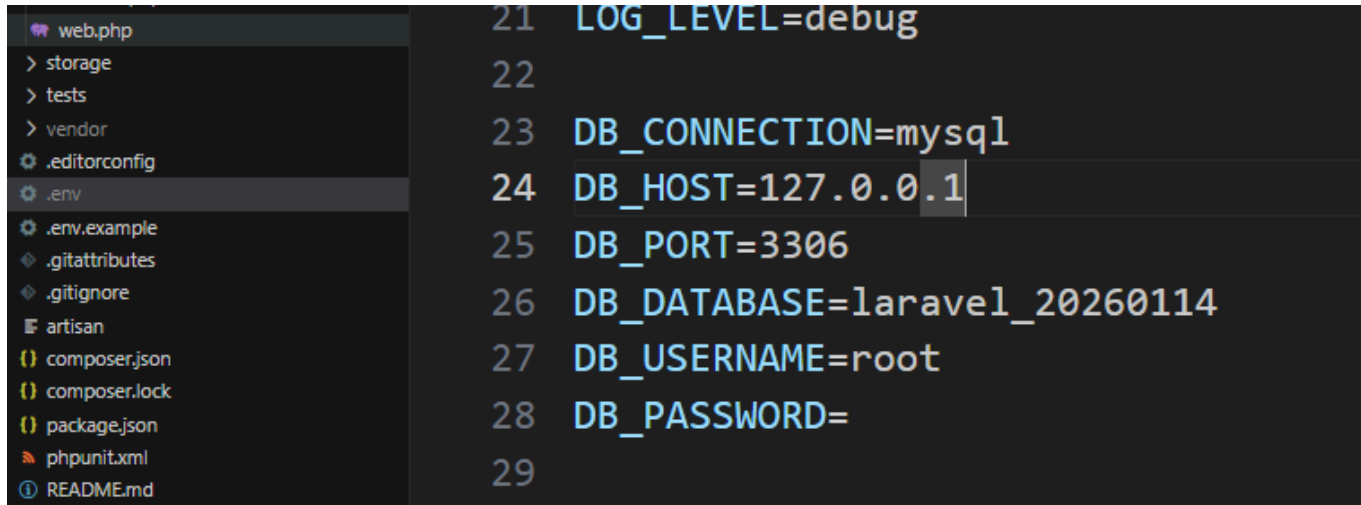A screenshot of a code editor with a dark theme. On the left, a file explorer sidebar shows a project structure with files like web.php, storage, tests, vendor, .editorconfig, .env, .env.example, .gitattributes, .gitignore, artisan, composer.json, composer.lock, package.json, phpunit.xml, and README.md. The .env file is selected and open in the main editor. The code in the editor shows database configuration settings: LOG_LEVEL=debug, DB_CONNECTION=mysql, DB_HOST=127.0.0.1, DB_PORT=3306, DB_DATABASE=laravel_20260114, DB_USERNAME=root, and DB_PASSWORD=. The line numbers 21 through 29 are visible on the left of the code block.

```
21 LOG_LEVEL=debug
22
23 DB_CONNECTION=mysql
24 DB_HOST=127.0.0.1
25 DB_PORT=3306
26 DB_DATABASE=laravel_20260114
27 DB_USERNAME=root
28 DB_PASSWORD=
29
```

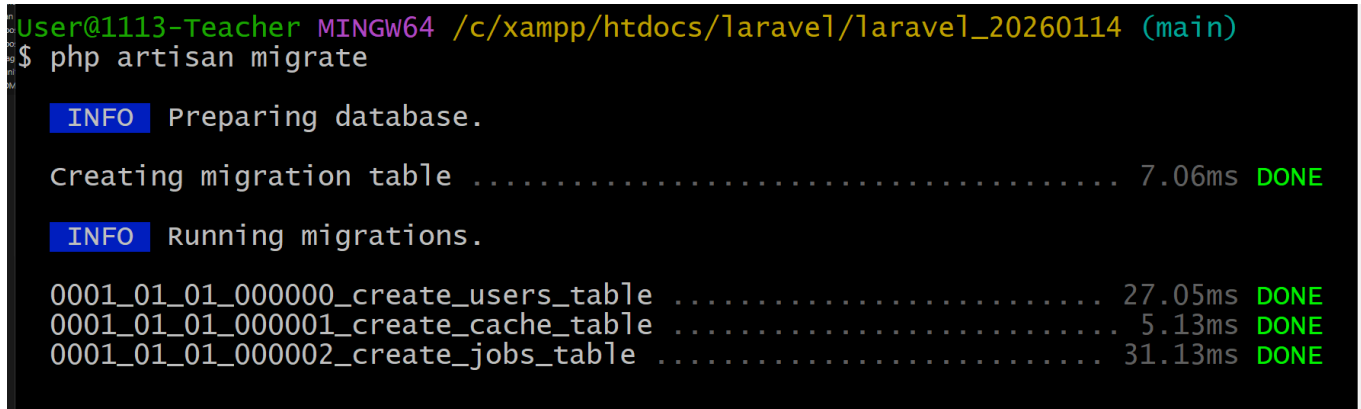A screenshot of a terminal window with a dark background. The prompt shows the user is at a system named 'User@1113-Teacher' with a 'MINGW64' shell, in the directory '/c:/xampp/htdocs/laravel/laravel_20260114' on the 'main' branch. The command 'php artisan migrate' has been executed. The output shows an 'INFO' message 'Preparing database.', followed by 'Creating migration table' taking 7.06ms and marked 'DONE'. Another 'INFO' message 'Running migrations.' is shown, followed by three migration steps: '0001_01_01_000000_create_users_table' (27.05ms, DONE), '0001_01_01_000001_create_cache_table' (5.13ms, DONE), and '0001_01_01_000002_create_jobs_table' (31.13ms, DONE).


```
User@1113-Teacher MINGW64 /c:/xampp/htdocs/laravel/laravel_20260114 (main)
$ php artisan migrate

INFO  Preparing database.

Creating migration table ..... 7.06ms DONE

INFO  Running migrations.

0001_01_01_000000_create_users_table ..... 27.05ms DONE
0001_01_01_000001_create_cache_table ..... 5.13ms DONE
0001_01_01_000002_create_jobs_table ..... 31.13ms DONE
```

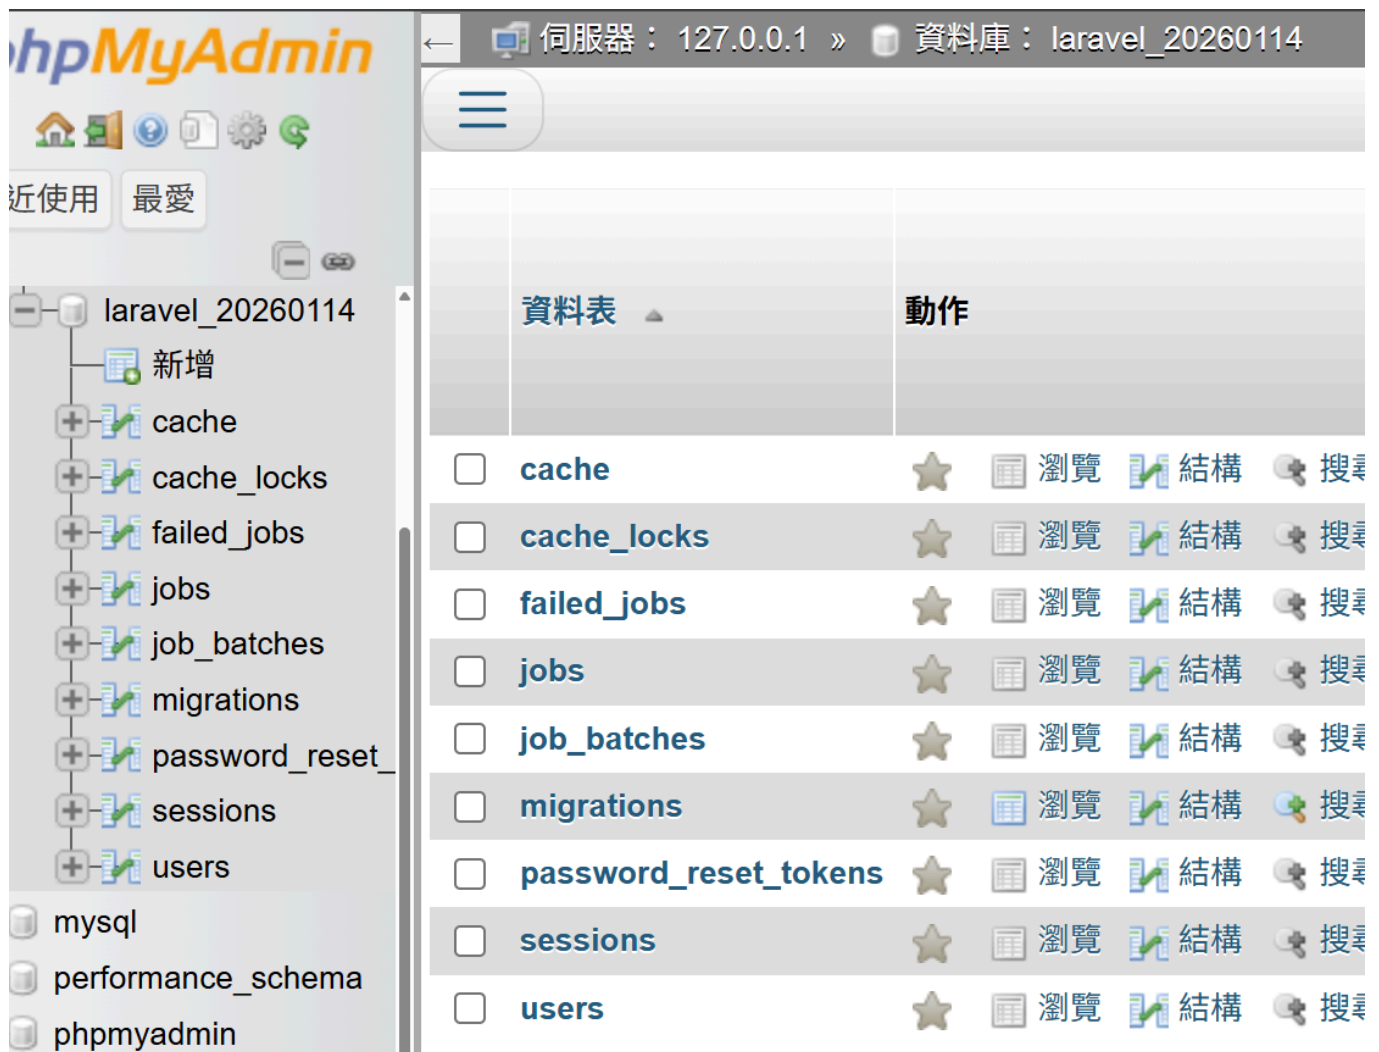

1. mysql create db , laravel_20260114
2. vscode .env 設定db
3. php artisan migrate


php artisan make:controller UserController

php artisan make:controller CarController

```
use App\Http\Controllers\UserController;  
Route::get('/user/{id}',  
[UserController::class, 'show']);
```



```
use App\Http\Controllers\CarController;  
Route::get('/car', [CarController::class,  
'index']);
```

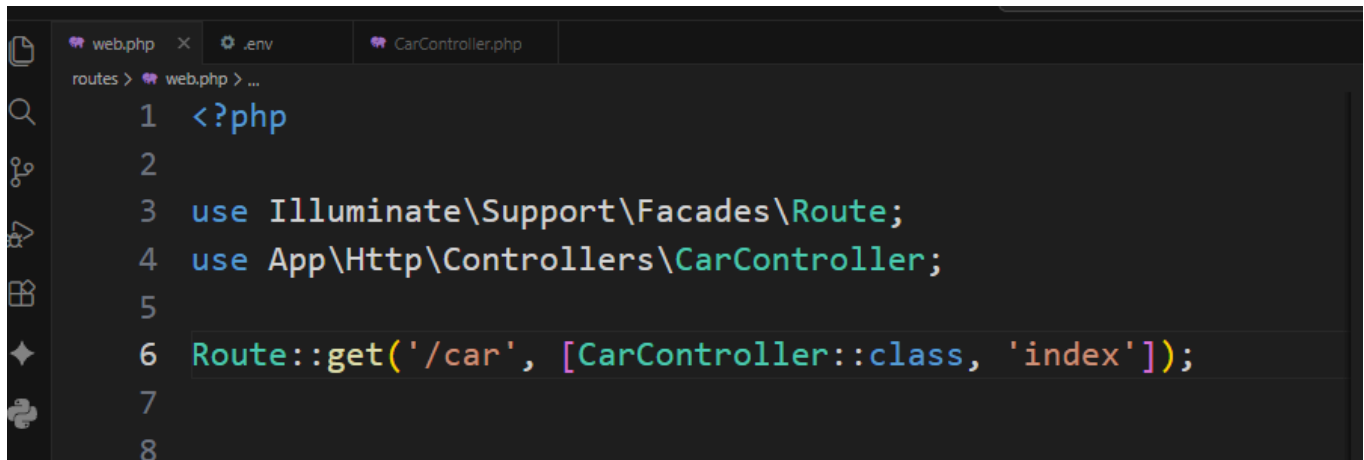

The screenshot shows a code editor with three tabs: 'web.php', '.env', and 'CarController.php'. The 'CarController.php' tab is active, displaying the following PHP code:

```
1 <?php  
2  
3 use Illuminate\Support\Facades\Route;  
4 use App\Http\Controllers\CarController;  
5  
6 Route::get('/car', [CarController::class, 'index']);  
7  
8
```

\

```
CarController.php X
app > Http > Controllers > CarController.php > ...
1  <?php
2
3  namespace App\Http\Controllers;
4
5  use Illuminate\Http\Request;
6
7  class CarController extends Controller
8  {
9      public function index()
10     {
11         dd('hello car controller index');
12         // return 'This is Car Controller';
13     }
14 }
15
```

route

```
tes > web.php > ...
1  <?php
2
3  use Illuminate\Support\Facades\Route;
4  use App\Http\Controllers\CarController;
5
6  Route::get('/cars', [CarController::class, 'index']);
7  Route::get('/cars_hello', [CarController::class, 'hello']);
8
```

controller

```
web.php  index.blade.php  calculator.blade.php  hello.blade.php  .env  CarController.php X
app > Http > Controllers > CarController.php > CarController > hello
3 namespace App\Http\Controllers;
4
5 use Illuminate\Http\Request;
6
7 class CarController extends Controller
8 {
9     public function index()
10    {
11        // dd('hello car controller index');
12        return view('car.index');
13        // return 'This is Car Controller';
14    }
15
16    public function hello()
17    {
18        // dd('hello car controller hello');
19        return view('car.hello');
20    }
21 }
22
```

view

```
views
└─ car
    ├── hello.blade.php
    ├── index.blade.php
    └── calculator.blade.php
```