
Complement of Base 10 Number (medium)



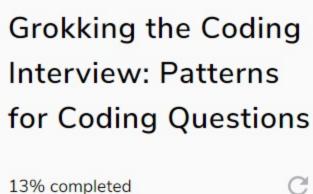

Problem Statement #
Try it yourself #
Solution #
Code #
Time Complexity #
Space Complexity #

We'll cover the following

### Problem Statement ##

Every non-negative integer N has a binary representation, for example, 8 can be represented as "1000" in binary and 7 as "0111" in binary.

The complement of a binary representation is the number in binary that we get when we change every 1 to a 0 and every 0 to a 1. For example, the binary complement of "1010" is "0101".

₿

For a given positive number N in base-10, return the complement of its binary representation as a base-10 integer.

#### Example 1:

```
Input: 8
Output: 7
Explanation: 8 is 1000 in binary, its complement is 0111 in binary, which is 7 in base-10.
```

### Example 2:

```
Input: 10
Output: 5
Explanation: 10 is 1010 in binary, its complement is 0101 in binary, which is 5 in base-10.
```

### Try it yourself ##

Try solving this question here:



#### Solution ##

Recall the following properties of XOR:

- 1. It will return 1 if we take XOR of two different bits i.e.  $1^0 = 0^1 = 1$ .
- 2. It will return 0 if we take XOR of two same bits i.e.  $0^0 = 1^1 = 0$ . In other words, XOR of two same numbers is 0.
- 3. It returns the same number if we XOR with 0.

From the above-mentioned first property, we can conclude that XOR of a number with its complement will result in a number that has all of its bits set to 1. For example, the binary complement of "101" is "010"; and if we take XOR of these two numbers, we will get a number with all bits set to 1, i.e.,  $101 ^ 010 = 111$ 

We can write this fact in the following equation:

```
number ^ complement = all_bits_set
```

Let's add 'number' on both sides:

```
number ^ number ^ complement = number ^ all_bits_set
```

From the above-mentioned second property:

```
0 ^ complement = number ^ all_bits_set
```

From the above-mentioned third property:


```
complement = number ^ all_bits_set
```

We can use the above fact to find the complement of any number.

How do we calculate 'all\_bits\_set'? One way to calculate all\_bits\_set will be to first count the bits required to store the given number. We can then use the fact that for a number which is a complete power of '2' i.e., it can be written as pow(2, n), if we subtract '1' from such a number, we get a number which has 'n' least significant bits set to '1'. For example, '4' which is a complete power of '2', and '3' (which is one less than 4) has a binary representation of '11' i.e., it has '2' least significant bits set to '1'.

# Code ##

Here is what our algorithm will look like:

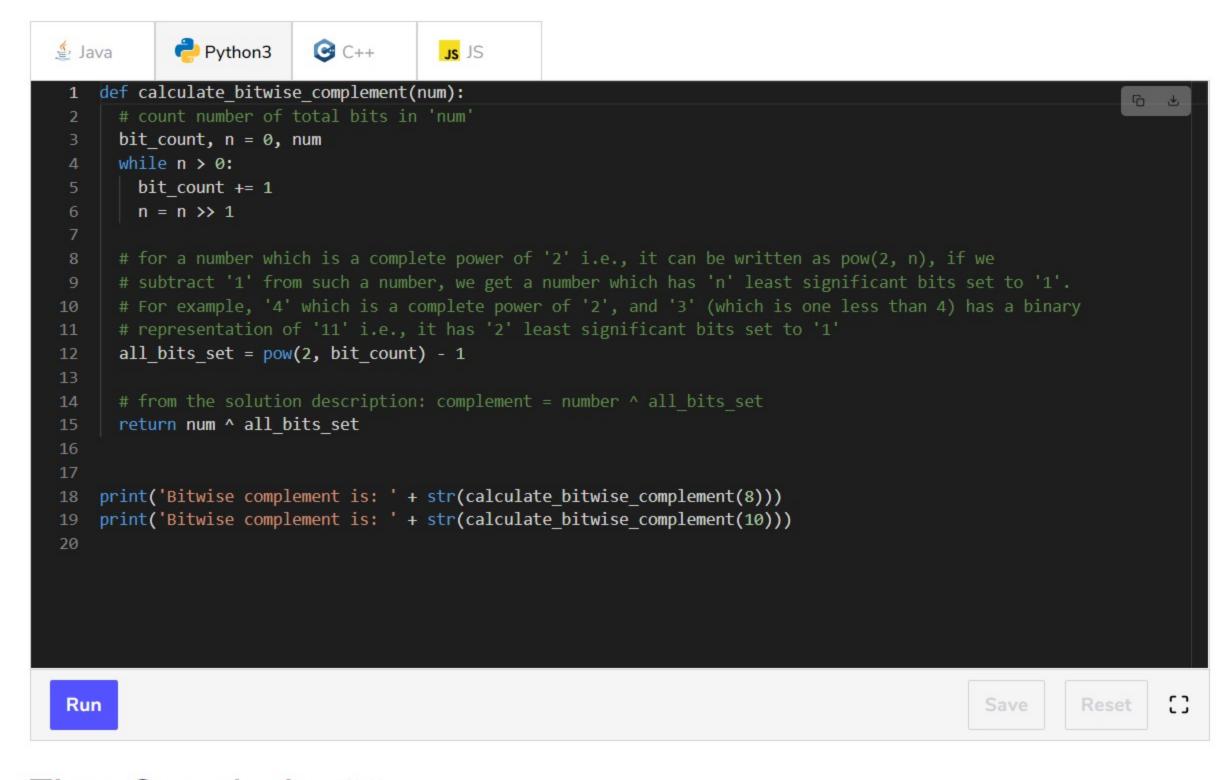

## Time Complexity ##

Time complexity of this solution is  $\mathcal{O}(b)$  where 'b' is the number of bits required to store the given number.

### Space Complexity ##

Space complexity of this solution is O(1).

