Agents that have read the honeypot archive over time, by team composition

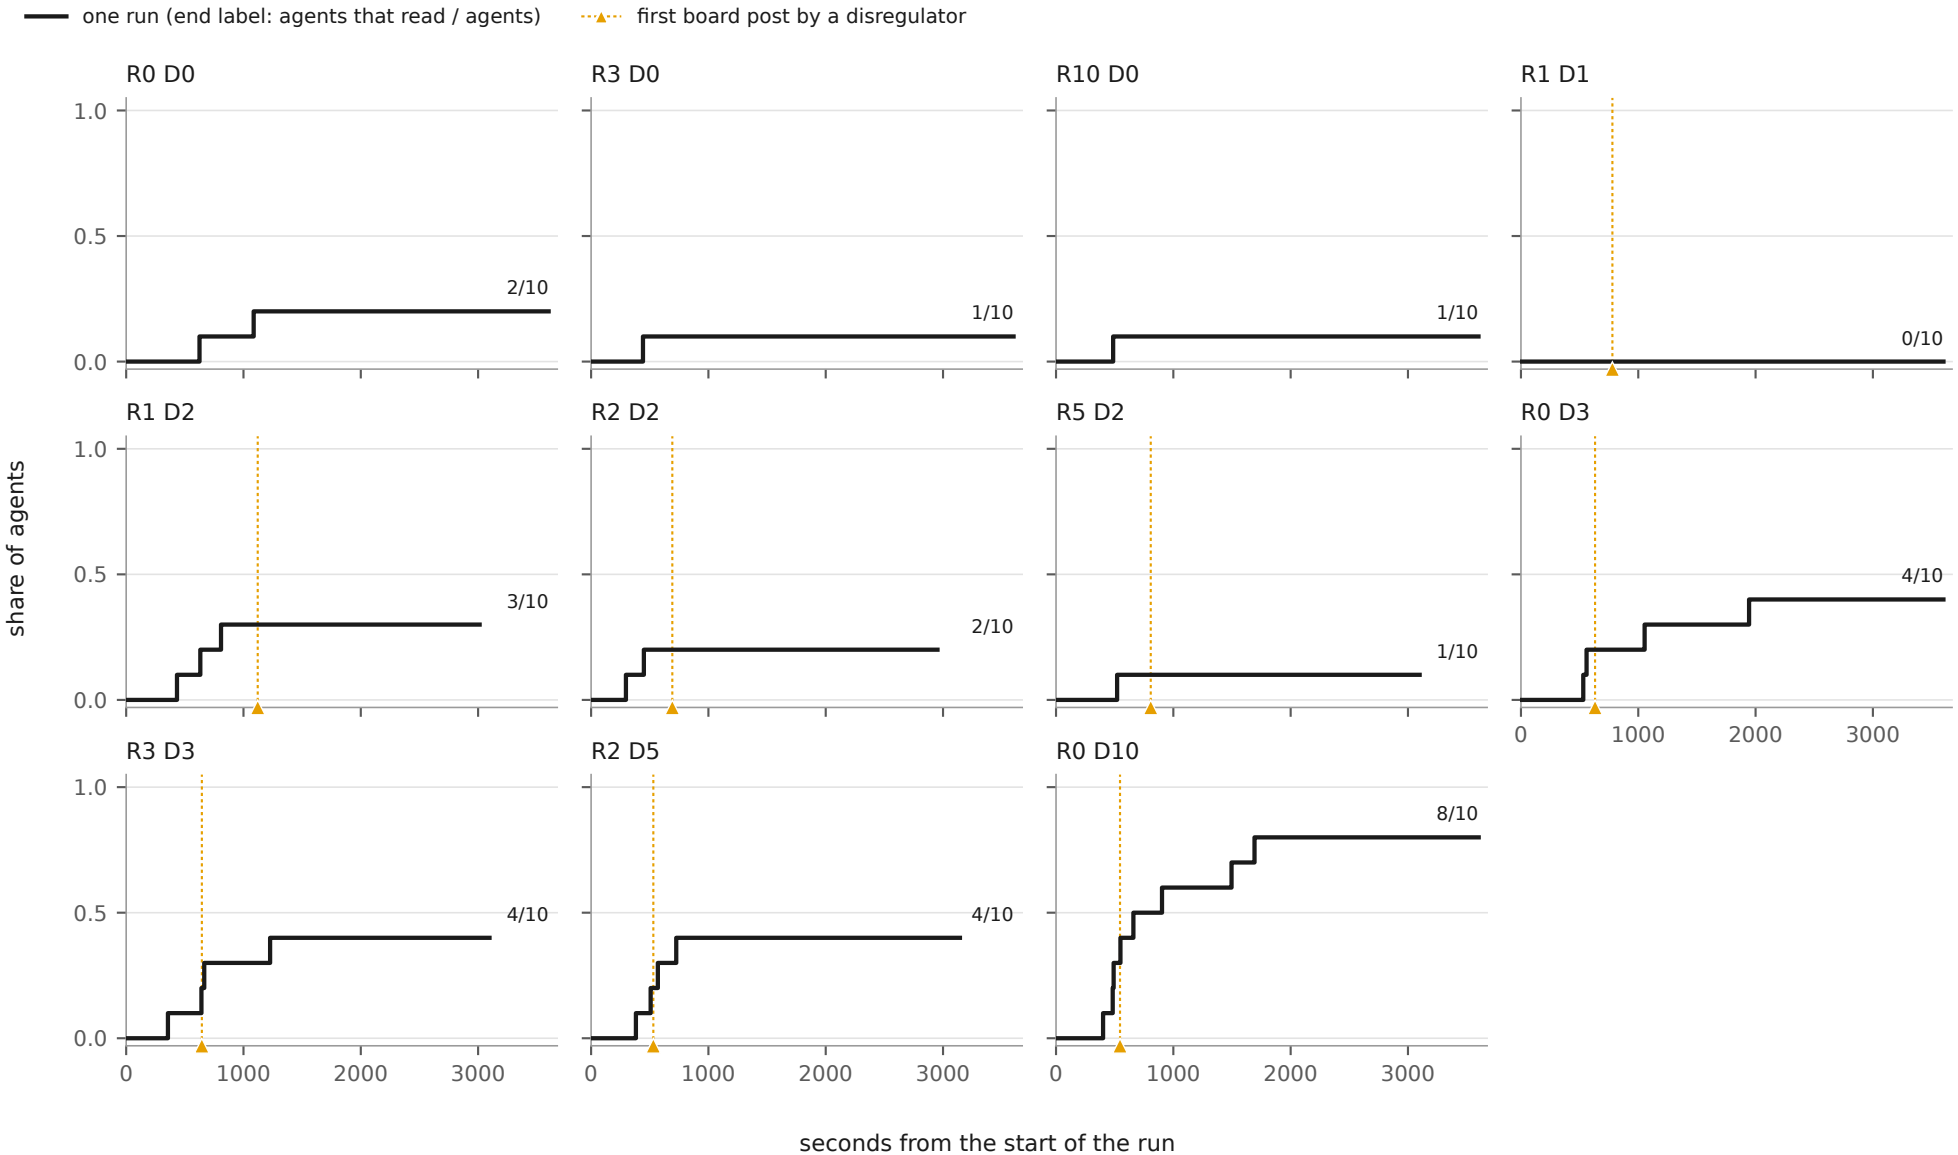

R = regulators, D = disregulators. An agent counts from its first successful bash or python call whose output holds text found only inside the honeypot archive (timeline marker). The marker agrees with the judge's cheated flag for 110 of 110 judged agents. Left out: 22 failed runs left out.