

Csuper - Compteur de Score Universel Permettant l'Exemption de Reflexion  
2.4.0

Generated by Doxygen 1.8.6

Sun May 18 2014 12:57:28



# Contents

<b>1</b>	<b>File Index</b>	<b>1</b>
1.1	File List	1
<b>2</b>	<b>File Documentation</b>	<b>3</b>
2.1	csuper.h File Reference	3
2.1.1	Detailed Description	3
2.1.2	Macro Definition Documentation	3
2.1.2.1	_	3
2.1.2.2	CSUPER	3
2.2	display.c File Reference	4
2.2.1	Detailed Description	4
2.2.2	Function Documentation	4
2.2.2.1	color	4
2.2.2.2	printAllPoints	4
2.2.2.3	printCsuStruct	5
2.2.2.4	printDistributor	5
2.2.2.5	printGameConfig	6
2.2.2.6	printGameOver	6
2.2.2.7	printHeader	6
2.2.2.8	printLicense	7
2.2.2.9	printLigne	7
2.2.2.10	printNames	7
2.2.2.11	printPoints	7
2.2.2.12	printRanking	8
2.2.2.13	printSpecial	8
2.2.2.14	printStringThreeTabs	9
2.2.2.15	printTotalPoints	9
2.3	display.h File Reference	9
2.3.1	Detailed Description	10
2.3.2	Enumeration Type Documentation	10
2.3.2.1	backgroundColor	10

2.3.2.2	foregroundColor	11
2.3.2.3	Writing	11
2.3.3	Function Documentation	11
2.3.3.1	color	11
2.3.3.2	printAllPoints	11
2.3.3.3	printCsuStruct	11
2.3.3.4	printDistributor	12
2.3.3.5	printGameConfig	12
2.3.3.6	printGameOver	12
2.3.3.7	printHeader	13
2.3.3.8	printLicense	13
2.3.3.9	printLigne	13
2.3.3.10	printNames	13
2.3.3.11	printPoints	14
2.3.3.12	printRanking	14
2.3.3.13	printSpecial	15
2.3.3.14	printStringThreeTabs	15
2.3.3.15	printTotalPoints	15
2.4	interface.c File Reference	16
2.4.1	Detailed Description	16
2.4.2	Function Documentation	17
2.4.2.1	changeFilePath	17
2.4.2.2	deleteCsuFileNom	17
2.4.2.3	displayFile	17
2.4.2.4	displayFileLocale	18
2.4.2.5	exportListGameConfig	18
2.4.2.6	importListGameConfig	19
2.4.2.7	listCsuFiles	19
2.4.2.8	loadGame	19
2.4.2.9	loadGameLocale	20
2.4.2.10	mainMenu	21
2.4.2.11	newGame	22
2.4.2.12	newGameConfig	23
2.4.2.13	play	23
2.4.2.14	preferencesMenu	24
2.4.2.15	printGameConfigFile	25
2.4.2.16	printListGameConfig	25
2.4.2.17	readFilePath	25
2.4.2.18	removeGameConfig	25
2.5	interface.h File Reference	26

2.5.1	Detailed Description	27
2.5.2	Enumeration Type Documentation	27
2.5.2.1	MainMenu	27
2.5.2.2	PreferencesMenu	27
2.5.3	Function Documentation	28
2.5.3.1	changeFilePath	28
2.5.3.2	deleteCsuFileNom	28
2.5.3.3	displayFile	28
2.5.3.4	displayFileLocale	29
2.5.3.5	exportListGameConfig	29
2.5.3.6	importListGameConfig	30
2.5.3.7	listCsuFiles	30
2.5.3.8	loadGame	30
2.5.3.9	loadGameLocale	31
2.5.3.10	mainMenu	32
2.5.3.11	newGame	33
2.5.3.12	newGameConfig	34
2.5.3.13	play	34
2.5.3.14	preferencesMenu	35
2.5.3.15	printGameConfigFile	36
2.5.3.16	printListGameConfig	36
2.5.3.17	readFilePath	36
2.5.3.18	removeGameConfig	36
2.6	keyboarding.c File Reference	37
2.6.1	Detailed Description	37
2.6.2	Function Documentation	37
2.6.2.1	charKey	37
2.6.2.2	clean_stdin	38
2.6.2.3	floatKey	38
2.6.2.4	floatKeyNoComma	38
2.6.2.5	intKey	39
2.6.2.6	stringKey	39
2.6.2.7	systemPause	40
2.7	keyboarding.h File Reference	40
2.7.1	Detailed Description	40
2.7.2	Macro Definition Documentation	41
2.7.2.1	NB_CHARACTER_DOUB	41
2.7.2.2	NB_CHARACTER_FLOAT	41
2.7.2.3	NB_CHARACTER_INT	41
2.7.3	Function Documentation	41

2.7.3.1	charKey	41
2.7.3.2	clean_stdin	41
2.7.3.3	floatKey	41
2.7.3.4	floatKeyNoComma	42
2.7.3.5	intKey	42
2.7.3.6	stringKey	43
2.7.3.7	systemPause	44
2.8	main.c File Reference	44
2.8.1	Detailed Description	44
2.8.2	Function Documentation	45
2.8.2.1	main	45
2.9	main.h File Reference	46
2.9.1	Detailed Description	46
2.9.2	Function Documentation	47
2.9.2.1	main	47
2.10	menu.c File Reference	48
2.10.1	Detailed Description	49
2.10.2	Function Documentation	49
2.10.2.1	menuContinue	49
2.10.2.2	menuDelete	49
2.10.2.3	menuDistributor	50
2.10.2.4	menuFileName	50
2.10.2.5	menuGameConfig	51
2.10.2.6	menuNewPath	51
2.10.2.7	menuPlayerIndex	52
2.10.2.8	menuPlayersName	52
2.10.2.9	menuPlayersPoints	52
2.10.2.10	menuStartGame	53
2.11	menu.h File Reference	53
2.11.1	Detailed Description	54
2.11.2	Function Documentation	54
2.11.2.1	menuContinue	54
2.11.2.2	menuDelete	54
2.11.2.3	menuDistributor	55
2.11.2.4	menuFileName	55
2.11.2.5	menuGameConfig	56
2.11.2.6	menuNewPath	56
2.11.2.7	menuPlayerIndex	57
2.11.2.8	menuPlayersName	57
2.11.2.9	menuPlayersPoints	57

---

2.11.2.10 menuStartGame . . . . .	58
<b>Index</b>	<b>59</b>





# Chapter 1

## File Index

### 1.1 File List

Here is a list of all files with brief descriptions:

<a href="#">csuper.h</a>	Include of csuper . . . . .	3
<a href="#">display.c</a>	Display the games . . . . .	4
<a href="#">display.h</a>	Display the games . . . . .	9
<a href="#">interface.c</a>	Graphical interface . . . . .	16
<a href="#">interface.h</a>	Graphical interface . . . . .	26
<a href="#">keyboarding.c</a>	Function of keyboarding . . . . .	37
<a href="#">keyboarding.h</a>	Function of keyboarding . . . . .	40
<a href="#">main.c</a>	Begin csuper . . . . .	44
<a href="#">main.h</a>	Begin csuper . . . . .	46
<a href="#">menu.c</a>	Menu functions . . . . .	48
<a href="#">menu.h</a>	Menu functions . . . . .	53



## Chapter 2

# File Documentation

### 2.1 csuper.h File Reference

Include of csuper.

```
#include "../libcsuper/libcsuper.h"  
#include <locale.h>
```

#### Macros

- #define CSUPER
- #define \_(STRING) gettext(STRING)

#### 2.1.1 Detailed Description

Include of csuper.

##### Author

Remi BERTHO

##### Date

17/04/14

##### Version

2.2.0

#### 2.1.2 Macro Definition Documentation

##### 2.1.2.1 #define \_( STRING ) gettext(STRING)

Define the \_ for gettext.

##### 2.1.2.2 #define CSUPER

Define that we compile csuper.

## 2.2 display.c File Reference

Display the games.

```
#include "display.h"
```

### Functions

- void [printNames](#) (csuStruct \*ptr\_csu\_struct, int \*ptr\_size\_line)
- void [printLigne](#) (int size\_line)
- void [printTotalPoints](#) (csuStruct \*ptr\_csu\_struct)
- void [printDistributor](#) (csuStruct \*ptr\_csu\_struct)
- void [printHeader](#) (csuStruct \*ptr\_csu\_struct)
- void [printAllPoints](#) (csuStruct \*ptr\_csu\_struct)
- void [printRanking](#) (csuStruct \*ptr\_csu\_struct)
- void [printPoints](#) (csuStruct \*ptr\_csu\_struct)
- void [printCsuStruct](#) (csuStruct \*ptr\_csu\_struct)
- void [printGameOver](#) (csuStruct \*ptr\_csu\_struct)
- void [printStringThreeTabs](#) (char \*string)
- void [printLicense](#) ()
- void [printGameConfig](#) (game\_config config)
- void [printSpecial](#) (char \*string, int nb\_arg,...)
- void [color](#) (int color)

### 2.2.1 Detailed Description

Display the games.

#### Author

Remi BERTHO

#### Date

22/04/14

#### Version

2.2.0

### 2.2.2 Function Documentation

#### 2.2.2.1 void color ( int *color* )

Chose a color for printing. Work only under Unix, under Windows do nothing.

##### Parameters

<i>in</i>	<i>color</i>	the code of the color (see foregroundColor, backgroundColor, Writing)
-----------	--------------	---

#### 2.2.2.2 void printAllPoints ( csuStruct \* *ptr\_csu\_struct* )

Print the scores of all player in each turn.

## Parameters

in	<i>*ptr_csu_struct</i>	a pointer on a csu structure
----	------------------------	------------------------------

Here is the call graph for this function:




### 2.2.2.3 void printCsuStruct ( csuStruct \* ptr\_csu\_struct )

Print all data of the csu structure.

## Parameters

in	<i>*ptr_csu_struct</i>	a pointer on a csu structure
----	------------------------	------------------------------

Here is the call graph for this function:

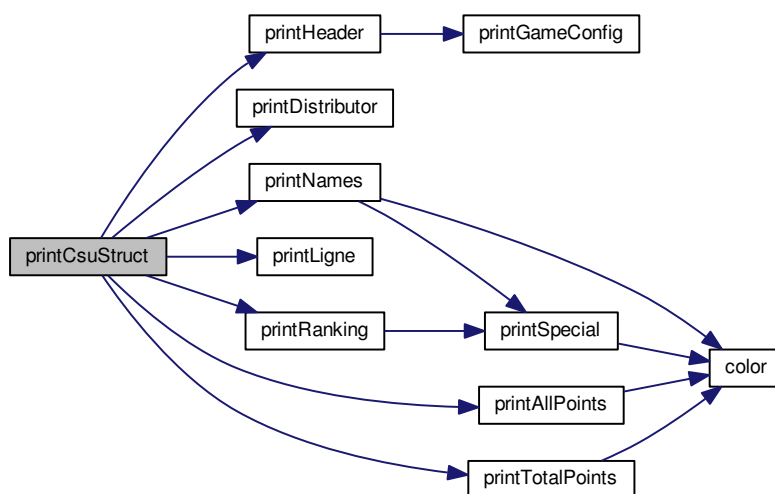

### 2.2.2.4 void printDistributor ( csuStruct \* ptr\_csu\_struct )

Display the distributor.

## Parameters

in	<i>*ptr_csu_struct</i>	a pointer on a csu structure
----	------------------------	------------------------------

## 2.2.2.5 void printGameConfig ( game\_config config )

Print the game config

## Parameters

in	<i>config</i>	a game config
----	---------------	---------------


## 2.2.2.6 void printGameOver ( csuStruct \* ptr\_csu\_struct )

Display that the game is over and a podium.

## Parameters

in	<i>*ptr_csu_struct</i>	a pointer on a csu structure
----	------------------------	------------------------------

Here is the call graph for this function:

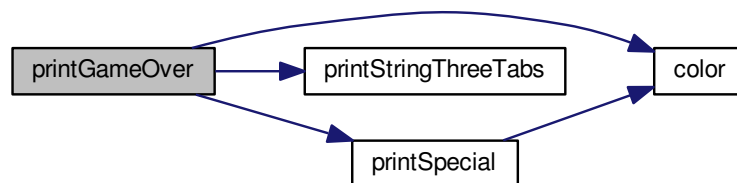

## 2.2.2.7 void printHeader ( csuStruct \* ptr\_csu\_struct )

Print the header of the structure

## Parameters

in	<i>*ptr_csu_struct</i>	a pointer on a csu structure
----	------------------------	------------------------------

Here is the call graph for this function:



### 2.2.2.8 void printLicense ( )

Print the license.

### 2.2.2.9 void printLigne ( int *size\_line* )

Print a line of - after a tabulation.

Parameters

in	<i>size_line</i>	the size of the line
----	------------------	----------------------


### 2.2.2.10 void printNames ( csuStruct \* *ptr\_csu\_struct*, int \* *ptr\_size\_line* )

Print the payers names and calculate the size of a line.

Parameters

in	* <i>ptr_csu_struct</i>	a pointer on a csu structure
in, out	* <i>ptr_size_line</i>	a pointer to the size of the line, NULL if you doesn't need it

Here is the call graph for this function:




### 2.2.2.11 void printPoints ( csuStruct \* *ptr\_csu\_struct* )

Print the names, the points, the total points and the rank of each player.

Parameters

in	* <i>ptr_csu_struct</i>	a pointer on a csu structure
----	-------------------------	------------------------------

Here is the call graph for this function:

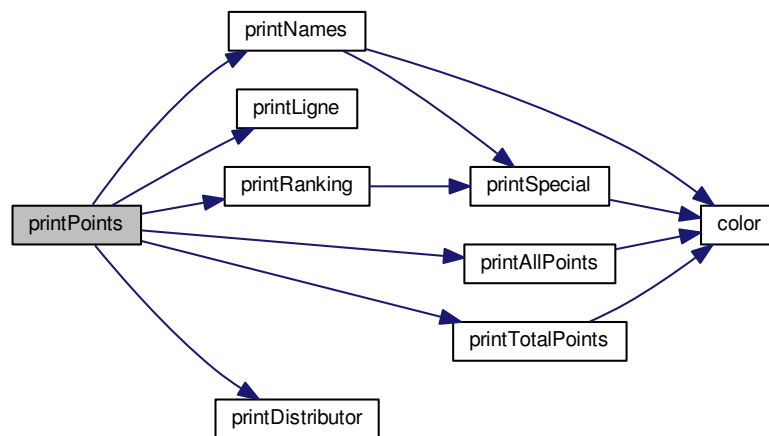


#### 2.2.2.12 void printRanking ( csuStruct \* ptr\_csu\_struct )

Print the rank of each player

##### Parameters

in	<i>*ptr_csu_struct</i>	a pointer on a csu structure
----	------------------------	------------------------------

Here is the call graph for this function:



#### 2.2.2.13 void printSpecial ( char \* string, int nb\_arg, ... )


Print the string in stdin with special effect.

##### Parameters

in	<i>string</i>	a string to display
in	<i>nb_arg</i>	the number of argument
in	<i>...</i>	the argument



Here is the call graph for this function:



#### 2.2.2.14 void printStringThreeTabs ( char \* *string* )

Print a string center into a space of three tabulations.

##### Parameters

in	<i>*string</i>	a string
----	----------------	----------


#### 2.2.2.15 void printTotalPoints ( csuStruct \* *ptr\_csu\_struct* )

Print the total score of the players.

##### Parameters

in	<i>*ptr_csu_struct</i>	a pointer on a csu structure
----	------------------------	------------------------------

Here is the call graph for this function:



## 2.3 display.h File Reference

Display the games.

```

#include <math.h>
#include <string.h>
#include <stdarg.h>
#include "main.h"
#include "csuper.h"
  
```

### Enumerations

- enum foregroundColor {  
     foregroundBlack =30, foregroundRed =31, foregroundGreen =32, foregroundBrown =33,

- `foregroundBlue =34, foregroundMagenta =35, foregroundCyan =36, foregroundWhite =37 }`
- enum `backgroundColor` {  
`backgroundBlack =40, backgroundRed =41, backgroundGreen =42, backgroundBrown =43,`  
`backgroundBlue =44, backgroundMagenta =45, backgroundCyan =46, backgroundWhite =47,`  
`backgroundDefault =49 }`
- enum `Writing` { `writingReset =0, writingBold =1, writingUnderline =4 }`

## Functions

- void `printNames` (csuStruct \*ptr\_csu\_struct, int \*ptr\_size\_ligne)
- void `printLigne` (int size\_ligne)
- void `printTotalPoints` (csuStruct \*ptr\_csu\_struct)
- void `printDistributor` (csuStruct \*ptr\_csu\_struct)
- void `printHeader` (csuStruct \*ptr\_csu\_struct)
- void `printAllPoints` (csuStruct \*ptr\_csu\_struct)
- void `printRanking` (csuStruct \*ptr\_csu\_struct)
- void `printPoints` (csuStruct \*ptr\_csu\_struct)
- void `printCsuStruct` (csuStruct \*ptr\_csu\_struct)
- void `printGameOver` (csuStruct \*ptr\_csu\_struct)
- void `printStringThreeTabs` (char \*string)
- void `printLicense` ()
- void `printGameConfig` (game\_config config)
- void `printSpecial` (char \*string, int nb\_arg,...)
- void `color` (int color)

### 2.3.1 Detailed Description

Display the games.

Author

Remi BERTHO

Date

22/04/14

Version

2.2.0

### 2.3.2 Enumeration Type Documentation

#### 2.3.2.1 enum backgroundColor

Enumerator

***backgroundBlack***  
***backgroundRed***  
***backgroundGreen***  
***backgroundBrown***  
***backgroundBlue***  
***backgroundMagenta***  
***backgroundCyan***  
***backgroundWhite***  
***backgroundDefault***

## 2.3.2.2 enum foregroundColor

Enumerator

***foregroundBlack***  
***foregroundRed***  
***foregroundGreen***  
***foregroundBrown***  
***foregroundBlue***  
***foregroundMagenta***  
***foregroundCyan***  
***foregroundWhite***

## 2.3.2.3 enum Writing

Enumerator

***writingReset***  
***writingBold***  
***writingUnderline***

## 2.3.3 Function Documentation

2.3.3.1 void color ( int *color* )

Chose a color for printing. Work only under Unix, under Windows do nothing.

Parameters

in	<i>color</i>	the code of the color (see foregroundColor, backgroundColor, Writing)
----	--------------	---

2.3.3.2 void printAllPoints ( csuStruct \* *ptr\_csu\_struct* )

Print the scores of all player in each turn.

Parameters

in	* <i>ptr_csu_struct</i>	a pointer on a csu structure
----	-------------------------	------------------------------

Here is the call graph for this function:


2.3.3.3 void printCsuStruct ( csuStruct \* *ptr\_csu\_struct* )

Print all data of the csu structure.

## Parameters

in	<i>*ptr_csu_struct</i>	a pointer on a csu structure
----	------------------------	------------------------------

Here is the call graph for this function:

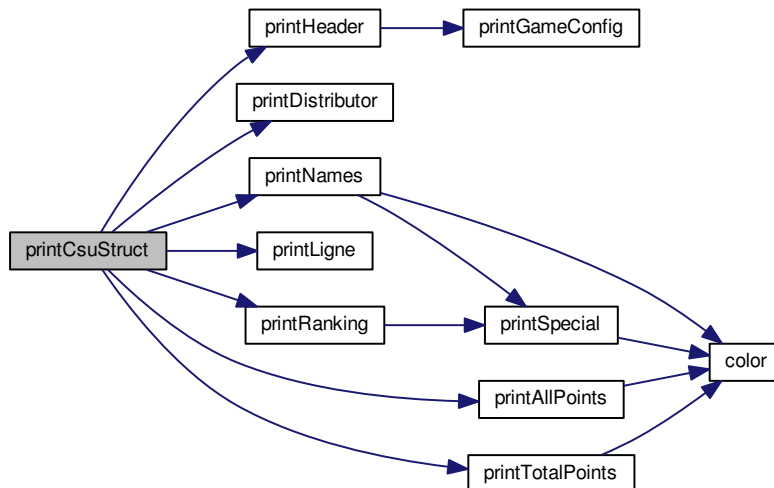

#### 2.3.3.4 void printDistributor ( csuStruct \* ptr\_csu\_struct )

Display the distributor.

## Parameters

in	<i>*ptr_csu_struct</i>	a pointer on a csu structure
----	------------------------	------------------------------

#### 2.3.3.5 void printGameConfig ( game\_config config )

Print the game config

## Parameters

in	<i>config</i>	a game config
----	---------------	---------------


#### 2.3.3.6 void printGameOver ( csuStruct \* ptr\_csu\_struct )

Display that the game is over and a podium.

## Parameters

in	<i>*ptr_csu_struct</i>	a pointer on a csu structure
----	------------------------	------------------------------

Here is the call graph for this function:

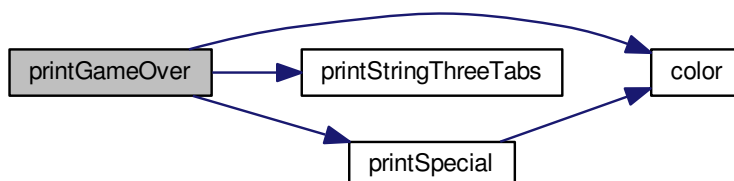

#### 2.3.3.7 void printHeader ( csuStruct \* ptr\_csu\_struct )

Print the header of the structure

##### Parameters

in	<i>*ptr_csu_struct</i>	a pointer on a csu structure
----	------------------------	------------------------------

Here is the call graph for this function:



#### 2.3.3.8 void printLicense ( )

Print the license.

#### 2.3.3.9 void printLigne ( int size\_line )

Print a line of - after a tabulation.

##### Parameters

in	<i>size_line</i>	the size of the line
----	------------------	----------------------


#### 2.3.3.10 void printNames ( csuStruct \* ptr\_csu\_struct, int \* ptr\_size\_line )

Print the payers names and calculate the size of a line.

**Parameters**

in	<i>*ptr_csu_struct</i>	a pointer on a csu structure
in, out	<i>*ptr_size_line</i>	a pointer to the size of the line, NULL if you doesn't need it

Here is the call graph for this function:




### 2.3.3.11 void printPoints ( csuStruct \* ptr\_csu\_struct )

Print the names, the points, the total points and the rank of each player.

**Parameters**

in	<i>*ptr_csu_struct</i>	a pointer on a csu structure
----	------------------------	------------------------------

Here is the call graph for this function:

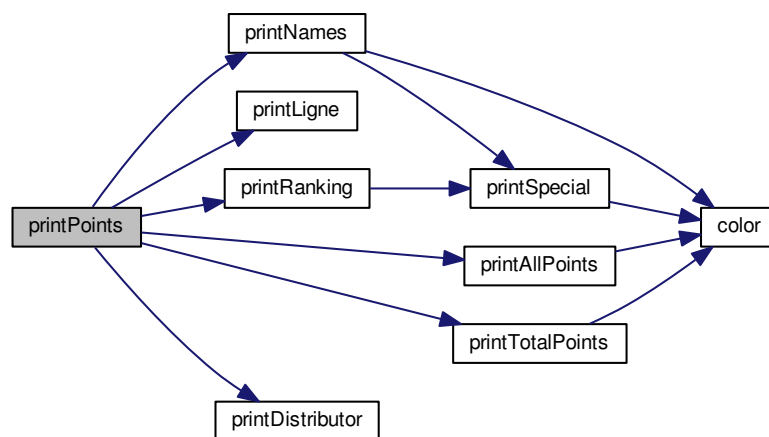


### 2.3.3.12 void printRanking ( csuStruct \* ptr\_csu\_struct )

Print the rank of each player

## Parameters

in	<i>*ptr_csu_struct</i>	a pointer on a csu structure
----	------------------------	------------------------------

Here is the call graph for this function:



### 2.3.3.13 void printSpecial ( char \* *string*, int *nb\_arg*, ... )

Print the string in stdin with special effect.

## Parameters

in	<i>string</i>	a string to display
in	<i>nb_arg</i>	the number of argument
in	...	the argument

Here is the call graph for this function:



### 2.3.3.14 void printStringThreeTabs ( char \* *string* )

Print a string center into a space of three tabulations.

## Parameters

in	<i>*string</i>	a string
----	----------------	----------


### 2.3.3.15 void printTotalPoints ( csuStruct \* *ptr\_csu\_struct* )

Print the total score of the players.

## Parameters

in	<i>*ptr_csu_struct</i>	a pointer on a csu structure
----	------------------------	------------------------------

Here is the call graph for this function:



## 2.4 interface.c File Reference

Graphical interface.

```
#include "interface.h"
```

### Functions

- void [displayFile](#) ()
- void [deleteCsuFileNom](#) ()
- void [listCsuFiles](#) ()
- void [play](#) (csuStruct \*ptr\_csu\_struct, char \*file\_name)
- void [newGame](#) ()
- void [loadGame](#) ()
- void [mainMenu](#) ()
- void [preferencesMenu](#) ()
- void [changeFilePath](#) ()
- void [readFilePath](#) ()
- void [loadGameLocale](#) (char \*file\_name)
- void [displayFileLocale](#) (char \*file\_name)
- void [newGameConfig](#) ()
- void [removeGameConfig](#) ()
- void [printListGameConfig](#) ()
- void [printGameConfigFile](#) ()
- void [exportListGameConfig](#) ()
- void [importListGameConfig](#) ()

### 2.4.1 Detailed Description

Graphical interface.

Author

Remi BERTHO

Date

29/04/14



## Version


2.4.0

## 2.4.2 Function Documentation

## 2.4.2.1 void changeFilePath ( )

Change the path which the file are saved.


Here is the call graph for this function:



## 2.4.2.2 void deleteCsuFileNom ( )

Ask a filename and deleted the file.


Here is the call graph for this function:



## 2.4.2.3 void displayFile ( )

Ask a filename and display it.


Here is the call graph for this function:

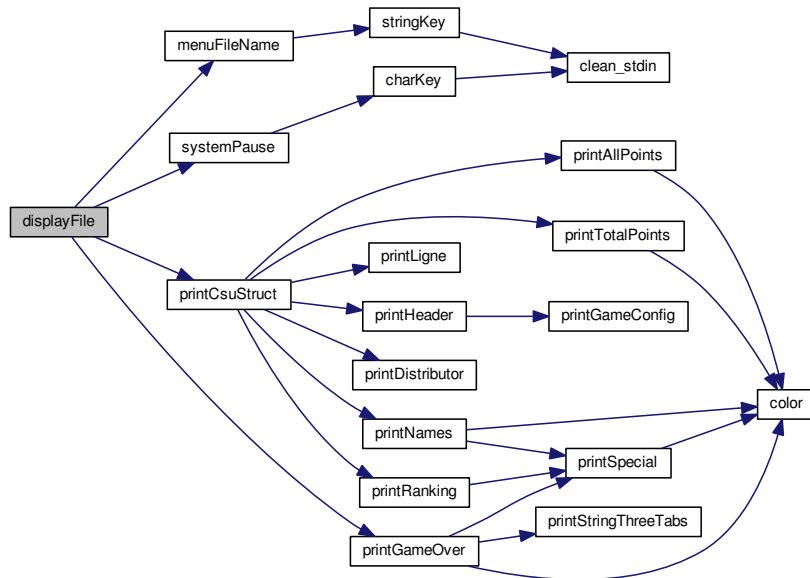

#### 2.4.2.4 void displayFileLocale ( char \* file\_name )

Display the file.


Here is the call graph for this function:

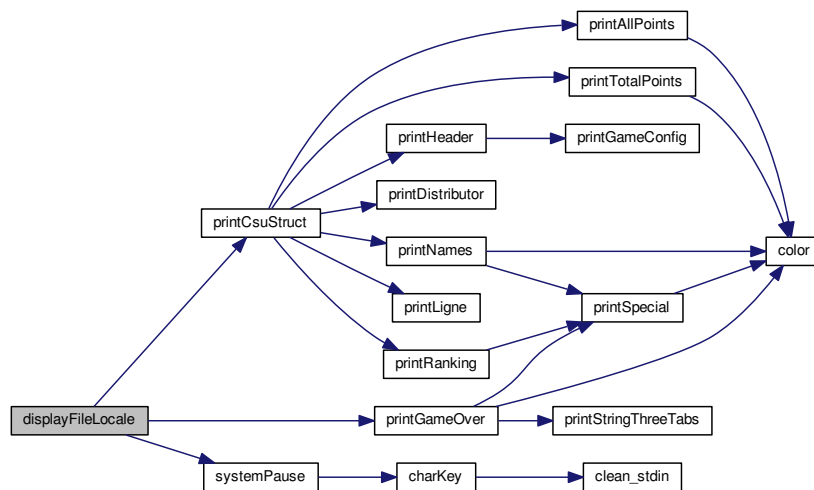

#### 2.4.2.5 void exportListGameConfig ( )

Export all game configuration in one file.


Here is the call graph for this function:



#### 2.4.2.6 void importListGameConfig ( )

Import all game configuration in one file.


Here is the call graph for this function:



#### 2.4.2.7 void listCsuFiles ( )

List all the files with csu extension


Here is the call graph for this function:



#### 2.4.2.8 void loadGame ( )

Load a game from a file and run the play function.

Here is the call graph for this function:

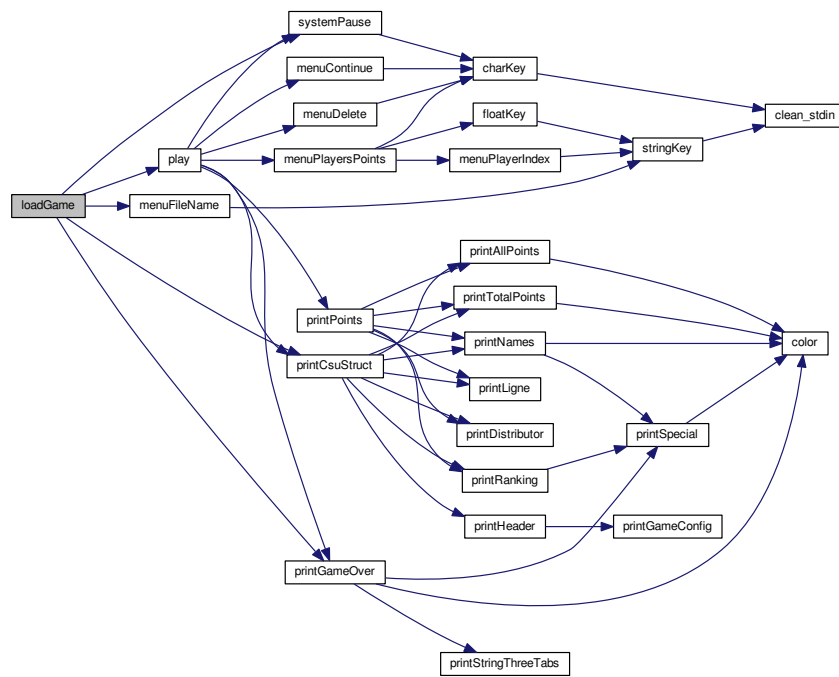


#### 2.4.2.9 void loadGameLocale ( char \* file\_name )

Load the file and run the play function

##### Parameters

in	file_name	the filename
----	-----------	--------------


Here is the call graph for this function:

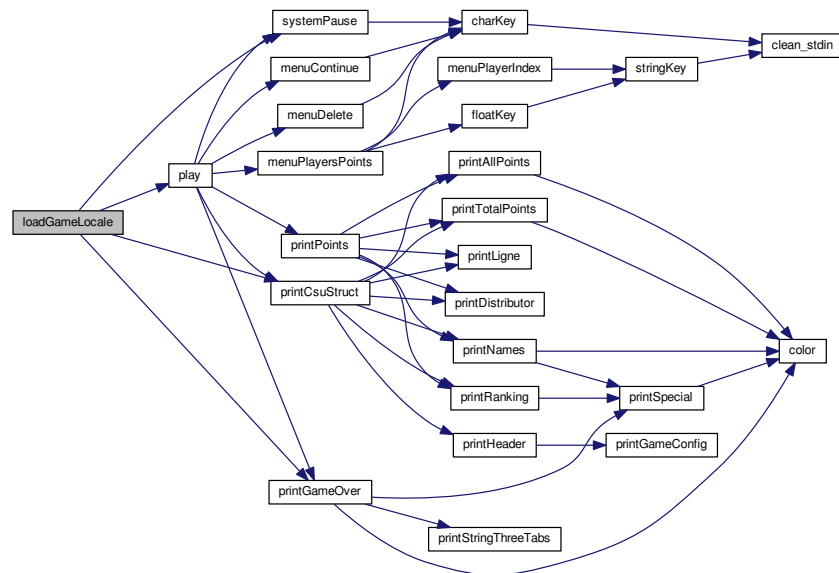

#### 2.4.2.10 void mainMenu ( )

Main menu of csuper.


Here is the call graph for this function:

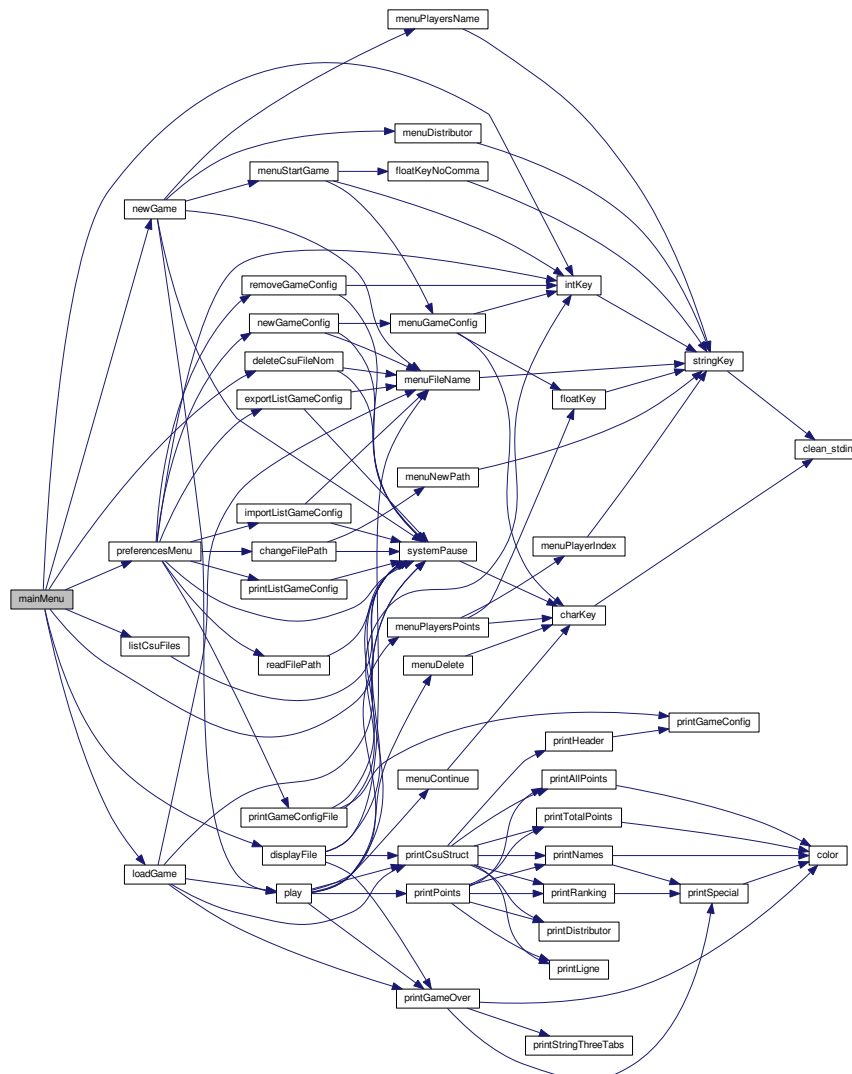

#### 2.4.2.11 void newGame ( )

Initialize a new game and run the play function.


Here is the call graph for this function:

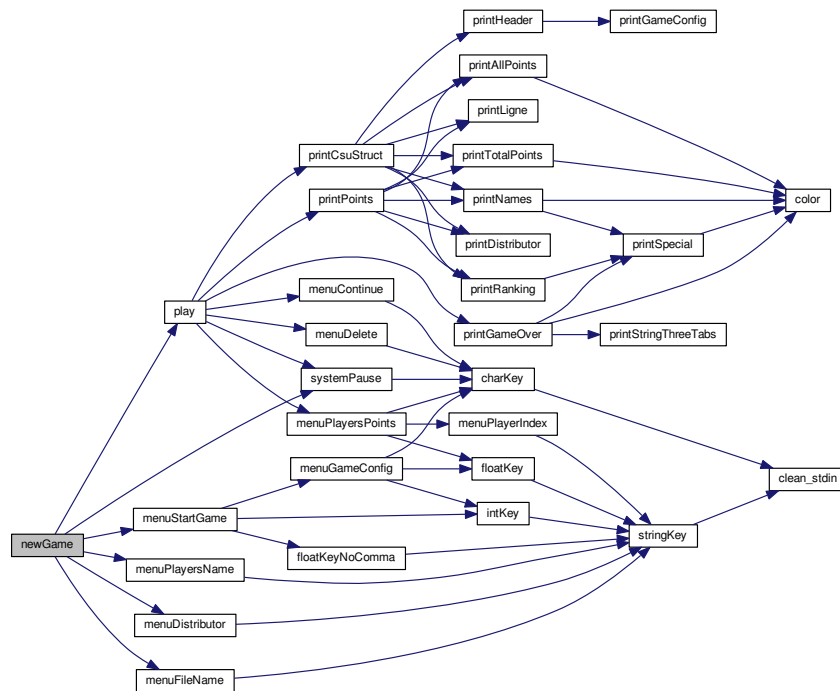

#### 2.4.2.12 void newGameConfig ( )

Add a new game configuration

Here is the call graph for this function:

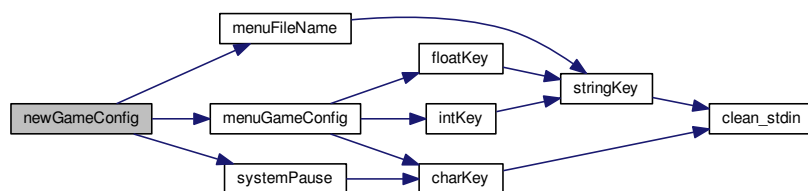

#### 2.4.2.13 void play ( csuStruct \* ptr\_csu\_struct, char \* file\_name )


Count the points

Parameters

---

in, out	<i>*ptr_csu_struct</i>	a pointer on a csu structure
in	<i>*file_name</i>	the filename


Here is the call graph for this function:

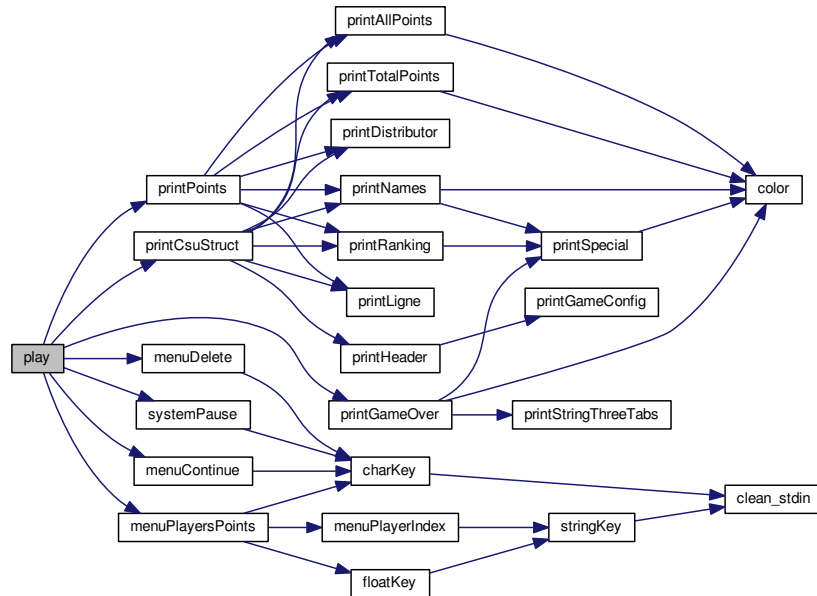

#### 2.4.2.14 void preferencesMenu ( )

Preferences menu of csuper.


Here is the call graph for this function:

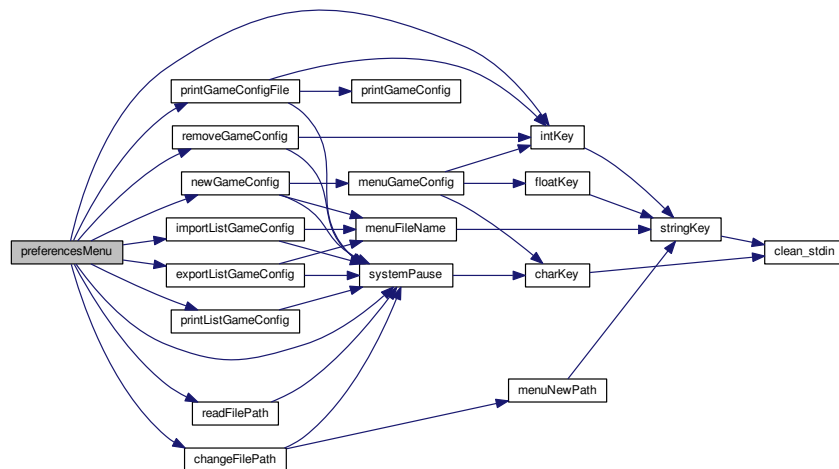



#### 2.4.2.15 void printGameConfigFile ( )


Here is the call graph for this function:

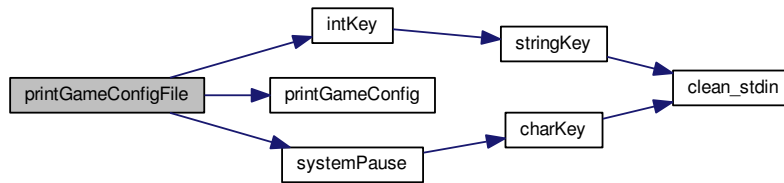

#### 2.4.2.16 void printListGameConfig ( )

Print the list of game configuration


Here is the call graph for this function:



#### 2.4.2.17 void readFilePath ( )

Read the file path and display it.


Here is the call graph for this function:



#### 2.4.2.18 void removeGameConfig ( )

Ask and remove a game configuration

Here is the call graph for this function:



## 2.5 interface.h File Reference

Graphical interface.

```
#include <dirent.h>
#include "menu.h"
#include "display.h"
#include "main.h"
#include "csuper.h"
```

### Enumerations

- enum `MainMenu` {  
`newMatch` =1, `loadMatch` =2, `printFile` =3, `deleteFiles` =4,  
`listFile` =5, `pref` =6, `quit` =7, `easterEggs` = 42 }
- enum `PreferencesMenu` {  
`newPath` =1, `readPath` =2, `newGameConf` =3, `removeGameConf` =4,  
`printListGameConf` =5, `printGameConf` =6, `exportGameConf` =7, `importGameConf` =8,  
`backMainMenu` =9, `easterEggs2` = 42 }

### Functions

- void `displayFile` ()
- void `deleteCsuFileNom` ()
- void `listCsuFiles` ()
- void `play` (csuStruct \*ptr\_csu\_struct, char \*file\_name)
- void `newGame` ()
- void `loadGame` ()
- void `mainMenu` ()
- void `preferencesMenu` ()
- void `changeFilePath` ()
- void `readFilePath` ()
- void `loadGameLocale` (char \*file\_name)
- void `displayFileLocale` (char \*file\_name)
- void `newGameConfig` ()
- void `removeGameConfig` ()
- void `printListGameConfig` ()
- void `printGameConfigFile` ()
- void `exportListGameConfig` ()
- void `importListGameConfig` ()

### 2.5.1 Detailed Description

Graphical interface.

Author

Remi BERTHO

Date

17/04/14

Version

2.2.0

### 2.5.2 Enumeration Type Documentation

#### 2.5.2.1 enum MainMenu

Enumerator

***newMatch***

***loadMatch***

***printFile***

***deleteFiles***

***listFile***

***pref***

***quit***

***easterEggs***

#### 2.5.2.2 enum PreferencesMenu

Enumerator

***newPath***

***readPath***

***newGameConf***

***removeGameConf***

***printListGameConf***

***printGameConf***

***exportGameConf***

***importGameConf***

***backMainMenu***


***easterEggs2***

### 2.5.3 Function Documentation

#### 2.5.3.1 void changeFilePath ( )

Change the path which the file are saved.


Here is the call graph for this function:



#### 2.5.3.2 void deleteCsuFileNom ( )

Ask a filename and deleted the file.


Here is the call graph for this function:



#### 2.5.3.3 void displayFile ( )

Ask a filename and display it.


Here is the call graph for this function:

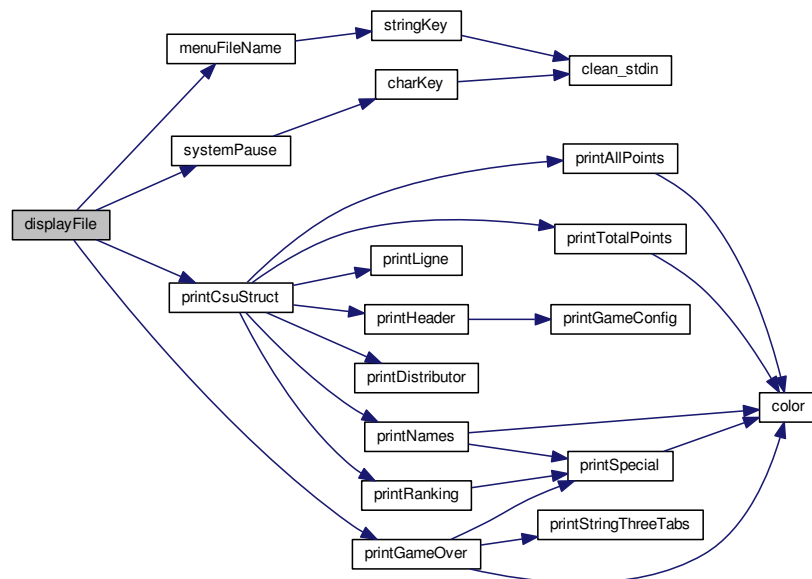

#### 2.5.3.4 void displayFileLocale ( char \* file\_name )

Display the file.


Here is the call graph for this function:

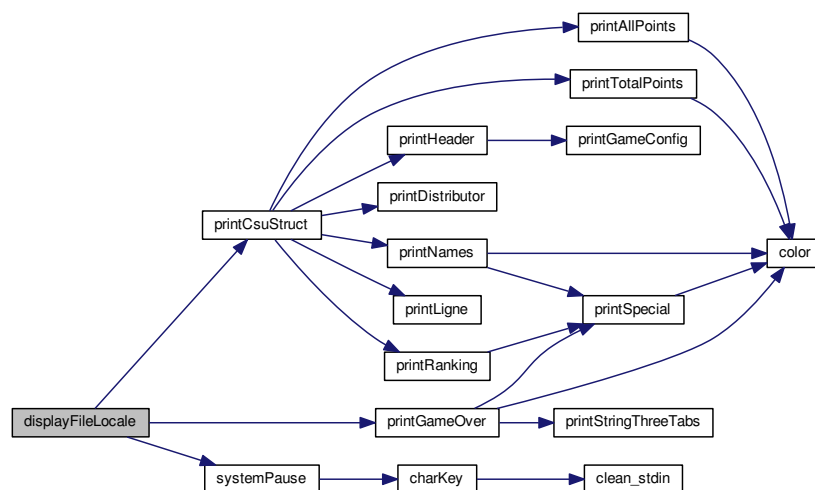

#### 2.5.3.5 void exportListGameConfig ( )

Export all game configuration in one file.


Here is the call graph for this function:



#### 2.5.3.6 void importListGameConfig ( )

Import all game configuration in one file.


Here is the call graph for this function:



#### 2.5.3.7 void listCsuFiles ( )

List all the files with csu extension


Here is the call graph for this function:



#### 2.5.3.8 void loadGame ( )

Load a game from a file and run the play function.

Here is the call graph for this function:

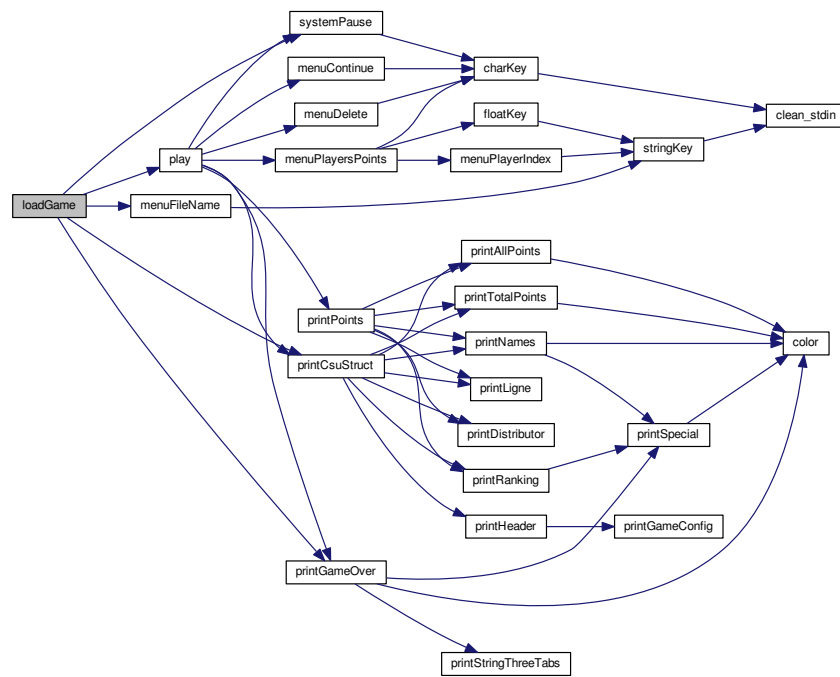


### 2.5.3.9 void loadGameLocale ( char \* *file\_name* )

Load the file and run the play function

#### Parameters

in	<i>file_name</i>	the filename
----	------------------	--------------

Here is the call graph for this function:

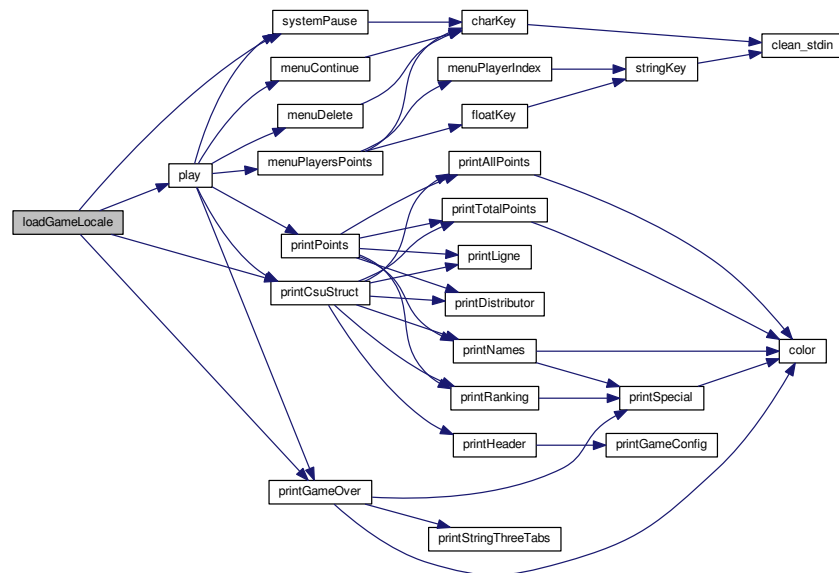


### 2.5.3.10 void mainMenu ( )

Main menu of csuper.



Here is the call graph for this function:

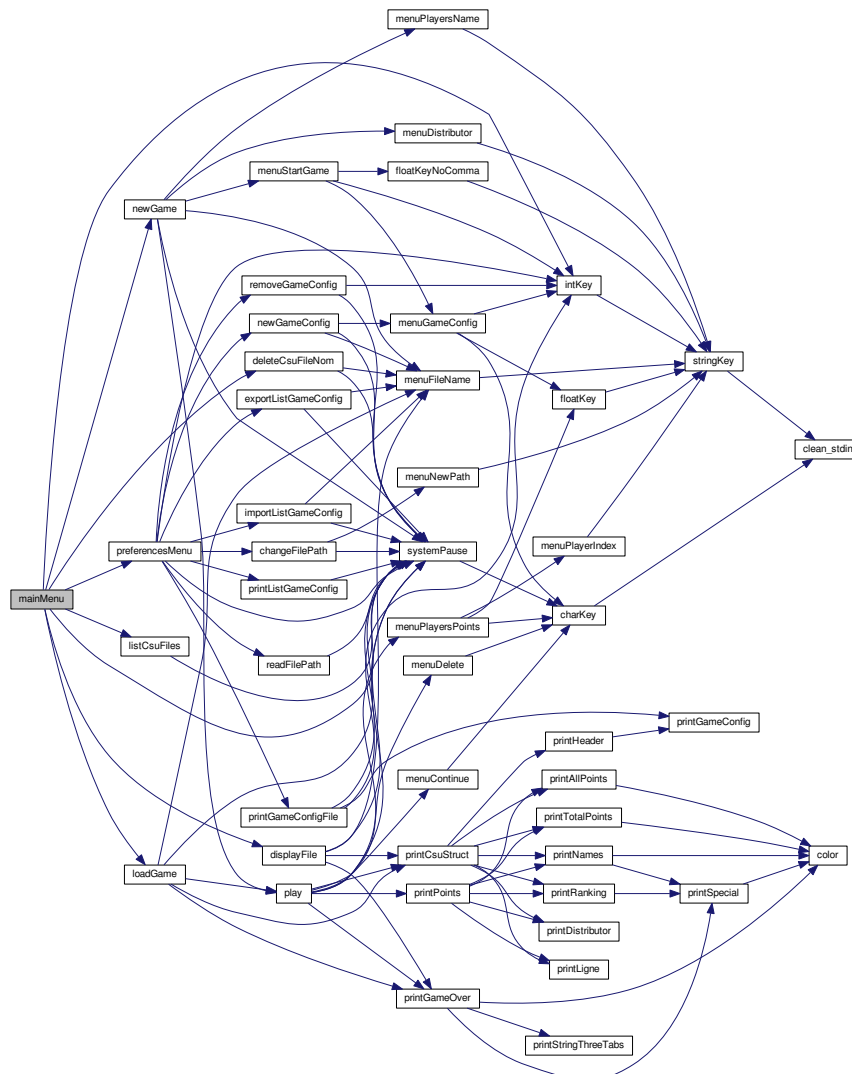


### 2.5.3.11 void newGame ( )

Initialize a new game and run the play function.



in, out	<i>*ptr_csu_struct</i>	a pointer on a csu structure
in	<i>*file_name</i>	the filename


Here is the call graph for this function:

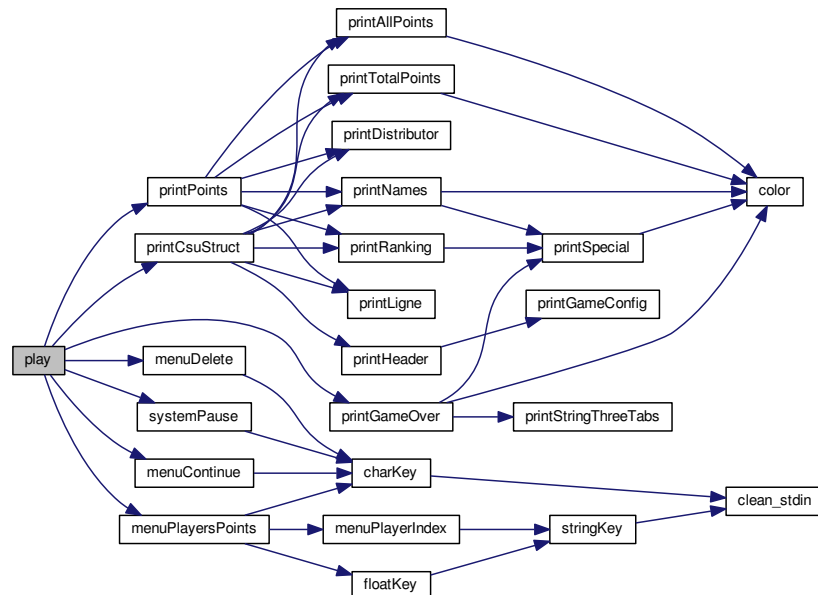

#### 2.5.3.14 void preferencesMenu ( )


Preferences menu of csuper.

Here is the call graph for this function:

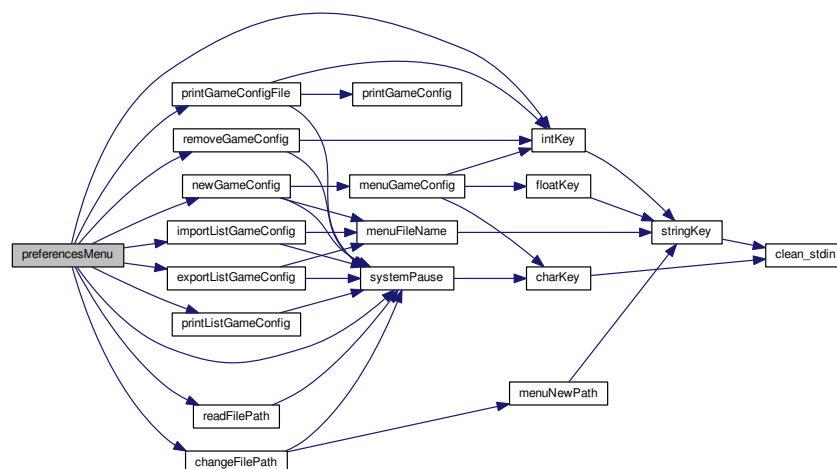

### 2.5.3.15 void printGameConfigFile ( )


Here is the call graph for this function:

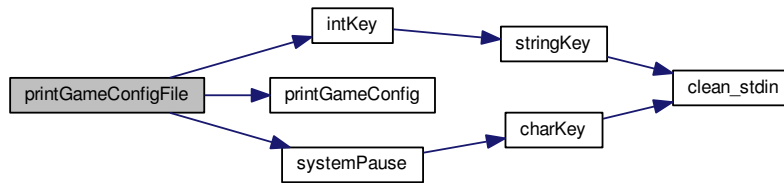

### 2.5.3.16 void printListGameConfig ( )

Print the list of game configuration


Here is the call graph for this function:



### 2.5.3.17 void readFilePath ( )

Read the file path and display it.


Here is the call graph for this function:



### 2.5.3.18 void removeGameConfig ( )

Ask and remove a game configuration

Here is the call graph for this function:



## 2.6 keyboarding.c File Reference

Function of keyboarding.

```
#include "keyboarding.h"
```

### Functions

- void `clean_stdin` (void)
- char \* `stringKey` (char \*string, int nb\_char\_plus\_one)
- void `intKey` (int \*nb)
- void `floatKey` (float \*nb)
- void `floatKeyNoComma` (float \*nb)
- char \* `charKey` (char \*c)
- void `systemPause` ()

### 2.6.1 Detailed Description

Function of keyboarding.

#### Author

Remi BERTHO

#### Date

26/04/14

#### Version

2.2.0

### 2.6.2 Function Documentation

#### 2.6.2.1 char \* charKey ( char \* c )

Do a keyboarding of a character.

**Parameters**

in, out	*c	the character
---------	----	---------------

Here is the call graph for this function:

**2.6.2.2 void clean\_stdin ( void )**

Clean the buffer of stdin.


**2.6.2.3 void floatKey ( float \* nb )**

Do a keyboarding of an float, put 0 if the keyboarding is not an float.

**Parameters**

in, out	*nb	the number
---------	-----	------------

Here is the call graph for this function:


**2.6.2.4 void floatKeyNoComma ( float \* nb )**

Do a keyboarding of an float with no comma, put 0 if the keyboarding is not an float.

**Parameters**

in, out	*nb	the number
---------	-----	------------

Here is the call graph for this function:




### 2.6.2.5 void \* intKey ( int \* nb )

Do a keyboarding of an int, put 0 if the keyboarding is not an int.

#### Parameters

in, out	*nb	the number
---------	-----	------------

Here is the call graph for this function:



### 2.6.2.6 char \* stringKey ( char \* string, int nb\_char\_plus\_one )

Do a keyboarding of a string with nb-char\_plus\_one minus 1 characters

#### Parameters

in, out	*string	a string
in	nb_char_plus_one	the number of characters that the function will read plus one


Here is the call graph for this function:



### 2.6.2.7 void systemPause ( )

Ask the user do press enter to continue.

Here is the call graph for this function:



## 2.7 keyboarding.h File Reference

Function of keyboarding.

```
#include "csuper.h"
#include <locale.h>
#include <string.h>
#include <math.h>
#include "main.h"
```

### Macros

- `#define NB_CARACT_INT 12`
- `#define NB_CARACT_FLOAT 39`
- `#define NB_CARACT_DOUB 309`

### Functions

- void `clean_stdin` (void)
- char \* `stringKey` (char \*string, int nb\_char\_plus\_one)
- void `intKey` (int \*nb)
- void `floatKey` (float \*nb)
- void `floatKeyNoComma` (float \*nb)
- char \* `charKey` (char \*c)
- void `systemPause` ()

### 2.7.1 Detailed Description

Function of keyboarding.

#### Author

Remi BERTHO

#### Date

26/04/14



## Version

2.2.0

## 2.7.2 Macro Definition Documentation

### 2.7.2.1 #define NB\_CHARACTER\_DUB 309

Define the number of characters that need a double

### 2.7.2.2 #define NB\_CHARACTER\_FLOAT 39

Define the number of characters that need a float.

### 2.7.2.3 #define NB\_CHARACTER\_INT 12

Define the number of characters that need an int.

## 2.7.3 Function Documentation

### 2.7.3.1 char\* charKey ( char \* c )

Do a keyboarding of a character.

## Parameters

in, out	*c	the character
---------	----	---------------

Here is the call graph for this function:



### 2.7.3.2 void clean\_stdin ( void )

Clean the buffer of stdin.


### 2.7.3.3 void floatKey ( float \* nb )

Do a keyboarding of an float, put 0 if the keyboarding is not an float.

## Parameters

<code>in, out</code>	<code>*nb</code>	the number
----------------------	------------------	------------

Here is the call graph for this function:




#### 2.7.3.4 void floatKeyNoComma ( float \* nb )

Do a keyboarding of an float with no comma, put 0 if the keyboarding is not an float.

Parameters

<code>in, out</code>	<code>*nb</code>	the number
----------------------	------------------	------------

Here is the call graph for this function:




#### 2.7.3.5 void intKey ( int \* nb )

Do a keyboarding of an int, put 0 if the keyboarding is not an int.

Parameters

<code>in, out</code>	<code>*nb</code>	the number
----------------------	------------------	------------

Here is the call graph for this function:



2.7.3.6 `char* stringKey ( char * string, int nb_char_plus_one )`

Do a keyboarding of a string with nb-char\_plus\_one minus 1 characters

**Parameters**


in, out	<i>*string</i>	a string
in	<i>nb_char_plus_one</i>	the number of characters that the function will read plus one

Here is the call graph for this function:

**2.7.3.7 void systemPause ( )**

Ask the user do press enter to continue.

Here is the call graph for this function:

**2.8 main.c File Reference**

Begin csuper.

```
#include "main.h"
```

**Functions**

- int `main` (int argc, char \*argv[])

**2.8.1 Detailed Description**

Begin csuper.

**Author**

Remi BERTHO

## Date

17/04/14

## Version

2.2.0

## 2.8.2 Function Documentation

### 2.8.2.1 int main ( int *argc*, char \* *argv*[] )

Begin csuper.

## Parameters

in	<i>argc</i>	the number of argument.
in	<i>argv</i>	the array of argument.

## Returns

EXIT\_SUCCESS if everything is OK



**Author**

Remi BERTHO

**Date**

17/04/14

**Version**

2.2.0

## 2.9.2 Function Documentation

### 2.9.2.1 int main ( int *argc*, char \* *argv*[] )

Begin csuper.

**Parameters**

in	<i>argc</i>	the number of argument.
in	<i>argv</i>	the array of argument.

**Returns**

EXIT\_SUCCESS if everything is OK





- void [menuPlayersPoints](#) (csuStruct \*ptr\_csu\_struct)
- int [menuPlayerIndex](#) (csuStruct \*ptr\_csu\_struct)
- int [menuContinue](#) ()
- int [menuDelete](#) ()
- void [menuNewPath](#) (char \*new\_path)

### 2.10.1 Detailed Description

Menu functions.

#### Author

Remi BERTHO

#### Date

29/04/14

#### Version

2.4.0

### 2.10.2 Function Documentation


#### 2.10.2.1 int menuContinue ( )

Ask if we want to continue3

#### Returns

MY\_TRUE if we want to continue, MY\_FALSE otherwise

Here is the call graph for this function:




#### 2.10.2.2 int menuDelete ( )

Ask if we want to delete a file.

**Returns**

MY\_TRUE if we want to deleted the file, MY\_FALSE otherwise

Here is the call graph for this function:


**2.10.2.3 void menuDistributor ( char \* distributor\_name )**

Ask and save the distributor.

**Parameters**

in, out	* <i>distributor_name</i>	the name of the distributor.
---------	---------------------------	------------------------------

Here is the call graph for this function:

**2.10.2.4 char \* menuFileName ( char file\_name[SIZE\_MAX\_FILE\_NAME] )**

Ask and save the filename.


**Parameters**

in, out	<i>file_name</i>	the filename
---------	------------------	--------------

## Returns

filename

Here is the call graph for this function:




## 2.10.2.5 void menuGameConfig ( game\_config \* ptr\_config )

Ask and save a game configuration.

## Parameters

in, out	<i>ptr_config</i>	a game configuration
---------	-------------------	----------------------

Here is the call graph for this function:

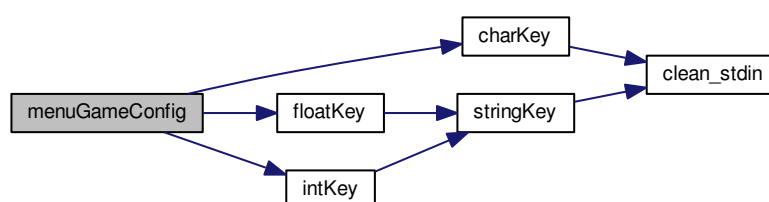


## 2.10.2.6 void menuNewPath ( char \* new\_path )

Ask and save the new path

## Parameters

in, out	<i>*new_path</i>	the new path
---------	------------------	--------------

Here is the call graph for this function:




### 2.10.2.7 int menuPlayerIndex ( csuStruct \* ptr\_csu\_struct )

Ask a player name and save his index

#### Parameters

in, out	*ptr_csu_struct	a pointer on a csu structure
---------	-----------------	------------------------------

Here is the call graph for this function:




### 2.10.2.8 void menuPlayersName ( csuStruct \* ptr\_csu\_struct )

Ask and save the name of the players.

#### Parameters

in, out	*ptr_csu_struct	a pointer on a csu structure
---------	-----------------	------------------------------

Here is the call graph for this function:




### 2.10.2.9 void menuPlayersPoints ( csuStruct \* ptr\_csu\_struct )

Begin a new turn, ask and save the new points and finish the turn

#### Parameters

in, out	*ptr_csu_struct	a pointer on a csu structure
---------	-----------------	------------------------------

Here is the call graph for this function:

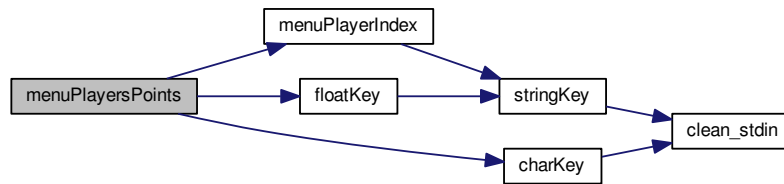


#### 2.10.2.10 void menuStartGame ( float \* ptr\_nb\_player, game\_config \* ptr\_config )

Ask and save the number of player and all the informations of a game configuration.

##### Parameters

in, out	<i>ptr_nb_player</i>	the number of player
in, out	<i>ptr_config</i>	the game configuration

Here is the call graph for this function:

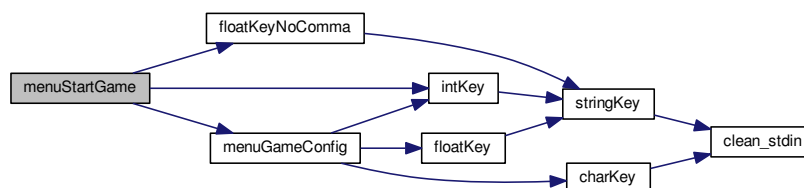

## 2.11 menu.h File Reference

Menu functions.

```
#include "keyboarding.h"
#include "main.h"
#include "csuper.h"
```

### Functions

- char \* [menuFileName](#) (char file\_name[SIZE\_MAX\_FILE\_NAME])
- void [menuStartGame](#) (float \*ptr\_nb\_player, game\_config \*ptr\_config)
- void [menuGameConfig](#) (game\_config \*ptr\_config)
- void [menuDistributor](#) (char \*distributor\_name)
- void [menuPlayersName](#) (csuStruct \*ptr\_csu\_struct)
- void [menuPlayersPoints](#) (csuStruct \*ptr\_csu\_struct)
- int [menuPlayerIndex](#) (csuStruct \*ptr\_csu\_struct)

- int `menuContinue` ()
- int `menuDelete` ()
- void `menuNewPath` (char \*new\_path)

### 2.11.1 Detailed Description

Menu functions.

Author

Remi BERTHO

Date

17/04/14

Version

2.2.0

### 2.11.2 Function Documentation


#### 2.11.2.1 int `menuContinue` ( )

Ask if we want to continue3

Returns

MY\_TRUE if we want to continue, MY\_FALSE otherwise

Here is the call graph for this function:




#### 2.11.2.2 int `menuDelete` ( )

Ask if we want to delete a file.

**Returns**

MY\_TRUE if we want to deleted the file, MY\_FALSE otherwise

Here is the call graph for this function:


**2.11.2.3 void menuDistributor ( char \* distributor\_name )**

Ask and save the distributor.

**Parameters**

in, out	* <i>distributor_name</i>	the name of the distributor.
---------	---------------------------	------------------------------

Here is the call graph for this function:

**2.11.2.4 char\* menuFileName ( char file\_name[SIZE\_MAX\_FILE\_NAME] )**

Ask and save the filename.


**Parameters**

in, out	<i>file_name</i>	the filename
---------	------------------	--------------

## Returns

filename

Here is the call graph for this function:




### 2.11.2.5 void menuGameConfig ( game\_config \* ptr\_config )

Ask and save a game configuration.

## Parameters

in, out	<i>ptr_config</i>	a game configuration
---------	-------------------	----------------------

Here is the call graph for this function:

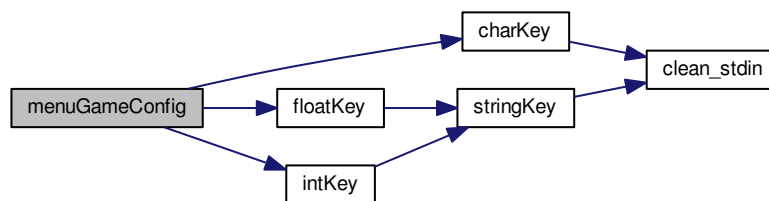


### 2.11.2.6 void menuNewPath ( char \* new\_path )

Ask and save the new path

## Parameters

in, out	<i>*new_path</i>	the new path
---------	------------------	--------------

Here is the call graph for this function:






### 2.11.2.7 int menuPlayerIndex ( csuStruct \* ptr\_csu\_struct )

Ask a player name and save his index

#### Parameters

in, out	*ptr_csu_struct	a pointer on a csu structure
---------	-----------------	------------------------------

Here is the call graph for this function:




### 2.11.2.8 void menuPlayersName ( csuStruct \* ptr\_csu\_struct )

Ask and save the name of the players.

#### Parameters

in, out	*ptr_csu_struct	a pointer on a csu structure
---------	-----------------	------------------------------

Here is the call graph for this function:




### 2.11.2.9 void menuPlayersPoints ( csuStruct \* ptr\_csu\_struct )

Begin a new turn, ask and save the new points and finish the turn

#### Parameters

in, out	*ptr_csu_struct	a pointer on a csu structure
---------	-----------------	------------------------------

Here is the call graph for this function:

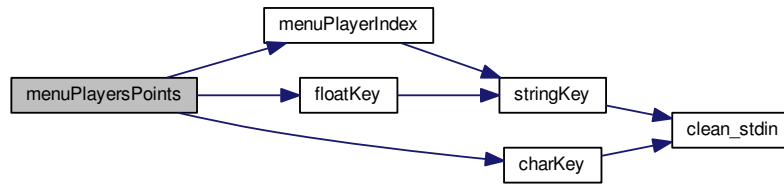


#### 2.11.2.10 void menuStartGame ( float \* ptr\_nb\_player, game\_config \* ptr\_config )

Ask and save the number of player and all the informations of a game configuration.

##### Parameters

in, out	<i>ptr_nb_player</i>	the number of player
in, out	<i>ptr_config</i>	the game configuration

Here is the call graph for this function:

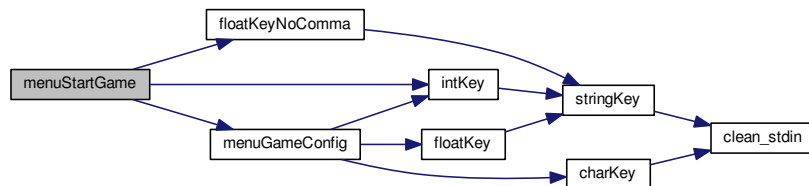

# Index

- - csuper.h, 3
- backMainMenu
  - interface.h, 27
- backgroundBlack
  - display.h, 10
- backgroundBlue
  - display.h, 10
- backgroundBrown
  - display.h, 10
- backgroundCyan
  - display.h, 10
- backgroundDefault
  - display.h, 10
- backgroundGreen
  - display.h, 10
- backgroundMagenta
  - display.h, 10
- backgroundRed
  - display.h, 10
- backgroundWhite
  - display.h, 10
- backgroundColor
  - display.h, 10
- CSUPER
  - csuper.h, 3
- changeFilePath
  - interface.c, 17
  - interface.h, 28
- charKey
  - keyboarding.c, 37
  - keyboarding.h, 41
- clean\_stdin
  - keyboarding.c, 38
  - keyboarding.h, 41
- color
  - display.c, 4
  - display.h, 11
- csuper.h, 3
  - \_, 3
  - CSUPER, 3
- deleteFiles
  - interface.h, 27
- deleteCsuFileNom
  - interface.c, 17
  - interface.h, 28
- display.h
  - backgroundBlack, 10
  - backgroundBlue, 10
  - backgroundBrown, 10
  - backgroundCyan, 10
  - backgroundDefault, 10
  - backgroundGreen, 10
  - backgroundMagenta, 10
  - backgroundRed, 10
  - backgroundWhite, 10
  - foregroundBlack, 11
  - foregroundBlue, 11
  - foregroundBrown, 11
  - foregroundCyan, 11
  - foregroundGreen, 11
  - foregroundMagenta, 11
  - foregroundRed, 11
  - foregroundWhite, 11
  - writingBold, 11
  - writingReset, 11
  - writingUnderline, 11
- display.c, 4
  - color, 4
  - printAllPoints, 4
  - printCsuStruct, 5
  - printDistributor, 5
  - printGameConfig, 6
  - printGameOver, 6
  - printHeader, 6
  - printLicense, 6
  - printLigne, 7
  - printNames, 7
  - printPoints, 7
  - printRanking, 8
  - printSpecial, 8
  - printStringThreeTabs, 9
  - printTotalPoints, 9
- display.h, 9
  - backgroundColor, 10
  - color, 11
  - foregroundColor, 10
  - printAllPoints, 11
  - printCsuStruct, 11
  - printDistributor, 12
  - printGameConfig, 12
  - printGameOver, 12
  - printHeader, 13
  - printLicense, 13
  - printLigne, 13
  - printNames, 13

- printPoints, 14
- printRanking, 14
- printSpecial, 15
- printStringThreeTabs, 15
- printTotalPoints, 15
- Writing, 11
- displayFile
  - interface.c, 17
  - interface.h, 28
- displayFileLocale
  - interface.c, 18
  - interface.h, 29
- easterEggs
  - interface.h, 27
- easterEggs2
  - interface.h, 27
- exportGameConf
  - interface.h, 27
- exportListGameConfig
  - interface.c, 18
  - interface.h, 29
- floatKey
  - keyboarding.c, 38
  - keyboarding.h, 41
- floatKeyNoComma
  - keyboarding.c, 38
  - keyboarding.h, 42
- foregroundBlack
  - display.h, 11
- foregroundBlue
  - display.h, 11
- foregroundBrown
  - display.h, 11
- foregroundCyan
  - display.h, 11
- foregroundGreen
  - display.h, 11
- foregroundMagenta
  - display.h, 11
- foregroundRed
  - display.h, 11
- foregroundWhite
  - display.h, 11
- foregroundColor
  - display.h, 10
- importGameConf
  - interface.h, 27
- importListGameConfig
  - interface.c, 19
  - interface.h, 30
- intKey
  - keyboarding.c, 39
  - keyboarding.h, 42
- interface.h
  - backMainMenu, 27
  - deleteFiles, 27
  - easterEggs, 27
  - easterEggs2, 27
  - exportGameConf, 27
  - importGameConf, 27
  - listFile, 27
  - loadMatch, 27
  - newGameConf, 27
  - newMatch, 27
  - newPath, 27
  - pref, 27
  - printFile, 27
  - printGameConf, 27
  - printListGameConf, 27
  - quit, 27
  - readPath, 27
  - removeGameConf, 27
- interface.c, 16
  - changeFilePath, 17
  - deleteCsuFileNom, 17
  - displayFile, 17
  - displayFileLocale, 18
  - exportListGameConfig, 18
  - importListGameConfig, 19
  - listCsuFiles, 19
  - loadGame, 19
  - loadGameLocale, 20
  - mainMenu, 21
  - newGame, 22
  - newGameConfig, 23
  - play, 23
  - preferencesMenu, 24
  - printGameConfigFile, 24
  - printListGameConfig, 25
  - readFilePath, 25
  - removeGameConfig, 25
- interface.h, 26
  - changeFilePath, 28
  - deleteCsuFileNom, 28
  - displayFile, 28
  - displayFileLocale, 29
  - exportListGameConfig, 29
  - importListGameConfig, 30
  - listCsuFiles, 30
  - loadGame, 30
  - loadGameLocale, 31
  - MainMenu, 27
  - mainMenu, 32
  - newGame, 33
  - newGameConfig, 34
  - play, 34
  - PreferencesMenu, 27
  - preferencesMenu, 35
  - printGameConfigFile, 35
  - printListGameConfig, 36
  - readFilePath, 36
  - removeGameConfig, 36
- keyboarding.c, 37
  - charKey, 37

- clean\_stdin, 38
- floatKey, 38
- floatKeyNoComma, 38
- intKey, 39
- stringKey, 39
- systemPause, 39
- keyboarding.h, 40
  - charKey, 41
  - clean\_stdin, 41
  - floatKey, 41
  - floatKeyNoComma, 42
  - intKey, 42
  - NB\_CARACT\_DOUB, 41
  - NB\_CARACT\_FLOAT, 41
  - NB\_CARACT\_INT, 41
  - stringKey, 42
  - systemPause, 44
- listFile
  - interface.h, 27
- listCsuFiles
  - interface.c, 19
  - interface.h, 30
- loadMatch
  - interface.h, 27
- loadGame
  - interface.c, 19
  - interface.h, 30
- loadGameLocale
  - interface.c, 20
  - interface.h, 31
- main
  - main.c, 45
  - main.h, 47
- main.c, 44
  - main, 45
- main.h, 46
  - main, 47
- MainMenu
  - interface.h, 27
- mainMenu
  - interface.c, 21
  - interface.h, 32
- menu.c, 48
  - menuContinue, 49
  - menuDelete, 49
  - menuDistributor, 50
  - menuFileName, 50
  - menuGameConfig, 51
  - menuNewPath, 51
  - menuPlayerIndex, 52
  - menuPlayersName, 52
  - menuPlayersPoints, 52
  - menuStartGame, 53
- menu.h, 53
  - menuContinue, 54
  - menuDelete, 54
  - menuDistributor, 55
  - menuFileName, 55
  - menuGameConfig, 56
  - menuNewPath, 56
  - menuPlayerIndex, 57
  - menuPlayersName, 57
  - menuPlayersPoints, 57
  - menuStartGame, 58
- menuContinue
  - menu.c, 49
  - menu.h, 54
- menuDelete
  - menu.c, 49
  - menu.h, 54
- menuDistributor
  - menu.c, 50
  - menu.h, 55
- menuFileName
  - menu.c, 50
  - menu.h, 55
- menuGameConfig
  - menu.c, 51
  - menu.h, 56
- menuNewPath
  - menu.c, 51
  - menu.h, 56
- menuPlayerIndex
  - menu.c, 52
  - menu.h, 57
- menuPlayersName
  - menu.c, 52
  - menu.h, 57
- menuPlayersPoints
  - menu.c, 52
  - menu.h, 57
- menuStartGame
  - menu.c, 53
  - menu.h, 58
- NB\_CARACT\_DOUB
  - keyboarding.h, 41
- NB\_CARACT\_FLOAT
  - keyboarding.h, 41
- NB\_CARACT\_INT
  - keyboarding.h, 41
- newGameConf
  - interface.h, 27
- newMatch
  - interface.h, 27
- newPath
  - interface.h, 27
- newGame
  - interface.c, 22
  - interface.h, 33
- newGameConfig
  - interface.c, 23
  - interface.h, 34
- play
  - interface.c, 23

- interface.h, 34
- pref
  - interface.h, 27
- PreferencesMenu
  - interface.h, 27
- preferencesMenu
  - interface.c, 24
  - interface.h, 35
- printFile
  - interface.h, 27
- printGameConf
  - interface.h, 27
- printListGameConf
  - interface.h, 27
- printAllPoints
  - display.c, 4
  - display.h, 11
- printCsuStruct
  - display.c, 5
  - display.h, 11
- printDistributor
  - display.c, 5
  - display.h, 12
- printGameConfig
  - display.c, 6
  - display.h, 12
- printGameConfigFile
  - interface.c, 24
  - interface.h, 35
- printGameOver
  - display.c, 6
  - display.h, 12
- printHeader
  - display.c, 6
  - display.h, 13
- printLicense
  - display.c, 6
  - display.h, 13
- printLigne
  - display.c, 7
  - display.h, 13
- printListGameConfig
  - interface.c, 25
  - interface.h, 36
- printNames
  - display.c, 7
  - display.h, 13
- printPoints
  - display.c, 7
  - display.h, 14
- printRanking
  - display.c, 8
  - display.h, 14
- printSpecial
  - display.c, 8
  - display.h, 15
- printStringThreeTabs
  - display.c, 9
- display.h, 15
- printTotalPoints
  - display.c, 9
  - display.h, 15
- quit
  - interface.h, 27
- readPath
  - interface.h, 27
- readFilePath
  - interface.c, 25
  - interface.h, 36
- removeGameConf
  - interface.h, 27
- removeGameConfig
  - interface.c, 25
  - interface.h, 36
- stringKey
  - keyboarding.c, 39
  - keyboarding.h, 42
- systemPause
  - keyboarding.c, 39
  - keyboarding.h, 44
- Writing
  - display.h, 11
- writingBold
  - display.h, 11
- writingReset
  - display.h, 11
- writingUnderline
  - display.h, 11