

FreeNet Algorithm with Socket Programming in Python

by Damian Boquete Costa and Ludovico Grabau

FreeNet Algorithm with Socket Programming in Python

[Hot to run](#)

[Help](#)

[Test procedure](#)

Hot to run

We used a system that simply allows the user to input the number of the yaml node file to invoke its content and build it into a node object. Therefore, we recommend, if one wants to add more nodes, to simply add a new yaml file to the folder `data/nodes/` and then run the program with the number of the new file.

Proactive node:

```
python3 freenet.py 50001 1 INIT
```

Reactive node:


```
python3 freenet.py [50002-50006] [2-6] WAIT
```

Help

```
python3 freenet.py -h
```

Test procedure

Here's a screenshot of an app called Tilix that we used to run the program.

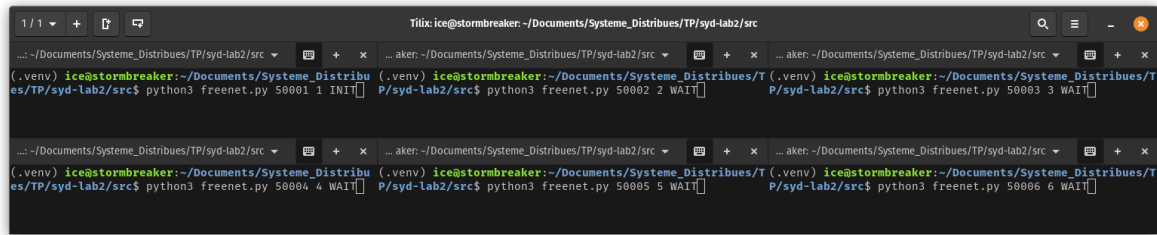

We used 6 terminals, one for each node. We ran the proactive node first, then the reactive nodes. To re-test the program, we activated the synchronised input option (see below) to close all the programs at the same time using CTRL-C and run them again by pressing the up arrow key, and then enter.

