

Computational Complexity

Ryan O'Donnell

June 14, 2021

Contents

1	Notational conventions	1
2	Lecture 1	1
2.1	Lecture notes	1
2.2	Book	3
2.2.1	Chapter 1: The computational model	3
2.2.2	NP and NP completeness	7

1 Notational conventions

Use $\llbracket x \rrbracket$ to denote some canonical binary representation of the object x .
The length of a string x is denoted by $|x|$

2 Lecture 1

2.1 Lecture notes

$\text{TIME}(t(n))$ = all languages L decidable in $O(t(n))$ steps on input of length n

Language $L(\Sigma^*) \equiv$ decision problem \rightarrow yes/no problem

Language L	decision problem	$f : \{0, 1\}^* \rightarrow \{0, 1\}$
Σ^*	yes/no problem	$x \in L \Leftrightarrow f(x) = 1$

decide if a string is in language

Model: multitape Turing machine (TM)

Time Hierarchy Theorem (More time = more power to decide a language)

$$\Rightarrow \text{TIME}(n^2) \subsetneq \text{TIME}(n^3)$$

$$\mathbf{P} = \text{TIME}(\text{poly}(n)), \mathbf{EXP} = \text{TIME}(2^{\text{poly}(n)}), \mathbf{E} = \text{TIME}(2^{O(n)})$$

$$\Rightarrow \mathbf{P} \subsetneq \mathbf{E} \subsetneq \mathbf{EXP}$$

$$\text{SPACE}(s(n)) = \text{langs decidable using tape cells} \subseteq O(s(n))$$

$$\text{TIME}(f(n)) \subseteq \text{SPACE}(f(n))$$

(each operation takes a cell)

$$\mathbf{PSPACE} = \text{SPACE}(\text{poly}(n))$$

$$\mathbf{P} \subseteq \mathbf{PSPACE}$$

$\text{SPACE}(f(n)) \subseteq \text{TIME}(2^{O(f(n))})$ (since only $O(f(n))$ possible states if each state is different)

$$\mathbf{L} = \text{SPACE}(\log n)$$

$$\mathbf{L} \subseteq \mathbf{P} \subseteq \mathbf{PSPACE} \subseteq \mathbf{EXP}$$

Theorem 2.1 (HPV77). $\text{TIME}(t(n)) \subseteq \text{SPACE}(\frac{t(n)}{\log t(n)}) \subsetneq \text{SPACE}(t(n))$

Space is more valuable than time.

$\mathbf{NP} = \mathbf{NTIME}(\text{poly}(n))$ computed by nondeterministic multitape turing machine

$$\mathbf{NE} = \mathbf{NTIME}(2^{O(n)})$$

Circuits - "Non-uniform" model

"Non-uniform" different algorithms for different input length

$\mathbf{P/poly}$ = langs decidable by $\text{poly}(n)$ -size circuit families

$$\mathbf{P} \subsetneq \mathbf{P/poly}$$

if $\mathbf{NP} \neq \mathbf{P}$ then $\mathbf{NP} \not\subseteq \mathbf{P/poly}$

which is equivalent to SAT not decidable by $\text{poly}(n)$ -size circuits

Theorem 2.2. *there exists language with no poly-size constant-depth circuits (actually in \mathbf{P})*

Theorem 2.3. *CLIQUE requires exponential size AND/OR circuits*

Theorem 2.4. *There exists a language $L \in \mathbf{P}$ requiring circuit families of size $\geq 3n$*

Theorem 2.5 (Santhanam theorem). *for all c there exists L s.t. L is not computable by $O(n^c)$ -size circuit*

Theorem 2.6 (William's Theorem). $\exists L \in \mathbf{NEXP}$ is not computable by $AC^0[6]$ (constant depth, $\text{poly}(n)$ size, also get mod 6 gates)

Randomness

BPP = langs decidable in $poly(n)$ -time using randomness

P \subseteq **BPP** \subseteq **EXP**

PIT = "polynomial identity testing" that are in **BPP**, but we don't know if they are in **P**

Hardness vs Randomness Paradigm


2.2 Book

2.2.1 Chapter 1: The computational model

1. Efficiency and Running Time

Definition 2.7. A TM M is described by a tuple (Γ, Q, δ) containing

- A finite set Γ of the symbols that M 's tapes can contain. We assume that Γ contains a designated "blank" symbol, denoted \square ; a designated "start" symbol, denoted \triangleright ; and the numbers 0 and 1. We call Γ the **alphabet** of M
- A finite set Q of possible states M ' register can be in. We assume that Q contains a designated start state, denoted q_{start} , and a designated halting state, denoted q_{halt}
- A function $\delta : Q \times \Gamma^k \rightarrow Q \times \Gamma^{k-1} \times \{L, S, R\}^k$, where $k \geq 2$, describing the rules M use in performing each step. This function is called the **transition function** of M

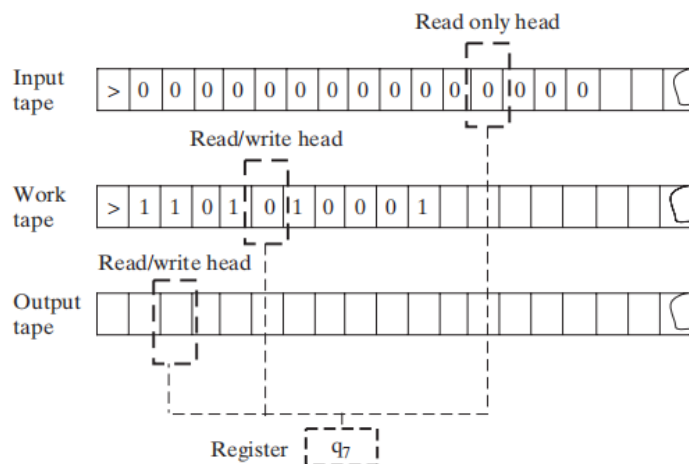

Definition 2.8 (Computing a function and running time). Let $f : \{0, 1\}^* \rightarrow \{0, 1\}$ and let $T : \mathbb{N} \rightarrow \mathbb{N}$ be some functions, and let M be a Turing machine. We say that M **computes** f if for every $x \in \{0, 1\}^*$, whenever M is initialized to the start configuration on input x , then it halts with $f(x)$ written on its output tape. We say M **computes** f **in** $T(n)$ -**time** if its computation on every input x requires at most $T(|x|)$ steps

A function $T : \mathbb{N} \rightarrow \mathbb{N}$ is **time constructible** if $T(n) \geq n$ and there is a TM M that computes the function $x \mapsto \lfloor T(|x|) \rfloor$ in time $T(n)$. $\lfloor T(|x|) \rfloor$ denotes the binary representation of the number $T(|x|)$. The restriction $T(n) \geq n$ is to allow the algorithm time to read its input.

Proposition 2.9. *For every $f : \{0, 1\}^* \rightarrow \{0, 1\}$ and a time-constructible $bT : \mathbb{N} \rightarrow \mathbb{N}$, if f is computable in time $T(n)$ by a TM M using alphabet Γ , then it's computable in time $4 \log|\Gamma|T(n)$ by a TM M using the alphabet $\{0, 1, \square, \triangleright\}$.*

Proof. Let M be a TM with alphabet Γ , k tapes and state set Q that computes the function f in $T(n)$ times. We describe an equivalent TM \tilde{M} computing f with alphabet $\{0, 1, \square, \triangleright\}$, k tapes and a set Q' of states.

One can encode any member of Γ using $\log|\Gamma|$ bits. Thus each of \tilde{M} 's work tapes will simply encode one of M 's tapes: For every cell in M 's tape we will have $\log|\Gamma|$ cells in the corresponding tape of \tilde{M}

To simulate one step of M , the machine \tilde{M} will 1. use $\log|\Gamma|$ steps to read from each tape the $\log|\Gamma|$ bits encoding of a symbol of Γ 2. use its state register to store the symbols read 3. use M 's transition function to compute the symbols M writes and M 's new state given this information 4. store this information in its state register 5. use $\log|\Gamma|$ steps to write the encodings of these symbols on its tapes \square

Proposition 2.10. *Define a single-tape Turing machine to be a TM that has only one read-write tape. For every $f : \{0, 1\}^* \rightarrow \{0, 1\}$ and time-constructible $T : \mathbb{N} \rightarrow \mathbb{N}$ if f is computable in time $T(n)$ by a TM M using k tapes, then it is computable in time $5kT(n)^2$ by a single-tape TM M*


Proof. The TM \tilde{M} encodes k tapes of M on a single tape by using locations $1, k+1, 2k+1, \dots$ to encode the first tape, locations $2, k+2, 2k+2, \dots$ to encode the second tape etc. For every symbol a in M 's alphabet, \tilde{M} will contain both the symbol a and the symbol \hat{a} . In the encoding of

each tape, exactly one symbol will be of the " \wedge type", indicating that the corresponding head of M is positioned in that location. \tilde{M} will not touch the first $n + 1$ locations of its tape (where the input is located) but rather start by taking $O(n^2)$ steps to copy the input bit by bit into the rest of the tape, while encoding it in the above way. \square


Remark (Oblivious Turing machines). One can ensure that the proof of Proposition 2.10 yields a TM \tilde{M} with the following property: its head movements do not depend on the input but only depend on the input length. That is, every input $x \in \{0, 1\}^*$ and $i \in \mathbb{N}$, the location of each of M 's at the i th step of execution on input x is only a function of $|x|$ and i . A machine with this property is called **oblivious**.

Proposition 2.11. *Define a bidirectional TM to be a TM whose tapes are infinite in both directions. For every $f : \{0, 1\}^* \rightarrow \{0, 1\}^*$ and time-constructible $T : \mathbb{N} \rightarrow \mathbb{N}$ if f is computable in time $T(n)$ by a directional TM M , then it is computable in time $4T(n)$ by a standard (unidirectional) TM \tilde{M}*

M 's tape is infinite in both directions:



\tilde{M} uses a larger alphabet to represent it on a standard tape:



Proof.

If M uses alphabet Γ , then \tilde{M} will use the alphabet Γ^2 \square

2. Machines as Strings and the Universal Turing Machine We will also find it convenient to assume that our representation scheme satisfies the following properties:


- (a) We will also find it convenient to assume that our representation scheme satisfies the following properties:
- (b) Every TM is represented by infinitely many strings

We denote by $\lfloor M \rfloor$ the TM M 's representation as a binary string. If α is a string then M_α denotes the TM that α represents.

Theorem 2.12 (Efficient universal Turing machine). *There exists a TM \mathcal{U} s.t. for every $x, \alpha \in \{0, 1\}^*$, $\mathcal{U}(x, \alpha) = M_\alpha(x)$. Moreover, if M_α halts*

on input x within T steps then $\mathcal{U}(x, \alpha)$ falls within $CT \log T$ steps, where C is a number independent of $|x|$ and depending only on M_α 's alphabet size, number of tapes and number of states.

Proof of relaxed version of theorem [?]. We assume M has a single work tape (in addition to the input and output tape) and uses the alphabet $\{\triangleright, \square, 0, 1\}$. The reason is that \mathcal{U} can transform a representation of every TM M into a representation of an equivalent TM \tilde{M} that satisfies these properties. (which may take $C'T^2$ time)

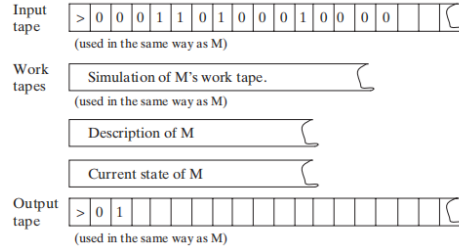

□

3. Uncomputability: An Introduction

Theorem 2.13. *There exists a function $UC : \{0, 1\}^* \rightarrow \{0, 1\}$ that is not computable by any TM*

Proof. For every $\alpha \in \{0, 1\}^*$, if $M_\alpha(\alpha) = 1$ then $UC(\alpha) = 0$; otherwise $UC(\alpha) = 1$.

If it is computable, then there exists a TM M s.t. $M(\alpha) = UC(\alpha)$, then $M(\ulcorner M \urcorner) = UC(\ulcorner M \urcorner)$ □

Theorem 2.14. *HALT is not computable by any TM*

4. The Class **P** A **complexity class** is a set of functions that can be computed within given resource bounds.

We say that a machine **decides** a language $L \subseteq \{0, 1\}^*$ if it computes the function $f_L : \{0, 1\}^* \rightarrow \{0, 1\}$ where $f_L(x) = 1 \Leftrightarrow x \in L$

Definition 2.15. Let $T : \mathbb{N} \rightarrow \mathbb{N}$ be some function. A language L is in **DTIME**($T(n)$) iff there is a Turing machine that runs in $cT(n)$ for some constant $c > 0$ and decides L .

The D in **DTIME** refers to “deterministic”.

Definition 2.16. $P = \bigcup_{c \geq 1} \text{DTIME}(n^c)$

2.2.2 NP and NP completeness

1. The Class NP

Definition 2.17. A language $L \subseteq \{0, 1\}^*$ is in **NP** if there exists a polynomial $p : \mathbb{N} \rightarrow \mathbb{N}$ and a polynomial-time TM M (called the **verifier** for L) s.t. for every $x \in \{0, 1\}^*$

$$x \in L \Leftrightarrow \exists u \in \{0, 1\}^{p(|x|)} \text{ s.t. } M(x, u) = 1$$

If $x \in L$ and $u \in \{0, 1\}^{p(|x|)}$ satisfy $M(x, u) = 1$ then we call u a **certificate** for x

Example 2.1 ($\text{INDSET} \in \text{NP}$). By representing the possible invitees to a dinner party with the vertices of a graph having an edge between any two people who don’t get along. The dinner party computational problem becomes the problem of finding a maximum sized **independent set** (set of vertices without any common edges) in a given graph. The corresponding language is

$$\text{INDSET} = \{ \langle G, k \rangle : \exists S \subseteq V(G) \text{ s.t. } |S| \geq k \text{ and } \forall u, v \in S, \overline{uv} \notin E(G) \}$$

Consider the following polynomial-time algorithm M : Given a pair $\langle G, k \rangle$ and a string $u \in \{0, 1\}^*$, output 1 iff u encodes a list of k vertices of G s.t. there is no edge between any two members of the list. Note that if n is the number of vertices in G , then a list of k vertices can be encoded using $O(k \log n)$ bits, where n is the number of vertices in G . Thus u is a string of at most $O(n \log n)$ bits, which is polynomial in the size of the representation of G .

Proposition 2.18. Let $\text{EXP} = \bigcup_{c > 1} \text{DTIME}(2^{n^c})$. Then $P \subseteq \text{NP} \subseteq \text{EXP}$

Proof. $P \subseteq \text{NP}$. Suppose $L \in P$ is decided in polynomial-time by a TM N . Then we take N as the machine M and make $p(x)$ the zero polynomial

$\text{NP} \subseteq \text{EXP}$. We can decide L in time $2^{O(p(n))}$ by enumerating all possible n and using M to check whether u is a valid certificate for the input x . Note that $p(n) = O(n^c)$ for some $c > 1$, the number of choices for u is $2^{O(n^c)}$. \square

NP stands for **nondeterministic polynomial time**.

NDTM has **two** transition function δ_0 and δ_1 , and a special state denoted by q_{accept} . When an NDTM M computes a function, we envision that at each computational step M makes an arbitrary choice at to which of its two transition functions to apply. For every input x , we say that $M(x) = 1$ if there **exists** some sequence of this choices that would make M reach q_{accept} on input x . We say that M runs in $T(n)$ time if for every input $x \in \{0, 1\}^*$ and every sequence of nondeterministic choices, M reaches the halting state or q_{accept} within $T(|x|)$ steps

Definition 2.19. For every function $f : \mathbb{N} \rightarrow \mathbb{N}$ and $L \subseteq \{0, 1\}^*$ we say that $L \in \mathbf{NTIME}(T(n))$ if there is a constant $c > 0$ and a $cT(n)$ -time NDTM M s.t. for every $x \in \{0, 1\}^*$, $x \in L \Leftrightarrow M(x) = 1$

Theorem 2.20. $\mathbf{NP} = \bigcup_{c \in \mathbb{N}} \mathbf{NTIME}(n^c)$

Proof. The main idea is that the sequence of nondeterministic choices made by an accepting computation of an NDTM can be viewed as a certificate that the input is in the language, and vice versa

Suppose $p : \mathbb{N} \rightarrow \mathbb{N}$ is a polynomial and L is decidable by a NDTM N that runs in time $p(n)$. For every $x \in L$, there is a sequence of nondeterministic choices that makes N reach q_{accept} on input x . We can use this sequence as a certificate for x . This certificate has length $p(|x|)$ and can be verified in polynomial time by a deterministic machine.

Conversely, if $L \in \mathbf{NP}$, then we describe a polynomial time NDTM N that decides L . On input x , it uses the ability to make nondeterministic choices to write down a string u of length $p(|x|)$. (Having transition δ_0 correspond to writing a 0 and δ_1). Then it runs the deterministic verifier \square

2. Reducibility and NP-Completeness

Definition 2.21. A language $L \subseteq \{0, 1\}^*$ is **polynomial-time Karp reducible to a language** $L' \subseteq \{0, 1\}^*$, denoted by $L \leq_p L'$ if there is a polynomial-time computable function $f : \{0, 1\}^* \rightarrow \{0, 1\}^*$ s.t. for every $x \in \{0, 1\}^*$, $x \in L$ iff $f(x) \in L'$

We say that L' is **NP-hard** if $L \leq_p L'$ for every $L \in \mathbf{NP}$. We say that L' is **NP-complete** if L' is NP-hard and $L' \in \mathbf{NP}$

Theorem 2.22. (a) (Transitivity) If $L \leq_p L'$ and $L' \leq_p L''$ then $L \leq_p L''$
(b) If language L is **NP-hard** and $L \in \mathbf{P}$ then $\mathbf{P} = \mathbf{NP}$
(c) If language L is **NP-complete**, then $L \in \mathbf{P}$ iff $\mathbf{P} = \mathbf{NP}$

Theorem 2.23. The following language is **NP-complete**

$$\text{TMSAT} = \{ \langle \alpha, x, 1^n, 1^t \rangle : \exists u \in \{0, 1\}^n \text{ s.t. } M_\alpha \text{ outputs 1 on input } \langle x, u \rangle \text{ within } t \text{ steps} \}$$

Proof. There is a polynomial p and a verifier TM M s.t. $x \in L$ iff there is a string $u \in \{0, 1\}^{p(|x|)}$ satisfying $M(x, u) = 1$ and M runs in time $q(n)$ for some polynomial q .

Map every string $x \in \{0, 1\}^*$ to the tuple $\langle \ulcorner M \urcorner, x, 1^{p(|x|)}, 1^{q(m)} \rangle$ where $m = |x| + p(|x|)$ and $\ulcorner M \urcorner$ denotes the representation of M as string.

$$\begin{aligned} \langle \ulcorner M \urcorner, x, 1^{p(|x|)}, 1^{q(m)} \rangle &\in \text{TMSAT} \\ \Leftrightarrow \exists u \in \{0, 1\}^{p(|x|)} \text{ s.t. } M(x, u) &\text{ outputs 1 within } q(m) \text{ steps} \\ \Leftrightarrow x &\in L \end{aligned}$$

□

3. The Cook-Levin Theorem: Computation is Local We denote by SAT the language of all satisfiable CNF formulae and by 3SAT the language of all satisfiable 3CNF formulae

Theorem 2.24 (Cook-Levin Theorem). (a) SAT is **NP-complete**
(b) 3SAT is **NP-complete**

Lemma 2.25 (Universality of AND, OR, NOT). For every Boolean function $f : \{0, 1\}^l \rightarrow \{0, 1\}$, there is an l -variable CNF formula φ of size $l2^l$ s.t. $\varphi(u) = f(u)$ for every $u \in \{0, 1\}^l$, where the size of a CNF formula is defined to be the number of \wedge/\vee symbols it contains

Proof. For every $v \in \{0, 1\}^l$, there exists a clause $C_v(z_1, \dots, z_l)$ s.t. $C_v(v) = 0$ and $C_v(u) = 1$ for every $u \neq v$.

We let φ be the AND of all the clauses C_v for v s.t. $f(v) = 0$

$$\varphi = \bigwedge_{v:f(v)=0} C_v(z_1, \dots, z_l)$$

Note that φ has size at most $l2^l$.

□

Lemma 2.26. *SAT is NP-hard*

Proof. Let L be an **NP** language. By definition, there is a polynomial time TM M s.t. for every $x \in \{0, 1\}^*$, $x \in L \Leftrightarrow M(x, u) = 1$ for some $u \in \{0, 1\}^{p(|x|)}$, where $p : \mathbb{N} \rightarrow \mathbb{N}$ is some polynomial. We show L is polynomial-time Karp reducible to SAT by describing a polynomial-time transformation $x \rightarrow \varphi_x$ from strings to CNF formulae s.t. $x \in L$ iff φ_x is satisfiable. Equivalently

$$\varphi_x \in \text{SAT} \quad \text{iff} \quad \exists u \in \{0, 1\}^{p(|x|)} \text{ s.t. } M(x \circ u) = 1$$

where \circ denotes concatenation

Assume M

- (a) M only has two tapes - an input tape and a work/output tape
- (b) M is an oblivious TM in the sense that its head movement does not depend on the contents of its tapes. That is, M 's computation takes the same time for all inputs of size n , and for every i the location of M 's head at the i th step depends only on i and the length of the input

We can make these assumptions without loss of generality because for every $T(n)$ -time TM M there exists a two-tape oblivious TM \tilde{M} computing the same function in $O(T(n)^2)$. Thus in particular, if $L \in \text{NP}$, then there exists a two-tape oblivious polynomial-time TM M and a polynomial p s.t.

$$x \in L \Leftrightarrow \exists u \in \{0, 1\}^{p(|x|)} \text{ s.t. } M(x \circ u) = 1 \quad (1)$$

Note that because M is oblivious, we can run it on the trivial input $(x, 0^{p(|x|)})$ to determine the precise head position of M during its computation on every other input of the same length.

Denote by Q the set of M 's possible states and by Γ its alphabet. The **snapshot** of M 's execution on some input y at a particular step i is the triple $\langle a, b, q \rangle \in \Gamma \times \Gamma \times Q$ s.t. a, b are the symbols read by M 's heads from the two tapes and q is the state M is in at the i th step. Clearly the snapshot can be encoded as a binary string. Let c denote the length of this string, which is some constant depending upon $|Q|$ and $|\Gamma|$

For every $y \in \{0, 1\}^*$, the snapshot of M 's execution on input y at the i th step depends on its state in the $(i - 1)$ st step and the contents of the current cells of its input and work tapes.

$z_{\text{prev}(i)}$, there is at most one value of z_i that is correct. Thus there is some function F that maps $\{0, 1\}^{2^{c+1}}$ to $\{0, 1\}^c$ s.t. a correct z_i satisfies

$$z_i = F(z_{i-1}, z_{\text{prev}(i)}, y_{\text{inputpos}(i)})$$

Because M is oblivious, the values $\text{inputpos}(i)$ and $\text{prev}(i)$ do not depend on the particular input i . These indices can be computed in polynomial-time by simulating M on a trivial input.

By (1), $x \in \{0, 1\}^n \in L$ iff $M(x \circ u) = 1$ for some $u \in \{0, 1\}^{p(n)}$. The previous discussion shows this latter condition occurs iff there exists a string $y \in \{0, 1\}^{n+p(n)}$ and a sequence of strings $z_1, \dots, z_{T(n)} \in \{0, 1\}^c$ (where $T(n)$ is the number of steps M takes on inputs of length $n + p(n)$) satisfying the following four conditions

- (a) The first n bits of y are equal to x
- (b) The string z_1 encodes the initial snapshot of M . That is, z_1 encodes the triple $\langle \triangleright, \square, q_{\text{start}} \rangle$.
- (c) For every $i \in \{2, \dots, T(n)\}$, $z_i = F(z_{i-1}, z_{\text{prev}(i)}, y_{\text{inputpos}(i)})$.
- (d) The last string $z_{T(n)}$ encodes a snapshot where the machine halts and outputs 1

The formula φ_x will take variables $y \in \{0, 1\}^{n+p(n)}$ and $z \in \{0, 1\}^{cT(n)}$ and will verify that y, z satisfy the AND of these four conditions. Thus $x \in L \Leftrightarrow \varphi_x \in \text{SAT}$.

Condition 1 can be expressed as a CNF formula of size $4n$. Conditions 2 and 4 each depend on c variables and hence by Proposition 2.25 can be expressed by CNF formulae of size $c2^c$. Condition 3, which is an AND of $T(n)$ conditions each depending on at most $3c + 1$ variables, can be expressed as a CNF formula of size at most $T(n)(3c + 1)2^{3c+1}$. Hence the AND of all these conditions can be expressed as a CNF formula of size $d(n + T(n))$ where d is some constant depending only on M . Moreover, this CNF formula can be computed in time polynomial in the running time of M . \square


Lemma 2.27. $\text{SAT} \leq_p 3\text{SAT}$

Proof. Suppose φ is a 4CNF. Let C be a clause of φ , say $C = u_1 \vee \bar{u}_2 \vee \bar{u}_3 \vee u_4$. We add a new variable z to the φ and replace C with the pair $C_1 = u_1 \vee \bar{u}_2 \vee z$ and $C_2 = \bar{u}_3 \vee u_4 \vee \bar{z}$. If C is true, then there is an

assignment to z that satisfies both C_1 and C_2 . If C is false, then no matter what value we assign to z either C_1 or C_2 will be false.

For every clause C of size $k > 3$, we change it into an equivalent pair of clauses C_1 of size $k - 1$ and C_2 of size 3. \square

4. The Web of Reductions

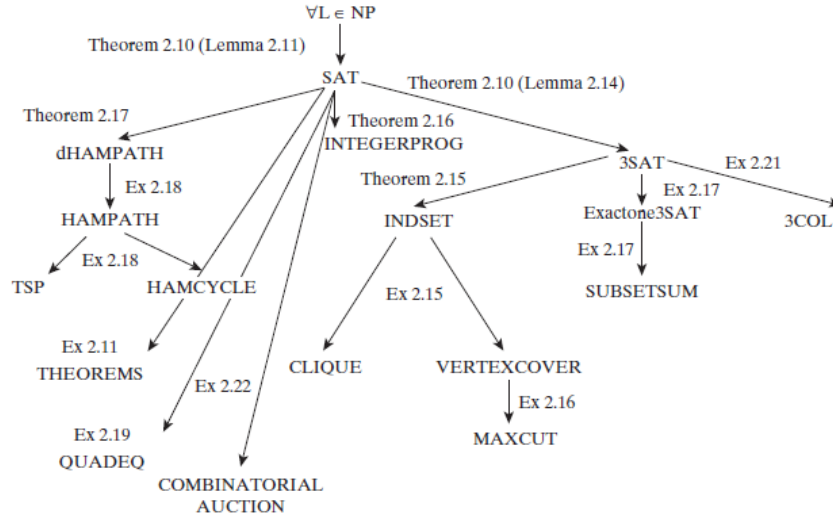

Theorem 2.28. *INDSET is NP-complete*

Proof. Transform in polynomial time every m -clause 3CNF formula φ into a $7m$ -vertex graph G

We associate a cluster of 7 vertices in G with each clause of φ . The vertices in a cluster associated with a clause C correspond to the seven possible satisfying partial assignments to the three variables on which C depends. For example, if C is $\bar{u}_2 \vee \bar{u}_5 \vee u_7$, then the seven vertices in the cluster associated with C correspond to all partial assignments of the form $u_1 = a, u_2 = b, u_3 = c$ for a binary vector $\langle a, b, c \rangle \neq \langle 1, 1, 0 \rangle$. We put an edge between two vertices of G if they correspond to inconsistent partial assignments. In addition, we put edges between every two vertices that are in the same cluster

φ is satisfiable iff G has an independent set of size m \square

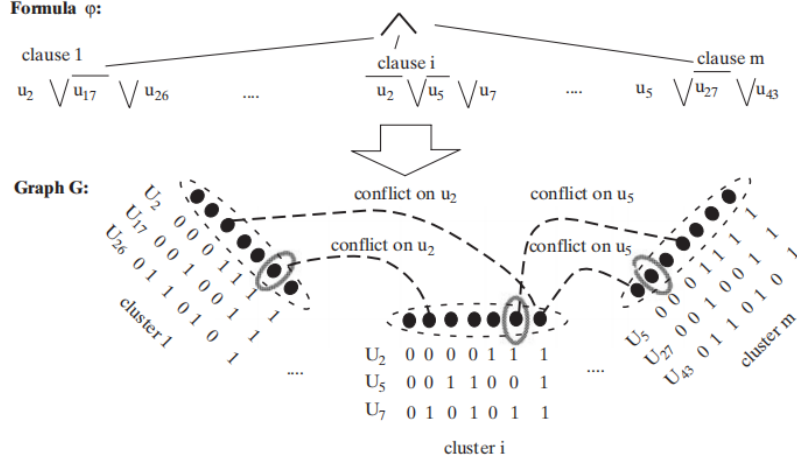


Figure 2.5. We transform a 3CNF formula φ with m clauses into a graph G with $7m$ vertices as follows: each clause C is associated with a cluster of 7 vertices corresponding to the 7 possible satisfying assignments to the variables C depends on. We put edges between any two vertices in the same cluster and any two vertices corresponding to *inconsistent* partial assignments. The graph G will have an independent set of size m if and only if φ was satisfiable. The figure above contains only a sample of the edges. The three circled vertices form an independent set.

We let $1/0$ IPROG be the set of satisfiable 0/1 integer programs. That is, a set of linear inequalities with rational coefficients over variables u_1, \dots, u_n is in $1/0$ IPROG if there is an assignment of numbers in $\{0, 1\}$ to u_1, \dots, u_n that satisfies it

Theorem 2.29. *1/0 IPROG is NP-complete*

Every CNF formula can be expressed as an integer program by expressing every clause as inequality. For example, the clause $u_1 \vee \bar{u}_2 \vee \bar{u}_3$ can be expressed by $u_1 + (1 - u_2) + (1 - u_3) \geq 1$.

A **Hamilton path** in a directed graph is a path that visits all vertices exactly once. Let $dHAMPATH$ denote the set of all directed graphs that contain such a path

Theorem 2.30. *dHAMPATH is NP-complete*

Proof. The graph G has

- (a) m vertices for each of φ 's clause c_1, \dots, c_m
- (b) a special starting vertex v_{start} and ending vertex v_{end}

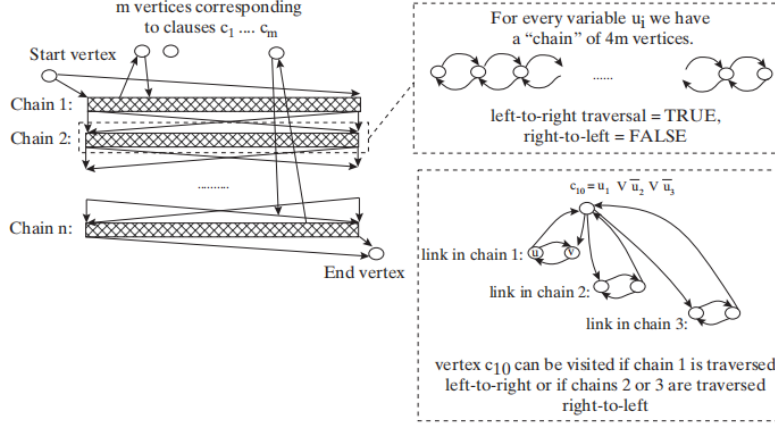


Figure 2.6. Reducing SAT to dHAMPATH. A formula φ with n variables and m clauses is mapped to a graph G that has m vertices corresponding to the clauses and n doubly linked chains, each of length $4m$, corresponding to the variables. Traversing a chain left to right corresponds to setting the variable to True, while traversing it right to left corresponds to setting it to False. Note that in the figure every Hamiltonian path that takes the edge from u to c_{10} must immediately take the edge from c_{10} to v , as otherwise it would get “stuck” the next time it visits v .

- (c) n “chains” of $4m$ vertices corresponding to the n variables of φ .
A chain is a set of vertices v_1, \dots, v_{4m} s.t. for every $i \in [1, 4m - 1]$,
 v_i and v_{i+1} are connected by two edges in both directions

If C contains the literal u_j , then we take two neighboring vertices v_i, v_{i+1} in the j th chain and put an edge from v_i to C and from C to v_{i+1} . If C contains the literal \bar{u}_j then we construct these edges in the opposite direction. When adding these edges, we never “reuse” a link v_i, v_{i+1} in a particular chain and always keep an unused link between every two used links.

$G \in \text{dHAMPATH} \Rightarrow \varphi \in \text{SAT}$. Suppose that G has an Hamiltonian path P . We first note that the path P must start in v_{start} and end at v_{end} . Furthermore, we claim that P needs to traverse all the chains in order and, within each chain, traverse it either in left-to-right order or right-to-left order. \square

5. Decision versus Search

Theorem 2.31. Suppose that $P = NP$. Then for every NP language L and a verifier TM M for L , there is a polynomial-time TM B that on input $x \in L$ outputs a certificate for x .

Proof. We need to show that if $\mathbf{P} = \mathbf{NP}$ then for every polynomial-time TM M and polynomial $p(n)$, there is a polynomial-time TM B with the following property: for every $x \in \{0, 1\}^n$ if there is $u \in \{0, 1\}^{p(n)}$ s.t. $M(x, u) = 1$ then $|B(x)| = p(n)$ and $M(x, B(x)) = 1$

We start by showing the theorem for the case of SAT. In particular, we show that given an algorithm A that decides SAT, we can come up an algorithm B that on input a satisfiable CNF formula φ with n variables, finds a satisfying assignment for φ using $2n + 1$ calls to A and some additional polynomial-time computation.

We first use A to check that the input formula is satisfiable. If so, we first substitute $x_1 = 0$ and then $x_1 = 1$ in φ and then use A to decide which of the two is satisfiable. Say the first is satisfiable. Then we fix $x_1 = 0$. Continuing this way, we end up with an assignment

To solve the search problem for an arbitrary \mathbf{NP} -language L , we use the fact that the reduction of Theorem 2.24 from L to SAT is actually a Levin reduction. This means that we have a polynomial-time computable function f s.t. we can map a satisfying assignment of $f(x)$ into a certificate for x . \square

The theorem 2.31 shows that SAT is **downward self-reducible**, which means that given an algorithm that solves SAT on inputs of length smaller than n we can solve SAT on inputs of length n .

6. \mathbf{coNP} , \mathbf{EXP} and \mathbf{NEXP}

Definition 2.32. $\mathbf{coNP} = \{L : \bar{L} \in \mathbf{NP}\}$

Definition 2.33 (alternative definition). For every $L \subseteq \{0, 1\}^*$, we say that $L \in \mathbf{coNP}$ if there exists a polynomial $p : \mathbb{N} \rightarrow \mathbb{N}$ and a polynomial-time TM M s.t. for every $x \in \{0, 1\}^*$

$$x \in L \Leftrightarrow \forall u \in \{0, 1\}^{p(|x|)}, M(x, u) = 1$$

7. Exercise

Exercise 2.2.1. Prove that $\mathbf{P} \subseteq \mathbf{NP} \cap \mathbf{coNP}$

Exercise 2.2.2. Prove that Definition 2.32 and 2.33 do indeed define the same class

Proof. Suppose $\mathbf{coNP} = \{L : \bar{L} \in \mathbf{NP}\}$. align \square