Advanced Shipping and Receiving (ASR) [Erweiterter Warenannahme- und Versandprozess]

Freitag, 7. Mai 2021 11:34

Relevance of Outbound Deliveries for Advanced Shipping and Receiving

Table LIKP ⇨ Field TM_ADV_SHIP_RECV

Derived from:

1. **ASR relevance of the shipping point**

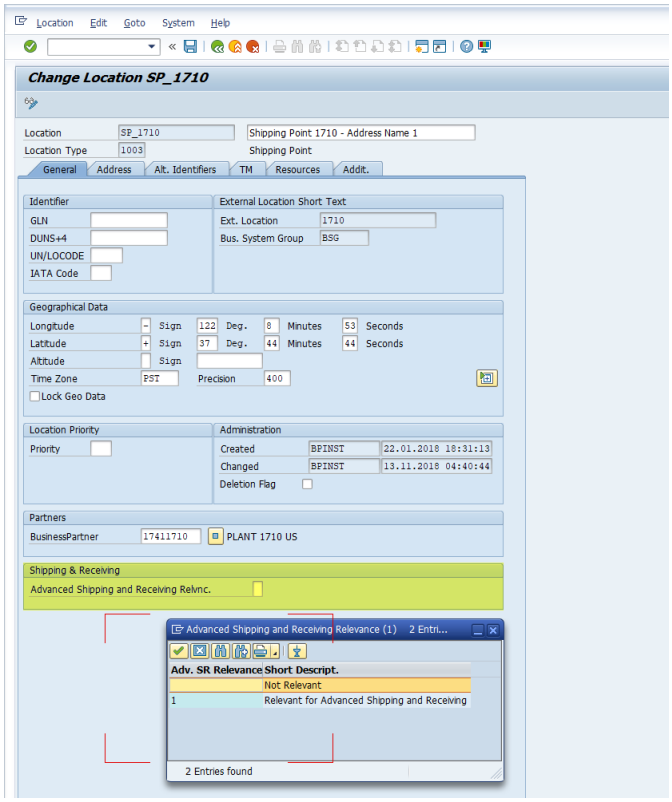

2. **TM relevance of the outbound delivery**

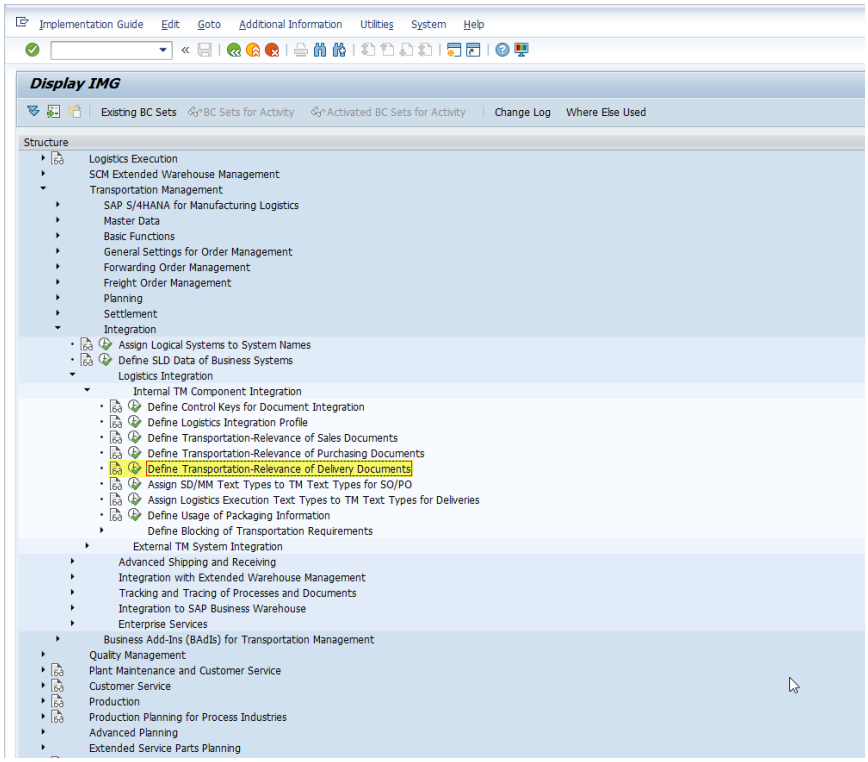

3. **Mapping to a separate document type in EWM**

In order to determine a separate document type for ASR Outbound processing in D21/S21 a BAdI was implemented to enhance the standard mapping logic.

BAdI: /SCWM/IF_EX_ERP_INT_CONF

BAdI Implementation in D/S21: Z_ASR_DET_DOC_TYPE
Tx SE19

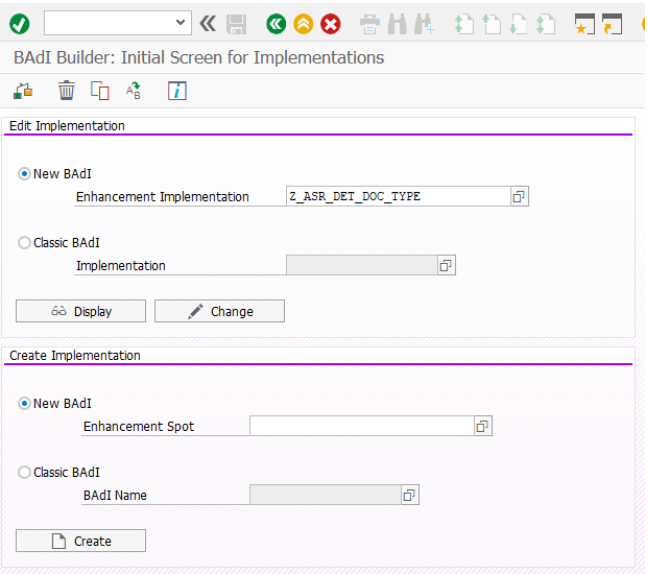

Implementing Class in D21: **Z_SCWM_CL_EXM_IM_ERP_INT_CONF**

The Method DET_DOCTYPE was enhanced in order to determine a separate document type.

Method /SCWM/IF_EX_ERP_INT_CONF~DET_DOCTYPE active

```
METHOD /scwm/if_ex_erp_int_conf~det_doctype.

DATA: gs_prof      TYPE bal_s_prof,
      gs_log       TYPE bal_s_log,
      gs_lgtyp     TYPE /scwm/t331,
      gs_bin       TYPE /scwm/lagp.  "for select option only


  " initialize class attributes
  CLEAR: mv_doctype, mv_erpbskey, mv_erpdlvtype, mv_doccat.

  SELECT SINGLE tm_adv_ship_recv FROM likp
    WHERE vbeln = @is_header-deliv_numb
    INTO @DATA(lv_asr_relevance).

  IF lv_asr_relevance = 1.

     " determine document type with WMD Process Initiator
    /scwm/cl_erp_int_conf=>select_doctype(
    EXPORTING
      iv_erpbskey           = iv_erpbskey
      iv_erpdlvtype         = is_header-dlv_type
      iv_initiator_process = 'WMD'
    IMPORTING
      ev_doctype            = ev_doctype ).

     " Do logging
     add_log_message(
      EXPORTING
        is_header = is_header
        ).

   ELSE.

      /scwm/cl_erp_int_conf=>select_doctype(
      EXPORTING
        iv_erpbskey           = iv_erpbskey
        iv_erpdlvtype         = is_header-dlv_type
        iv_initiator_process = is_header-initiator_process
      IMPORTING
        ev_doctype            = ev_doctype ).

  ENDIF.

  " keep data to be used for item type determination
  mv_erpbskey   = iv_erpbskey.
  mv_doccat     = iv_doccat.
  mv_erpdlvtype = is_header-dlv_type.

  IF ev_doctype IS NOT INITIAL.
    " keep data to be used for item type determination
    mv_doctype    = ev_doctype.
  ENDIF.

ENDMETHOD.
```

Mapping Delivery Type - Document Type

Business System	DocTypeERP	C...	Doc. Type
	DIG		INB
	DIG	GRP	INBI
	DIG	RNP	EGRI
	EL		INB
	LF		OUTB
	LF	WMD	ZASR
	RLL		ORET

The BAdI checks if the field LIKP-TM_ADV_SHIP_RECV equals 1. This indicates, that the ERP delivery is relevant for ASR.
Afterwards it sets the initiator communication chain to "WMD".
This leads to the EWM document type ZASR in D21/S21.

When a delivery is relevant for ASR in EWM, during creation a LOG entry is added to SLG1.