

Model lft, Experiment *real_data - run1 - 1103 - 1714*

November 5, 2025

1 Model Description and Training

The lft is used with a channel dimension of 32. The model has an overall number of 1880640 of learnable parameters. The model was trained for 80 epochs with a batch size of 16. The adam optimizer was used with an initial learning rate of 0.0002. The learning rate is decreased every 15 epochs by a factor of 0.5.

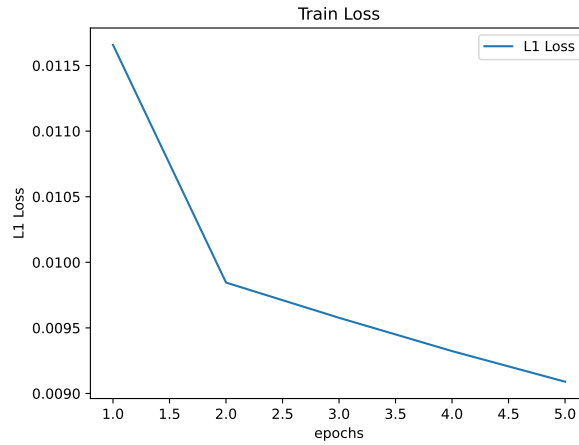


Figure 1: Train Loss

2 Qualitative Results

3 Quantitative Results

3.1 PSNR

	Lab day	Lab night	Indoors day	Indoors night	Showroom	Outdoors
MAX	37.737	43.308	40.045	49.027	35.489	31.056
LAST	37.703	42.617	39.951	47.409	35.489	31.056

3.2 SSIM

	Lab day	Lab night	Indoors day	Indoors night	Showroom	Outdoors
MAX	0.945	0.955	0.944	0.984	0.945	0.902
LAST	0.945	0.955	0.944	0.983	0.945	0.902

3.3 SAM

	Lab day	Lab night	Indoors day	Indoors night	Showroom	Outdoors
MIN	0.053	0.058	0.032	0.080	0.059	0.077
LAST	0.053	0.058	0.032	0.082	0.059	0.077

3.4 SRE

	Lab day	Lab night	Indoors day	Indoors night	Showroom	Outdoors
MIN	6.780	5.417	5.537	2.572	8.410	11.607
LAST	6.780	5.417	5.537	2.642	8.410	11.607



Figure 2: Qualitative Results, from left to right, Bicubically upsampled, Super Resolved, Original Data

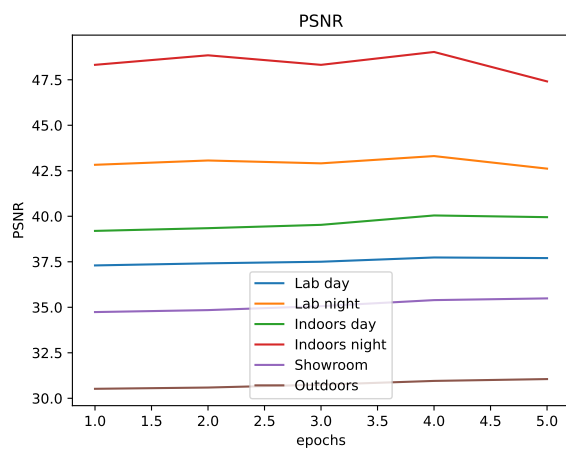


Figure 3: PSNR

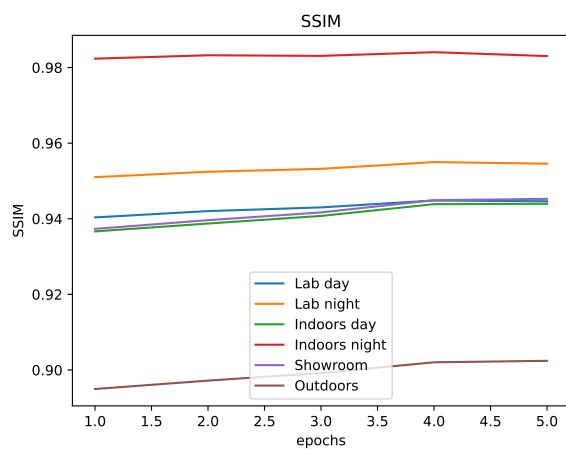


Figure 4: SSIM

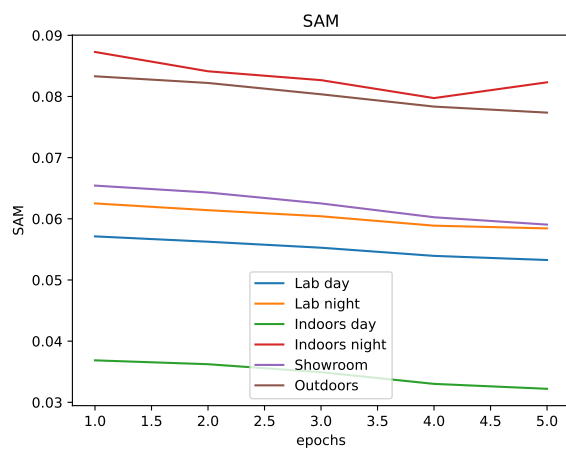


Figure 5: SAM

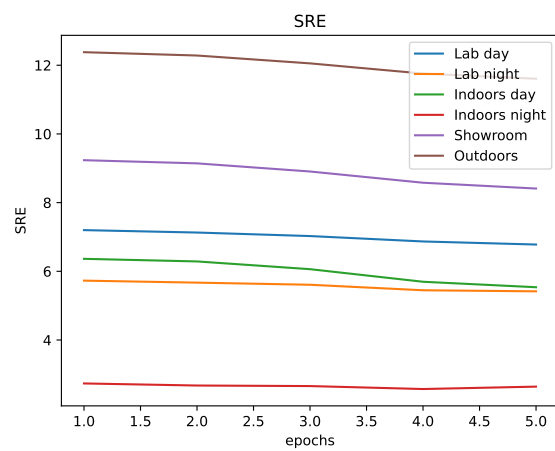


Figure 6: SRE