

# IoT Data Stream Novelty Detection: Design, Implementation and Evaluation [DRAFT]

Luís Puhl, Guilherme Weigert Cassales, Hermes Senger, Helio Crestana Guardia

Universidade Federal de São Carlos, Brasil

<https://orcid.org/{0000-0003-4029-2047, 0000-0003-1273-9809, 0000-0001-5010-747X}>

**Abstract**—The ongoing implementation of the Internet of Things (IoT) is sharply increasing the small devices count and variety on edge networks and, following this increase the attack opportunities for hostile agents also increases, requiring more from the network administrator role and the need for tools to detect and react to those threats. One such tool are the Network Intrusion Detection Systems (NIDS) where the network traffic is captured and analysed raising alarms when a known attack pattern or new pattern is detected. For a network security tool to operate in the context of edge and IoT it has to comply with processing time, storage space and energy requirements alongside traditional requirements for stream and network analysis like accuracy and scalability. This work addresses the construction details and evaluation of an prototype distributed IDS using MINAS Novelty Detection algorithm following up the previously defined IDSA-IoT architecture. We discuss the algorithm steps, how it can be deployed in a distributed environment, the impacts on the accuracy of MINAS and evaluate the performance and scalability using a cluster of constrained devices commonly found in IoT scenarios. We found an increase of  $A\ 0.0$  processed network flow descriptors per core added to the cluster. Also  $B\ 0.0\%$  and  $C\ 0.0\%$  change in  $FIScore$  in the tested datasets when stream was unlimited in speed and limited to  $0.0\ z\ MB/s$  respectively.

**Index Terms**—novelty detection, intrusion detection, data streams, distributed system, edge computing, internet of things

## I. INTRODUCTION

A survey released by Gartner estimated about 20 billion devices connected to the Internet by 2020, many of them through the IoT [1]. More recently, Statista predicted that the total number of such devices will reach 38 billion by 2025, and 50 billion by 2030 [2]. The Internet of Things (IoT) brings together a wide variety of devices, including mobile, wearable, consumer electronics, automotive and sensors of various types. Such devices can either be accessed by users through the Internet or to connect to other devices, servers, and applications running on the back-end without any human intervention or supervision [3], [4], [5].

Security and privacy is a major concern in the IoT, as devices like smart home assistants and wearable devices hold personal information about the user's like their location, health data, and many other sensitive data [6]. Furthermore, once compromised such devices can also be used to attack other devices and systems, steal information, cause immediate physical damage, or either perform various other malicious actions. As additional concerns, IoT devices likely have long

lifespan or less frequent software patches, and the increase of the mesh of devices of diverse technologies considerably increase the surface of attack.

A study reveals that nearly 20% of organizations have experienced at least one IoT-based attack in the last three years. The study shows that most organizations have no control over the origin and nature of software and hardware used by connected devices. To protect against these threats, IoT's worldwide spending on security is estimated \$3.1 billion in 2021 [7], including tools and services to improve asset discovery and management, software security evaluation, hardware testing, and penetration testing.

Because most IoT devices have limited resources (i.e., battery, processing power, bandwidth, and memory), configurable and expensive algorithm-based security techniques can not be applied [8]. Machine Learning (ML) techniques have been studied for years to detect attacks from known patterns or to discover new attacks at an early stage [9], [10]. A recent survey in [3] shows that ML based methods are a promising alternative which can provide potential security tools for the IoT devices which make them more reliable and accessible than before. Despite of the promising use of ML to secure IoT systems, most studies presented in the literature (e.g., those surveyed in [9], [10], [3]) are limited to traditional ML methods that use static models of traffic behavior. Most existing ML solutions for network-based intrusion detection cannot maintain their reliability over time when facing evolving attacks [11]. Unlike traditional methods, stream mining algorithms can be applied to intrusion detection with several advantages, such as: (i) working with limited memory, which allows the implementation in small devices (for example, on the edge from the Web); (ii) processing traffic data with a single read; (iii) producing real-time response; and (iv) detecting novelty and changes in concepts already learned.

This paper elaborates on the previous work in the following aspects. First, we instantiated and validated experimentally the IDSA-IoT architecture (proposed in [12]) on a distributed system composed of small devices with limited resources on the edge of the network. Our implementation can be fully executed on the edge, thus avoiding any dependency and high latency of cloud resources. We proposed and implemented dMINAS, a distributed extension of MINAS [13] (a novelty detection for data streams). We evaluated through experimental

method, how the distribution of the novelty detection affects the capability to detect changes (novelty) in traffic patterns, and the impact on the computational efficiency. Finally, some distribution strategies for the novelty detection are discussed.

This article is organized as follows: Section II presents the related works. Section III reviews the original algorithm MINAS. A distributed extension of the novelty detection algorithm, including its implementation and evaluation are presented in Section IV. Finally, Section VI summarizes the main findings and presents possible future work.

This paper is structured as follows: Section II presents previous works that addresses related problems and how they influenced our solution. Section IV-B address our proposal, the work done, issues found during implementation and discusses parameters and configurations options and how we arrived at our choices. Section V shows experiments layouts and results, we compare serial and distributed implementation's metrics for validation, we also evaluate communication delay effects on classification metrics and conclude with the speedup per core and overall maximum stream speed. Section VI summarizes the research results and presents our final conclusions and future works.

## II. RELATED WORK **NAO MEXER POR ENQUANTO**

Recent works explored those areas, to name a few: BigFlow [11] employing Apache Kafka and Apache Flink for distributed stream processing evaluating with package stream dataset, CATRACA [14], [15] uses Apache Kafka and Apache Spark for stream processing and [16]

6LoWPAN is a standard defined by the IETF in RFC 6282, to transmit data with IPv6 and other protocols on low power wireless devices using IEEE 802.15.4 in the lower layers. However, this technology still lacks protection and security mechanisms. For instance, in [17], signature detection is used to detect DoS and UDP flood attacks. The architecture uses a probe to promiscuously listen the whole traffic of a 6LoWPAN network and sends the data to analysis on a non-constrained host. The work in [19] proposed an hybrid IDS which focuses on specific routing attacks, such as sink-hole and selective-forwarding. Higher complexity tasks which demand more computational resources are executed on the border router, while simpler tasks execute on constrained nodes. Results were expressed by metrics as recall and memory and energy consumption. The work in [18] proposed the use of anomaly detection to identify internal routing attacks, and signature detection to identify external attacks. Anomaly detection was tested with simulated attacks, while signature detection used a subset of NSL-KDD. They used the recall and FAR as metrics.

A three-layer architecture (composed of WSN, Fog and Cloud) with focus on fault tolerance in disaster scenarios is proposed in [20]. Fog computing is used to execute ML functions and data aggregation. Experiments used real data collected from sensors. The metrics used included precision, recall and accuracy. The work in [21] proposed an hybrid IDS which collects information about the environment and activates

specific modules to mitigate each kind of attack. Experiments were made in a real environment and metrics used were recall, precision and resource consumption (CPU and RAM). Smart cities scenarios also employ IoT to measuring and monitoring tasks. In [22], the authors propose an architecture that uses three stream mining methods based on ML to characterize water and energy consumption behavior, predict consumption, and detect incidents. The metrics used to express results include water and energy consumption. The work in [23] also aimed to identify anomalies in a water distribution network and proposes a three layer architecture (sensors, base stations and datacenter). The second layer performs time-sensitive tasks, thus reducing latency, while third layer provides storage and aggregates the results of the second layer with historical data to generate more accurate information. Water distribution measures were used, comparing the values of the predictions with the actual measurements. Intrusion detection for smart cities, based on data mining techniques running on an unrestricted devices is proposed in [24]. Experiments using KDD99 data are presented and the metrics used were precision, Kappa, memory consumption, time, FAR, and FNR.

Table I summarizes the discussion on the related work. Note that some works use data from KDD99 or derived from this dataset. Collected two decades ago, KDD is no longer representative of current attack patterns and IoT environments. Some works used traces captured from local infrastructure, which provide realistic evaluation, but lack of reproducibility. Some works use data produced by intentional attacks simulated, designed by the same people who designed the detection techniques. This can bring unrealistic advantages to the detection methods. Also, it is worth noting that most articles used metrics like FAR, recall, and accuracy. Although widely adopted in classical scenarios, such metrics are inaccurate for stream processing [25].

## III. MINAS **GUILHERME PODE FAZER**

Apresentar o MINAS de forma resumida (1 pagina no max): como funciona, etc. Veja se a Quali do Guilherme tem algum techo que possa inspirar

Citar que o trabalho anterior já validou o uso do MINAS para detecção de novidade porem com uma implementação sequencial.

Figura do MINAS (offline + online) ...

## IV. PROPOSAL

Este apresenta uma proposta de implementação distribuida do MINAS que segue as diretrizes da arquitetura IDSA-IoT, atendendo aos seguintes requisitos: (i) a etapa de classificação de vários fluxos deve ocorrer em paralelo, sendo processada em diversos locais físicos da arquitetura (ii) a etapa de detecção de novidades (evolução do modelo) deve ocorrer em paralelo, sendo processada em diversos locais físicos da arquitetura (iii) as duas etapas anteriores, por sua vez também deverão ser executadas paralelamente, podendo ocorrer em

Parci  
aqui  
a  
redaçã  
da  
Introduçã  
grifado  
em  
vermelho  
o  
paragrafo  
que  
fala  
das  
contribuições  
Talvez  
com  
um  
pequeno  
esforço  
em  
especificar  
uma  
versão  
distribuida  
do  
MINAS  
teriamos  
uma  
extensão  
do  
mesmo

TABLE I: Summary of related works

Work	Platforms	Technique	DataSet	Metrics
Kasinathan et al[17]	6LoWPAN	Suricata	Real data with metasploit	Accuracy, packets/second
Sheikhan and Bostani[18]	6LoWPAN	Hybrid - MR OPF	NSL-KDD and simulated attacks	FAR and recall
Raza et al[19]	6LoWPAN	DAG analysis	No information	Recall, energy and memory consumption
Furquim et al[20]	WSN	MLP of Weka	Real data	MAE, RMSE, R <sup>2</sup> , R, accuracy, recall, precision, specificity
Midi et al[21]	WSN	Independent modules, each with one technique	Trace replay and attack injection	Recall, accuracy, memory and CPU consumption
Lloret et al[22]	Smart City	Clustering, MLP and statistical models	Real data from meters	Water and energy consumption
Diffalah et al[23]	Smart City	LiSA, smoothing function	Real data	Outliers, comparison between simulation and collected data
Faisal et al[24]	Smart Grid	7 MOA classifiers	KDD99	Accuracy, Kappa, memory consumption, time, FAR and FNR

partes distintas do sistema (iv) possa ser implementada em dispositivos com recursos limitados

Thus we propose a NIDS using MINAS [13] (a Novelty Detection algorithm) to effectively identify previous and new intrusion threats, implemented over a architecture [12] using parallel and distributed techniques leveraging edge and cloud for efficient computing.


NIDS monitor the packet network traffic, aggregate into flow descriptors and analyze to identify any intrusion or misbehavior. However, this problem requires both fast and accurate response: the former is needed to have a proper reaction before harm can be caused with the traffic without imposing observed network; the latter is harmless with harmful and vice we leverage fog computing.

In common IoT scenarios, data and sent to the cloud for analysis; however this is not feasible though we also capture data p this data to the cloud would i internet communication require Fog computing infrastructure resources from cloud providers IoT Sensors to end-users and/or data sources; this fog offload, the processing intensive novelty detection and, long term model storage and distribution of the physical model. Those steps surpass the capabilities of common fog hardware and therefore need to be at least shared to a cloud where such requirements are easy and cheap to fulfill.


In our proposed NIDS, fog and cloud computing resources are employed as to minimize the time elapsed between a flow descriptor ingestion and intrusion alarm, allocating the classification step of MINAS in a MPI cluster running multiple classifier instances. After the initial classification, the resulting label can be used immediately, but if the sample is labeled as *unknown*, this sample must be stored and the novelty detection step will be triggered, and those steps require more resources and thus are divided in fog and cloud.

To have a better overview of our proposal and how does it integrate in existing IoT environments, Figure 1a depicts such scenario showing from bottom to top: IoT devices directly connected to a (local) gateway network; this gateway network

could be as simple as a single router to the internet or be more complex by connecting to private clouds or containing more devices providing fog computing capabilities; lastly, available over the internet, traditional public cloud provides inexpensive computing and storage on demand. In this scenario the further apart resources are, more network resources need to be dedicated and, as any networked system, more latency between action and reaction is observed.

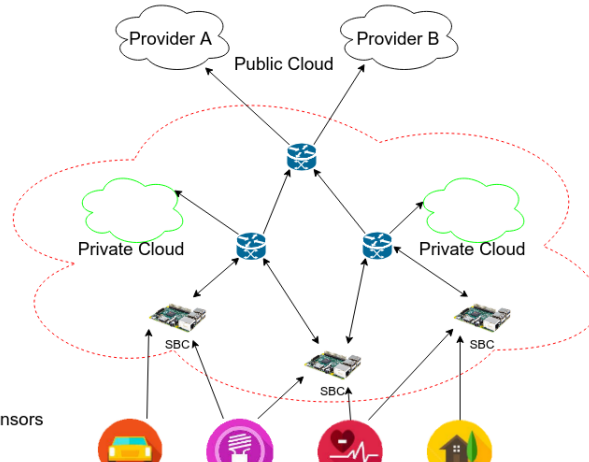

(a) Physical architecture and deployment scenario overview

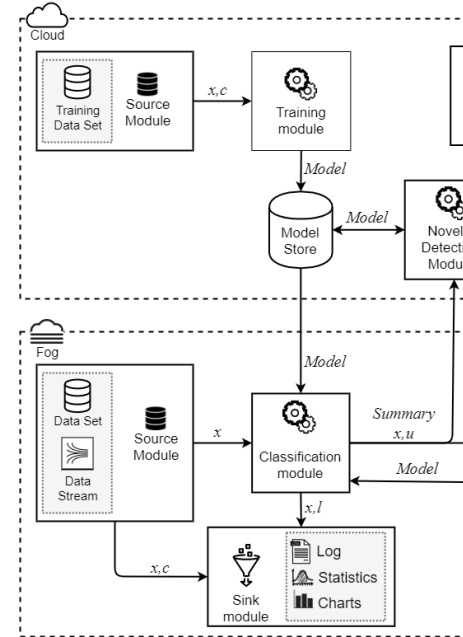

(b) MFOG components and communication

Fig. 1: Architecture overview.

While our proposal focuses on fog computing resources, those resources are often limited and they do not have the same reach and availability as traditional public cloud. For that reason we also leverage the public cloud for model storage and distribution, global novelty detection and alarm forwarding.

In Figure 1b we depict the overall architecture cut down to individual modules: three main functional modules being Training, Classification and Novelty Detection handling MINAS main tasks; and three auxiliary Source, Sink and Model Store, addressing external and internal connections as well as providing facilities to our tests and experiments.

Source Module provides the input data stream for Offline and Online phases of MINAS and is deployed in cloud and in fog for each respective phase and a variant for testing on our experiments. Model Store is another trivial module handling the initial Model storage and distribution for Classification and Novelty Detection modules. Last of the auxiliary modules is the Sink module, it denotes the consumer of labeling output stream such as an alarm system, however in our implementation it is much more complex, handling all tests metrics extraction and evaluations for our experiments, aggregating all output (stream and logs) in files for proper analysis and later comparisons. This module also differs in its software stack from the C language and MPI library, for the ease of implementing such analysis needed by our experiments, courtesy of Pandas and NumPy libraries, we employed Python for this module.

Training Module encapsulates the Offline phase of MINAS and its output, being the initial model, is stored by the Model Store. Classification Module houses the homonymous task of MINAS Online phase and is the focal point for parallelism in our proposal, being replicated in the fog on each local network containing a cluster with one or more nodes and each node multiple processes (limited to the individual CPU core count). Novelty Detection Module can be also replicated, one instance per local network and one global instance, also handling the homonymous task of MINAS Online phase. This modules takes as input all samples labeled with *unknown*, stores them in a internal *unknown* buffer and when this buffer is full, triggers MINAS Novelty Detection task (clustering followed by validation).

Each communication in Figure 1b shows the direction of the data flow and identifies the data contained: *Model* is MINAS internal Model containing a set of cluster data structures,  $x, c$  identifies a sample with the real class,  $x$  is the sample without the real class,  $x, l$  identifies a sample with the assigned label,  $x, u$  is sample with the *unknown* label, *summary* is a statistical summary of model usage.

#### A. Policies

The distribution of steps and tasks in various modules opens data distribution and its impacts to discussion. The decisions following these discussions can be organized in several policies, some of them are:

- Regarding the allocation of the Novelty Detection Module:
  - It can be located at each fog node meaning novelties will be only detected if sufficient patterns occurs in the local observed network, it also spends the local node processing power and a model sharing mechanism must be added;
  - It can be located in the cloud and thus detect patterns even when their footprint is small in each local network, also a model sharing mechanism is not needed as the model has a single instance stored in the cloud, the penalty of this choice is increased internet usage as any sample with *unknown* label

must be sent from edge to cloud, implying some delay between the appearance of a novel pattern, its detection and its propagation to fog classifiers;

- It can be located in both, meaning that a local *unknown* buffer is maintained, novelty detection is performed on that buffer, and once a sample is to be discarded as noise or outlier it must be sent to the cloud where the process repeats but with global data. This choice also need the model sharing mechanism and is clearly the more complex.
- Regarding the model cleanup (forget mechanism): Even when a global novelty detection is used, local models can be optimized for faster classification using the its local model statistics, sorting last or removing clusters that are not in frequent use;
- Lastly, a feature not explicitly shown in the original MINAS is the reclassification of *unknowns* after the detection of a novelty pattern with the newfound label: As the last step in the novelty detection step in MINAS, the *unknown* sample buffer is classified using the newfound subset of clusters, if the sample can be explained by a new cluster it is removed from the *unknown* sample buffer, however, this new labeling is not put forward to the systems output restraining the system data-stream behavior to a *map* (meaning each input has one output), whereas if this feature was enabled the behavior would be a *flatMap* (each input can have many outputs) and introduce new outputs, more recent and perhaps more accurate but later.

#### B. Implementation

The original MINAS algorithm has a companion implementation (*Ref*) written in Java using MOA library base algorithms such as K-means and CluStream, however in the new implementation only K-means is used. Another difference between *Ref* and *MFOG* is cluster radius calculation from the distances of elements forming the cluster and the cluster's center, where the former uses the maximum distance, the latter uses the standard deviation of all distances as described in [13].

The stream format for input and output also of note. Input information needed is the samples value ( $\vec{v}$ ), this  $\vec{v}$  is a number sequence of length  $d$  (referenced as dimension). In addition to the  $\vec{v}$  for evaluation and training purposes the class identifier as single character, optionally an unique item identifier (*uid*) can be provided. For output information and format the decision isn't so clear as we can't predict future system integrations needs like only novelty alarms or every samples original  $\vec{v}$  with assigned label so, we have a compromise and put only enough information for the Sink Module (where the full information from the testing file or stream can be accessed) meaning the format can be defined as a tuple containing *uid* and assigned label.

Another implementation decision related to the output stream is whether or not to reprocess, and add to the output stream, examples in the unknown buffer after the novelty



detection procedure, meaning one item can be classified once as unknown and again with a label. Our preliminary tests using this technique had increased true positives when compared to not using it. However this changes the stream operator behavior from a *Map* to a *FlatMap* having duplicate entries on the output stream as previously mentioned. Regardless of choice the classification of the unknown buffer after a model update, using the full model or just the added set of clusters, is done to remove the examples “consumed” in the creation of a new cluster in the internals of the clustering algorithm.

For *MFOG* the Message Passing Interface (MPI, from *Open MPI 4.0.4*) library was used. In MPI programming, multiple processes of the same program are created by the runtime and each process instance receives a rank parameter, for *MFOG* this parameters indicate if the process is root, rank 0, or leaf otherwise. Beyond this division, each process also operates two threads, for the root there is a sampler and detector threads, for the leafs each has a model receiver thread and multiple classifier threads. The overall sequence of interactions is shown in Figure 2.

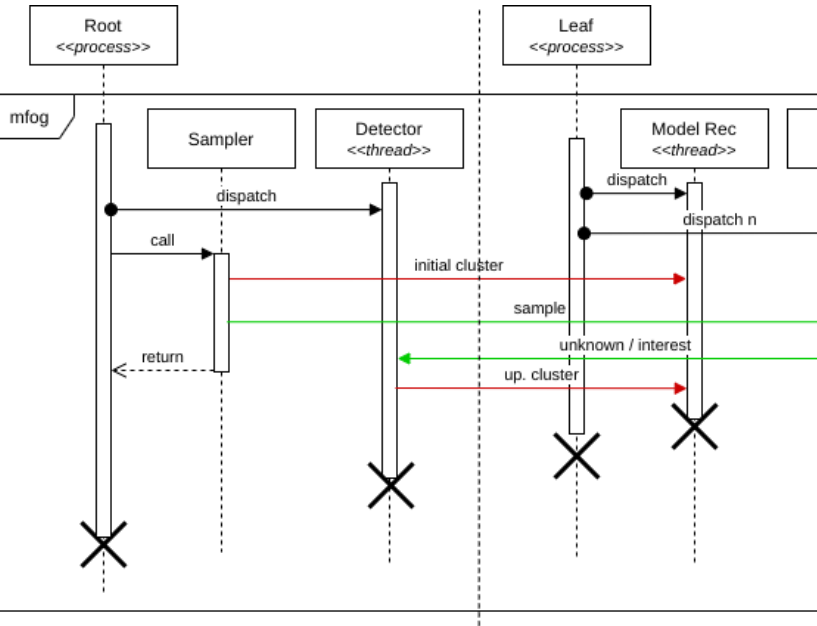


Fig. 2: *MFOG* life line overview.

The Sink Module was also build following reference techniques like multi-class confusion matrix with label-class association [13] to extract classification quality metrics.

## V. EXPERIMENTS AND RESULTS

For the experimental setup we dedicated three Raspberry Pi 3 model B single board computers connected via Gigabit Ethernet Switch forming a simple cluster. This cluster stored all source code, binaries (compiled and linked in place) and datasets, being accessed via our laboratory network over Secure Shell (SSH). All experiments were executed in this cluster for isolation of otherwise unforeseen variations.

The dataset used is the December 2015 segment of Kyoto 2006+ Dataset<sup>1</sup> (Traffic Data from Kyoto University’s Honeypots) [26]. This segment was filtered (from 7 865 245 instances) to only examples associated to known attack types identified by existing IDS, and attack types with more than 10 000 instances for significance as done by [12]. The remaining instances then were transformed by normalization, transforming each feature value space (e.g. IP Address, Duration, Service) to the Real interval  $[0, 1]$ . The result is stored in two sets, training set and test set, using the holdout technique filtering in only normal class resulting in 72 000 instances for training set and 653 457 for test set, containing 206 278 *N* (normal) class and 447 179 *A* (attack) class.

O que quer testar com os experimentos.

- Tese: Mostrar que detecção por novidade e classificação contínua viável em fog.
- Seria inviável por conta do atraso de distribuição de modelo e,
- limitação pelo hardware pequeno.
- *MFOG*: Um Agregador Regional, instalado na FOG, que observa a rede local.

Como realizou (cenário, rpi, setup, coleta de métricas).  
Quais resultados obteve.

Como interpretar os resultados.

### A. Metrics and Visualizations

There are two broad evaluation metrics for each experiment: a time measure extracted by using *GNU Time 1.9* and, a set of qualitative mesures extracted by a python program. The first metric is straightforward and is the time measure of the full program execution. The latter metric is not as simple and for its extraction required a purposely build python program. This program takes two inputs, the test dataset and the captured output stream, and outputs the confusion matrix, label-class association, final quality summary with: Hits (accuracy), Misses (Err), Unknowns (UnKR); and stream visualization chart with per example instance summary with novelty label markers.

For clarity, it is necessary to detail how to interpret and compare each metric, as for some it is trivial but others are not so straightforward.

In the confusion matrix  $M = m_{ij} \in \mathbb{N}^{c \times l}$ , computed by our evaluation program, each row denotes one of the datasets original (actual) class and each column denotes the marked (predicted) label present in the captured output stream. Thus, each cell  $M_{c,l}$  contains the count of examples from the test dataset of class  $c$  found in the output stream with the label  $l$  assigned by the under evaluation experiment. For the dataset under use, original classes are “*N*” and “*A*”, and for the labels we have the training class “*N*”, *unknown* label “-” and the novelties  $i \in \mathbb{N}$ .

Added to the original confusion matrix  $C$  are the rows *Assigned* and *Hits*. The former represents which original class

<sup>1</sup>Available at [http://www.takakura.com/Kyoto\\_data/](http://www.takakura.com/Kyoto_data/)

$c$  (or if *unknown*, “-”) the label  $l$  is assigned to, this is computed by using the original class if  $c = l$  or by associated novelty label to original class as described in [27] section 4.1. The latter row, *Hits*, shows the true positive count for each label, computed by coping the value of the cell  $M_{c,l}$  where the label is the same and the class  $c$  is the value in the above *Assigned* row. The *Hits* row is also used to compute the overall accuracy. The complete matrix is shown in Tab. II.

For the metric summary table, six metrics from two sources are displayed. Three metrics *Hits Unknowns Misses* represented as ratio of the captured output stream, extracted from the evaluation python program, computed as follows: *Hits* (overall accuracy) is the summation of the homograph row in the extended confusion matrix; *Unknowns* is the count of examples in the captured output stream marked with the *unknown* label “-”; *Misses* is the count of all examples in the captured output stream marked with a label distinct from the *Assigned* original class and are not marked as unknown. Lastly, *Time*, *System* and *Elapsed* metrics represented in seconds, are extracted from *GNU Time*. *Time* is the amount of CPU seconds expended in user-mode (indicates time used doing CPU intensive computing, e.g. math); *System* is the amount of CPU seconds expended in kernel-mode (for our case it indicates time doing input or output); *Elapsed* is the real-world (wall clock) elapsed time (indicates how long another system or person had to wait for the result). To compare the time metric is simple, the lower time taken, the better. Our four main experiments are shown in Tab. III.

Lastly, the stream visualization chart shows the summary quality metrics (*Hits Unknowns Misses*) computed for each example in the captured output stream. This summary is computed for each example but it uses the *Assigned* row computed previously to evaluate *Hits*, other metrics are derived as described before. Therefore, horizontal axis (x, domain) plots the index of the example and the vertical axis (y, image) shows the metric computed until that example index on the captured output stream. Adding to the summary metrics, novelty label markers are represented as vertical lines indicating *when* in the captured output stream a new label first appeared. Some of the novelty label markers include the label itself ( $l \in \mathbb{N}$ ) for reference as if showing every label would turn this feature unreadable due to overlapping. Figure 3 shows two complete stream visualization charts.

## B. Results Discussion

Four main experiments need detailed discussion: (a) reference implementation of Minas (*Ref*) [13]; (b) new implementation in serial mode; (c) new implementation in single-node, multi-task mode and (d) new implementation in multi-node, multi-task mode. Each experiment uses the adequate binary executable, initial model (or training set for the reference implementation) and test set to compute a resulting output stream which is stored for qualitative evaluation. The summary of all four experiments is shown in Table III.

The first two experiments (a and b) comparison does serve as validation for our implementation, while the latter three (b, c and d) serves as showcase for the effects of distribution. As stated, to validate our implementation we compare it to *Ref* (the original MINAS companion implementation), so we extracted the same metrics using same process for both a and b, they can be viewed on Tables II, IV and for ease of comparison on III the summary can be compared side by side.

## VI. CONCLUSION NAO MEXER POR ENQUANTO

### ACKNOWLEDGMENT

The authors thank CNPq (Contract 167345/2018-4). Hermes Senger also thanks CNPq (Contract 305032/2015-1) and FAPESP (Contract 2018/00452-2, and Contract 2015/24461-2) for their support.

### REFERENCES

- [1] I. Gartner, “Gartner says 8.4 billion connected “things” will be in use in 2017, up 31 percent from 2016,” 2017. [Online]. Available: <https://www.gartner.com/en/newsroom/press-releases/2017-02-07-gartner-says-8-billion-connected-things-will-be-in-use-in-2017-up-31-per>
- [2] Statista, “Iot connected devices worldwide 2030,” 2021. [Online]. Available: <https://www.statista.com/statistics/802690/worldwide-connected-devices-by-access-technology/>
- [3] S. M. Tahsien, H. Karimipour, and P. Spachos, “Machine learning based solutions for security of Internet of Things (IoT): A survey,” *Journal of Network and Computer Applications*, vol. 161, no. November 2019, 2020.
- [4] A. Abane, P. Muhlethaler, S. Bouzeffrane, and A. Battou, “Modeling and improving named data networking over ieee 802.15.4,” in *2019 8th International Conference on Performance Evaluation and Modeling in Wired and Wireless Networks (PEMWN)*, 2019, pp. 1–6.
- [5] H. HaddadPajouh, A. Dehghantanha, R. M. Parizi, M. Aledhari, and H. Karimipour, “A survey on internet of things security: Requirements, challenges, and solutions,” *Internet of Things*, p. 100129, 2019.
- [6] J. Sengupta, S. Ruj, and S. D. Bit, “A comprehensive survey on attacks, security issues and blockchain solutions for iot and iiot,” *Journal of Network and Computer Applications*, vol. 149, p. 102481, 2020.
- [7] I. Gartner, “Gartner says worldwide iot security spending will reach \$1.5 billion in 2018,” Mar 2018. [Online]. Available: <https://www.gartner.com/newsroom/id/3869181>
- [8] J. Zhou, Z. Cao, X. Dong, and A. V. Vasilakos, “Security and privacy for cloud-based iot: Challenges,” *IEEE Communications Magazine*, vol. 55, no. 1, pp. 26–33, 2017.
- [9] A. L. Buczak and E. Guven, “A survey of data mining and machine learning methods for cyber security intrusion detection,” *IEEE Communications Surveys & Tutorials*, vol. 18, no. 2, pp. 1153–1176, 2016.
- [10] R. Mitchell and I.-R. Chen, “A survey of intrusion detection techniques for cyber-physical systems,” *ACM Computing Surveys (CSUR)*, vol. 46, no. 4, p. 55, 2014.
- [11] E. Viegas, A. Santin, A. Bessani, and N. Neves, “Bigflow: Real-time and reliable anomaly-based intrusion detection for high-speed networks,” *Future Generation Computer Systems*, vol. 93, pp. 473 – 485, 2019. [Online]. Available: <http://www.sciencedirect.com/science/article/pii/S0167739X18307635>
- [12] G. W. Cassales, H. Senger, E. R. DE FARIA, and A. Bifet, “IDSA-IoT: An Intrusion Detection System Architecture for IoT Networks,” in *2019 IEEE Symposium on Computers and Communications (ISCC)*, June 2019, pp. 1–7. [Online]. Available: <https://ieeexplore.ieee.org/document/8969609/>
- [13] E. R. d. Faria, A. C. Ponce de Leon Ferreira Carvalho, and J. Gama, “Minas: multiclass learning algorithm for novelty detection in data streams,” *Data Mining and Knowledge Discovery*, vol. 30, no. 3, pp. 640–680, May 2015. [Online]. Available: <https://doi.org/10.1007/s10618-015-0433-y>

TABLE II: Reference implementation: Confusion Matrix and Qualitative Metrics

Labels	-	N	1	2	3	4	5	6	7	8	9	10	11	12
Classes														
A	3774	438750	123	145	368	8	52	165	1	1046	161	2489	71	26
N	8206	193030	0	79	44	0	0	0	229	181	154	4066	289	0
Assigned	-	N	A	A	A	A	A	A	N	A	A	N	N	A
Hits	0	193030	123	145	368	8	52	165	229	1046	161	4066	289	26

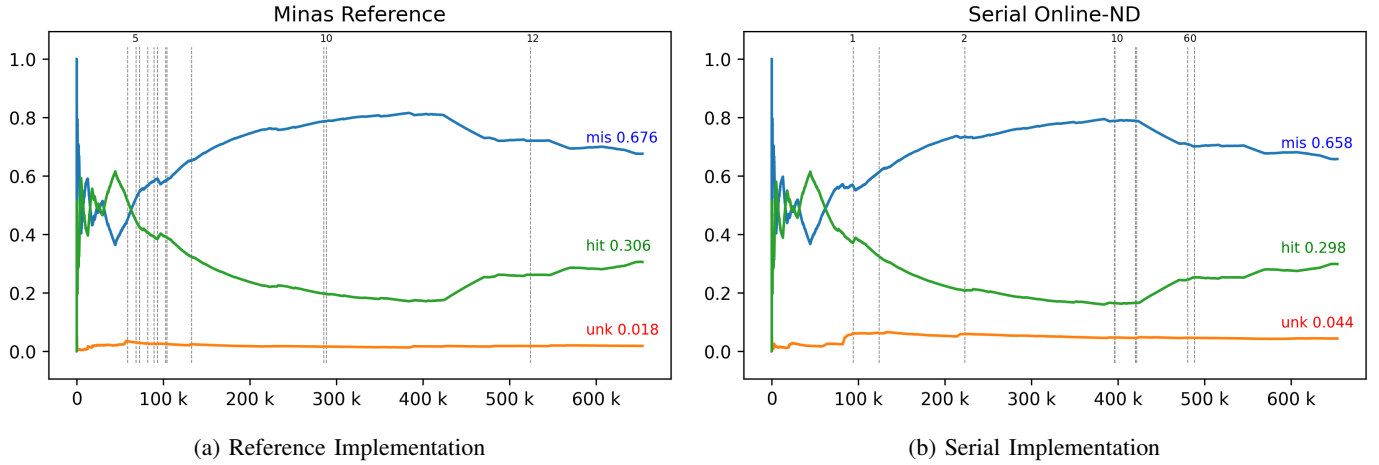


Fig. 3: Validation Comparison: Stream hits and novelties visualization

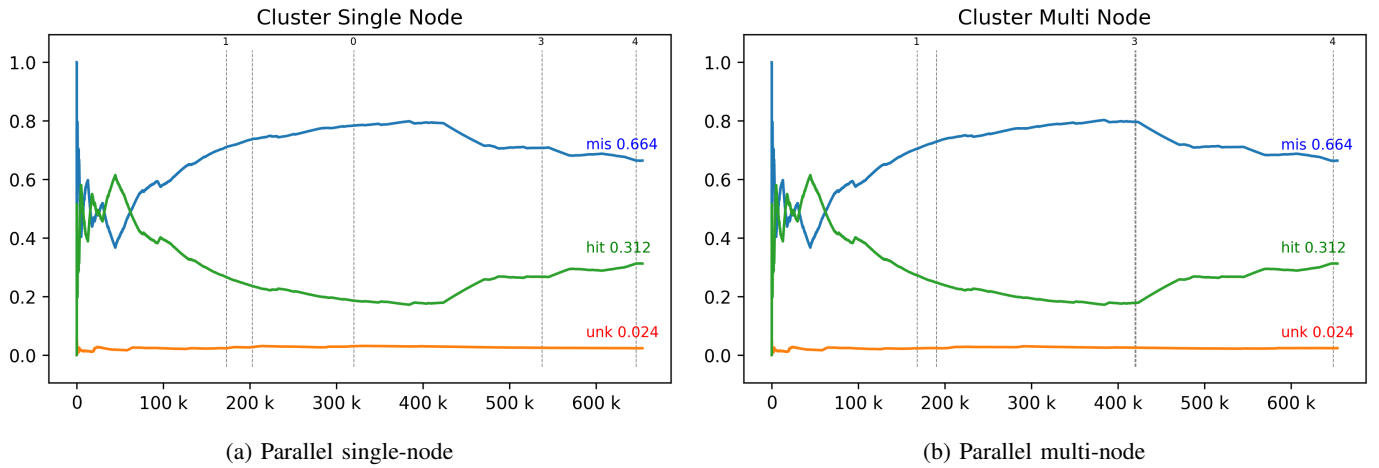


Fig. 4: Parallelism Comparison: Stream hits and novelties visualization

TABLE III: Collected Metrics Summary

	Exp. (a)	Exp. (b)	Exp. (c)	Exp. (d)
Hits	0.305618	0.298438	0.312416	0.312478
Misses	0.676049	0.657843	0.664061	0.663802
Unknowns	0.018333	0.043717	0.023521	0.023718
Time	2761.830000	80.790000	522.100000	207.140000
System	7.150000	11.510000	47.770000	157.610000
Elapsed	2772.070000	93.030000	145.040000	95.380000

- [14] M. E. Andreoni Lopez, "A monitoring and threat detection system using stream processing as a virtual function for big data," Theses, Sorbonne Université ; Universidade federal do Rio de Janeiro, Jun 2018. [Online]. Available: <https://tel.archives-ouvertes.fr/tel-02111017>

- [15] M. E. Andreoni Lopez, "A Monitoring and Threat Detection System Using Stream Processing as a Virtual Function for Big Data," Ph.D. dissertation, 2019.
- [16] K. A. da Costa, J. P. Papa, C. O. Lisboa, R. Munoz, and V. H. C. de Albuquerque, "Internet of Things: A survey on machine learning-based intrusion detection approaches," *Computer Networks*, vol. 151, pp. 147–157, 2019.
- [17] P. Kasinathan, C. Pastrone, M. A. Spirito, and M. Vinkovits, "Denial-of-service detection in 6lowpan based internet of things," in *IEEE 9th Intl. Conf. on Wireless and Mobile Computing, Networking and Communications (WiMob)*, Oct 2013, pp. 600–607.
- [18] M. Sheikhan and H. Bostani, "A hybrid intrusion detection architecture for internet of things," in *8th Intl. Symp. on Telecommunications (IST)*, Sept 2016, pp. 601–606.
- [19] S. Raza, L. Wallgren, and T. Voigt, "Svelte: Real-time intrusion detection in the internet of things," *Ad Hoc Networks*, vol. 11, no. 8, pp. 2661 –

TABLE IV: Serial implementation: Confusion Matrix and Qualitative Metrics

Labels	-	N	0	1	2	4	5	6	7	8	10
Classes											
A	16086	429765	94	995	104	0	23	3	29	46	34
N	12481	193642	3	94	0	47	0	0	0	11	0
Assigned	-	N	A	A	A	N	A	A	A	A	A
Hits	0	193642	94	995	104	47	23	3	29	46	34

TABLE V: Parallel single-node: Confusion Matrix and Qualitative Metrics

Labels	-	N	0	1	2	3	4
Classes							
A	12282	433797	147	952	0	0	1
N	3088	203019	40	99	27	5	0
Assigned	-	N	A	A	N	N	A
Hits	0	203019	147	952	27	5	1

2674, 2013.

- [20] G. Furquim, G. P. R. Filho, R. Jalali, G. Pessin, R. W. Pazzi, and J. Ueyama, "How to improve fault tolerance in disaster predictions: A case study about flash floods using iot, ml and real data," *Sensors*, vol. 18, no. 3, 2018.
- [21] D. Midi, A. Rullo, A. Mudgerikar, and E. Bertino, "Kalis - a system for knowledge-driven adaptable intrusion detection for the internet of things," in *IEEE Intl. Conf. on Distributed Computing Systems (ICDCS)*, June 2017, pp. 656–666.
- [22] J. Lloret, J. Tomas, A. Canovas, and L. Parra, "An integrated iot architecture for smart metering," *IEEE Communications Magazine*, vol. 54, no. 12, pp. 50–57, 2016.
- [23] D. E. Difallah, P. Cudré-Mauroux, and S. A. McKenna, "Scalable anomaly detection for smart city infrastructure networks," *IEEE Internet Computing*, vol. 17, no. 6, pp. 39–47, Nov 2013.
- [24] M. A. Faisal, Z. Aung, J. R. Williams, and A. Sanchez, "Data-stream-based intrusion detection system for advanced metering infrastructure in smart grid: A feasibility study," *IEEE Systems Journal*, vol. 9, no. 1, pp. 31–44, March 2015.
- [25] J. Gama, *Knowledge Discovery from Data Streams*. CRC Press Chapman Hall, 2010.
- [26] J. Song, H. Takakura, Y. Okabe, M. Eto, D. Inoue, and K. Nakao, "Statistical analysis of honeypot data and building of Kyoto 2006+ dataset for NIDS evaluation," *Proceedings of the 1st Workshop on Building Analysis Datasets and Gathering Experience Returns for Security, BADGERS 2011*, pp. 29–36, 2011.
- [27] E. R. de Faria, I. R. Goncalves, J. Gama, and A. C. P. d. L. F. Carvalho, "Evaluation of Multiclass Novelty Detection Algorithms for Data Streams," *IEEE Transactions on Knowledge and Data Engineering*, vol. 27, no. 11, pp. 2961–2973, nov 2015. [Online]. Available: <http://ieeexplore.ieee.org/document/7118190/>