Introduction To Programming

Python fundamentals

Universidad...

Luis Ángel Bustos Ochoa

Applied Physics | Course:

October 29, 2026

Today...

Introduction to the course

1. Course info.
2. Brief Introduction to a Computer Machine.
3. Evolution

The importance of two

Brief Introduction to Information Theory

- We need at least two "cables" to complete a circuit.

The importance of two

Brief Introduction to Information Theory

- We need at least two "cables" to complete a circuit.
- We need a sender and a receiver to establish any form of conversation.

The importance of two

Brief Introduction to Information Theory

- We need at least two "cables" to complete a circuit.
- We need a sender and a receiver to establish any form of conversation.
- We only need two distinct states to describe and build a complete communication system.

The importance of two

Brief Introduction to Information Theory

- We need at least two "cables" to complete a circuit.
- We need a sender and a receiver to establish any form of conversation.
- We only need two distinct states to describe and build a complete communication system.

The number 2 represents the fundamental minimum base for the existence and measurement of information.

The importance of two

Brief Introduction to Information Theory


- We need at least two "cables" to complete a circuit.
- We need a sender and a receiver to establish any form of conversation.
- We only need two distinct states to describe and build a complete communication system.

The number 2 represents the fundamental minimum base for the existence and measurement of information.

Therefore, the number 2 is the absolute minimum required to build a complete "efficient" arithmetic system.



Stibitz's "Model K" (1937): Relays & Batteries



Two distinct states: 0 and 1 bits


Computer Machine

Powering on the system

The Initial Spark:

When you press the start button of your computer, a signal sends voltage across your hardware components.

This sudden flow of electricity synchronizes the subsystem, preparing the physical architecture to communicate with the software.

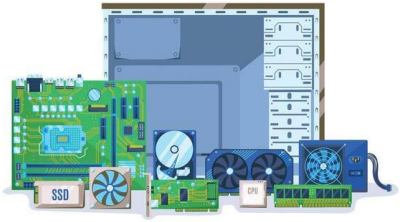

Hardware Architecture

Inside the Brain

The CPU and the Kernel

Executing the First Instructions:

First, the CPU (Central Processing Unit) wakes up and "activates the kernel".

Inside the Brain

The CPU and the Kernel

Executing the First Instructions:

First, the CPU (Central Processing Unit) wakes up and "activates the kernel".

The kernel contains core instructions stored in memory, highly dependent on your Operating System.

Inside the Brain


The CPU and the Kernel

Executing the First Instructions:

First, the CPU (Central Processing Unit) wakes up and "activates the kernel".

The kernel contains core instructions stored in memory, highly dependent on your Operating System.


The CPU executes **millions of operations per second** just to initialize the graphic system and show you the login screen.

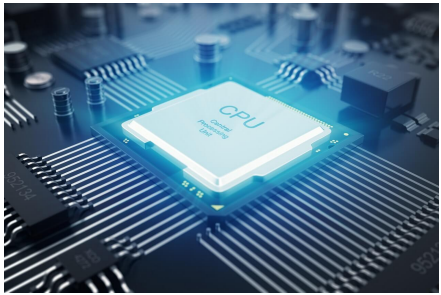

Modern Central Processing Unit (CPU)


The thinks that computers do:

calculate billions of simple operations per second and remember thinks

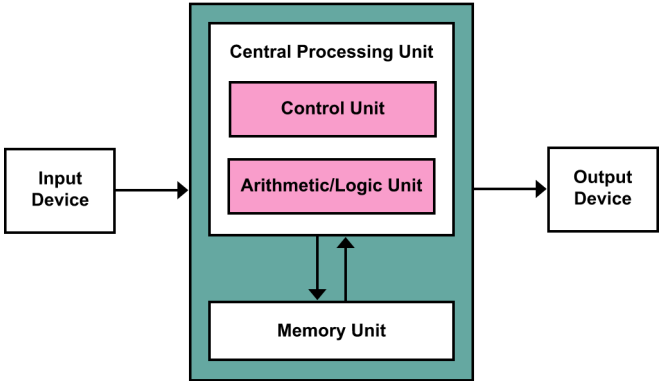

Basic Machine Architecture

"The Eniac"

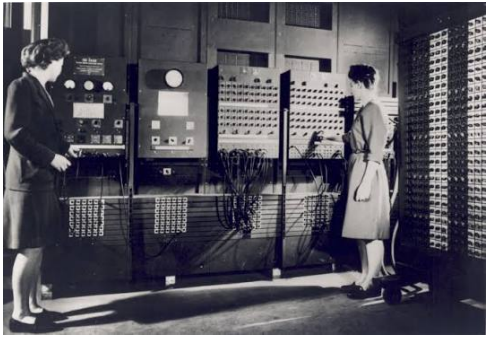

18,000 vacuum tubes, 30 tons.




Diagram of subroutines, nested loops for the Eniac.

Nowadays...

Before: Low-Level (Assembly)

Coding was about micro-managing the circuits and memory.

```
MOV AX, 5 ; Initialize count
MOV BX, 3 ; Load modifier
ADD AX, BX ; Perform addition
PUSH AX ; Save result to RAM
```

→ Hard to write, easy to break.

Now: High-Level (Python)

Coding is about solving logical problems in human-centric terms.

```
# Fully abstracted
total = 5 + 3
print(total)
```

→ Focus on logic, not hardware.