


Luis Calvillo

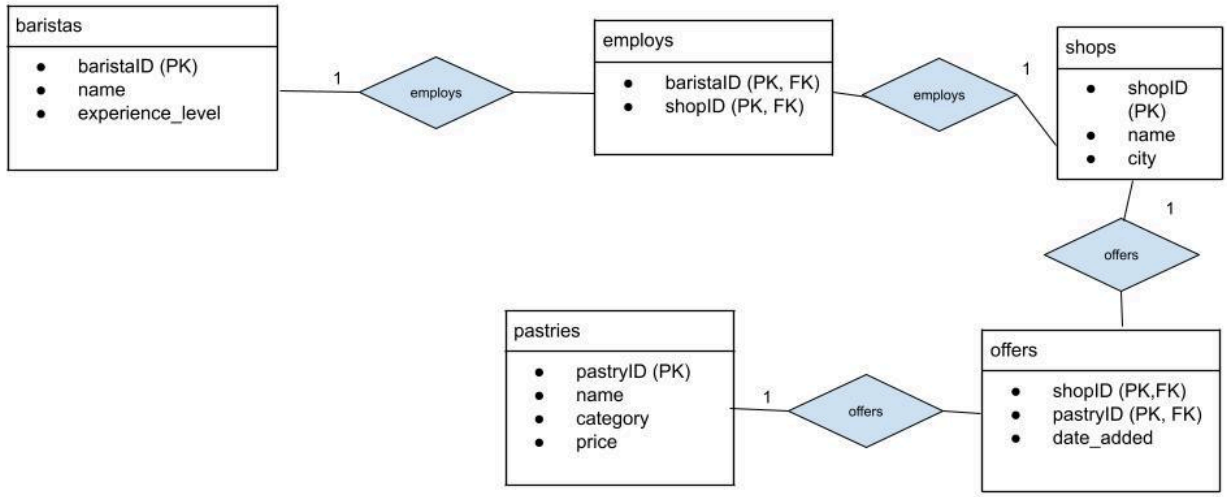


Question 1

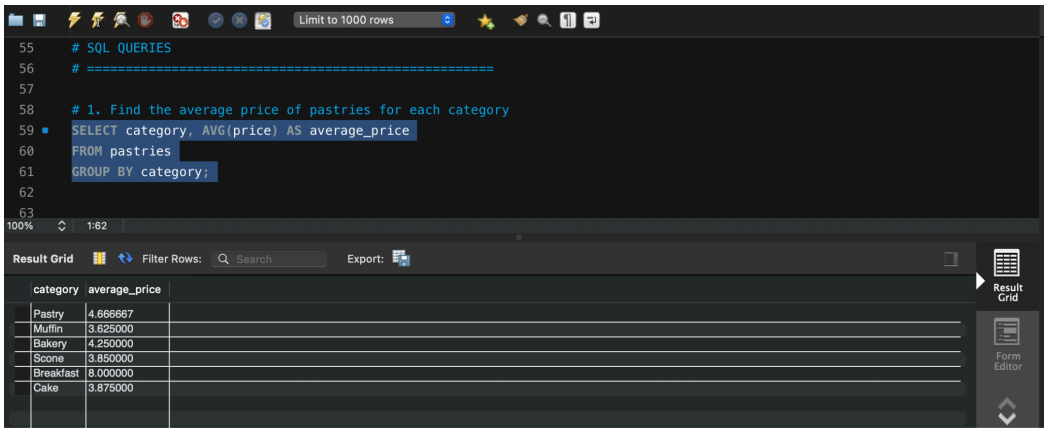

Question 2

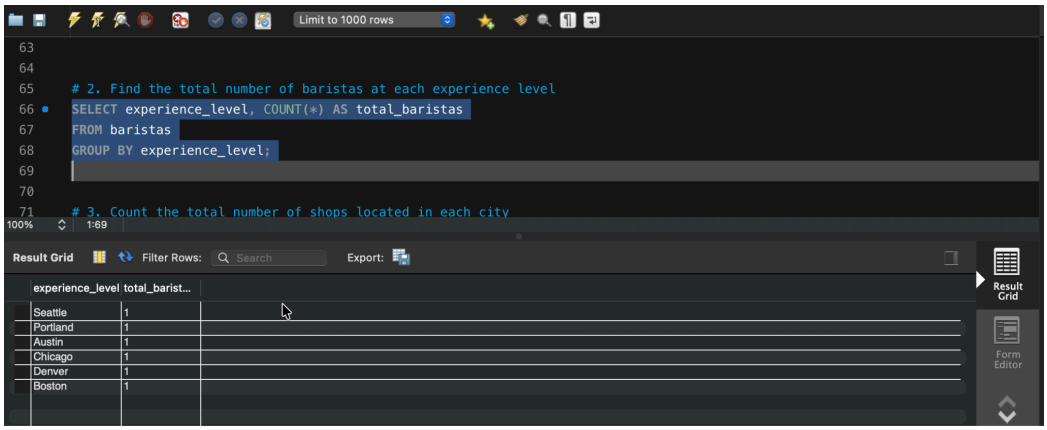

Question 3

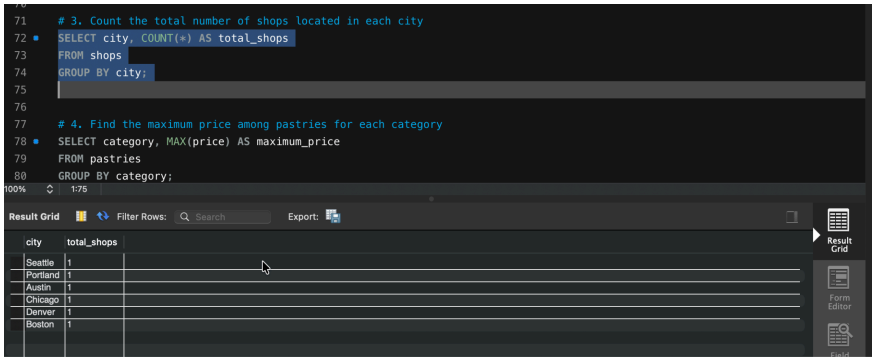


```
# 3. Count the total number of shops located in each city
SELECT city, COUNT(*) AS total_shops
FROM shops
GROUP BY city;

# 4. Find the maximum price among pastries for each category
SELECT category, MAX(price) AS maximum_price
FROM pastries
GROUP BY category;
```

Result Grid

city	total_shops
Seattle	1
Portland	1
Austin	1
Chicago	1
Denver	1
Boston	1

Question 4

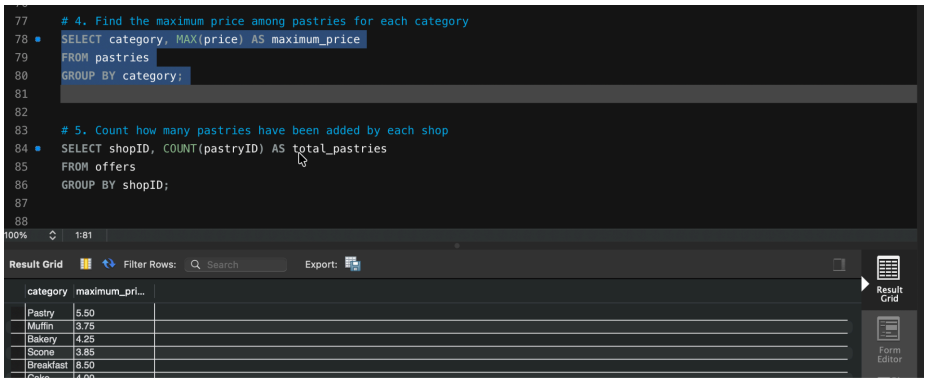


```
# 4. Find the maximum price among pastries for each category
SELECT category, MAX(price) AS maximum_price
FROM pastries
GROUP BY category;

# 5. Count how many pastries have been added by each shop
SELECT shopID, COUNT(pastryID) AS total_pastries
FROM offers
GROUP BY shopID;
```

Result Grid

category	maximum_pri...
Pastry	5.50
Muffin	3.75
Bakery	4.25
Scone	3.85
Breakfast	8.50

Question 5

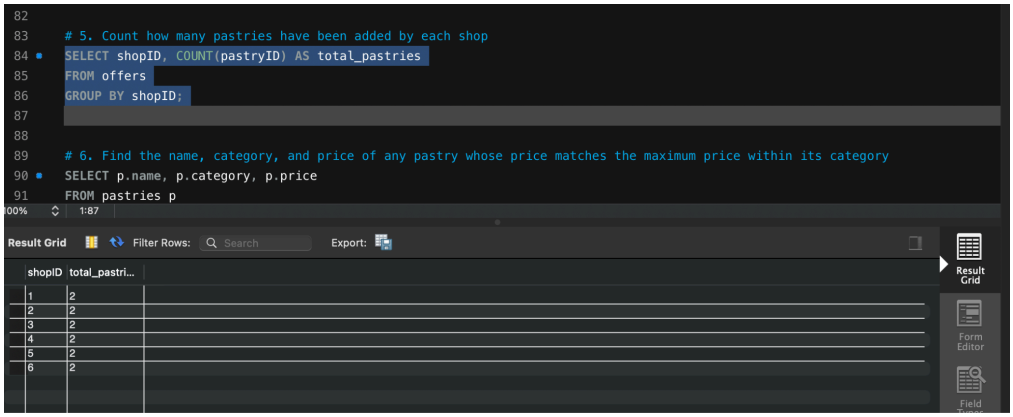


```
# 5. Count how many pastries have been added by each shop
SELECT shopID, COUNT(pastryID) AS total_pastries
FROM offers
GROUP BY shopID;

# 6. Find the name, category, and price of any pastry whose price matches the maximum price within its category
SELECT p.name, p.category, p.price
FROM pastries p
```

Result Grid

shopID	total_pastri...
1	2
2	2
3	2
4	2
5	2
6	2

Question 6

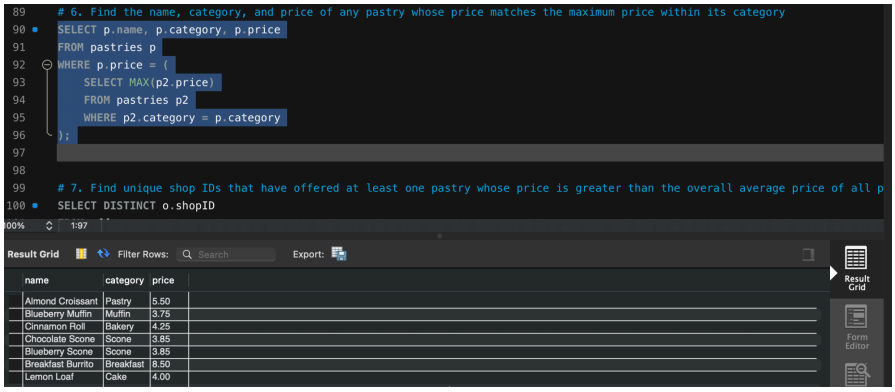


```
# 6. Find the name, category, and price of any pastry whose price matches the maximum price within its category
SELECT p.name, p.category, p.price
FROM pastries p
WHERE p.price = (
    SELECT MAX(p2.price)
    FROM pastries p2
    WHERE p2.category = p.category
);

# 7. Find unique shop IDs that have offered at least one pastry whose price is greater than the overall average price of all p
SELECT DISTINCT o.shopID
```

Result Grid

name	category	price
Almond Croissant	Pastry	5.50
Blueberry Muffin	Muffin	3.75
Cinnamon Roll	Bakery	4.25
Chocolate Scone	Scone	3.85
Blueberry Scone	Scone	3.85
Breakfast Burrito	Breakfast	8.50
Lemon Loaf	Cake	4.00

Question 7

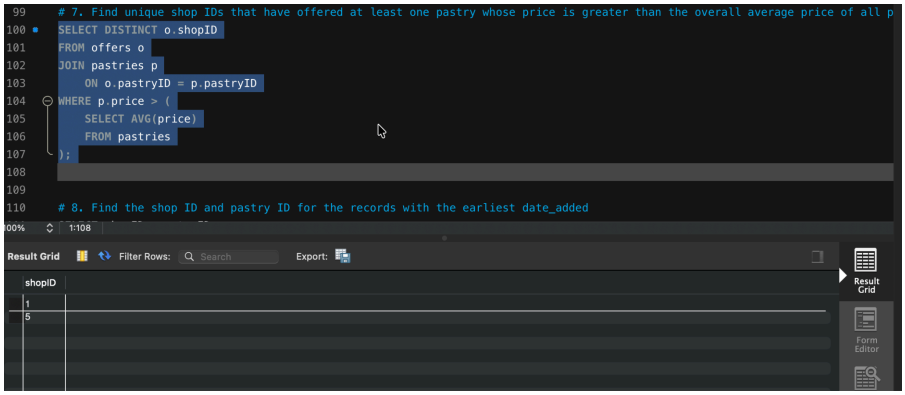


```
# 7. Find unique shop IDs that have offered at least one pastry whose price is greater than the overall average price of all p
SELECT DISTINCT o.shopID
FROM offers o
JOIN pastries p
    ON o.pastryID = p.pastryID
WHERE p.price > (
    SELECT AVG(price)
    FROM pastries
);

# 8. Find the shop ID and pastry ID for the records with the earliest date_added
```

Result Grid

shopID
1
5

Question 8

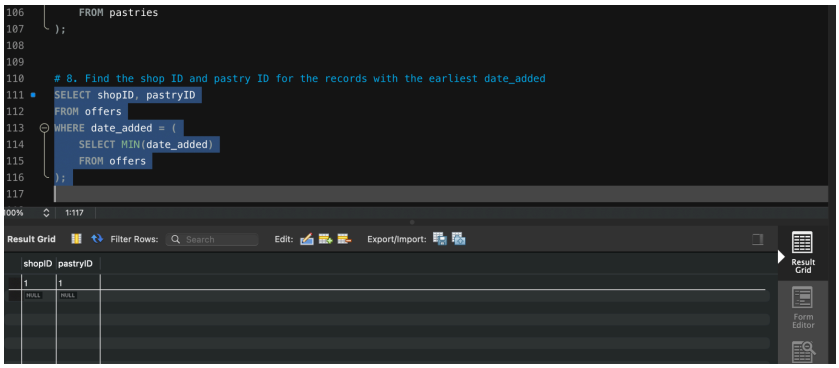


```
    FROM pastries
);

# 8. Find the shop ID and pastry ID for the records with the earliest date_added
SELECT shopID, pastryID
FROM offers
WHERE date_added = (
    SELECT MIN(date_added)
    FROM offers
);
```

Result Grid

shopID	pastryID
1	1
NULL	NULL

Question 9

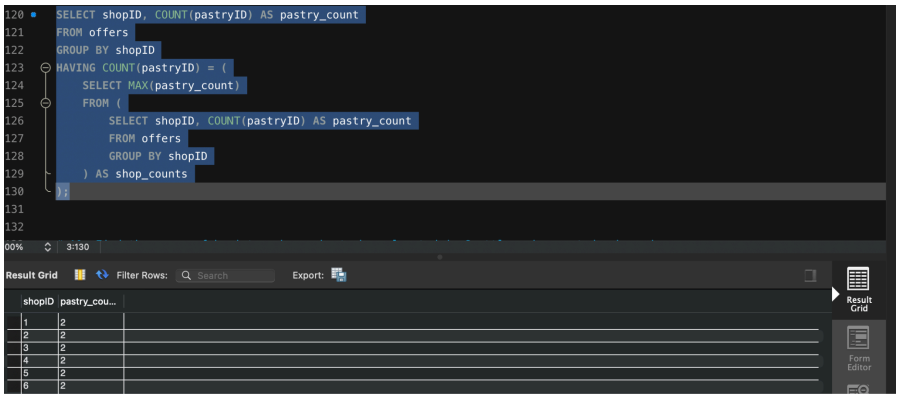


```
SELECT shopID, COUNT(pastryID) AS pastry_count
FROM offers
GROUP BY shopID
HAVING COUNT(pastryID) = (
    SELECT MAX(pastry_count)
    FROM (
        SELECT shopID, COUNT(pastryID) AS pastry_count
        FROM offers
        GROUP BY shopID
    ) AS shop_counts
);
```

Result Grid

shopID	pastry_cou...
1	2
2	2
3	2
4	2
5	2
6	2

Question 10

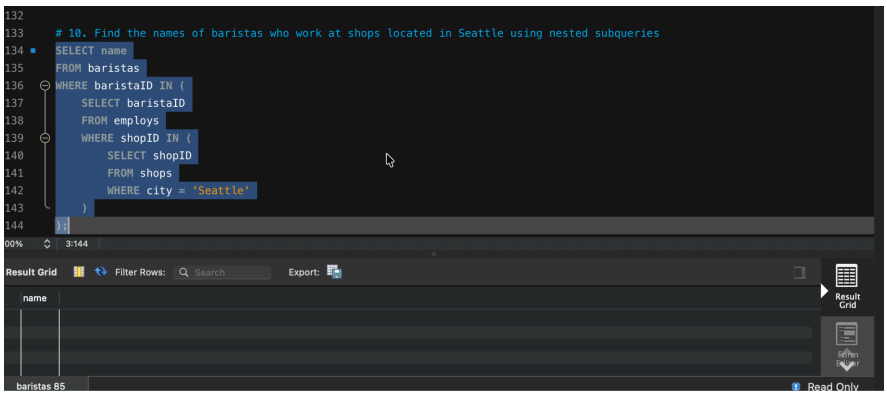

```
# 10. Find the names of baristas who work at shops located in Seattle using nested subqueries
SELECT name
FROM baristas
WHERE baristaID IN (
    SELECT baristaID
    FROM employs
    WHERE shopID IN (
        SELECT shopID
        FROM shops
        WHERE city = 'Seattle'
    )
);
```

Result Grid

name

baristas 85 Read Only