
Crear la VM en VMware Workstation

1. File → New Virtual Machine → Custom (advanced).
2. Hardware compatibility: la que ofrezca por defecto. Elige I will install the operating system later.
3. Guest OS: Linux → Ubuntu 64-bit. Nombre: MISP-Lab.
4. 4 procesadores, 8 GB de RAM, red NAT (o Bridged).
5. En Select a Disk elige Use an existing virtual disk y selecciona el .vmdk. Si VMware ofrece convertir el disco a un formato más nuevo, elige Keep Existing Format.

2.3 Primer arranque y endurecimiento mínimo Inicia sesión

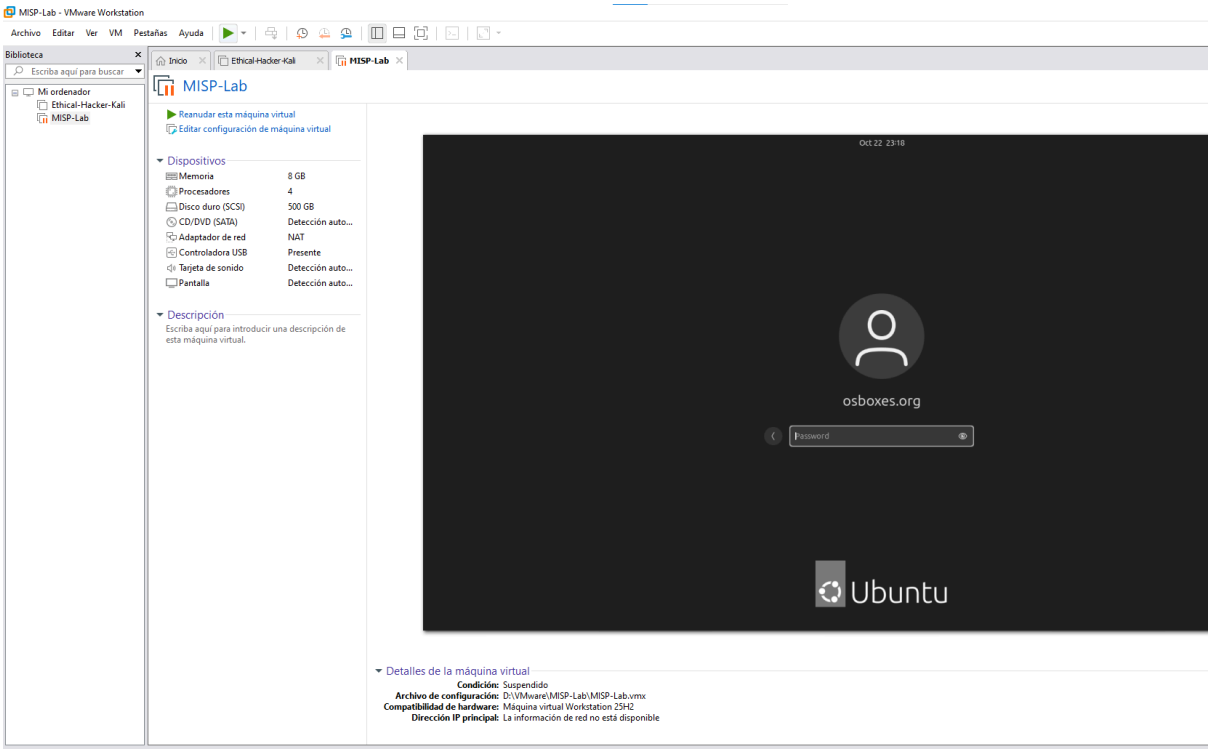

Ejecutar la instalación

```
osboxes@osboxes:/tmp$ wget -O INSTALL.ubuntu2404.sh https://raw.githubusercontent.com/MISP/MISP/refs/heads/2.5/INSTALL/INSTALL.ubuntu2404.sh
--2026-10-27 22:23:22--  https://raw.githubusercontent.com/MISP/MISP/refs/heads/2.5/INSTALL/INSTALL.ubuntu2404.sh
Resolving raw.githubusercontent.com (raw.githubusercontent.com)... 185.199.108.133, 185.199.109.133, 185.199.110.133, ...
Connecting to raw.githubusercontent.com (raw.githubusercontent.com)|185.199.108.133|:443... connected.
HTTP request sent, awaiting response... 200 OK
Length: 32068 (31K) [text/plain]
Saving to: 'INSTALL.ubuntu2404.sh'

INSTALL.ubuntu2404.sh                100%[=============================================================================>]  31.32K  --.-KB/s    in 0.001s

2026-10-27 22:23:22 (40.2 MB/s) - 'INSTALL.ubuntu2404.sh' saved [32068/32068]
```

Verificar que todo corre

Servicios activos systemctl is-active apache2 mariadb redis-server supervisor
systemctl is-active apache2 mariadb redis-server supervisor


```
osboxes@osboxes:/tmp$ systemctl is-active apache2 mariadb redis-server supervisor
active
active
active
active
```


Workers de MISP: todos deben estar en RUNNING sudo supervisorctl status
sudo supervisorctl status

```
osboxes@osboxes:/tmp$ sudo supervisorctl status
misp-workers:cache_00            RUNNING   pid 33327, uptime 0:12:24
misp-workers:cache_01            RUNNING   pid 33328, uptime 0:12:24
misp-workers:cache_02            RUNNING   pid 33336, uptime 0:12:24
misp-workers:cache_03            RUNNING   pid 33337, uptime 0:12:24
misp-workers:cache_04            RUNNING   pid 33338, uptime 0:12:24
misp-workers:default_00          RUNNING   pid 33310, uptime 0:12:24
misp-workers:default_01          RUNNING   pid 33311, uptime 0:12:24
misp-workers:default_02          RUNNING   pid 33312, uptime 0:12:24
misp-workers:default_03          RUNNING   pid 33313, uptime 0:12:24
misp-workers:default_04          RUNNING   pid 33314, uptime 0:12:24
misp-workers:email_00            RUNNING   pid 33316, uptime 0:12:24
misp-workers:email_01            RUNNING   pid 33318, uptime 0:12:24
misp-workers:email_02            RUNNING   pid 33319, uptime 0:12:24
misp-workers:email_03            RUNNING   pid 33322, uptime 0:12:24
misp-workers:email_04            RUNNING   pid 33323, uptime 0:12:24
misp-workers:prio_00             RUNNING   pid 33339, uptime 0:12:24
misp-workers:prio_01             RUNNING   pid 33340, uptime 0:12:24
misp-workers:prio_02             RUNNING   pid 33341, uptime 0:12:24
misp-workers:prio_03             RUNNING   pid 33397, uptime 0:12:24
misp-workers:prio_04             RUNNING   pid 33404, uptime 0:12:23
misp-workers:scheduler_00        RUNNING   pid 33408, uptime 0:12:23
misp-workers:update_00           RUNNING   pid 33405, uptime 0:12:23
```


La web responde (-k acepta el certificado autofirmado)
curl -kI https://misp.local Toma un segundo snapshot: MISP-instalado.

```
osboxes@osboxes:/tmp$ curl -kI https://misp.local
HTTP/1.1 302 Found
Date: Wed, 28 Oct 2026 03:11:35 GMT
Server: Apache/2.4.58 (Ubuntu)
Set-Cookie: CAKEPHP=tqpqrc5smjoidvrreh2a87r0gjhd79es; expires=Fri, 30 Oct 2026
 15:11:36 GMT; Max-Age=216000; path=/; secure; HttpOnly; SameSite=Lax
Content-Security-Policy: default-src 'self' data: 'unsafe-inline' 'unsafe-eval
'; style-src 'self' 'unsafe-inline'; object-src 'none'; frame-ancestors 'none'
; worker-src blob:; child-src 'none'; frame-src 'none'; base-uri 'self'; img-s
rc 'self' data:; font-src 'self'; form-action 'self'; connect-src 'self'; mani
fest-src 'none'; report-uri /servers/cspReport; upgrade-insecure-requests
X-XSS-Protection: 1; mode=block
Location: https://misp.local/users/login
X-Content-Type-Options: nosniff
X-Frame-Options: DENY
Content-Type: text/html; charset=UTF-8
```

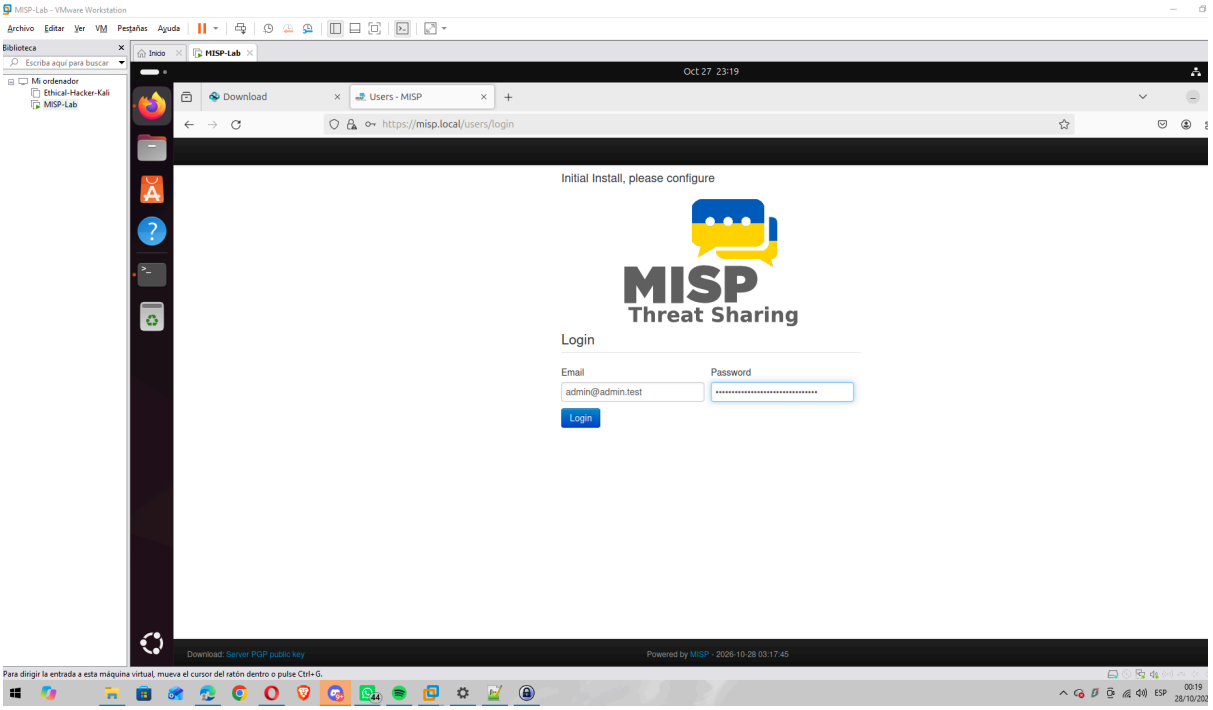

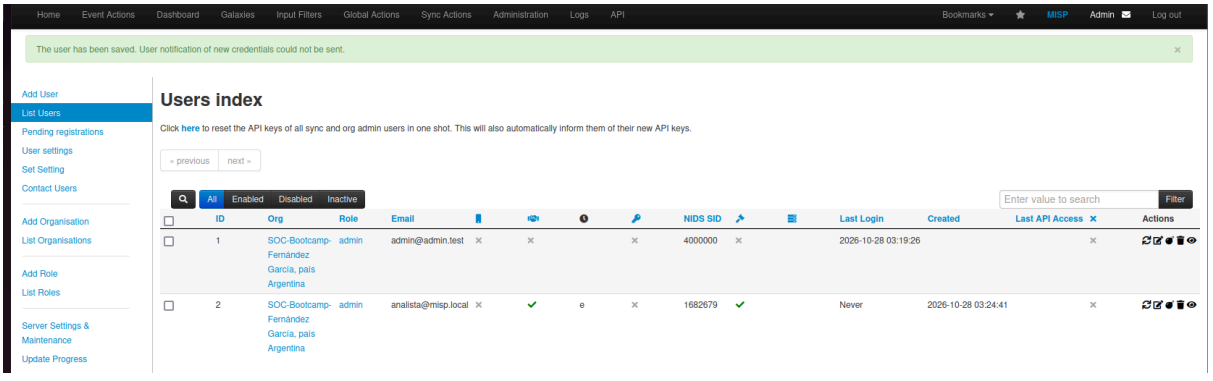


Revisa el diagnóstico. Administration → Server Settings & Maintenance → Diagnostics. Confirma que los workers aparecen en verde y que la sección Writeable directories no marca errores.

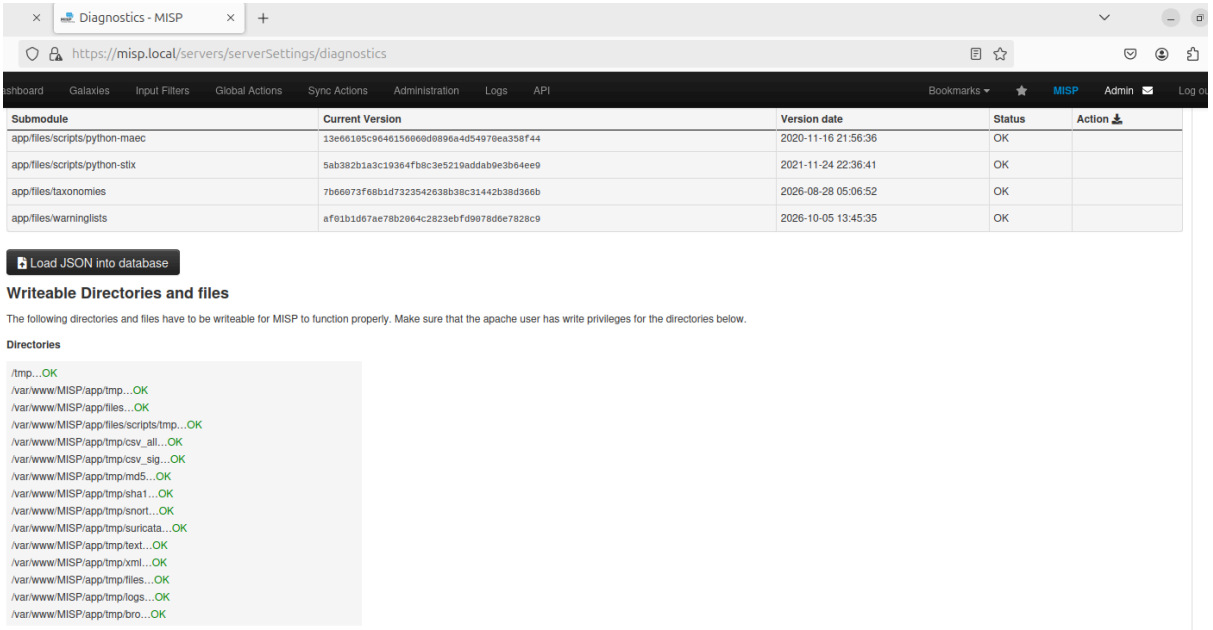

Actualiza las bibliotecas de conocimiento. En Administration → Server Settings & Maintenance, o desde la terminal:
sudo -u www-data /var/www/MISP/app/Console/cake Admin updateJSON


```
osboxes@osboxes:/tmp$ sudo -u www-data /var/www/MISP/app/Console/cake Admin up
dateJSON
[sudo] password for osboxes:
Updating all JSON structures.
Galaxies updated in 1.97 seconds.
Noticelists updated in 0.04 seconds.
Warninglists updated in 3.50 seconds.
Taxonomies updated in 0.03 seconds.
ObjectTemplates updated in 0.13 seconds.
ObjectRelationships updated in 0.13 seconds.
All JSON structures updated. Thank you and have a very safe and productive day
.
```


Habilita las taxonomías del laboratorio. Event Actions → List Taxonomies → habilita tlp, pap, kill-chain y misp. Sin habilitarlas no aparecen al etiquetar.

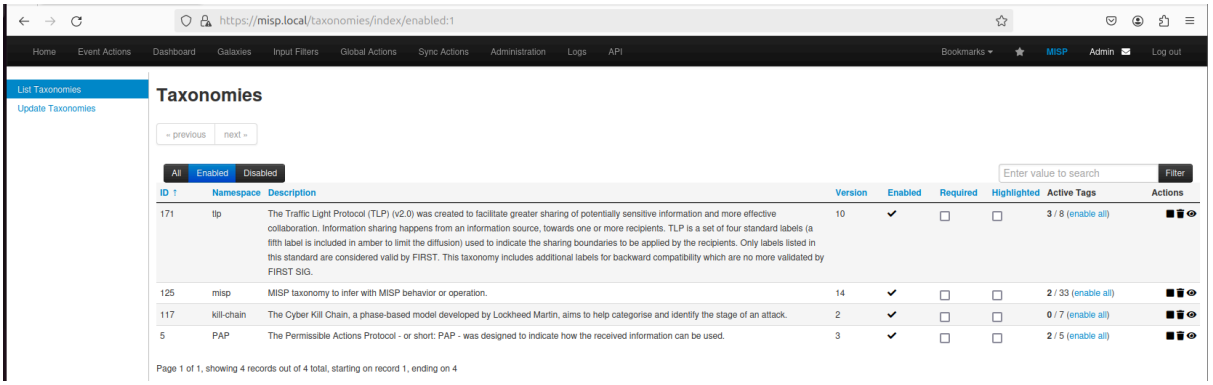


Paso 5: Ejemplo práctico — registrar una campaña de phishing

List events

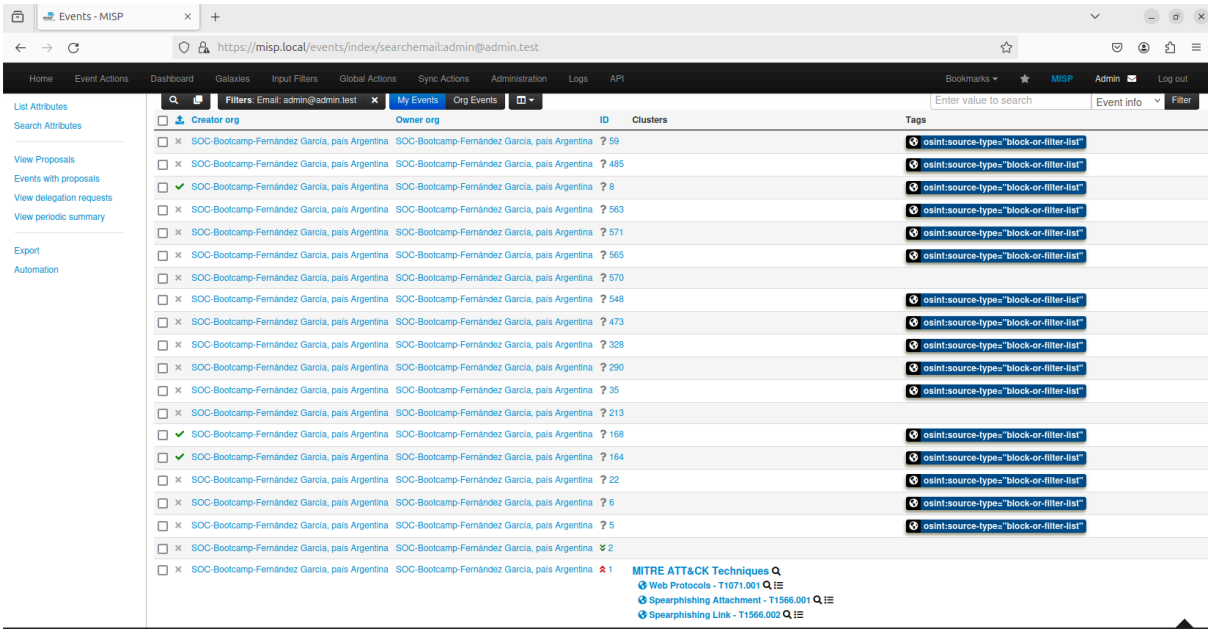


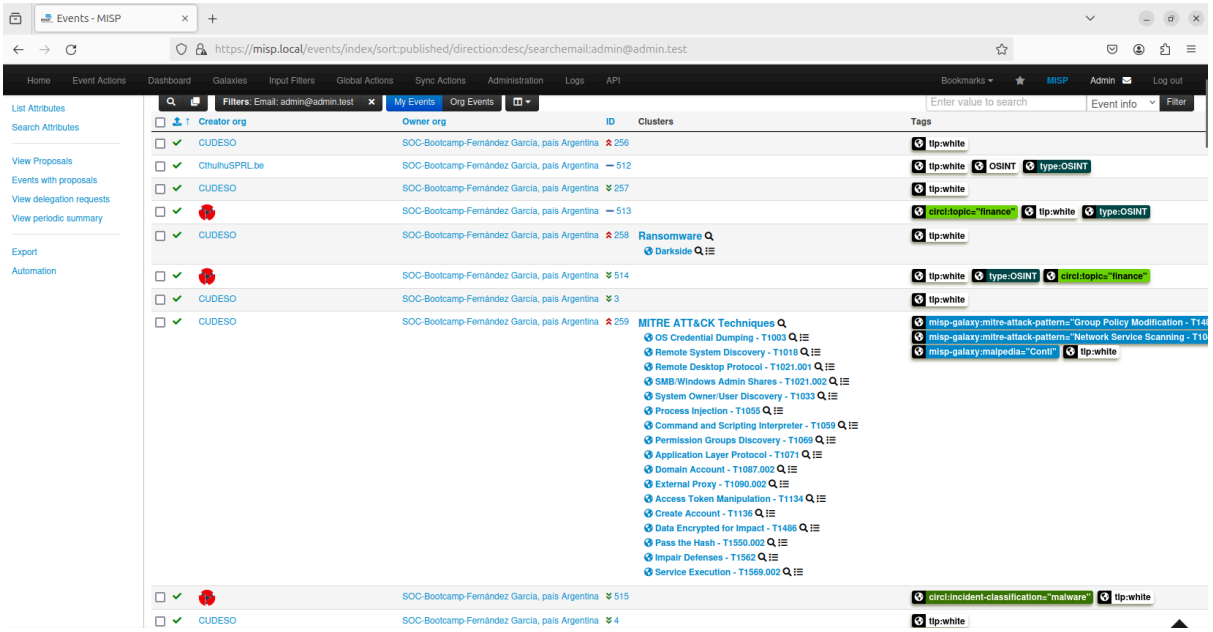
Events - MISP
https://misp.local/events/index/sort:published/direction:desc/searchemail:admin@admin.test
Home
Event Actions
Dashboard
Galaxies
Input Filters
Global Actions
Sync Actions
Administration
Logs
API
Bookmarks
MISP
Admin
Log out
List Attributes
Search Attributes
View Proposals
Events with proposals
View delegation requests
View periodic summary
Export
Automation
Filters: Email: admin@admin.test
My Events
Org Events
Enter value to search
Event info
Filter
Creator org
Owner org
ID
Clusters
Tags
CUDESO
SOC-Bootcamp-Fernández García, país Argentina
256
tlp:white
CthulhuSPRL.be
512
OSINT
type:OSINT
257
513
circl:topic="finance"
258
Ransomware
Darkside
514
circl:topic="finance"
3
259
MITRE ATT&CK Techniques
OS Credential Dumping - T1003
Remote System Discovery - T1018
Remote Desktop Protocol - T1021.001
SMB/Windows Admin Shares - T1021.002
System Owner/User Discovery - T1033
Process Injection - T1055
Command and Scripting Interpreter - T1059
Permission Groups Discovery - T1069
Application Layer Protocol - T1071
Domain Account - T1087.002
External Proxy - T1090.002
Access Token Manipulation - T1134
Create Account - T1136
Data Encrypted for Impact - T1486
Pass the Hash - T1550.002
Impair Defenses - T1562
Service Execution - T1569.002
misp-galaxy:mitre-attack-pattern="Group Policy Modification - T14
misp-galaxy:mitre-attack-pattern="Network Service Scanning - T10
misp-galaxy:malpedia="Conti"
515
circl:incident-classification="malware"
4


tags

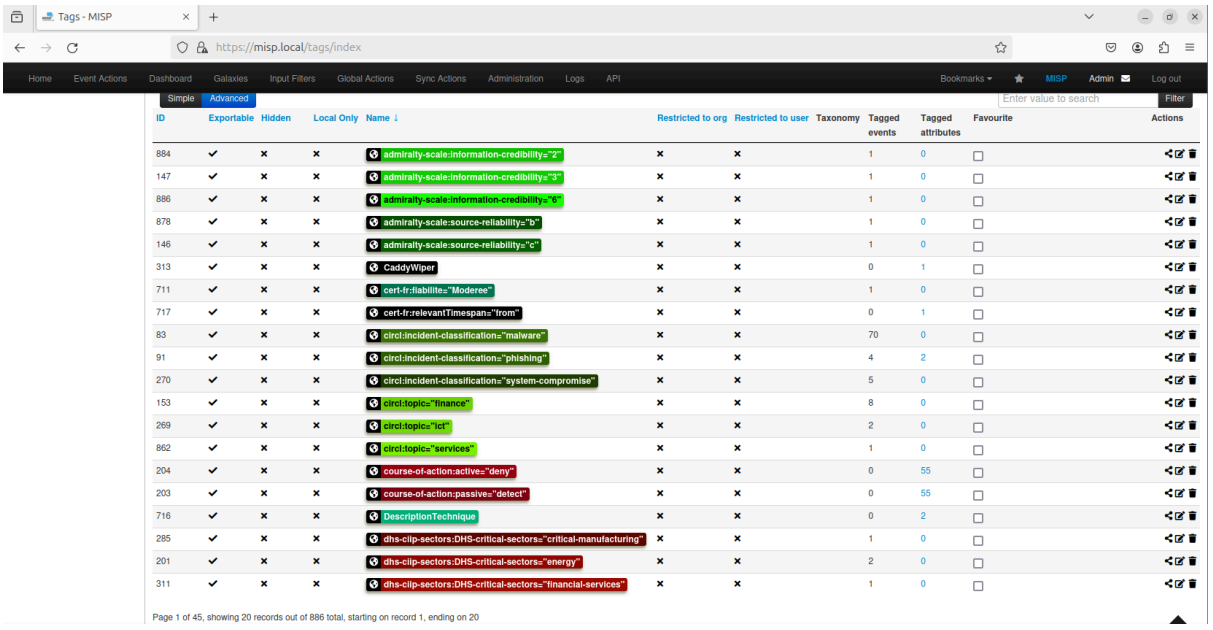

Tags - MISP
https://misp.local/tags/index
Home
Event Actions
Dashboard
Galaxies
Input Filters
Global Actions
Sync Actions
Administration
Logs
API
Bookmarks
MISP
Admin
Log out
Simple
Advanced
Enter value to search
Filter
ID
Exportable
Hidden
Local Only
Name
Restricted to org
Restricted to user
Taxonomy
Tagged events
Tagged attributes
Favourite
Actions
884 admiralty-scale:information-credibility="2"
147 admiralty-scale:information-credibility="3"
886 admiralty-scale:information-credibility="6"
878 admiralty-scale:source-reliability="b"
146 admiralty-scale:source-reliability="c"
313 CaddyWiper
711 cert-fr:fiabilite="Moderee"
717 cert-fr:relevantTimespan="from"
83 circl:incident-classification="malware"
91 circl:incident-classification="phishing"
270 circl:incident-classification="system-compromise"
153 circl:topic="finance"
269 circl:topic="ict"
862 circl:topic="services"
204 course-of-action:active="deny"
203 course-of-action:passive="detect"
716 DescriptionTechnique
285 dhs-ciip-sectors:DHS-critical-sectors="critical-manufacturing"
201 dhs-ciip-sectors:DHS-critical-sectors="energy"
311 dhs-ciip-sectors:DHS-critical-sectors="financial-services"
Page 1 of 45, showing 20 records out of 886 total, starting on record 1, ending on 20

List attributes

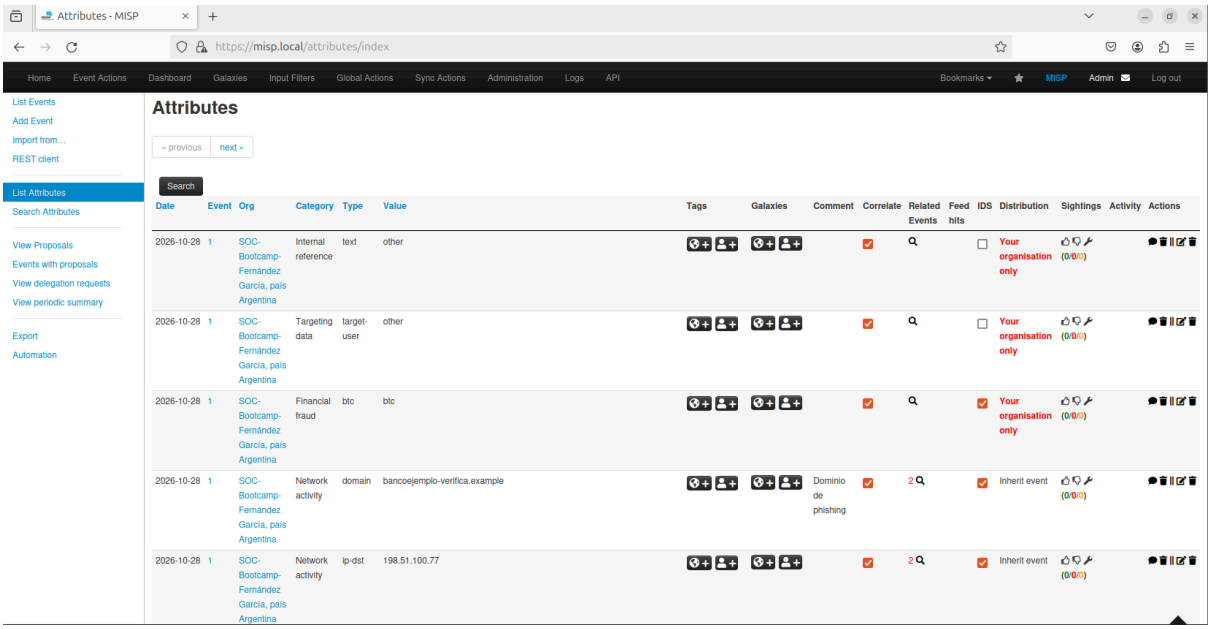

5.7 Registrar un sighting y publicar 1. En el atributo ip-dst 198.51.100.77, pulsa el ícono de sighting (pulgar arriba): significa "lo vimos en nuestra red". 2. Revisa el evento completo, cambia Analysis a Completed y pulsa Publish Event. Publicar lo deja disponible para exportación y sincronización.



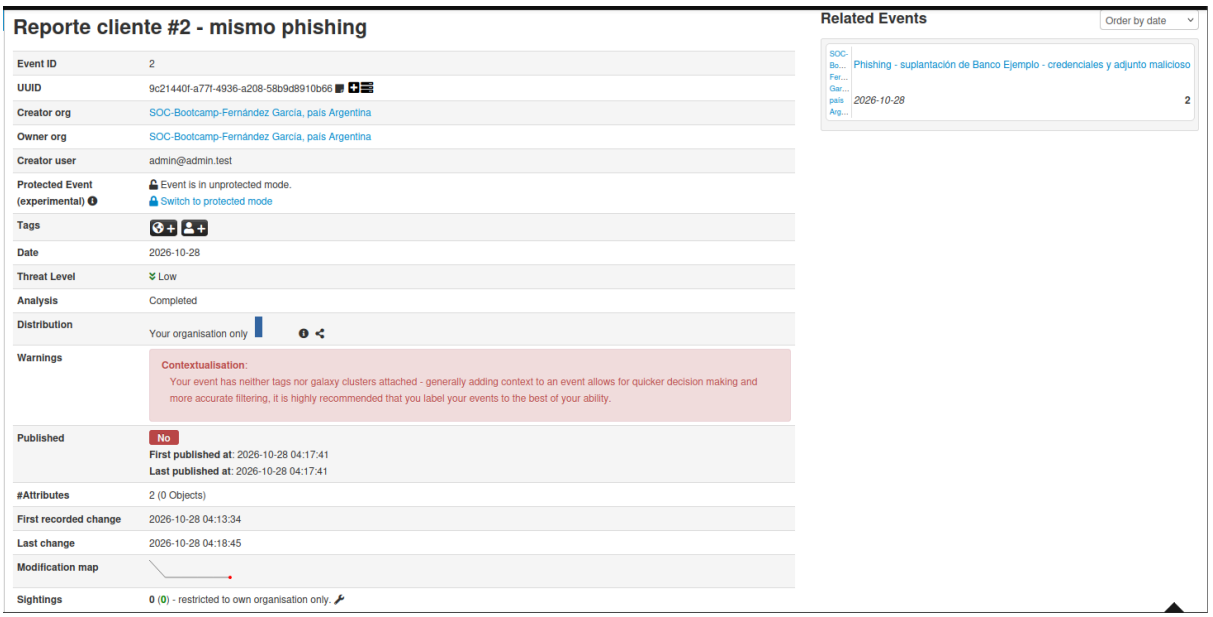

5.8 Consumir la inteligencia desde el SOC Crea una API key para tu analista (Global Actions → My Profile → Auth keys → Add authentication key) y consulta los IoCs como lo haría un SIEM o un playbook SOAR: curl -sk https://misp.local/attributes/restSearch \ -H "Authorization: " \ -H "Accept: application/json" -H "Content-Type: application/json" \ -d '{"tags":["tlp:amber"],"to_ids":true,"type":["ip-dst","domain","url"]}' También puedes exportar desde la interfaz: en el evento, Download as… → STIX 2 o CSV.





Paso 6: Alimentar MISP con fuentes abiertas (feeds OSINT) MISP trae configurados decenas de feeds OSINT públicos; solo hay que cargarlos y habilitarlos. Lista oficial completa: misp-project.org/feeds. Un feed se puede usar de dos maneras, y conviene entender la diferencia

• Cachear (caching): MISP guarda los indicadores en Redis y los compara contra tus eventos sin crear eventos nuevos. Ligero y rápido. Ideal para listas grandes de IPs o URLs.
• Importar (fetch): MISP crea eventos con los datos

6.2 Cargar y habilitar los feeds
1. Inicia sesión como admin y ve a Sync Actions → Feeds.
2. Pulsa Load default feed metadata. Aparece la lista de feeds por defecto, todos deshabilitados.
3. Filtra con el buscador o marca la casilla de cada feed de la tabla anterior.
4. Con los feeds seleccionados, usa Enable selected y luego Enable caching for selected.
5. Para que otros usuarios de tu instancia vean las coincidencias, edita cada feed (ícono de lápiz) y marca Lookup visible.

ID	Enabled	Caching	Name	Format	Provider	Org	Source	URL	He
2	✓	✗	The Botvrij.eu Data	misp	Botvrij.eu		network	https://www.botvrij.eu/data/feed-osint	
3	✓	✗	ELLIO: IP Feed (Community version)	freetext	ellio.tech		network	https://cdn.ellio.tech/community-feed	
4	✓	✗	blockrules of rules.emergingthreats.net	csv	rules.emergingthreats.net		network	https://rules.emergingthreats.net/blockrules/compromised-ips.txt	
5	✓	✗	Tor exit nodes	csv	TOR Node List from dan.me.uk - careful, this feed applies a lock-out after each pull. This is shared with the "Tor ALL nodes" feed.		network	https://www.dan.me.uk/torlist/?exit	
6	✓	✗	Tor ALL nodes	csv	TOR Node List from dan.me.uk - careful, this feed applies a lock-out after each pull. This is shared with the "Tor exit nodes" feed.		network	https://www.dan.me.uk/torlist/	
7	✓	✗	cybercrime-tracker.net - all	freetext	cybercrime-tracker.net		network	https://cybercrime-tracker.net/all.php	
8	✓	✗	Phishtank online valid phishing	csv	Phishtank		network	https://data.phishtank.com/data/online-valid.csv	
9	✓	✗	ip-block-list - snort.org	freetext	https://snort.org		network	https://snort.org/downloads/ip-block-list	
10	✓	✗	diamondfox_panels	freetext	pan-unit42		network	https://raw.githubusercontent.com/pan-unit42/iocs/master/diamondfox/diamondfox_panels.txt	
11	✓	✗	pop3gropers	csv	home.nuug.no		network	https://home.nuug.no/~peter/pop3gropers.txt	
12	✓	✓	Feodo IP Blocklist	csv	abuse.ch	SOC-Bootcamp-Fernández García, país Argentina	network	https://feodotracker.abuse.ch/downloads/ipblocklist.csv	
13	✓	✓	OpenPhish url list	freetext	openphish.com	SOC-Bootcamp-Fernández García, país Argentina	network	https://raw.githubusercontent.com/openphish/public_feed/refs/heads/main/feed.txt	

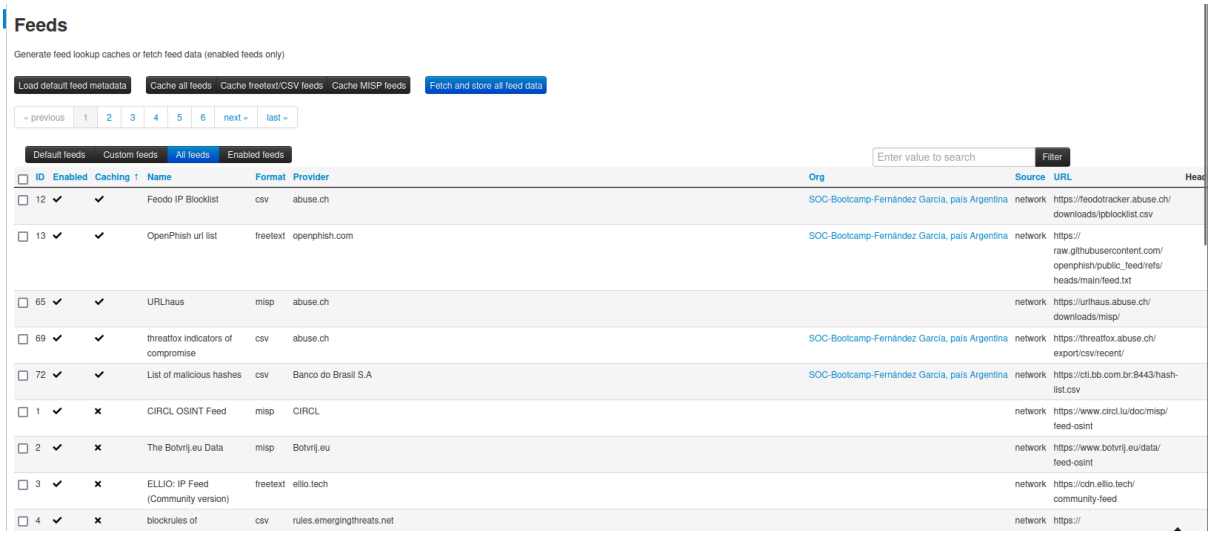


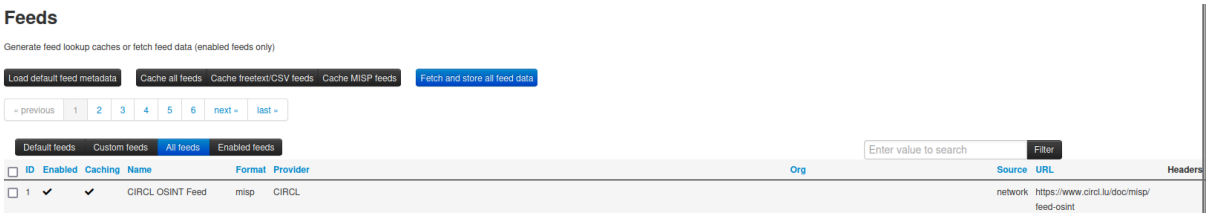




6.3 Descargar los datos


1. Pulsa Cache all feeds para cargar los indicadores en caché.
2. En los feeds CIRCL y Botvrij, pulsa el ícono Fetch all events (flecha hacia abajo) para importarlos como eventos.

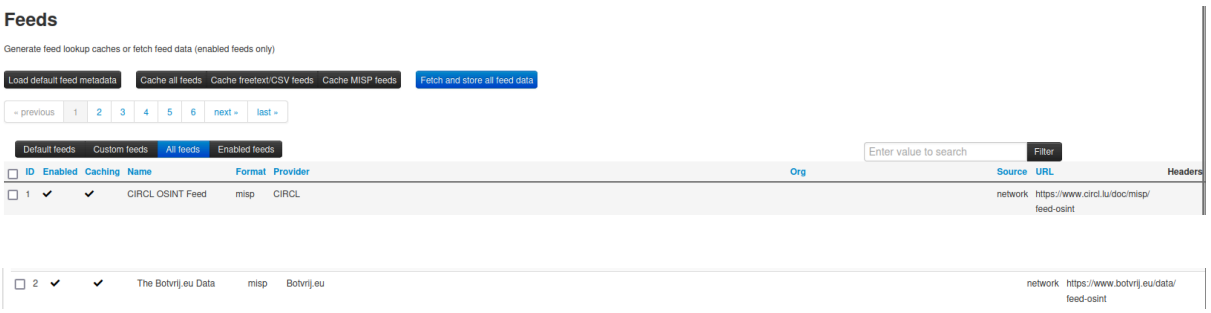



3. Sigue el progreso en Administration → Jobs. La primera descarga puede tardar de 10 a 30 minutos.

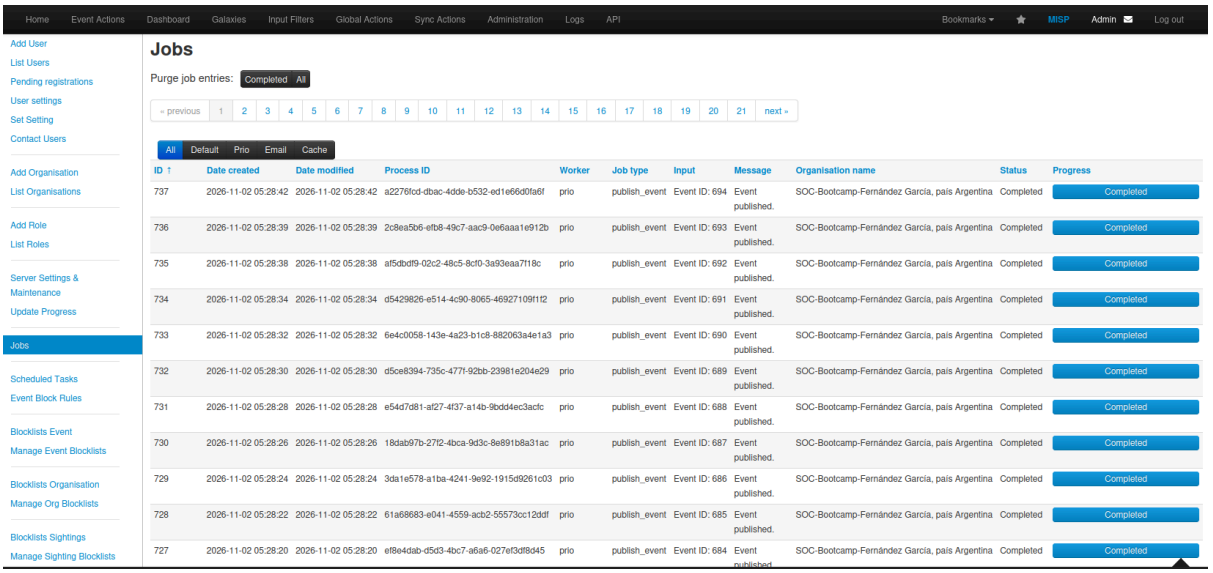

4. Al terminar, Event Actions → List Events mostrará cientos de eventos nuevos de CIRCL y Botvrij.

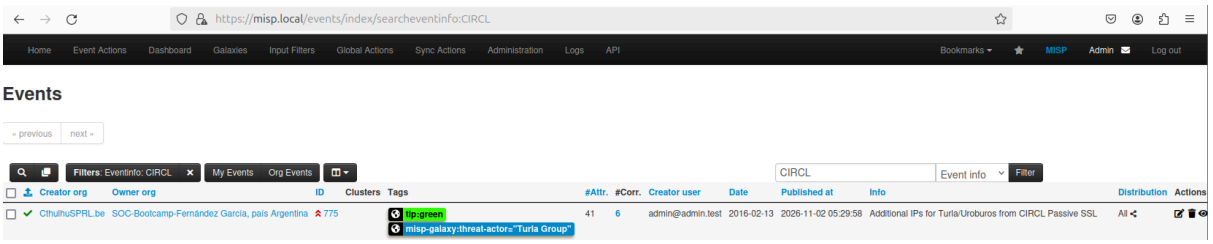


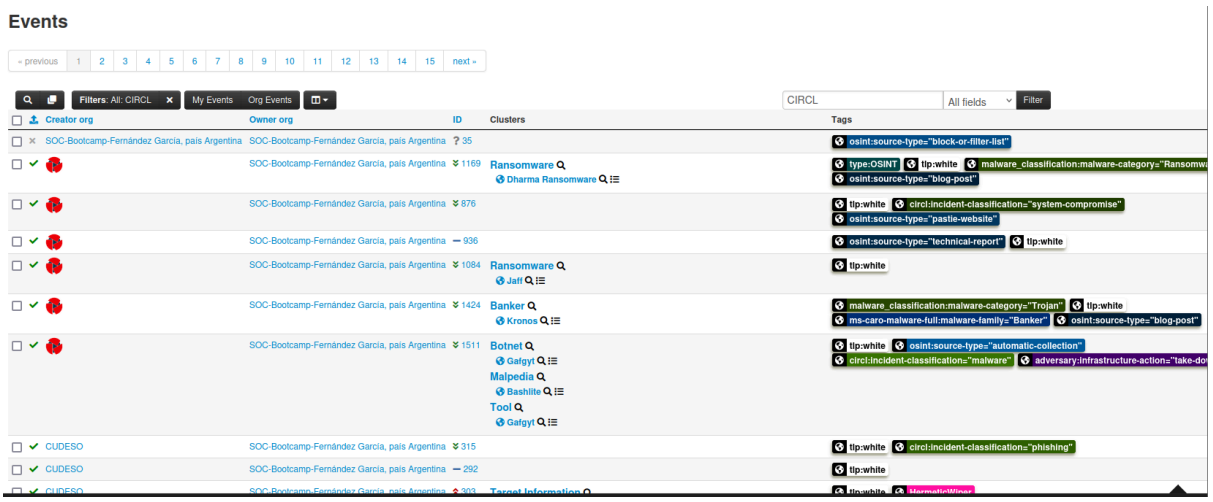

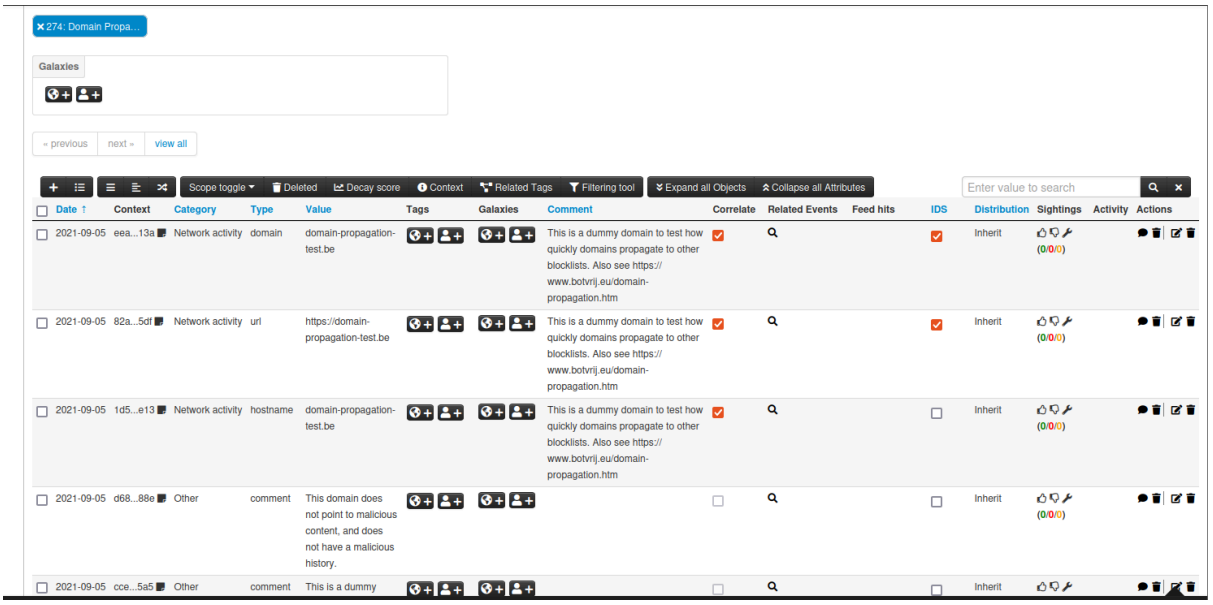


6.4 Comprobar que la inteligencia funciona

1. Ve a Sync Actions → Feeds → Search Feed Caches.
2. Copia un dominio o IP reciente de URLhaus o ThreatFox y búscalo. Debe aparecer el feed que lo contiene.
3. Agrega ese mismo valor como atributo en tu evento de práctica. En la vista del evento verás la coincidencia con el feed (columna Feed hits). Eso

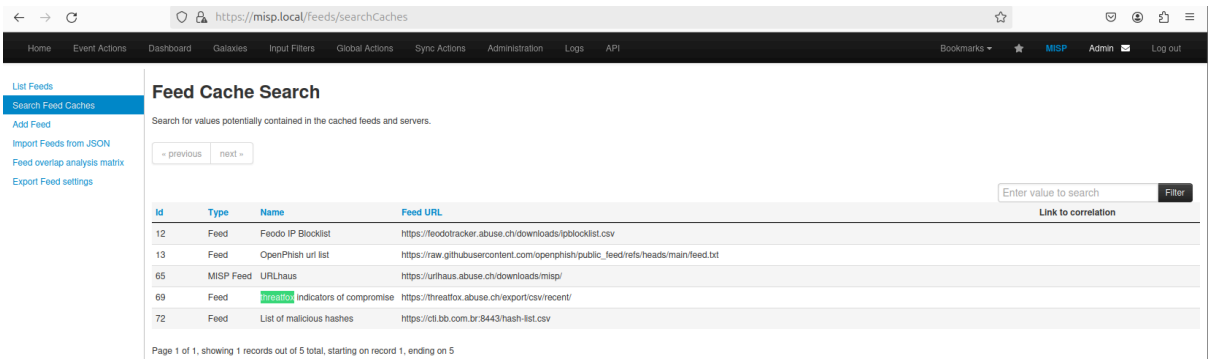

6.5 Agregar un feed manualmente Para aprender el formulario, agrega uno a mano:
1. Sync Actions → Feeds → Add Feed.
2. Enabled y Caching enabled marcados · Name = OpenPhish (manual) · Provider = openphish.com · Input Source = Network · URL = https://raw.githubusercontent.com/openphish/public_feed/refs/heads/main/feed.t xt · Source Format = Simple Freetext Parsed Feed.
3. Submit y luego Cache en esa fila.







6.6 Programar la actualización automática Los feeds cambian a diario. Programa la descarga con el cron del usuario www-data (el 1 es el ID del usuario admin):
sudo crontab -u www-data -e
Agrega estas líneas:
Cachear todos los feeds habilitados cada 6 horas 0 */6 * * * /var/www/MISP/app/Console/cake Server cacheFeed 1 all > /dev/null 2>&1
Importar eventos de los feeds en formato MISP cada día a las 02:30 30 2 * * * /var/www/MISP/app/Console/cake Server fetchFeed 1 all > /dev/null 2>&1 En producción,

```
# Cachear todos los feeds habilitados cada 6 horas
0 */6 * * * /var/www/MISP/app/Console/cake Server cacheFeed 1 all > /dev/null 2>&1
# Importar eventos de los feeds en formato MISP cada día a las 02:30
30 2 * * * /var/www/MISP/app/Console/cake Server fetchFeed 1 all > /dev/null 2>&1
```

revisa cada feed antes de usarlo para bloquear: algunos (por ejemplo IPsum nivel 1) generan muchos falsos positivos. Úsalos para contexto, no para bloqueo automático.

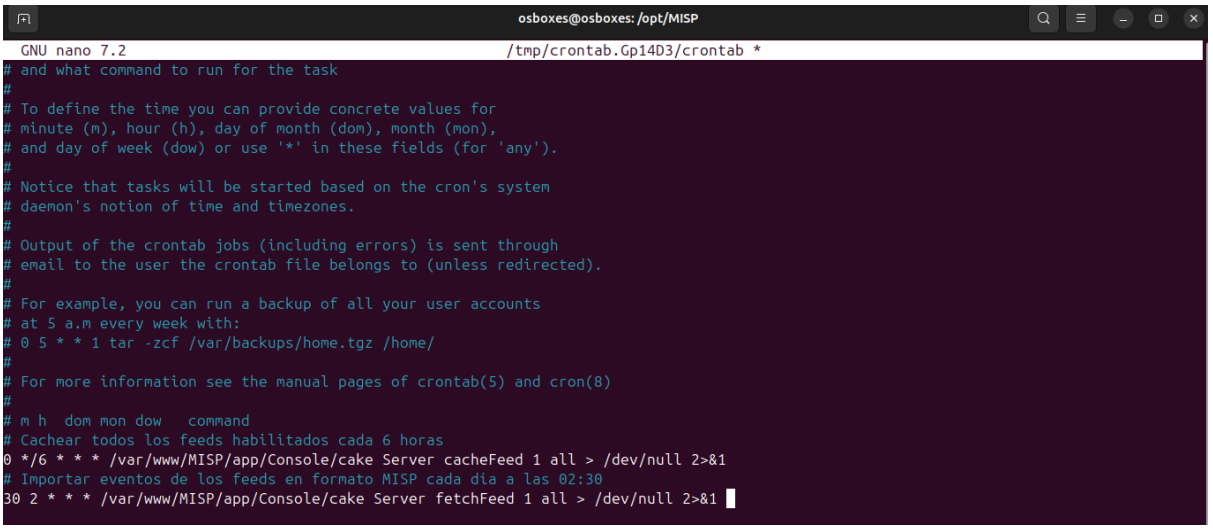

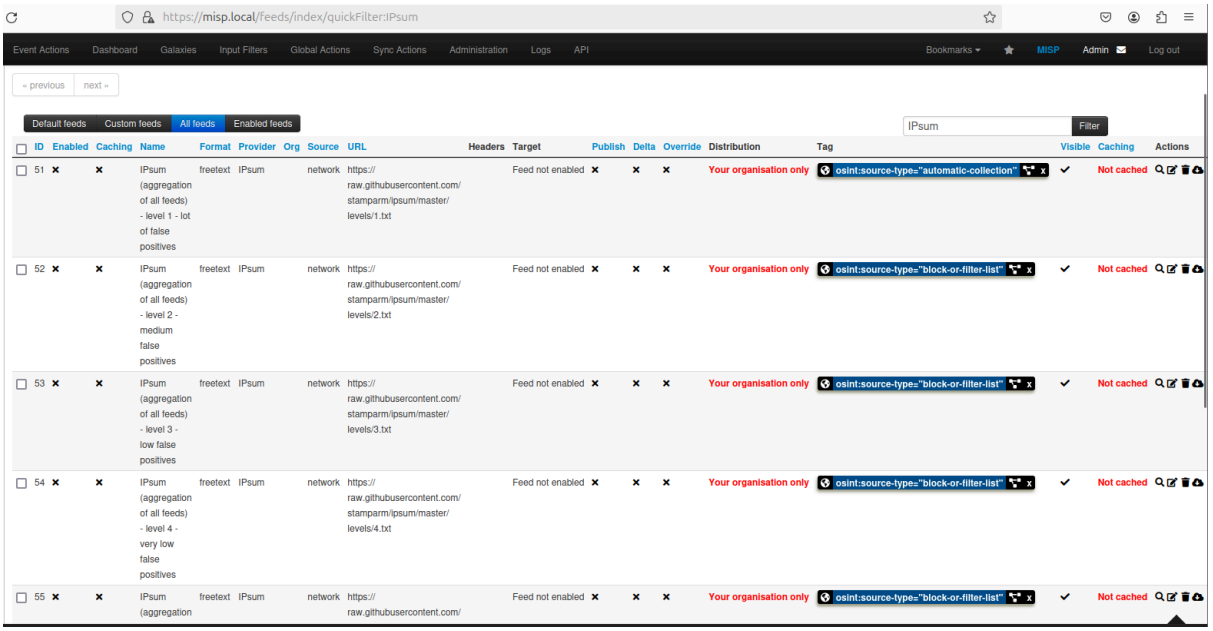

Laboratorio

Se configuró un entorno funcional de MISP 2.5 sobre Ubuntu 24.04, estableciendo la organización 'SOC-Bootcamp-Fernández Garcia' y el usuario analista. Se aplicaron las prácticas de análisis de inteligencia al registrar estructuradamente un incidente de phishing (con IPs, dominios, hashes y objetos de correo), enriqueciéndose con taxonomías y matrices ATT&CK. La plataforma quedó operativa y automatizada mediante la integración de fuentes OSINT clave (CIRCL, Botvrij, URLhaus) y la programación de actualizaciones periódicas.