


Testando as Rotas da API

Aluno: Luiz Fernando Nicassio de Oliveira

Para realizar os testes, foi utilizada uma extensão do Visual Studio Code chamada **REST Client**, que permite fazer requisições diretamente pelo Visual Studio Code.

1 - Listando todas as tarefas

Rota: GET /tarefas

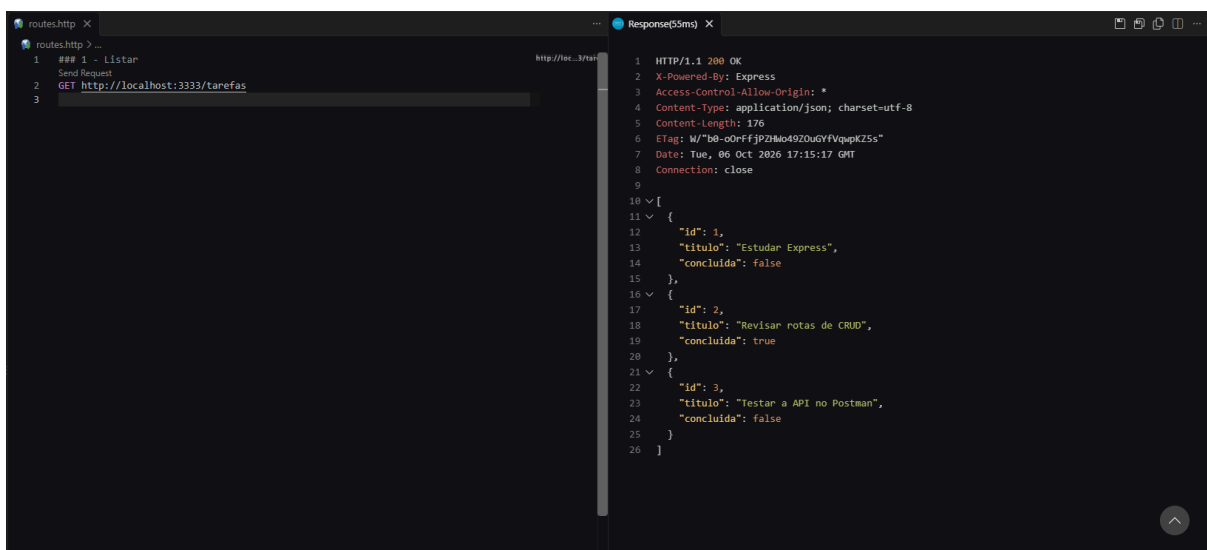

The screenshot shows the REST Client interface in Visual Studio Code. On the left, the 'routes.http' file contains the following content:


```
1 ### 1 - Listar
2 Send Request
3 GET http://localhost:3333/tarefas
```

On the right, the 'Response(Sms)' panel displays the response from the API:

```
1 HTTP/1.1 200 OK
2 X-Powered-By: Express
3 Access-Control-Allow-Origin: *
4 Content-Type: application/json; charset=utf-8
5 Content-Length: 176
6 ETag: W/"b0-c0rFfjPZMo492OuGYfVqupKZ5s"
7 Date: Tue, 06 Oct 2026 17:15:17 GMT
8 Connection: close
9
10 [
11   {
12     "id": 1,
13     "titulo": "Estudar Express",
14     "concluida": false
15   },
16   {
17     "id": 2,
18     "titulo": "Revisar rotas de CRUD",
19     "concluida": true
20   },
21   {
22     "id": 3,
23     "titulo": "Testar a API no Postman",
24     "concluida": false
25   }
26 ]
```

2 - Listando tarefa por id

Rota: GET /tarefas/2

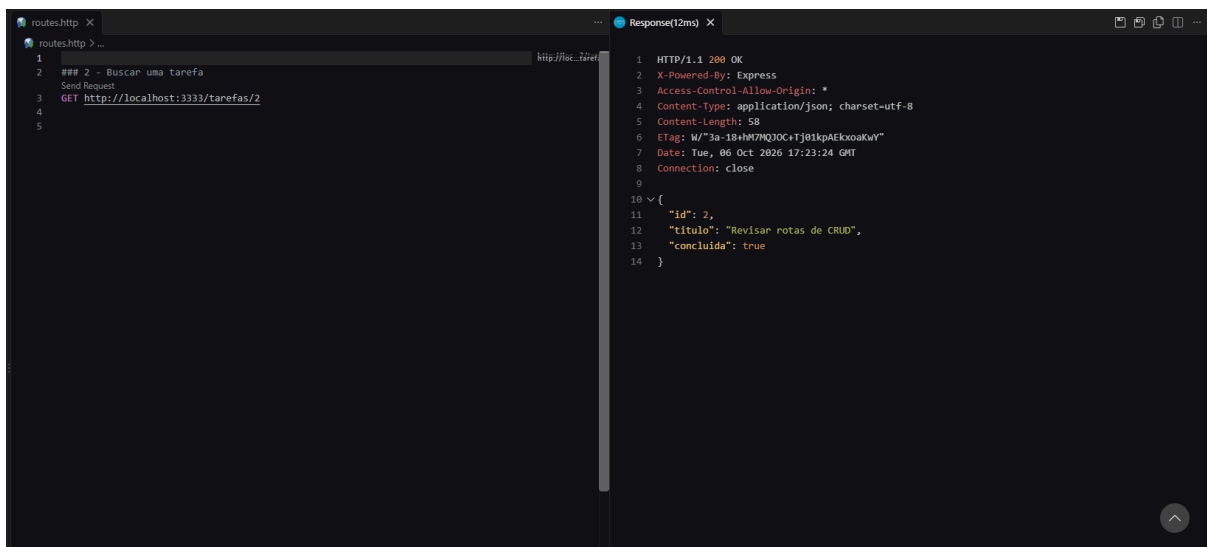

The screenshot shows the REST Client interface in Visual Studio Code. On the left, the 'routes.http' file contains the following content:


```
1 ### 2 - Buscar uma tarefa
2 Send Request
3 GET http://localhost:3333/tarefas/2
4
5
```

On the right, the 'Response(12ms)' panel displays the response from the API:

```
1 HTTP/1.1 200 OK
2 X-Powered-By: Express
3 Access-Control-Allow-Origin: *
4 Content-type: application/json; charset=utf-8
5 Content-Length: 58
6 ETag: W/"3a-1BvHw7WQJOC+tj0thpAEkxoaKwY"
7 Date: Tue, 06 Oct 2026 17:23:24 GMT
8 Connection: close
9
10 {
11   "id": 2,
12   "titulo": "Revisar rotas de CRUD",
13   "concluida": true
14 }
```

3 - Listando tarefa que não existe

Rota: GET /tarefas/999

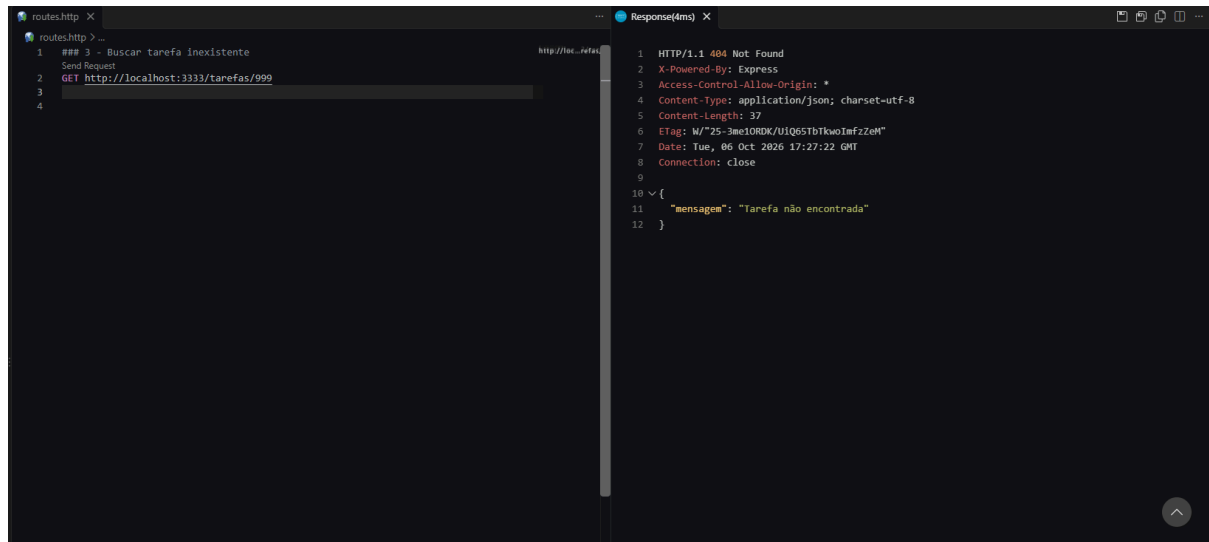


```
routes.http X
1 ### 3 - Buscar tarefa inexistente
2 Send Request
3 GET http://localhost:3333/tarefas/999
4

Response(4ms) X
1 HTTP/1.1 404 Not Found
2 X-Powered-By: Express
3 Access-Control-Allow-Origin: *
4 Content-Type: application/json; charset=utf-8
5 Content-Length: 37
6 ETag: W/"25-3me10RDK/UIQ65TbTkw0mfzZeH"
7 Date: Tue, 06 Oct 2026 17:27:22 GMT
8 Connection: close
9
10 {
11   "mensagem": "Tarefa não encontrada"
12 }
```

4 - Criando uma tarefa

Rota: POST /tarefas

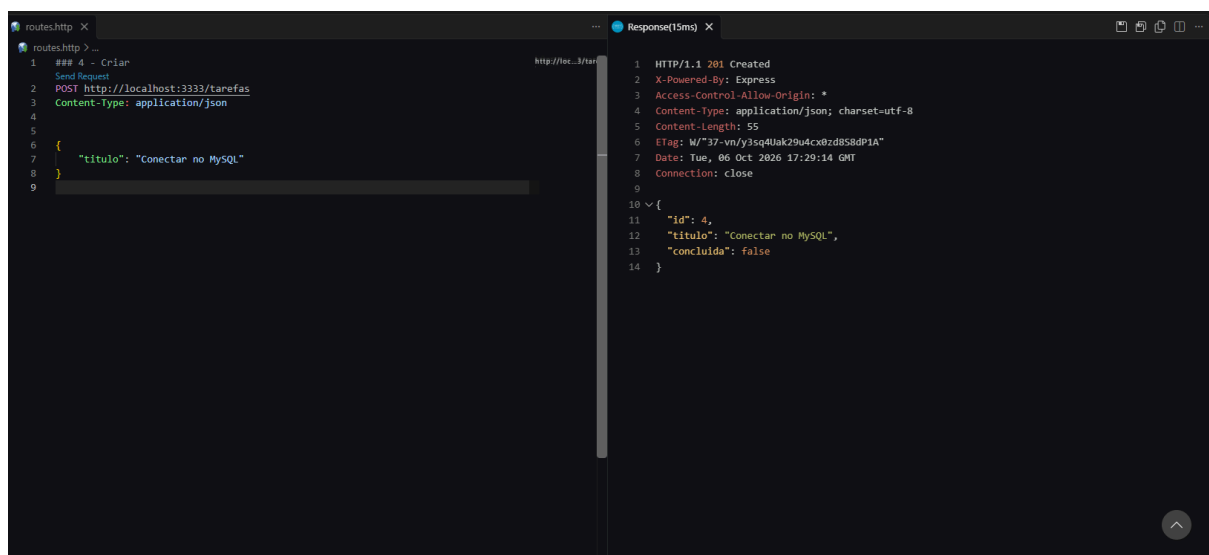


```
routes.http X
1 ### 4 - Criar
2 Send Request
3 POST http://localhost:3333/tarefas
4 Content-Type: application/json
5
6 {
7   "titulo": "Conectar no MySQL"
8 }
9

Response(15ms) X
1 HTTP/1.1 201 Created
2 X-Powered-By: Express
3 Access-Control-Allow-Origin: *
4 Content-Type: application/json; charset=utf-8
5 Content-Length: 55
6 ETag: W/"37-vn/y3sq4Uak29u4cx8zd8S8dP1A"
7 Date: Tue, 06 Oct 2026 17:29:14 GMT
8 Connection: close
9
10 {
11   "id": 4,
12   "titulo": "Conectar no MySQL",
13   "concluida": false
14 }
```

5 - Criando uma tarefa sem título

Rota:POST /tarefas

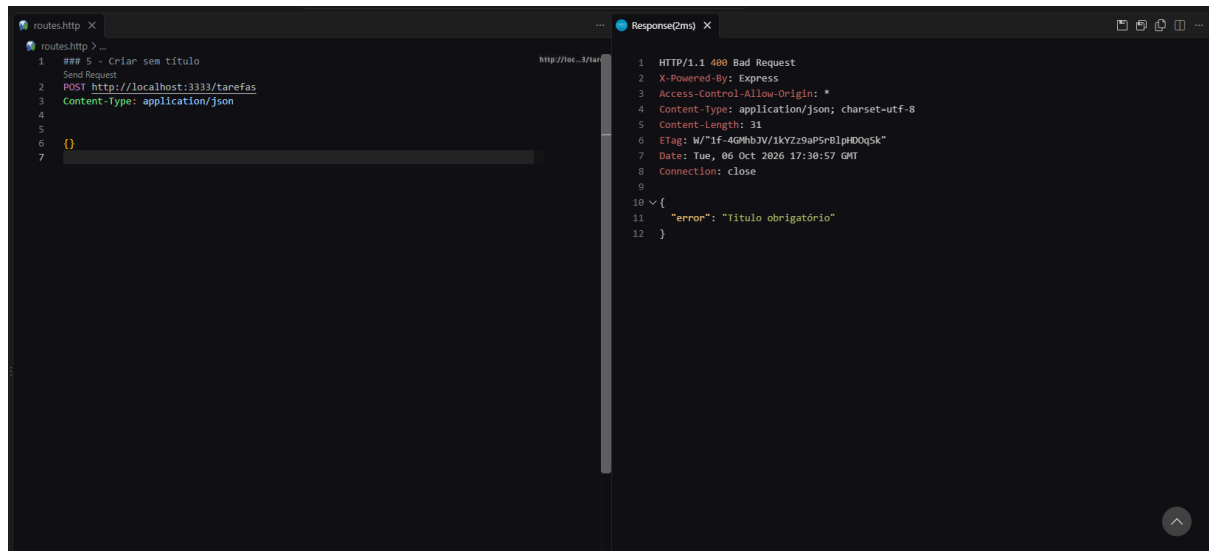


The screenshot shows a REST client interface with two panels. The left panel displays a REST client request for a POST to `http://localhost:3333/tarefas` with a JSON body `{}`. The right panel shows the response, which is a 400 Bad Request with an error message: `{ "error": "título obrigatório" }`.

```
routes.http X
1 ### 5 - Criar sem título
2 Send Request
3 POST http://localhost:3333/tarefas
4 Content-Type: application/json
5
6 {}
7

Response(2ms) X
1 HTTP/1.1 400 Bad Request
2 X-Powered-By: Express
3 Access-Control-Allow-Origin: *
4 Content-Type: application/json; charset=utf-8
5 Content-Length: 31
6 ETag: W/"1f-4GmhbJV/1kYZz9aP5rBlpHDOqSk"
7 Date: Tue, 06 Oct 2026 17:30:57 GMT
8 Connection: close
9
10 {
11   "error": "título obrigatório"
12 }
```

6 - Atualizando uma tarefa

Rota:PUT /tarefas/4

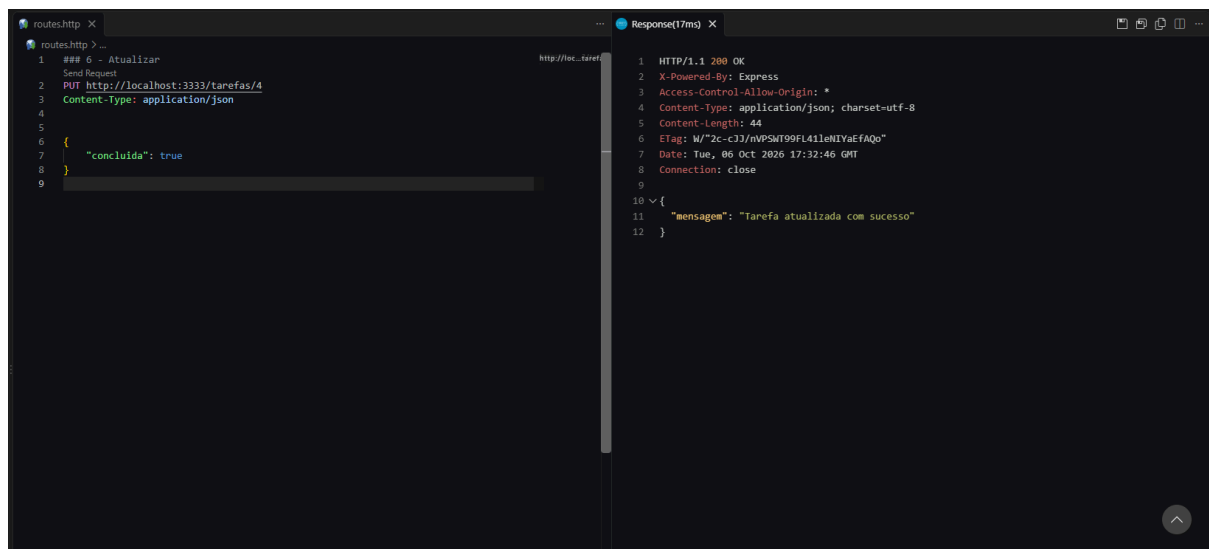


The screenshot shows a REST client interface with two panels. The left panel displays a REST client request for a PUT to `http://localhost:3333/tarefas/4` with a JSON body `{ "concluida": true }`. The right panel shows the response, which is a 200 OK with a message: `{ "mensagem": "Tarefa atualizada com sucesso" }`.

```
routes.http X
1 ### 6 - Atualizar
2 Send Request
3 PUT http://localhost:3333/tarefas/4
4 Content-Type: application/json
5
6 {
7   "concluida": true
8 }
9

Response(17ms) X
1 HTTP/1.1 200 OK
2 X-Powered-By: Express
3 Access-Control-Allow-Origin: *
4 Content-Type: application/json; charset=utf-8
5 Content-Length: 44
6 ETag: W/"2c-c3J/nVPSMT99FL41leNIYaEfaQo"
7 Date: Tue, 06 Oct 2026 17:32:46 GMT
8 Connection: close
9
10 {
11   "mensagem": "Tarefa atualizada com sucesso"
12 }
```

7 - Atualizando que tarefa que não existe

Rota:PUT /tarefas/999

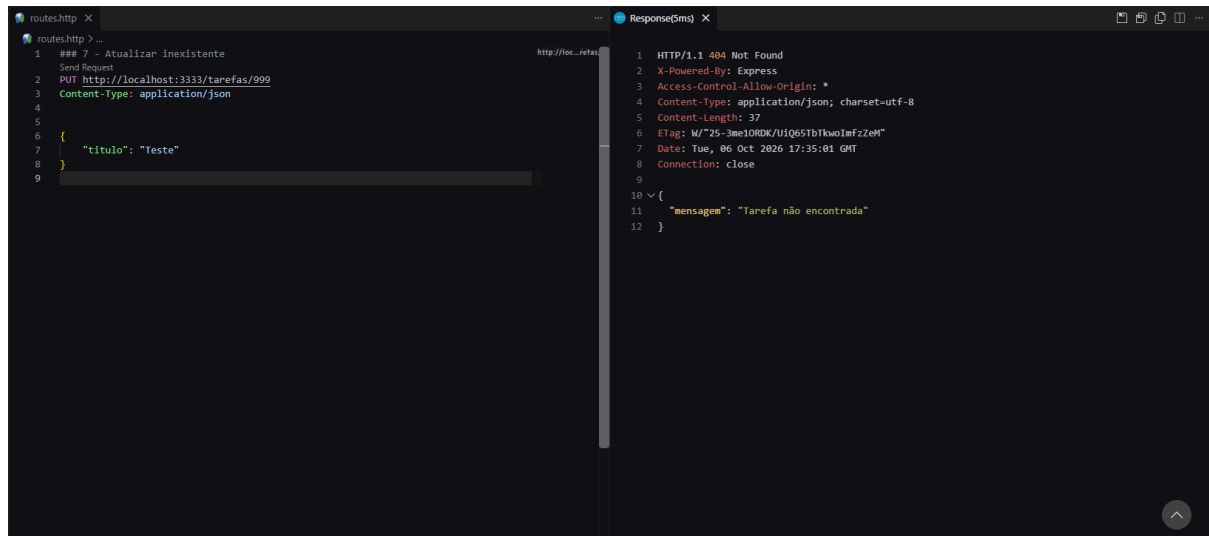


The screenshot shows a REST client interface with two panels. The left panel displays the request details for a PUT request to `http://localhost:3333/tarefas/999` with a JSON body `{ "titulo": "Teste" }`. The right panel shows the response, which is an HTTP 404 Not Found status. The response headers include `X-Powered-By: Express`, `Access-Control-Allow-Origin: *`, `Content-Type: application/json; charset=utf-8`, `Content-Length: 37`, `ETag: W/"25-3ac10MDK/UiQ65Tb1kwoImfzZeH"`, `Date: Tue, 06 Oct 2026 17:35:01 GMT`, and `Connection: close`. The response body is a JSON object: `{ "mensagem": "Tarefa não encontrada" }`.

```
routes.http X
1 ### 7 - Atualizar inexistente
2 Send Request
3 PUT http://localhost:3333/tarefas/999
4 Content-Type: application/json
5
6 {
7   "titulo": "Teste"
8 }
9

Response(Sms) X
1 HTTP/1.1 404 Not Found
2 X-Powered-By: Express
3 Access-Control-Allow-Origin: *
4 Content-Type: application/json; charset=utf-8
5 Content-Length: 37
6 ETag: W/"25-3ac10MDK/UiQ65Tb1kwoImfzZeH"
7 Date: Tue, 06 Oct 2026 17:35:01 GMT
8 Connection: close
9
10 {
11   "mensagem": "Tarefa não encontrada"
12 }
```

8 - Deletar

Rota:DELETE /tarefas/1

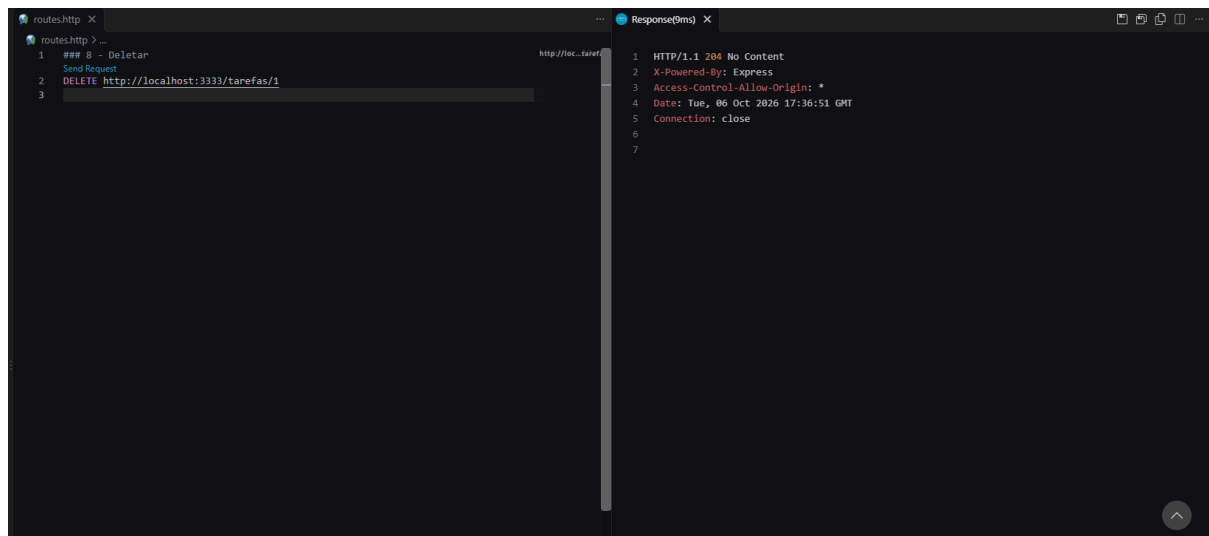


The screenshot shows a REST client interface with two panels. The left panel displays the request details for a DELETE request to `http://localhost:3333/tarefas/1`. The right panel shows the response, which is an HTTP 204 No Content status. The response headers include `X-Powered-By: Express`, `Access-Control-Allow-Origin: *`, `Date: Tue, 06 Oct 2026 17:36:51 GMT`, and `Connection: close`. There is no response body.

```
routes.http X
1 ### 8 - Deletar
2 Send Request
3 DELETE http://localhost:3333/tarefas/1
4

Response(Sms) X
1 HTTP/1.1 204 No Content
2 X-Powered-By: Express
3 Access-Control-Allow-Origin: *
4 Date: Tue, 06 Oct 2026 17:36:51 GMT
5 Connection: close
6
7
```

9 - Deletar novamente

Rota:DELETE /tarefas/1

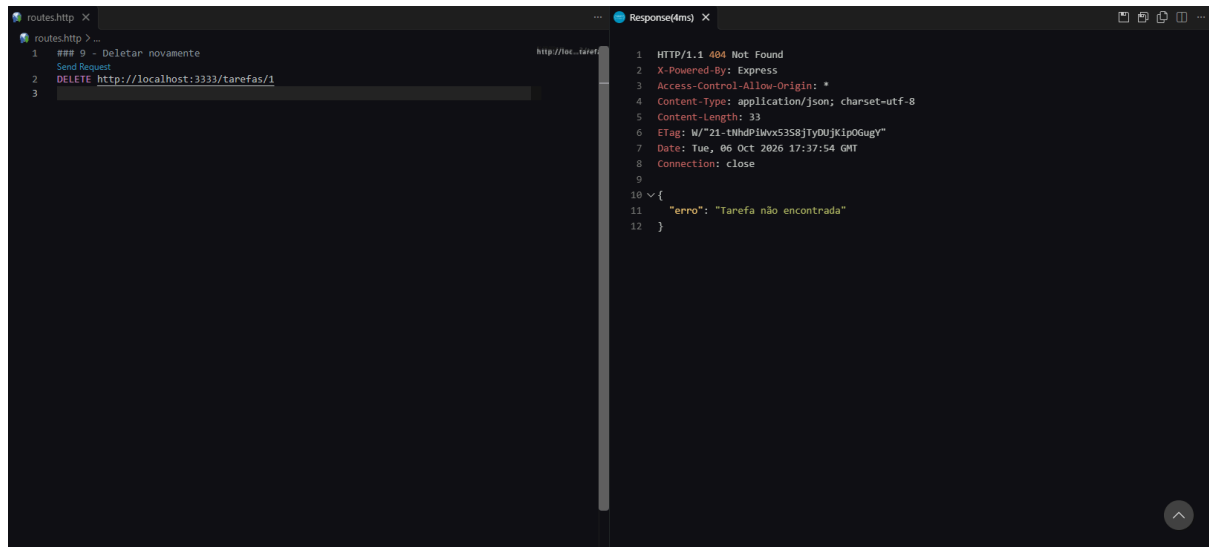

The screenshot shows a REST client interface with two panels. The left panel, titled 'routes.http', contains the following text:

```
1 ## 9 - Deletar novamente
2 Send Request
3 DELETE http://localhost:3333/tarefas/1
```


The right panel, titled 'Response(4ms)', shows the response details for the DELETE request. The status is 'HTTP/1.1 404 Not Found'. The response headers are:

- X-Powered-By: Express
- Access-Control-Allow-Origin: *
- Content-Type: application/json; charset=utf-8
- Content-Length: 33
- ETag: W/"21-ttHdPiWxS358JTyOUjKlp0GugY"
- Date: Tue, 06 Oct 2026 17:37:54 GMT
- Connection: close

The response body is a JSON object:

```
10 {
11   "erro": "Tarefa não encontrada"
12 }
```

10-Tabela do banco de dados :select * from tarefas;

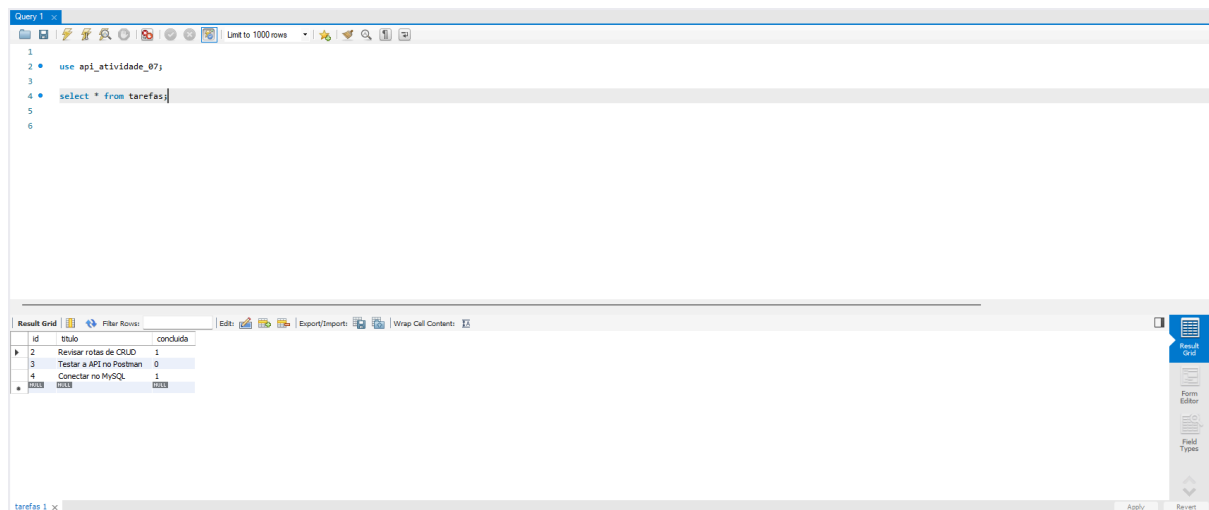

The screenshot shows a database query tool interface. The top panel, titled 'Query', contains the following SQL query:

```
1
2 use api_atividade_07;
3
4 select * from tarefas;
5
6
```

The bottom panel, titled 'Result Grid', shows the results of the query. The results are displayed in a table with two columns: 'id' and 'titulo'. The table contains four rows of data:

id	titulo
1	Revisar rotas de CRUD
2	Testar a API no Postman
3	Conectar no MySQL
4	

The bottom right corner of the interface shows a sidebar with options: 'Result Grid', 'Form Editor', and 'Field Types'.