



DEPARTMENT OF INFORMATICS

TECHNICAL UNIVERSITY MUNICH

Master Thesis

# **On the Parameterized Complexity of Semitotal Domination on Graph Classes**

Lukas Retschmeier







DEPARTMENT OF INFORMATICS

TECHNICAL UNIVERSITY MUNICH

Master Thesis

# **On the Parameterized Complexity of Semitotal Domination on Graph Classes**

## **Über die Parametrisierte Komplexität des Problems der halbtotalen stabilen Menge auf Graphklassen**

Author: Lukas Retschmeier  
Supervisors: Prof. Debarghya Ghoshdastidar  
*Technical University Munich*  
Prof. Paloma Thomé de Lima  
*IT University Copenhagen*  
Submission Date: January 11, 2023



I confirm that this master thesis is my own work and I have documented all sources and material used.

*København S*  
January 11, 2023

Lukas Retschmeier

## Acknowledgments

Where do I even begin? I have many people to thank for their tremendous support in this thesis, but first I want to start with the one person who truly made it all possible: my supervisor, *Paloma*!

Not only did you always have time for my questions and discussions, but you also showed a level of enthusiasm and passion for this problem I could not have wished more.

And yes, thank you for achieving your main mission that was to do everything to "find you a PhD programm".

Furthermore, I would like to express my sincere gratitude to my professor at TUM, *Prof. Ghoshdastidar*, for agreeing to formally supervise my thesis. Your immediate willingness to take on this role and the uncomplicated communication was greatly appreciated!

Furthermore, I would like to thank the whole algorithms group at ITU for letting me be a part of the group despite my status as a *mere* Master student.

From the moment I joined the group, you all made me feel welcome and integrated, and I am grateful for the opportunity to do my thesis in such a friendly and helpful environment

Thank you to Riko for inviting me to this year's Retriet, the running sessions with Martin and Christian

Another special thanks to Jan Arne at UiB for introducing me into the fascinating world of parameterized Complexity and engaging me to further dig into this area!

My employer Atos for providing me with the necessary flexibility of working hours

Lastly, I would like to thank openAI's *chatGPT Dec 15* for writing this acknowledgments section and *Dall-E 2* for the immense amount of creativity that went into the chapter's illustrations! What a time to be alive!



---

# CONTENTS

<b>Acknowledgments</b>	<b>v</b>
<b>Abstract</b>	<b>viii</b>
<b>Zusammenfassung</b>	<b>ix</b>
<b>1 Terminology and Preliminaries</b>	<b>2</b>
1.1 Graph Theory . . . . .	2
1.1.1 Basic Terminology . . . . .	2
1.1.2 Graph Classes . . . . .	3
1.2 Computational Complexity Theory . . . . .	4
1.2.1 NP-COMPLETENESS . . . . .	5
1.2.2 Definitions in Parameterized Complexity . . . . .	6
1.2.3 Fixed-Parameter Tractability . . . . .	6
1.2.4 Kernelization . . . . .	7
1.2.5 Reductions and Parameterized Intractability . . . . .	8
<b>2 On Parameterized Semitotal Domination</b>	<b>10</b>
2.1 Domination Problems . . . . .	10
2.2 Complexity Status of SEMITOTAL DOMINATING SET . . . . .	13
<b>Bibliography</b>	<b>17</b>
<b>List of Figures</b>	<b>22</b>
<b>List of Tables</b>	<b>23</b>

---

## ABSTRACT

### Abstract

For a graph  $G = (V, E)$ , a set  $D$  is called a *semitotal dominating set*, if  $D$  is a dominating set and every vertex  $v \in D$  is within distance two to another witness  $v' \in D$ . The MINIMUM SEMITOTAL DOMINATING SET problem is to find a semitotal dominating set of minimum cardinality. The semitotal domination number  $\gamma_{t2}(G)$  is the minimum cardinality of a semitotal dominating set and is squeezed between the domination number  $\gamma(G)$  and the total domination number  $\gamma_t(G)$ . Given a graph  $G = (V, E)$  and a positive integer  $k$ , the SEMITOTAL DOMINATION DECISION problem asks if  $G$  has a semitotal dominating set of size at most  $k$ .

After the problem was introduced by Goddard, Henning and McMillan in [30], NP-completeness was shown for general graphs [37], *split graphs* [37], *planar graphs* [37], *chordal bipartite graphs* [37], *circle graphs* [41] and *subcubic line graphs of bipartite graphs* [27]. On the other side, there exist polynomial-time algorithms for *AT-free graphs* [41], *graphs of bounded mim-width* [27], *graphs of bounded clique-width* [15], and *interval graphs* [37].

In this thesis, we start the systematic look through the lens of *parameterized complexity* by showing that SEMITOTAL DOMINATING SET is  $\omega[2]$ -hard for bipartite graphs and split graphs. By applying the techniques proposed in [1] and [28] for DOMINATING SET and TOTAL DOMINATING SET, we are going to construct a  $359k$  kernel for SEMITOTAL DOMINATING SET in planar graphs. This result further complements known linear kernels for other domination problems like PLANAR CONNECTED DOMINATING SET, PLANAR RED-BLUE DOMINATING SET, PLANAR EFFICIENT DOMINATING SET, PLANAR EDGE DOMINATING SET, INDEPENDENT DOMINATING SET and PLANAR DIRECTED DOMINATING SET.

**Keywords:** Domination; Semitotal Domination; parameterized Complexity; Planar Graphs; Linear Kernel



---

## ZUSAMMENFASSUNG

### Abstract

Hier kommt noch ein weiterer Abstract rein.

**Schlagworte:** Stabile Menge; Halbtotale Stabile Menge; Parametrisierte Komplexität; Plättbare Graphen; Linearer Problemkern






---

# CHAPTER 1

---

## TERMINOLOGY AND PRELIMINARIES

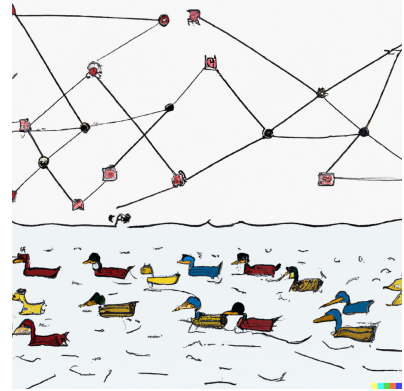

*“All we have to decide is what to do with the time that is given to us.”*

J. R. R. Tolkien, *Gandalf* in *Lord of the Rings*

In this chapter, we will introduce the core definitions used throughout this thesis. Most of the definitions of graph theory are taken from [19]. For definitions in the area of *parameterized complexity*, the book written by Cygan et al. [16] gives an excellent introduction. For standard mathematical notation, the reader is referred to any introductory textbook into discrete mathematics (e.g. [54]).

### 1.1 Graph Theory

If not explicitly stated otherwise, the following definitions are taken from the book *Graph Theory* written by Reinhard Diestel [20].

#### 1.1.1 Basic Terminology

**Definition 1.1.1 (Graph).** A simple graph is a pair  $G = (V, E)$  of two sets where  $V$  denotes the vertices and  $E \subseteq V \times V$  the edges of the graph. A vertex  $v \in V$  is incident with an edge  $e \in E$  if  $v \in e$ . Two vertices  $x, y$  are adjacent, or neighbours, if  $\{x, y\} \in E$ . By this definition, graph loops and multiple edges are excluded.

## 1.1 Graph Theory

A multigraph is a pair  $(V, E)$  of disjoint sets together with a map  $E \rightarrow V \cup [V]^2$  assigning to every edge either one or two vertices, its ends. Multigraphs can have loops and multiple edges.

We usually denote the vertex set by  $V(G)$  and its edge set by  $E(G)$ .

Unless stated otherwise, we usually consider only *simple graphs*, but the notion of *multigraphs* gets important when we later talk about the *underlying multigraph* of a *D-region decomposition*.

**Definition 1.1.2 (Subgraph and Induced Subgraph).** Let  $G = (V, E)$  and  $G' = (V', E')$  be two graphs. If  $V' \subseteq V$  and  $E' \subseteq E$  then  $G'$  is a subgraph of  $G$ . If  $G$  is a subgraph of  $G'$  and  $G'$  contains all the edges to  $G$  with both endpoints in  $V(G')$ , then  $G'$  is an induced subgraph of  $G$  and we write  $G' = G[V(G')]$ .

**Definition 1.1.3 (Degrees).** Let  $G = (V, E)$  be a graph. The degree  $d_G(v)$  (shortly  $d(v)$  if  $G$  is clear from the context) of a vertex  $v \in V$  is the number of neighbors of  $v$ . We call a vertex of degree 0 as isolated and one of degree 1 as a pendant. If all the vertices of  $G$  have the same degree  $k$ , then  $G$  is  $k$ -regular.

**Definition 1.1.4 (Closed and Open Neighborhoods [3]).** Let  $G = (V, E)$  be a (non-empty) graph. The set of all neighbors of  $v$  is the open neighborhood of  $v$  and denoted by  $N(v)$ ; the set  $N[v] = N(v) \cup \{v\}$  is the closed neighborhood of  $v$  in  $G$ . When  $G$  needs to be made explicit, those open and closed neighborhoods are denoted by  $N_G(v)$  and  $N_G[v]$ .

**Definition 1.1.5 (isomorphic Graphs).** Let  $G = (V, E)$  and  $G' = (V', E')$  be two graphs. We call  $G$  and  $G'$  isomorphic, if there exists a bijection  $\phi : V \rightarrow V'$  with  $\{x, y\} \in E \Leftrightarrow \phi(x)\phi(y) \in E'$  for all  $x, y \in V$ . Such a map  $\phi$  is called isomorphism.

If a graph  $G$  is isomorphic to another graph  $H$ , we denote  $G \simeq H$ .

**Definition 1.1.6 (Paths and Cycles).** A path is a non-empty graph  $P = (V, E)$  of the form  $V = \bigcup_{i \in [k]} \{x_i\}$  and  $E = \bigcup_{i \in [k-1]} \{x_i x_{i+1}\}$  where the  $x_i$  are distinct. The vertices  $x_0$  and  $x_k$  are linked by  $P$  and are called the ends of  $P$ . The length of a path is its number of edges and the path on  $n$  vertices is denoted by  $P_n$ . We refer to a path  $P$  by a natural sequence of its vertices:  $P = x_0 x_1 \dots x_k$ . Such a path  $P$  is a path between  $x_0$  and  $x_k$ , or a  $x_0, x_k$ -path. If  $P = x_0 \dots x_k$  is a path and  $k \geq 2$ , the graph with vertex set  $V(P)$  and edge set  $E(P) \cup \{x_k x_0\}$  is a cycle. The cycle on  $n$  vertices is denoted as  $C_n$ . The distance  $d_G(v, w)$  from a vertex  $v$  to a vertex  $w$  in a graph  $G$  is the length of the shortest path between  $v$  and  $w$ . If  $v$  and  $w$  are not linked by any path in  $G$ , we set  $d_G(v, w) = \infty$ . Again, if  $G$  is clear from the context, we omit the subscripted  $G$  and just write  $d(v, w)$  instead.

### 1.1.2 Graph Classes

A *graph class* is a set of graphs  $\mathfrak{G}$  that is closed under isomorphism that is if  $G \in \mathfrak{G}$  and a  $H \simeq G$  then  $H \in \mathfrak{G}$  as well.

## 1 Terminology and Preliminaries

**Definition 1.1.7 (Graph Parameters).** Let  $G = (V, E)$  be a graph. An independent set of  $G$  is a set of pairwise non-adjacent vertices. A clique of  $G$  is a set of pairwise adjacent vertices. A vertex cover of  $G$  is a subset of vertices containing at least one endpoint of every edge. A dominating set is a subset  $D$  of vertices such that all vertices not contained in  $D$  are adjacent to some vertex in  $D$ .

**Graph Class 1 (r-partite).** Let  $r \geq 2$  be an integer. A Graph  $G = (V, E)$  is called r-partite if  $V$  admits a partition into  $r$  classes such that every edge has its ends in different classes: Vertices in the same partition class must not be adjacent. A 2-partite graph is called bipartite.

An  $r$ -partite graph in which every two vertices from different partition classes are adjacent is called complete. For the complete bipartite graph on bipartitions  $X \uplus Y$  of size  $m$  and  $n$ , we shortly write  $K_{m,n}$ .

**Graph Class 2 (Complete).** If all vertices of a graph  $G = (V, E)$  are pairwise adjacent, we say that  $G$  is complete. A complete graph on  $n$  vertices is a  $K_n$ . A  $K_3$  is called a triangle.

**Graph Class 3 (Chordal).** For a graph  $G = (V, E)$ , an edge that joins two vertices of a cycle, but is not itself an edge of the cycle is a chord of that cycle.

Furthermore, we say  $G$  is chordal (or triangulated) if each of its cycles of length at least four has a chord. In other words, it contains no induced cycle other than triangles.

**Graph Class 4 (Split).** A split graph is a graph  $G = (V, E)$  whose vertices can be partitioned into a clique and an independent set.

**Graph Class 5 (Planar).** A plane graph is a pair  $(V, E)$  of finite sets with the following properties:

- $V \subseteq \mathbb{R}^2$  (Vertices),
- Every edge is an arc between two vertices,
- different edges have different sets of endpoints, and
- The interior of an edge contains no vertex and no point of any other edge

An embedding in the plane, or planar embedding, of an (abstract) graph  $G$  is an isomorphism between  $G$  and a plane graph  $H$ . A plane graph can be seen as a concrete **embedding** of the planar graph into the “plane”  $\mathbb{R}^2$ .

## 1.2 Computational Complexity Theory

Computational complexity investigates the question of how many computational resources are required to solve a specific problem. We are about to introduce two of the most important classes of problems in classical complexity theory:

**The Class P [2]**

If we denote **DTIME** as the set of decision problems that are solvable in  $\mathcal{O}(n^k)$  time by a deterministic Turing Machine, we can define the class **P** as:

$$\mathbf{P} := \bigcup_{k \in \mathbb{N}} (\text{DTIME}(n^k))$$

**The Class NP [2]**

A language  $L \subseteq \{0,1\}^*$  is in **P** if there exists a polynomial  $p : \mathbb{N} \rightarrow \mathbb{N}$  and a polynomial-time Turing Machine  $M$  such that for every  $x \in \{0,1\}^*$ ,

$$x \in L \Leftrightarrow \exists u \in \{0,1\}^{p(|x|)} \text{ s.t. } M(x, u) = 1$$

If  $x \in L$  and  $u \in \{0,1\}^{p(|x|)}$  satisfy  $M(x, u) = 1$ , then we call  $u$  a *certificate* for  $x$ .

**P** denotes the class of all problems that are *efficiently solvable* whereas **NP** contains all problems whose solution can efficiently be verified. Note that  $\mathbf{P} \subseteq \mathbf{NP}$ , but the opposite is unknown.

**1.2.1 NP-Completeness**

A major discovery in the early 1970s was the fact that some problems in **NP** are *at least as hard as* any other problem in **NP** by reducing them among each other. This spans a whole “web of reductions” [2] and gives strong evidence that none of these problems can be solved efficiently. The first results in this new field had been published independently by Cook [14] and Levin [47] after Karp [39] had introduced this notion of problem reductions. The Cook-Levin-Theorem [14] proved that the **BOOLEAN SATISFIABILITY (SAT)** problem is **NP-COMPLETE** any problem in **NP** can be reduced to SAT.

as hard as SAT, because a fast algorithm for  $P$  would immediately give a fast algorithm for SAT as well. one single algorithm for any of these problems would be enough to efficiently solve all of them. For a comprehensive introduction to classical complexity theory, the reader is referred to [2].

**Definition 1.2.1 (Reductions, NP-hardness and NP-COMPLETENESS [2]).** We say that a language  $A \subseteq \{0,1\}^*$  is polynomial-time Karp reducible to a language  $B \subseteq \{0,1\}^*$  (denote  $A \leq_p B$ ) if there is a poly-time computable function  $f : \{0,1\}^* \rightarrow \{0,1\}^*$  such that for every  $x \in \{0,1\}^*$ ,  $x \in A$  if and only if  $f(x) \in B$ .

We say that a problem  $B$  is **NP-HARD** if  $A \leq_p B$  for every  $A \in \mathbf{NP}$  and  $B$  is **NP-COMPLETE** if additionally  $B \in \mathbf{NP}$  holds.

## 1 Terminology and Preliminaries

There are thousands of **NP-COMPLETE** problems we do not expect to be solvable in polynomial time. The famous question of whether  $\mathbf{P} = \mathbf{NP}$  or not is still one of the biggest open questions in mathematics bountied with one million dollars by the *Clay Mathematical Institute* [26]. Most of the domination problems like **DOMINATING SET**, **SEMITOTAL DOMINATING SET**, **TOTAL DOMINATING SET** are **NP-COMPLETE**.

**Coping with NP-Completeness** Even though we do not expect **NP-COMPLETE** problems to have a polynomial-time algorithm, there are some strategies to cope with them. We can either give up the exactness of a solution to possibly find fast *approximation algorithms* or abandon the search for a polynomial-time algorithm in favor of finding good *Exact Exponential (EEA) Algorithms* instead.

A third technique is using additional structural parameters of a specific problem instance and therefore **restricting the input to special cases**. This idea lead to the development of *parameterized complexity*.

### 1.2.2 Definitions in Parameterized Complexity

Introduced by Downey and Fellows [21], parameterized complexity extends the classical theory with a framework that allows a more finely-grained analysis of computationally hard problems. The idea is to measure a problem in terms of input size and an additional (structural) parameter  $k$ .

We like to find an algorithm that is only exponential in a function  $f(k)$ , but polynomial in the instance size.  $k$  denotes how difficult the problem is:

If  $k$  is small then the problem can still be considered tractable although the underlying **NP-HARD** problem counts as intractable in general. Therefore  $k$  can be seen as a measure of the difficulty of a given instance. If not marked otherwise, all definitions are taken from [16].

**Definition 1.2.2 (Parameterized Problem).** A parameterized problem is a  $L \subseteq \Sigma^* \times \mathbb{N}$  ( $\Sigma$  finite fixed alphabet) for an instance  $(x, k) \in \Sigma^* \times \mathbb{N}$ , where  $k$  is called the parameter.

The size of an instance of an instance  $(x, k)$  of a parameterized problem is  $|(x, k)| = |x| + k$  where the parameter  $k$  is encoded in unary by convention.

### 1.2.3 Fixed-Parameter Tractability

We say that a problem is *fixed-parameter tractable (fpt)* if problem instances of size  $n$  can be solved in  $f(k)n^{\mathcal{O}(1)}$  time for some function  $f$  independent of  $n$ . Like the class **P** can be seen as a notion of *tractability* in classical complexity theory, there is an equivalent in parameterized complexity, which we denote as **FIXED-PARAMETER TRACTABLE (FPT)** and which we can define the following way:



### The Class FPT

A parameterized problem  $L \subseteq \Sigma^* \times \mathbb{N}$  is called *fixed-parameter tractable* if there exists an algorithm  $\mathcal{A}$  (called a *fixed-parameter algorithm*), a computable function  $f : \mathbb{N} \rightarrow \mathbb{N}$  and a constant  $c$  such that, given  $(x, k) \in \Sigma^* \times \mathbb{N}$ , the algorithm  $\mathcal{A}$  correctly decides whether  $(x, k) \in L$  in time bounded by  $f(k) \cdot |x|^c$ . The complexity class containing all fixed-parameter tractable problems is called **FPT**.

#### 1.2.4 Kernelization

A kernelization algorithm is a natural and intuitive way to approach problems and can be seen as a preprocessing procedure that simplifies parts of an instance already before the actual solving algorithm is run. A visualization of this idea can be seen in Figure 1.2. One can introduce *reduction rules* that iteratively reduce the instance until we are left with a small kernel.

**Definition 1.2.3 (Kernelization and Reduction Rules).** A kernelization algorithm or kernel is an algorithm  $\mathfrak{A}$  for a parameterized problem  $Q$  that given an instance  $(I, k)$  of  $Q$  runs in polynomial time and returns an equivalent instance  $(I', k')$  of  $Q$ . Moreover, we require that  $\text{size}_{\mathfrak{A}}(k) \leq g(k)$  for some computable function  $g : \mathbb{N} \rightarrow \mathbb{N}$ .

A *reduction rule* is a function  $\phi : \Sigma^* \times \mathbb{N} \rightarrow \Sigma^* \times \mathbb{N}$  that maps an instance  $(x, k)$  to an equivalent instance  $(x', k')$  such that  $\phi$  is computable in time polynomial in  $|x|$  and  $k$ .

A reduction rule is *sound* (or *safe*) if  $(I, k) \in Q \Leftrightarrow (I', k') \in Q$ .

We can give a precise definition of the size of the kernel, after a preprocessing algorithm  $\mathfrak{A}$  has been executed.  $\text{size}_{\mathfrak{A}}$  denotes the largest size of any instance  $I$  after  $\mathfrak{A}$  has been applied. We consider the size to be infinite if it cannot be bounded by a function in  $k$ .

**Definition 1.2.4 (Output size of a Preprocessing Algorithm).** The output size of a preprocessing algorithms  $\mathfrak{A}$  is defined as

$$\text{size}_{\mathfrak{A}}(k) = \sup\{|I'| + k' : (I', k') = \mathfrak{A}(I, k), I \in \Sigma^*\}$$

If we bound  $\text{size}_{\mathfrak{A}}$  by a polynomial in  $k$ , we say that the problem admits a **polynomial kernel**. Analogous, if the size after the reduction is only linear  $k$ , we refer to it as a **linear kernel**.

The following Lemma 1.2.1 shows the relation between the complexity class **FPT** and a kernelization algorithm. If we find a kernelization algorithm  $\mathfrak{A}$  for a (decidable) problem  $P$ , we immediately obtain an fpt algorithm by first running the  $\mathfrak{A}$  on an instance  $I$  of  $P$  in polynomial time. Assuming that  $P$  can be solved by an algorithm  $\mathfrak{M}$  running in time  $g(n)$  we can use the fact that the kernel is bounded by a function  $f(k)$  and apply

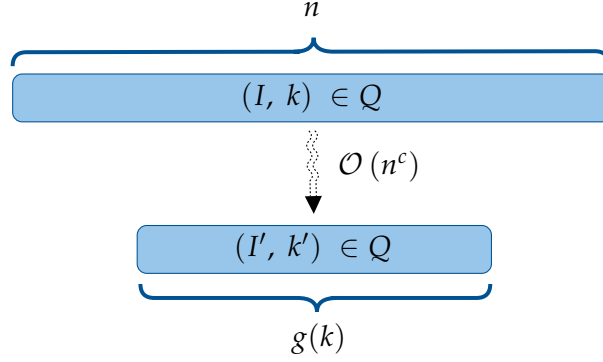


Figure 1.2: Kernelization: Reducing an instance  $(I, k)$  of size  $n$  to a smaller instance  $(I', k')$  in polynomial time. The size of the kernel is a function  $g(k)$  only dependent on  $k$ .

$\mathfrak{M}$  on the kernel resulting in a total running time of the order  $O(g(f(k)) \cdot \text{poly}(n))$  which is fpt. Surprisingly, also the converse is true:

**Lemma 1.2.1.** *If a parameterized problem  $Q$  is **FPT** if and only if it admits a kernelization algorithm.*

In ?? we will use this and by explicitly constructing a kernel for PLANAR SEMITOTAL DOMINATING SET, we show membership of the problem in **FPT**.

### 1.2.5 Reductions and Parameterized Intractability

It is natural to ask whether all (hard) problems are also fixed-parameter tractable. The answer is no and parameterized complexity has another tool in its toolbox that can be used to show that a problem is unlikely to be in **FPT**. The idea is to transfer the concepts of **NP**-hardness from Section 1.2.1 and reductions from the classical setting to the parameterized world. This raises the need for a new type of reduction that ensures that a reduced instance  $(I', k')$  is not only created in fpt time, but the new parameter  $k'$  depends only on the size of the parameter in the original instance.

There exists a whole hierarchy of classes  $\mathbf{FPT} \subseteq \mathbf{W}_1 \subseteq \mathbf{W}_2 \subseteq \dots \subseteq \mathbf{W}_t \subseteq \dots$ , which is known as the **W**-hierarchy. It is strongly believed that  $\mathbf{FPT} \subsetneq \mathbf{W}_t$  and therefore, we do not expect the existence of an algorithm solving any  $\mathbf{W}_t$ -hard problem in fpt time.

**Definition 1.2.5 (Parameterized Reduction).** *Let  $A, B \subseteq \Sigma^* \times \mathbb{N}$  two parameterized problems. A parameter preserving reduction from  $A$  to  $B$  is an algorithm that, given an instance  $(x, k)$  of  $A$ , outputs an instance  $(x', k')$  of  $B$  such that:*

- $(x, k)$  is a *yes instance* of  $A$  **iff**  $(x', k')$  is a *yes instance* of  $B$ ,
- $k' \leq g(k)$  for some computable function  $g$ , and
- runs in fpt-time  $f(k) \cdot |x|^{\mathcal{O}(1)}$  for some computable function  $f$ .

As shown in Lemmas 1.2.2 and 1.2.3 [16] this definition ensures that reductions are transitive and closed under fpt reductions.

**Lemma 1.2.2 (Closed under fpt-reductions).** *If there is a parameterized reduction from  $A$  to  $B$  and  $B \in \mathbf{FPT}$ , then  $A \in \mathbf{FPT}$ , too.*

**Lemma 1.2.3 (Transitivity).** *If there are parameterized reductions from  $A$  to  $B$  and from  $B$  to  $C$ , then there is a parameterized reduction from  $A$  to  $C$ .*

If there exists a parameterized reduction transforming a  $\mathbf{W}_t$ -hard problem  $A$  to another problem  $B$ , then  $B$  is  $\mathbf{W}_t$ -hard as well. We can define the classes  $\mathbf{W}_1$  and  $\mathbf{W}_2$ , by giving two problems that are complete for these classes.

**The Classes  $\mathbf{W}_1$  [22] and  $\mathbf{W}_2$  [16]**

INDEPENDENT SET is  $\mathbf{W}_1$ -complete.

DOMINATING SET is  $\mathbf{W}_2$ -complete.

A problem  $P$  is in the class  $\mathbf{W}_1$  (resp.  $\mathbf{W}_2$ ) if there is a parameterized reduction from  $P$  to INDEPENDENT SET (DOMINATING SET).

We have omitted a more precise definition via the WEIGHTED BOOLEAN SATISFIABILITY problem as it is not important for our work. We refer the interested reader to [16, 25] for more details.

---

## CHAPTER 2

---

### ON PARAMETERIZED SEMITOTAL DOMINATION



*TODO: Make a nice chatGPT poem.*

chatGPT, 2022

In connection with various chessboard problems, the concept of domination can be traced back to the mid-1800s. For example, De Jaenosch attempted in 1862 to solve the minimum number of queens required to fully cover an  $n \times n$ -chessboard [38]. Because of the immense amount of publications related to domination that followed, Haynes, Hedetniemi, and Slater started a comprehensive survey of the literature in 1998 [31, 32]. 20 years later, by a series of three more books, Haynes, Henning and Hedetniemi complemented the survey with the latest developments [33, 34, 35].

We are now introducing the problems of DOMINATING SET, SEMITOTAL DOMINATING SET and TOTAL DOMINATING SET and dedicate the rest of the chapter to giving a current status about the complexity status of various graph classes.

### 2.1 Domination Problems

We are now going to define the three most important domination problems for this work: DOMINATING SET, SEMITOTAL DOMINATING SET and TOTAL DOMINATING SET. Recall that a dominating set of a graph  $G = (V, E)$  is a subset  $D \subseteq V$ , such that every

vertex  $V \setminus D$  is adjacent to some vertex in  $D$ . We say that a vertex  $d$  is a *dominating vertex* or *dominator* if  $d \in D$  and that  $d$  *dominates* all of its neighbors.

The DOMINATING SET problem asks for a subset  $D$  of size at most  $k$  of vertices whose set of neighbors are adjacent to all the other vertices. In other words: every vertex  $v \notin D$  needs to have at least one neighbor in  $D$ .

#### Dominating Set (dom) [16, p. 586]

<b>Input</b>	Graph $G = (V, E)$ , $k \in \mathbb{N}$
<b>Question</b>	Is there a set $X \subseteq V$ of size at most $k$ such that $N[X] = V$ ?

If we also demand the dominating vertices to be dominated, need the notion of TOTAL DOMINATION. The TOTAL DOMINATING SET problem adds one additional constraint: Every vertex  $v \in D$  in the dominating set must also be dominated by some vertex  $v' \in D$  which we call the *witness* of  $v$ .

#### Total Dominating Set (tdom) [16, p. 596]

<b>Input</b>	Graph $G = (V, E)$ , $k \in \mathbb{N}$
<b>Question</b>	Does there exist a set $X \subseteq V$ with $ X  \leq k$ vertices such that for every $u \in V(G)$ there exists $v \in X$ with $\{u, v\} \in E$ ?

Finally, SEMITOTAL DOMINATION was introduced by Goddard, Henning and McPillan [30] as a relaxation of TOTAL DOMINATION. Assume that we have an arbitrary dominating set  $D$  for some (connected) graph  $G = (V, E)$  that has size at most two. It is easy to observe that for each  $v \in D$  there must be at least one other dominating vertex  $v' \in D$  that is at most three steps away because otherwise, this would not be a dominating set. On the other side, by definition of a total dominating set  $D$ , every dominating vertex  $d \in D$  has another vertex in  $d' \in N(d) \cap D$  that is also dominating. It is natural to ask what happens if we restrict this distance property to be at most two, which leads us straight to the idea of SEMITOTAL DOMINATION. For a semitotal dominating set  $D$ , we say that  $v$  witnesses  $v'$  if  $v, v' \in D$  and  $d(v, v') \leq 2$ .

## 2 On Parameterized Semitotal Domination

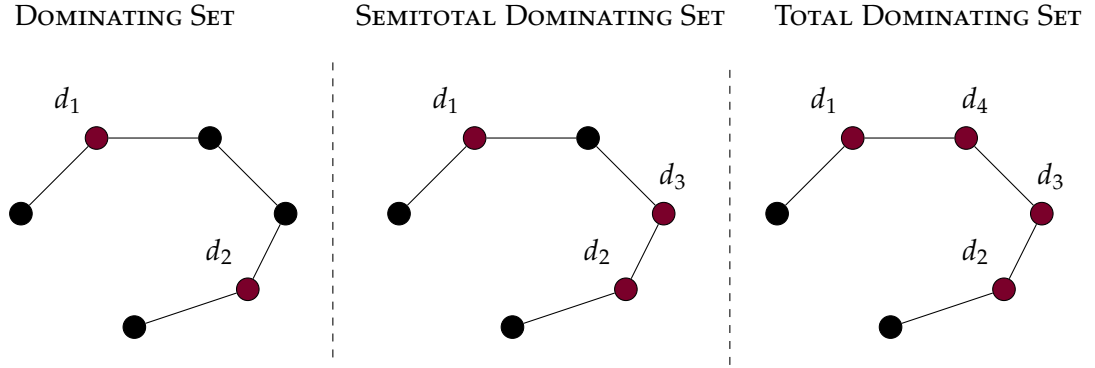


Figure 2.2: An example for a minimum dominating set, semitotal dominating set and a total dominating set, where  $\gamma(G) < \gamma_{2t}(G) < \gamma_t(G)$  are strict. In the first case, only two vertices suffice to dominate all others. In the second one, we need a witness between  $d_1$  and  $d_2$  that is at most distance two. In the last case,  $d_1$  and  $d_2$  both need a neighbor in the total dominating set.

### Semitotal Dominating Set (sdom) [30]

**Input**

Graph  $G = (V, E)$ ,  $k \in \mathbb{N}$

**Question**

Is there a subset  $X \subseteq V$  with  $|X| \leq k$  such that  $N[X] = V$  and for all  $d_1 \in X$  there exists another  $d_2 \in X$  such that  $d(d_1, d_2) \leq 2$ ?

Figure 2.2 demonstrates that the minimum ds, sds and tds can strictly differ in the size on a fixed graph  $G = (V, E)$ . a minimum ds (left) does not need any witnesses at all and we can choose  $d_1$  and  $d_2$  to dominate the graph. As  $d(d_1, d_2) = 3$ , we have to introduce additional dominating vertices for a minimum sds (middle) and tds (right). Their only purpose is, to bridge the gap between  $d_1$  and  $d_2$ .

**Definition 2.1.1 (Domination Numbers).** The domination number in a graph  $G$  is the minimum cardinality of a dominating set (ds) of  $G$ , denoted as  $\gamma(G)$ . The total domination number is the minimum cardinality of a total dominating set (tds) of  $G$ , denoted by  $\gamma_t(G)$ . The semitotal domination number is the minimum cardinality of a semitotal dominating set (sds) of  $G$ , denoted by  $\gamma_{2t}(G)$ .

We say that a ds  $D$  is minimal if no proper subset  $S' \subset S$  is a ds and that  $D$  is a minimum if it is the smallest ds.

Because any tds is also an sds and every sds is also a ds,  $\gamma_{2t}$  is squeezed between  $\gamma$  and  $\gamma_t$ . The following fact was first observed by Goddard and Henning [30]:

**Fact 2.1.1.** For every graph  $G$  with no isolated vertex,  $\gamma(G) \leq \gamma_{t2}(G) \leq \gamma_t(G)$ .

It turns out that for some graphs, all of these inequalities are strict. See ?? for an example, where  $\gamma < \gamma_{t2} < \gamma_t$  and therefore.

## 2.2 Complexity Status of Semitotal Dominating Set

Goddard et al. [30] first showed that **SDOM** is **NP-COMPLETE** in the general case and initiated further analysis. This section complements the complexity status of **SEMITOTAL DOMINATING SET** first surveyed by Galby et al. [27] with the latest results. Furthermore, we have added another column showing the parameterized complexity.

Table 2.1 shows the currently known complexities for **DOMINATING SET** (**DOM**), **SEMITOTAL DOMINATING SET** (**SDOM**) and **TOTAL DOMINATING SET** (**TDOM**) when restricted to specific graph classes next to each other and Figure 2.3 visualizes the big picture.

A polynomial-time algorithm has been shown for graphs of bounded *mim*-width by Galby et al. [27]. Because decomposition trees of constant *mim*-width can be found for permutation, convex, interval, (circular  $k$ -) trapezoid, circular permutation, Dilworth- $k$ ,  $k$ -polygon, circular arc, complements of  $d$ -degenerate, bipartite permutation and convex bipartite graphs in polynomial time [4], this algorithm immediately implies the existence of a polynomial time algorithm for these graph classes as well. Additionally, Galby et. al resolved the complexity for *bipartite permutation* and *convex bipartite* graphs.

Furthermore, new polynomial time algorithms have been discovered for *strongly chordal* [55], *AT-free* [41] and *block* [36] graphs a new linear time algorithm has been found for interval graphs [52] beating the previous  $\mathcal{O}(n^2)$ -algorithm given by Henning and Pandey [37].

On the negative side, **SEMITOTAL DOMINATING SET** on *circle graphs* [41] graphs and *undirected path graphs* [37] was shown to be **NP-COMPLETE**.

As  $\gamma_{t2}$  is squeezed between  $\gamma$  and  $\gamma_t$ , a comparison of the computational complexity of **SEMITOTAL DOMINATING SET** and **TOTAL DOMINATING SET** for specific graph classes on the dominating problems might already indicate the complexity of **SDOM**. There is symmetry between these domination problems and the complexity of many graph classes mirrors each other. Nevertheless, it looks like **SDOM** has more in common with **DOM** than with **TDOM**. For example for *chordal bipartite* graphs, **SDOM** and **DOM** are **NP-COMPLETE** while it is polynomial-time solvable for **TDOM**. Contrary, **SDOM** and **DOM** have a polynomial-time algorithm for *strongly chordal* graphs, but **TDOM** is **NP-COMPLETE**. In all currently known cases, **SEMITOTAL DOMINATING SET** follows the complexity of **DOMINATING SET**.

This thesis does the first steps in approaching the problem from the perspective of *Parameterized Complexity*. If not mentioned otherwise, the problem is always parameterized by the size of a solution and the results of this thesis are highlighted in **bold** text. Therefore, we have added the parameterized complexity for those graph classes

## 2 On Parameterized Semitotal Domination

as well and used it as an orientation. As we do not believe that  $\text{SDOM}$  is fundamentally different than  $\text{DOM}$ , the idea was that also the parameterized complexity mirror for  $\text{SDOM}$ . We were able to prove  $\mathbf{W}_2$ -hardness for *bipartite* and *split* graphs by giving a graph structure preserving reducing from  $\text{DOM}$ -

on the positive side, we were able to give an explicit construction of a kernel for the *planar* case, which also exists for  $\text{DOM}$  and  $\text{TDOM}$  as well.

It would be interesting to close the remaining complexity gaps. A discussion about those open problems can be found at the end of this thesis in ??.

Table 2.1: Comparison between the complexities of DOMINATING SET, SEMITOTAL DOMINATING SET and TOTAL DOMINATING SET in the classical and parameterized setting. Open problems are marked with an “?”.

Graph Class	Dominating Set		Semitotal Dominating Set		Total Dominating Set	
	classical	Parameterized	classical	Parameterized	classical	Parameterized
bipartite	NPc [5]	$\mathbf{W}_2$ [53]	NPc [37]	$\mathbf{W}_2$ (this)	NPc [46]	$\mathbf{W}_2$ (cite!)
line graph of bipartite	NPc [42]	? (?)	NPc [27]	? (?)	NPc [49]	? (?)
circle	NPc [40]	$\mathbf{W}_1$ [8]	NPc [41]	? (?)	NPc [49]	$\mathbf{W}_1$ [8]
chordal	NPc [7]	$\mathbf{W}_2$ [53]	NPc [37]	$\mathbf{W}_2$ (this)	NPc [51]	$\mathbf{W}_1$ [12] by <i>split</i>
s-chordal	NPc [48]	$\mathbf{W}_2$ [48]	XXX	XX	NPc [48]	$\mathbf{W}_1$ [48]
split	NPc [5]	$\mathbf{W}_2$ [53]	NPc [37]	$\mathbf{W}_2$ <b>this</b>	NPc [51]	$\mathbf{W}_1$ [12]
3-claw-free	NPc [17]	FPT [17]	Prob. Unk	Prob. Unk	NPc [49]	Unknown
t-claw-free, $t > 3$	NPc [17]	$\mathbf{W}_2$ [17]	Prob. Unknown	Unknown	NPc [49]	Prob. Unknown
chordal bipartite	NPc [50]	? (?)	NPc [37]	?		P [18]
planar	NPc (Sources!)	FPT [1]	NPc	<b>FPT (this)</b>	NPc	FPT [28]
undirected path	NPc [7]	FPT [24]	NPc [36]	?	NPc [45]	?
dually chordal		P [9]		? (partial res. [27])		P [44]
strongly chordal		P [23]		P [55]	NPc [23]	
AT-free		P [43]		P [41]		P [43]
tolerance		P [29]		?		?
block		P [23]		P [36]		P [11]
interval		P [13]		P [52]		P [6]
bounded clique-width		P [15]		P [15]		P [15]
bounded mim-width		P [4, 10]		P [27]		P [4, 10]



## 2.2 Complexity Status of SEMITOTAL DOMINATING SET

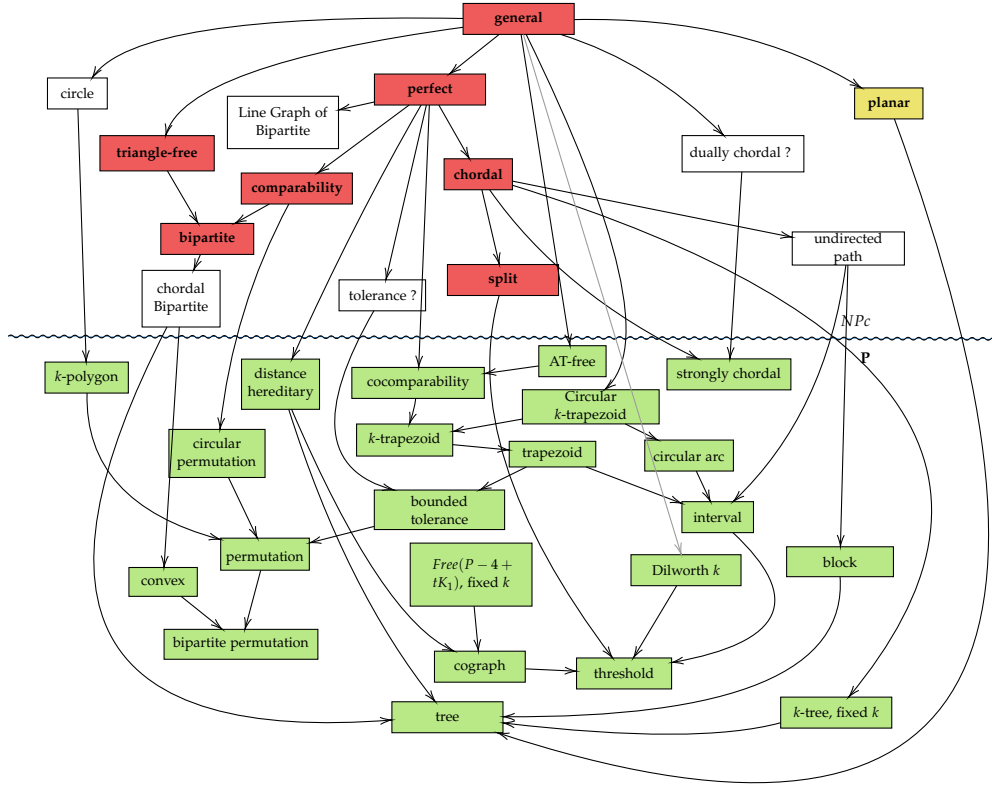


Figure 2.3: Computational Complexity of SEMITOTAL DOMINATING SET. Graph classes that admit a polynomial time algorithm are marked in green, those with an fpt algorithm in yellow and those that are not fpt in red. If the parameterized complexity is unknown, no color is used. This updates the figure given in the survey by Galby et al. [27].

## 2 *On Parameterized Semitotal Domination*

---

## BIBLIOGRAPHY

- [1] J. Alber, M. R. Fellows, and R. Niedermeier. "Polynomial-time data reduction for dominating set." In: (May 2004), pp. 363–384. doi: [10.1145/990308.990309](https://doi.org/10.1145/990308.990309).
- [2] S. Arora and B. Barak. *Computational Complexity: A Modern Approach*. Cambridge University Press, 2006. ISBN: 978-0-521-42426-4.
- [3] R. Balakrishnan and K. Ranganathan. *A textbook of graph theory*. English. 2nd ed. Universitext. New York, NY: Springer, 2012. ISBN: 978-1-4614-4528-9; 978-1-4614-4529-6. doi: [10.1007/978-1-4614-4529-6](https://doi.org/10.1007/978-1-4614-4529-6).
- [4] R. Belmonte and M. Vatshelle. "Graph Classes with Structured Neighborhoods and Algorithmic Applications." In: *Proceedings of the 37th International Conference on Graph-Theoretic Concepts in Computer Science*. WG'11. Teplá Monastery, Czech Republic: Springer-Verlag, 2011, pp. 47–58. ISBN: 9783642258695. doi: [10.1007/978-3-642-25870-1\\_6](https://doi.org/10.1007/978-3-642-25870-1_6).
- [5] A. A. Bertossi. "Dominating sets for split and bipartite graphs." English. In: *Information Processing Letters* 19 (1984), pp. 37–40. ISSN: 0020-0190. doi: [10.1016/0020-0190\(84\)90126-1](https://doi.org/10.1016/0020-0190(84)90126-1).
- [6] A. A. Bertossi. "Total domination in interval graphs." In: *Information Processing Letters* 23.3 (1986), pp. 131–134. ISSN: 0020-0190. doi: [https://doi.org/10.1016/0020-0190\(86\)90112-2](https://doi.org/10.1016/0020-0190(86)90112-2).
- [7] K. S. Booth and J. H. Johnson. "Dominating Sets in Chordal Graphs." In: *SIAM J. Comput.* 11.1 (Feb. 1982), pp. 191–199. ISSN: 0097-5397. doi: [10.1137/0211015](https://doi.org/10.1137/0211015).
- [8] N. Bousquet, D. Gonçalves, G. B. Mertzios, C. Paul, I. Sau, and S. Thomassé. "Parameterized Domination in Circle Graphs." In: *Proceedings of the 38th International Conference on Graph-Theoretic Concepts in Computer Science*. WG'12. Jerusalem, Israel: Springer-Verlag, 2012, pp. 308–319. ISBN: 9783642346101. doi: [10.1007/978-3-642-34611-8\\_31](https://doi.org/10.1007/978-3-642-34611-8_31).
- [9] A. Brandstädt, V. D. Chepoi, and F. F. Dragan. "The Algorithmic Use of Hypertree Structure and Maximum Neighbourhood Orderings." In: *Discrete Appl. Math.* 82.1–3 (Mar. 1998), pp. 43–77. ISSN: 0166-218X. doi: [10.1016/S0166-218X\(97\)00125-X](https://doi.org/10.1016/S0166-218X(97)00125-X).
- [10] B.-M. Bui-Xuan, J. A. Telle, and M. Vatshelle. "Fast Dynamic Programming for Locally Checkable Vertex Subset and Vertex Partitioning Problems." In: *Theor. Comput. Sci.* 511 (Nov. 2013), pp. 66–76. ISSN: 0304-3975. doi: [10.1016/j.tcs.2013.01.009](https://doi.org/10.1016/j.tcs.2013.01.009).

## Bibliography

- [11] G. J. Chang. "Total domination in block graphs." In: *Operations Research Letters* 8.1 (1989), pp. 53–57. issn: 0167-6377. doi: [https://doi.org/10.1016/0167-6377\(89\)90034-5](https://doi.org/10.1016/0167-6377(89)90034-5).
- [12] G. J. Chang. "Algorithmic Aspects of Domination in Graphs." In: *Handbook of Combinatorial Optimization: Volume 1–3*. Ed. by D.-Z. Du and P. M. Pardalos. Boston, MA: Springer US, 1998, pp. 1811–1877. isbn: 978-1-4613-0303-9. doi: [10.1007/978-1-4613-0303-9\\_28](https://doi.org/10.1007/978-1-4613-0303-9_28).
- [13] M.-S. Chang. "Efficient Algorithms for the Domination Problems on Interval and Circular-Arc Graphs." In: *SIAM Journal on Computing* 27.6 (1998), pp. 1671–1694. doi: [10.1137/S0097539792238431](https://doi.org/10.1137/S0097539792238431). eprint: <https://doi.org/10.1137/S0097539792238431>.
- [14] S. A. Cook. "The complexity of theorem-proving procedures." In: *Proceedings of the third annual ACM symposium on Theory of computing*. STOC '71. Shaker Heights, Ohio, USA: Association for Computing Machinery, May 1971, pp. 151–158. isbn: 9781450374644. doi: [10.1145/800157.805047](https://doi.org/10.1145/800157.805047).
- [15] B. Courcelle. "The Monadic Second-Order Logic of Graphs. I. Recognizable Sets of Finite Graphs." In: *Inf. Comput.* 85.1 (Mar. 1990), pp. 12–75. issn: 0890-5401. doi: [10.1016/0890-5401\(90\)90043-H](https://doi.org/10.1016/0890-5401(90)90043-H).
- [16] M. Cygan, F. V. Fomin, Ł. Kowalik, D. Lokshtanov, D. Marx, M. Pilipczuk, M. Pilipczuk, and S. Saurabh. *Parameterized Algorithms*. Berlin, Heidelberg: Springer, 2015. isbn: 978-3-319-21275-3.
- [17] M. Cygan, G. Philip, M. Pilipczuk, M. Pilipczuk, and J. O. Wojtaszczyk. "Dominating set is fixed parameter tractable in claw-free graphs." In: *Theoretical Computer Science* 412.50 (2011), pp. 6982–7000. issn: 0304-3975. doi: <https://doi.org/10.1016/j.tcs.2011.09.010>.
- [18] P. Damaschke, H. Müller, and D. Kratsch. "Domination in Convex and Chordal Bipartite Graphs." In: *Inf. Process. Lett.* 36.5 (Dec. 1990), pp. 231–236. issn: 0020-0190. doi: [10.1016/0020-0190\(90\)90147-P](https://doi.org/10.1016/0020-0190(90)90147-P).
- [19] V. Diekert and B. Durand, eds. *STACS 2005, 22nd Annual Symposium on Theoretical Aspects of Computer Science, Stuttgart, Germany, February 24–26, 2005, Proceedings*. Vol. 3404. Lecture Notes in Computer Science. Springer, 2005. isbn: 3-540-24998-2. doi: [10.1007/b106485](https://doi.org/10.1007/b106485).
- [20] R. Diestel. *Graph Theory*. Fourth. Vol. 173. Graduate Texts in Mathematics. Heidelberg; New York: Springer, 2010. isbn: 9783642142789 3642142788 9783642142796 3642142796.
- [21] R. G. Downey and M. R. Fellows. *Parameterized Complexity*. Ed. by D. Gries and F. B. Schneider. Monographs in Computer Science. New York, NY: Springer New York, 1999. isbn: 9781461267980 9781461205159. doi: [10.1007/978-1-4612-0515-9](https://doi.org/10.1007/978-1-4612-0515-9).

- [22] R. G. Downey and M. R. Fellows. “Fixed-parameter tractability and completeness II: On completeness for  $W[1]$ .” In: 141 (1995), pp. 109–131. ISSN: 0304-3975. DOI: [10.1016/0304-3975\(94\)00097-3](https://doi.org/10.1016/0304-3975(94)00097-3).
- [23] M. Farber. “Domination, independent domination, and duality in strongly chordal graphs.” In: *Discrete Applied Mathematics* 7.2 (1984), pp. 115–130. ISSN: 0166-218X. DOI: [https://doi.org/10.1016/0166-218X\(84\)90061-1](https://doi.org/10.1016/0166-218X(84)90061-1).
- [24] C. M. H. de Figueiredo, R. Lopes, A. A. de Melo, and A. Silva. “Parameterized Algorithms for Steiner Tree and Dominating Set: Bounding the Leafage by the Vertex Leafage.” In: *WALCOM: Algorithms and Computation: 16th International Conference and Workshops, WALCOM 2022, Jember, Indonesia, March 24–26, 2022, Proceedings*. Jember, Indonesia: Springer-Verlag, 2022, pp. 251–262. ISBN: 978-3-030-96730-7. DOI: [10.1007/978-3-030-96731-4\\_21](https://doi.org/10.1007/978-3-030-96731-4_21).
- [25] F. V. Fomin, D. Lokshtanov, S. Saurabh, and M. Zehavi. *Kernelization. Theory of parameterized preprocessing*. English. Cambridge: Cambridge University Press, 2019. ISBN: 978-1-107-05776-0; 978-1-107-41515-7. DOI: [10.1017/9781107415157](https://doi.org/10.1017/9781107415157).
- [26] L. Fortnow. “Fifty Years of P vs. NP and the Possibility of the Impossible.” In: *Commun. ACM* 65.1 (Dec. 2021), pp. 76–85. ISSN: 0001-0782. DOI: [10.1145/3460351](https://doi.org/10.1145/3460351).
- [27] E. Galby, A. Munaro, and B. Ries. “Semitotal Domination: New Hardness Results and a Polynomial-Time Algorithm for Graphs of Bounded Mim-Width.” In: *Theor. Comput. Sci.* 814.C (Apr. 2020), pp. 28–48. ISSN: 0304-3975. DOI: [10.1016/j.tcs.2020.01.007](https://doi.org/10.1016/j.tcs.2020.01.007).
- [28] V. Garnero and I. Sau. “A Linear Kernel for Planar Total Dominating Set.” In: *Discrete Mathematics & Theoretical Computer Science* Vol. 20 no. 1 (May 2018). Sometimes we explicitly refer to the arXiv version: <https://doi.org/10.48550/arXiv.1211.0978>. DOI: [10.23638/DMTCS-20-1-14](https://doi.org/10.23638/DMTCS-20-1-14). eprint: [1211.0978](https://arxiv.org/abs/1211.0978).
- [29] A. C. Giannopoulou and G. B. Mertzios. “New Geometric Representations and Domination Problems on Tolerance and Multitolerance Graphs.” In: *SIAM Journal on Discrete Mathematics* 30.3 (2016), pp. 1685–1725. DOI: [10.1137/15M1039468](https://doi.org/10.1137/15M1039468). eprint: <https://doi.org/10.1137/15M1039468>.
- [30] W. Goddard, M. A. Henning, and C. A. McPillan. “Semitotal domination in graphs.” In: *A Canadian journal of applied mathematics, computer science and statistics* 94 (June 2014).
- [31] T. W. Haynes, S. Hedetniemi, and P. Slater. *Domination in Graphs: Volume 2: Advanced Topics*. New York: Routledge, Oct. 1998. ISBN: 9781315141428. DOI: [10.1201/9781315141428](https://doi.org/10.1201/9781315141428).
- [32] T. W. Haynes, S. Hedetniemi, and P. Slater. *Fundamentals of Domination in Graphs*. Boca Raton: CRC Press, Jan. 1998. ISBN: 9780429157769. DOI: [10.1201/9781482246582](https://doi.org/10.1201/9781482246582).

## Bibliography

- [33] T. W. Haynes, S. T. Hedetniemi, and M. A. Henning. *Domination in Graphs: Core Concepts*. 1st ed. Not yet released by the writing of this theiss. Springer Nature, 2022.
- [34] T. W. Haynes, S. T. Hedetniemi, and M. A. Henning. *Structures of Domination in Graphs*. Google-Books-ID: YbosEAAAQBAJ. Springer Nature, May 2021. ISBN: 9783030588922.
- [35] T. W. Haynes, S. T. Hedetniemi, and M. A. Henning. *Topics in Domination in Graphs*. 1st ed. Springer Nature, 2020. ISBN: 978-3-030-51116-6.
- [36] M. A. Henning, S. Pal, and D. Pradhan. “The semitotal domination problem in block graphs.” English. In: *Discussiones Mathematicae. Graph Theory* 42.1 (2022), pp. 231–248. ISSN: 1234-3099. DOI: [10.7151/dmgt.2254](https://doi.org/10.7151/dmgt.2254).
- [37] M. A. Henning and A. Pandey. “Algorithmic aspects of semitotal domination in graphs.” In: *Theoretical Computer Science* 766 (2019), pp. 46–57. ISSN: 0304-3975. DOI: <https://doi.org/10.1016/j.tcs.2018.09.019>.
- [38] C. F. d. Jaenisch. *Traité des applications de l’analyse mathématique au jeu des échecs, précédé d’une introduction à l’usage des lecteurs soit étrangers aux échecs, soit peu versés dans l’analyse*. 3 vol. Saint-Petersbourg: Dufour et cie; [etc., etc.], 1862, 3 vol.
- [39] R. M. Karp. “Reducibility among Combinatorial Problems.” In: *Complexity of Computer Computations: Proceedings of a symposium on the Complexity of Computer Computations, held March 20–22, 1972, at the IBM Thomas J. Watson Research Center, Yorktown Heights, New York, and sponsored by the Office of Naval Research, Mathematics Program, IBM World Trade Corporation, and the IBM Research Mathematical Sciences Department*. Ed. by R. E. Miller, J. W. Thatcher, and J. D. Bohlinger. Boston, MA: Springer US, 1972, pp. 85–103. ISBN: 978-1-4684-2001-2. DOI: [10.1007/978-1-4684-2001-2\\_9](https://doi.org/10.1007/978-1-4684-2001-2_9).
- [40] J. M. Keil. “The Complexity of Domination Problems in Circle Graphs.” In: *Discrete Appl. Math.* 42.1 (Feb. 1993), pp. 51–63. ISSN: 0166-218X. DOI: [10.1016/0166-218X\(93\)90178-Q](https://doi.org/10.1016/0166-218X(93)90178-Q).
- [41] T. Kloks and A. Pandey. “Semitotal Domination on AT-Free Graphs and Circle Graphs.” In: *Algorithms and Discrete Applied Mathematics: 7th International Conference, CALDAM 2021, Rupnagar, India, February 11–13, 2021, Proceedings*. Rupnagar, India: Springer-Verlag, 2021, pp. 55–65. ISBN: 978-3-030-67898-2. DOI: [10.1007/978-3-030-67899-9\\_5](https://doi.org/10.1007/978-3-030-67899-9_5).
- [42] D. V. Korobitsin. “On the complexity of domination number determination in monogenic classes of graphs.” In: 2.2 (1992), pp. 191–200. DOI: [doi:10.1515/dma.1992.2.2.191](https://doi.org/10.1515/dma.1992.2.2.191).

- [43] D. Kratsch. "Domination and Total Domination on Asteroidal Triple-Free Graphs." In: *Proceedings of the 5th Twente Workshop on on Graphs and Combinatorial Optimization*. Enschede, The Netherlands: Elsevier Science Publishers B. V., 2000, pp. 111–123.
- [44] D. Kratsch and L. Stewart. "Total domination and transformation." In: *Information Processing Letters* 63.3 (1997), pp. 167–170. ISSN: 0020-0190. DOI: [https://doi.org/10.1016/S0020-0190\(97\)00115-4](https://doi.org/10.1016/S0020-0190(97)00115-4).
- [45] J. K. Lan and G. J. Chang. "On the algorithmic complexity of k-tuple total domination." In: *Discrete Applied Mathematics* 174 (2014), pp. 81–91. ISSN: 0166-218X. DOI: <https://doi.org/10.1016/j.dam.2014.04.007>.
- [46] J. P. R. Laskar and S. Hedetniemi. *NP-completeness of Total and Connected Domination, and Irredundance for bipartite graphs*. Technical Report 428. Department of Mathematical Sciences: Clemson University, 1983.
- [47] L. Levin. "Universal sequential search problems." In: *Problemy Peredachi Informatskii* (1973).
- [48] C. Liu and Y. Song. "Parameterized Complexity and Inapproximability of Dominating Set Problem in Chordal and near Chordal Graphs." In: *J. Comb. Optim.* 22.4 (Nov. 2011), pp. 684–698. ISSN: 1382-6905. DOI: [10.1007/s10878-010-9317-7](https://doi.org/10.1007/s10878-010-9317-7).
- [49] A. A. McRae. "Generalizing NP-Completeness Proofs for Bipartite Graphs and Chordal Graphs." UMI Order No. GAX95-18192. PhD thesis. USA, 1995.
- [50] H. Müller and A. Brandstädt. "The NP-Completeness of Steiner Tree and Dominating Set for Chordal Bipartite Graphs." In: *Theor. Comput. Sci.* 53.2 (June 1987), pp. 257–265. ISSN: 0304-3975.
- [51] R. L. Pfaff. *Domination and irredundance in split graphs*. Technical Report 428. Department of Mathematical Sciences: Clemson University, 1983.
- [52] D. Pradhan and S. Pal. "An  $O(n+m)$  time algorithm for computing a minimum semitotal dominating set in an interval graph." In: *Journal of Applied Mathematics and Computing* 66.1 (June 2021), pp. 733–747. ISSN: 1865-2085. DOI: [10.1007/s12190-020-01459-9](https://doi.org/10.1007/s12190-020-01459-9).
- [53] V. Raman and S. Saurabh. "Short Cycles Make W-hard Problems Hard: FPT Algorithms for W-hard Problems in Graphs with no Short Cycles." In: *Algorithmica* 52.2 (2008), pp. 203–225. ISSN: 1432-0541. DOI: [10.1007/s00453-007-9148-9](https://doi.org/10.1007/s00453-007-9148-9).
- [54] K. Rosen and K. Krithivasan. *Discrete Mathematics and Its Applications: With Combinatorics and Graph Theory*. McGraw-Hill Companies, 2012. ISBN: 9780070681880.
- [55] V. Tripathi, A. Pandey, and A. Maheshwari. *A linear-time algorithm for semitotal domination in strongly chordal graphs*. 2021. DOI: [10.48550/ARXIV.2109.02142](https://doi.org/10.48550/ARXIV.2109.02142).

---

## LIST OF FIGURES

1.1	Generated with Dall-E. <a href="https://labs.openai.com/">https://labs.openai.com/</a> . “Ducks learning graph theory while swimming on a sea sketched in color complex” . .	2
1.2	<i>Kernelization: Reducing an instance <math>(I, k)</math> of size <math>n</math> to a smaller instance <math>(I', k')</math> in polynomial time. The size of the kernel is a function <math>g(k)</math> only dependent on <math>k</math>.</i>	8
2.1	Generated with Dall-E. <a href="https://labs.openai.com/">https://labs.openai.com/</a> . “Duck playing chess”	10
2.2	An example for various dominating sets . . . . .	12
2.3	<i>Computational Complexity of SEMITOTAL DOMINATING SET. Graph classes that admit a polynomial time algorithm are marked in green, those with an fpt algorithm in yellow and those that are not fpt in red. If the parameterized complexity is unknown, no color is used. This updates the figure given in the survey by Galby et al. [27].</i> . . . . .	15



---

## LIST OF TABLES

2.1	<i>Comparison between the complexities of DOMINATING SET, SEMITOTAL DOMINATING SET and TOTAL DOMINATING SET in the classical and parameterized setting. Open problems are marked with an “?”. . . . .</i>	14
-----	---	----