src.balance += 10; }

dst.frozen = true; }

```
when(src) {
```

when(dst) {



```
def main(src: cown[Account], dst: cown[Account]) {
```

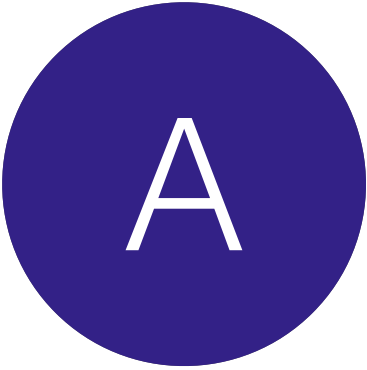
A

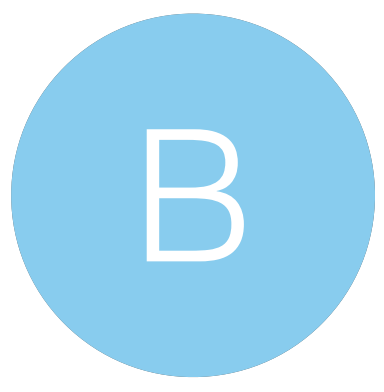
B

```
src.balance += 10;
```

What is BoC?

11

```
dst.frozen = true;
```

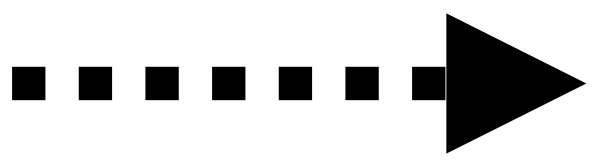

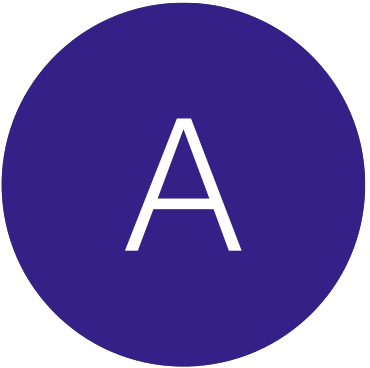
A

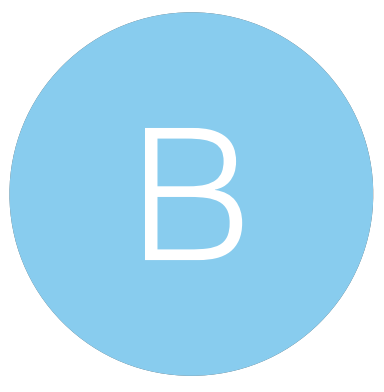
B

balance: 10

frozen: false

When the cowns are available the behaviours can execute with access to the cown’s state

balance: 0

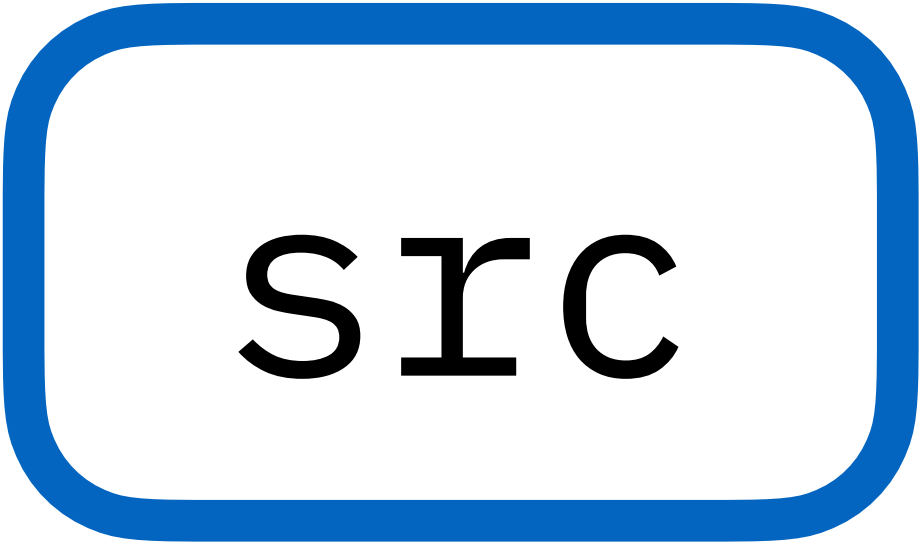
src

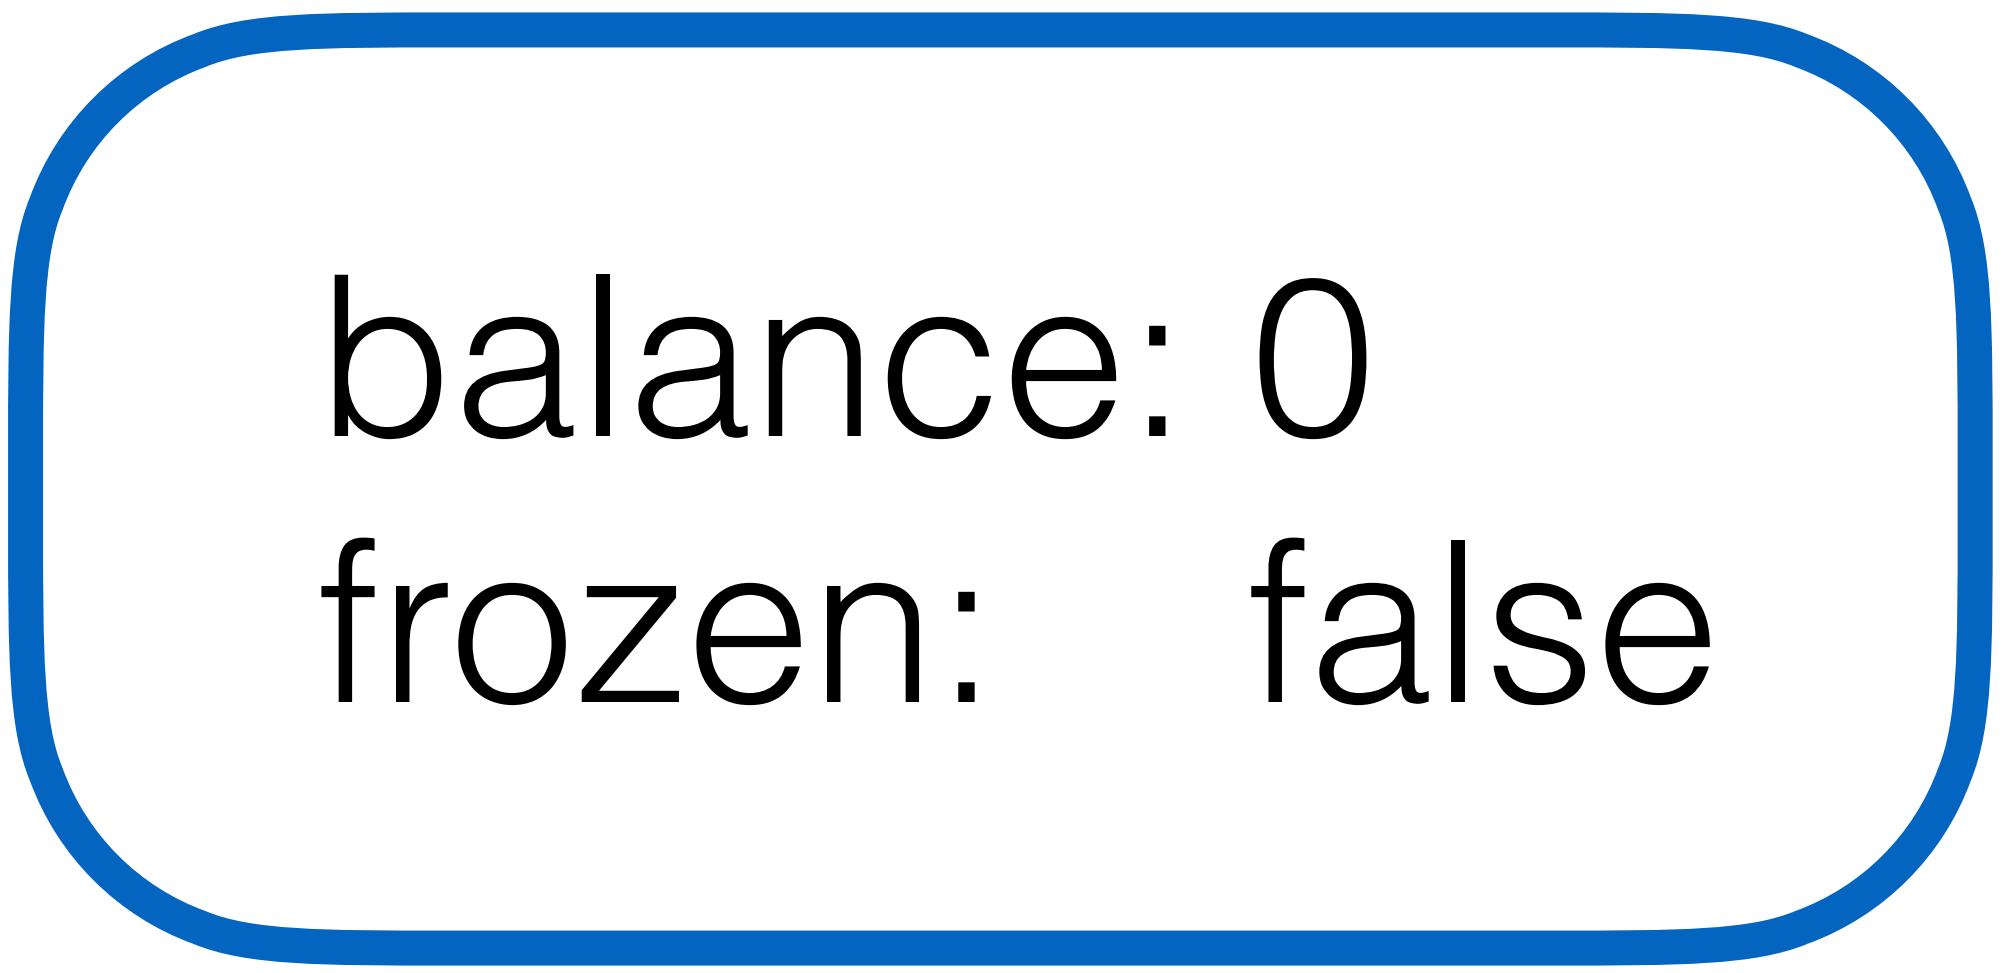
balance: 0
frozen: false

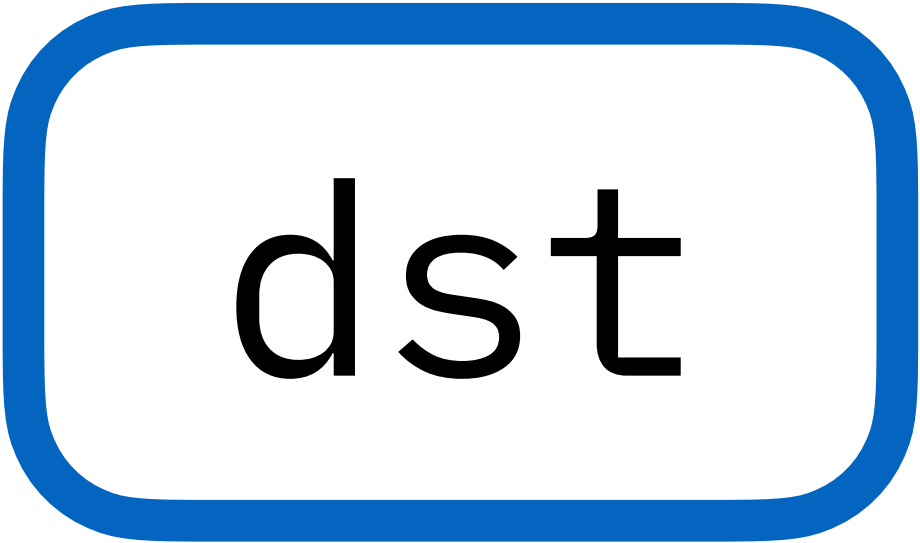
dst

```
src.balance += 10;
```

12