








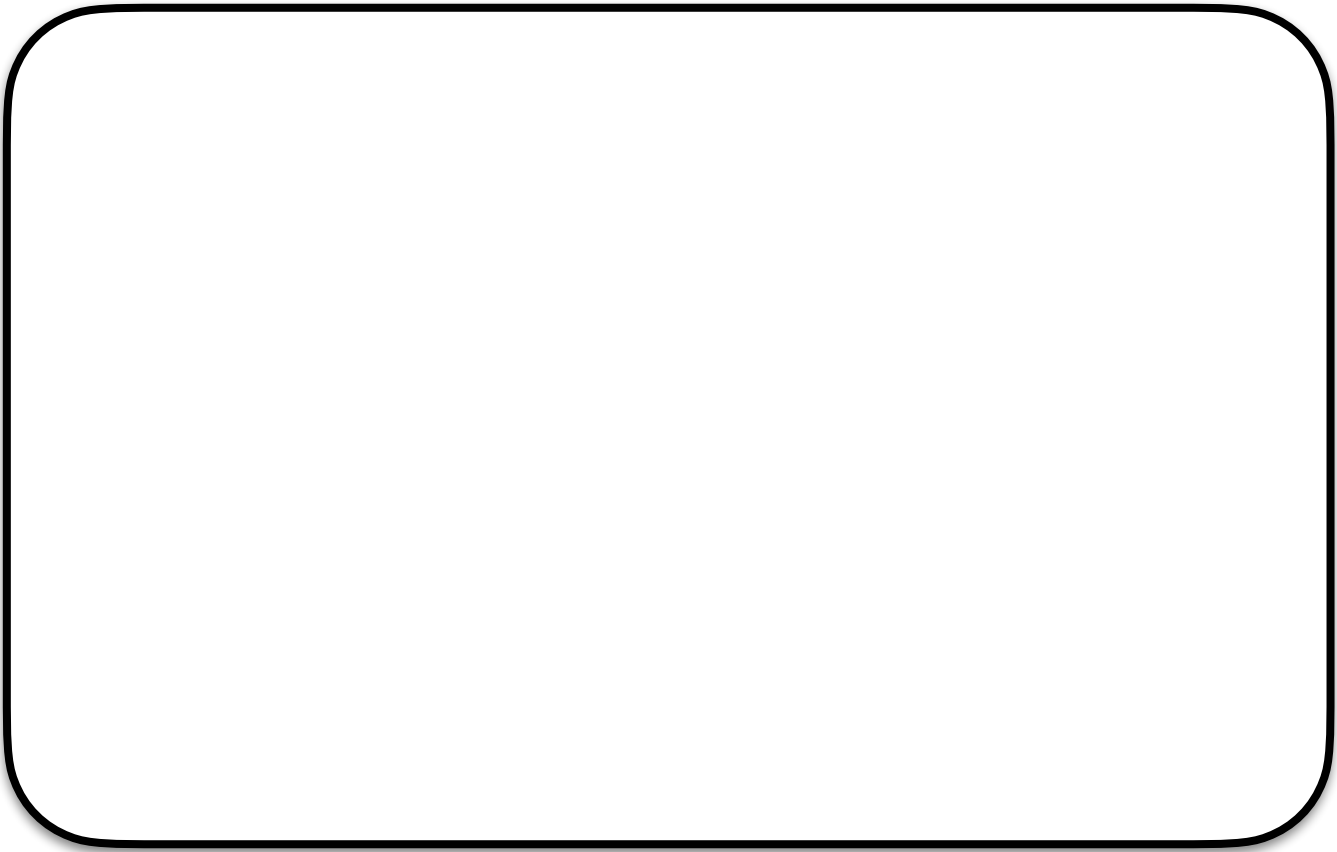

What does this get us?

5

6


```
when(popular, free) {
```

A

```
    val r = popular.use();
```

```
    free.use(r)
```

```
    when(log) {
```

B

```
    }
```

```
    free.use(r)
```

```
}
```

when(src) { 

when(dst) {  }

}

when(dst) {  }

when(dst) {  }

when(src) {  }

when(dst) {  }

}

**Can another behaviour start using a cown
before a behaviour finishes?**



Can we render behavior?











After the last behaviour


We can read about program transformation

As long as we aren't violating causality






What does this get us?

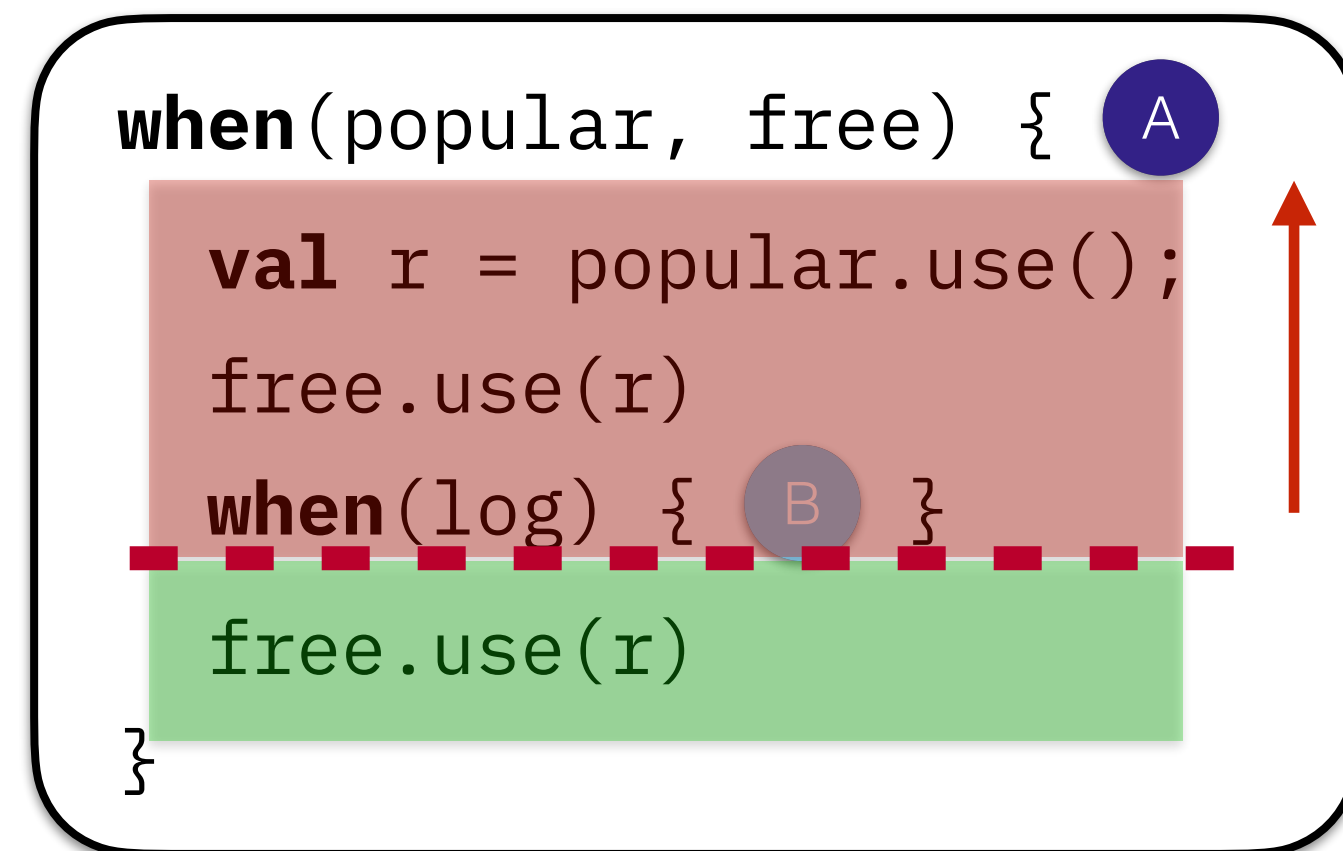


Can another behaviour start using a cow
before a behaviour finishes?

After the last behaviour spawn

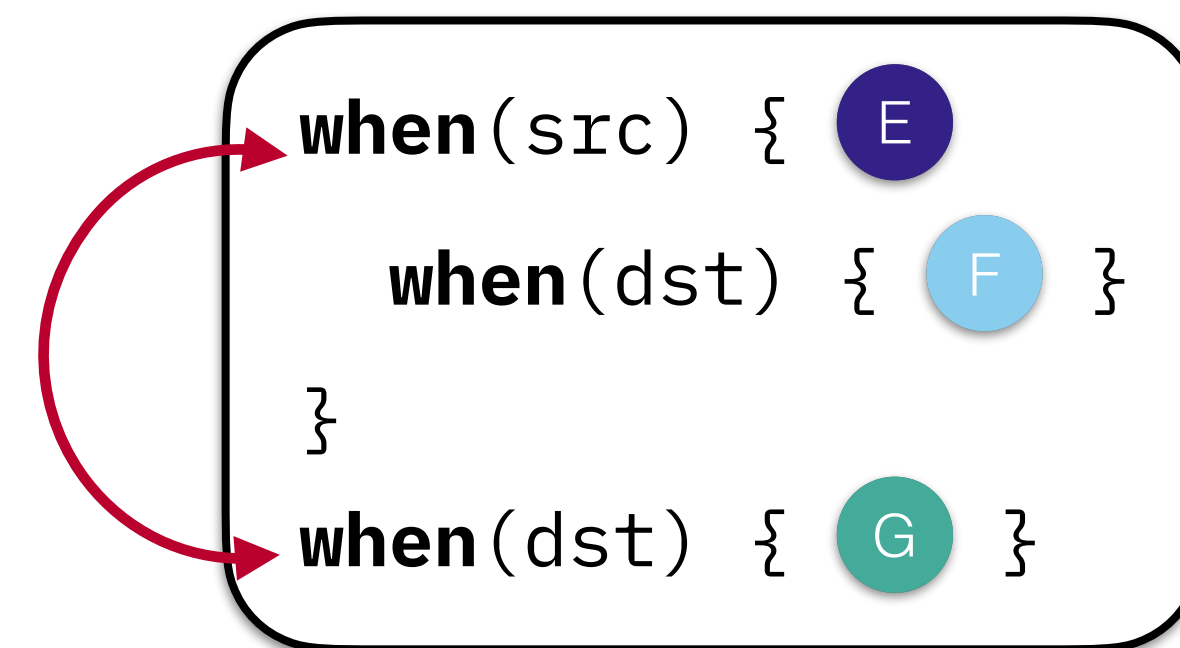

Can we reorder behaviours?

As long as we aren't violating causality

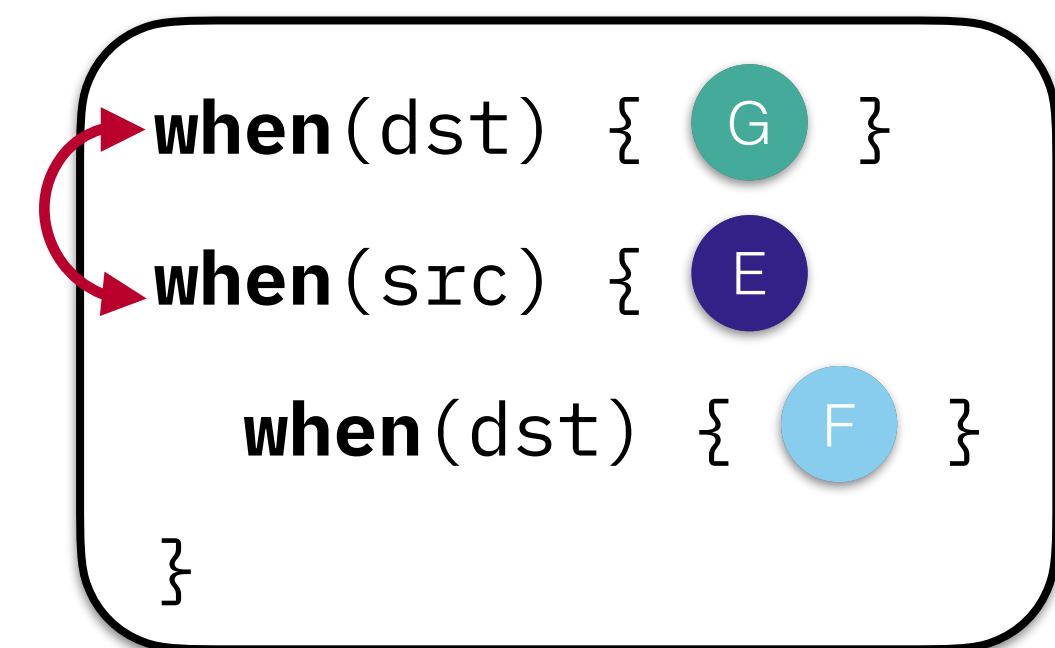

We can reason about program transformations



Future and Conclusion
