








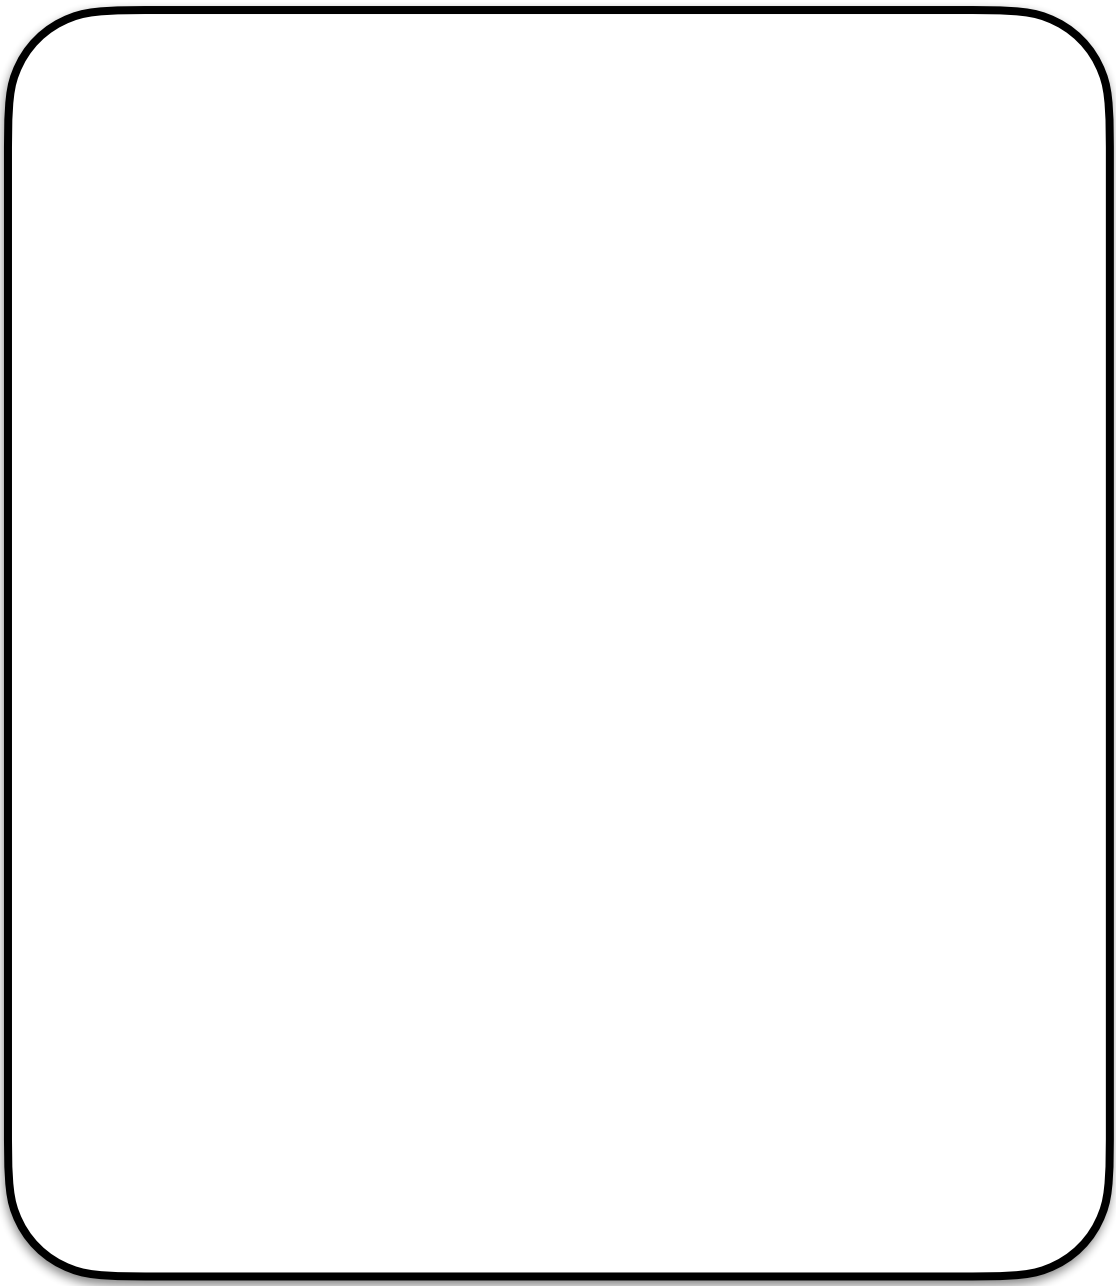

Why does this matter?

3

7

```
when(busy, idle) {  A
```

```
    val r = busy.use();
```

```
    idle.use(r)
```

```
when(log) {  B }
```

```
    idle.use(r)
```

```
}
```

```
when(busy) {  C
```

```
    when(log) {  D }
```

```
}
```

when(src) {  E

when(dst) {  }

}

when(dst) {  }

when(dst) {  }

when(src) { 

when(dst) {  }

}

Can we release owners that are highly contended?

Can we render behavior indivisible?




Release busy?





Why does this matter?

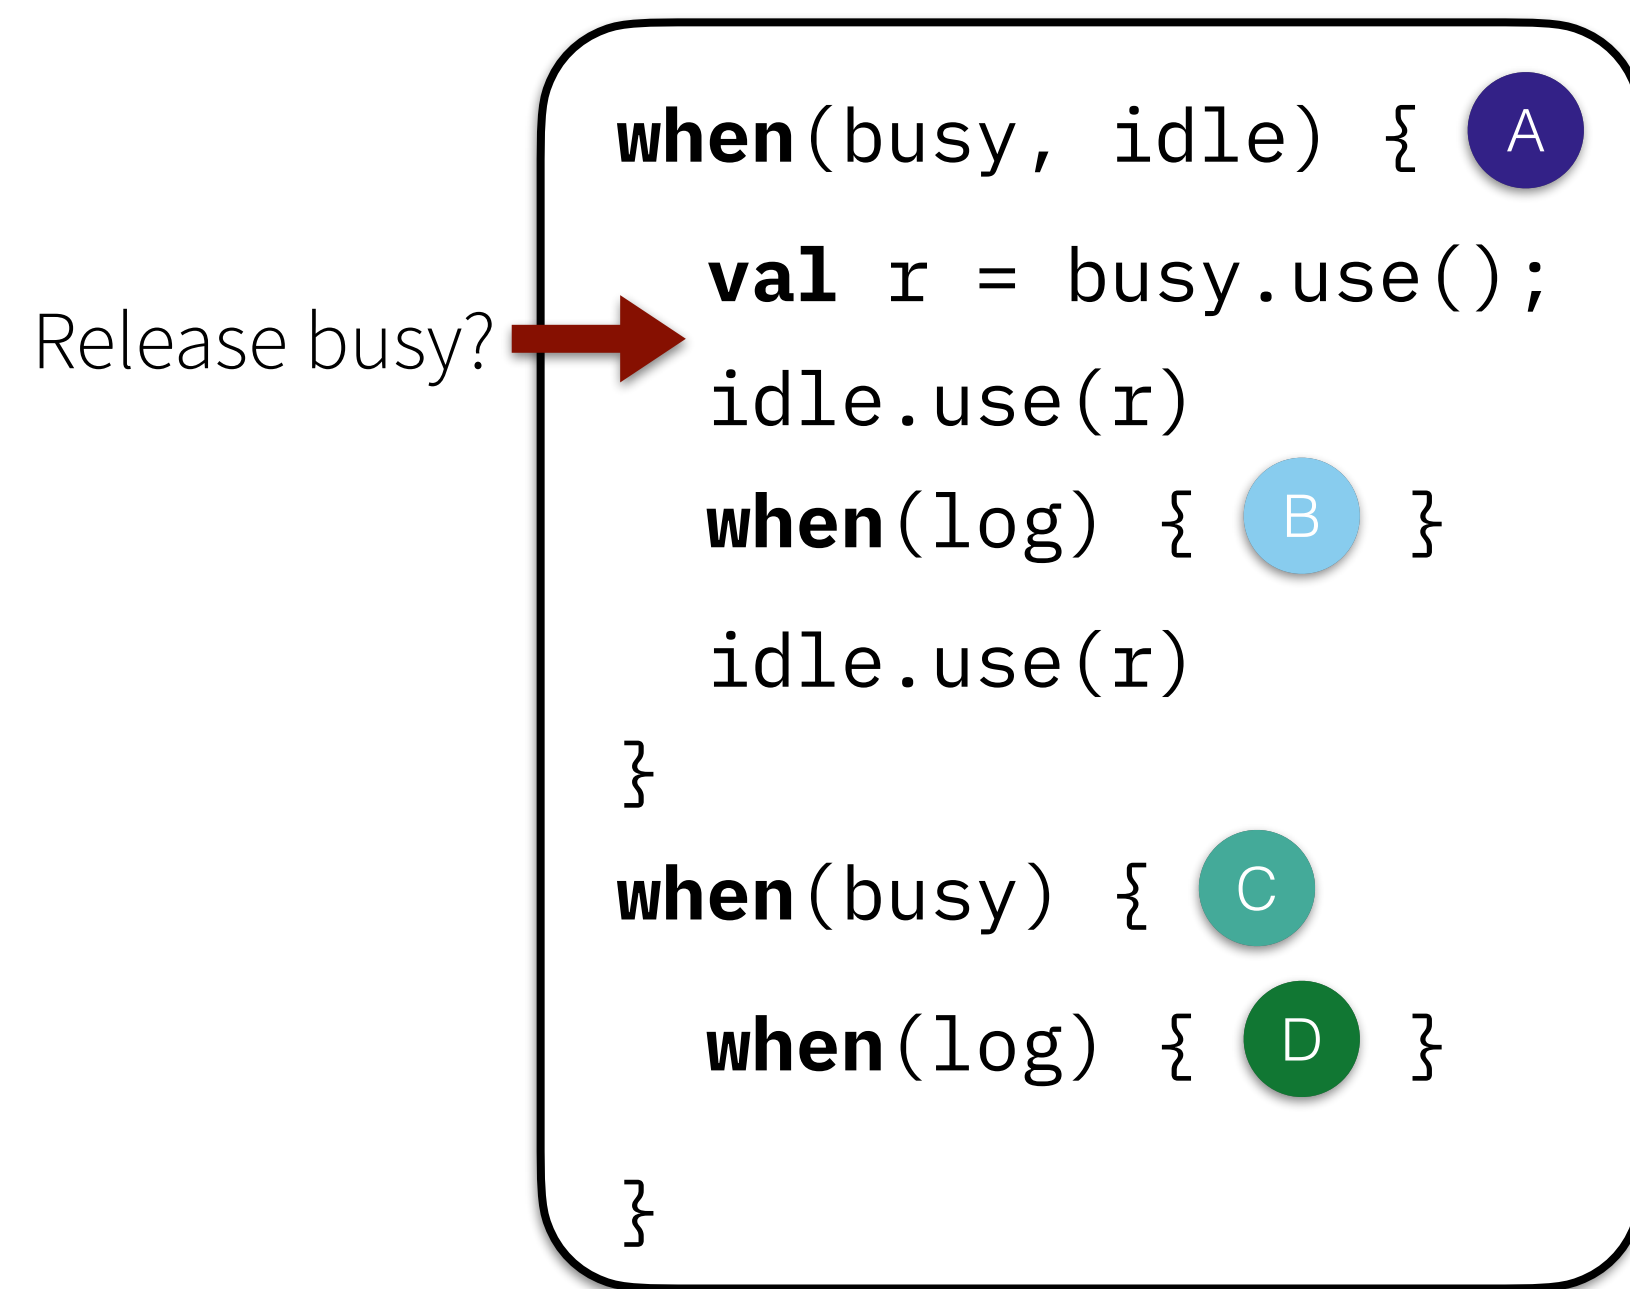

Can we release cows that are highly contended?



Can we reorder behaviours?





We still want programmers to have control!
