









A

—



A

—

Concurrent updates and logging behaviours should agree
on the order things happened

3


8

```
def update(account: cown[Account], amount: int) {  
  when(account) { A  
    if(account.balance + amount > 0) {  
      account.balance += amount  
      val id = account.id()  
      when(log) { B log.record(id, amount) }  
    } } }  
}
```

```
update(src, +100)
```

```
update(src, -100)
```

account




log














+











We still want programmers to have control!


We still want programmers to have control!

```
def update(account: cown[Account], amount: int) {  
  when(account) { A  
    if(account.balance + amount > 0) {  
      account.balance += amount  
      val id = account.id()  
      when(log) { B log.record(id, amount) }  
    }  
  }  
}
```

Concurrent updates and logging behaviours should agree
on the order things happened

update(src, +100)

update(src, -100)

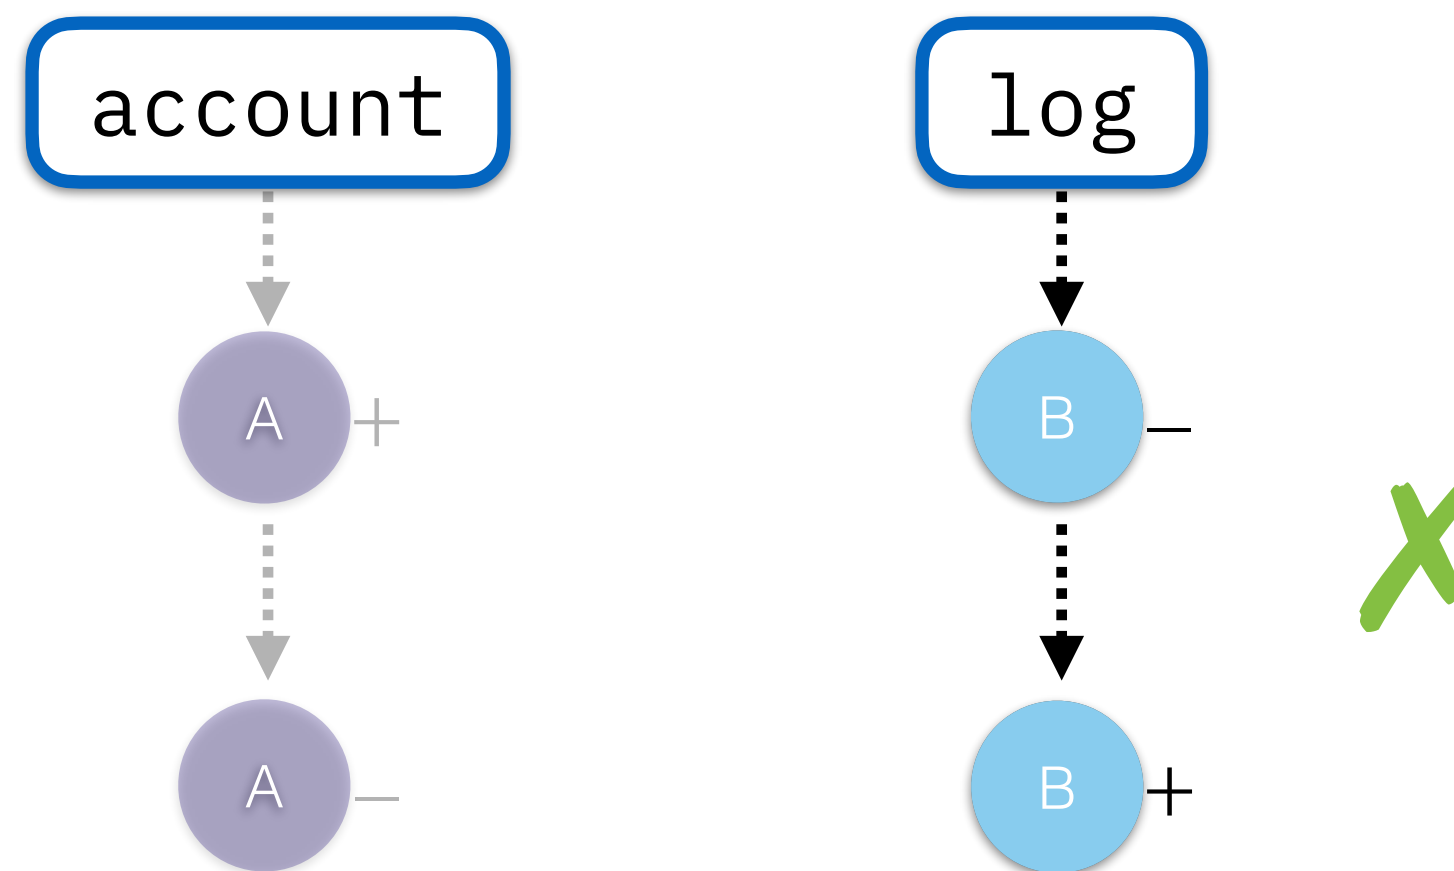

We still want programmers to have control!

```
def update(account: cown[Account], amount: int) {  
  when(account) { A  
    if(account.balance + amount > 0) {  
      account.balance += amount  
      val id = account.id()  
      when(log) { B log.record(id, amount) }  
    }  
  }  
}
```

Order

Permitted