







What does this get us?

5

6

when(src) { 

when(dst) {  }

}

when(dst) {  }

when(dst) {  }

when(src) {  }

when(dst) {  }

}

Can we reorder behavior?






We can read about program transformation

As long as we aren't violating causality





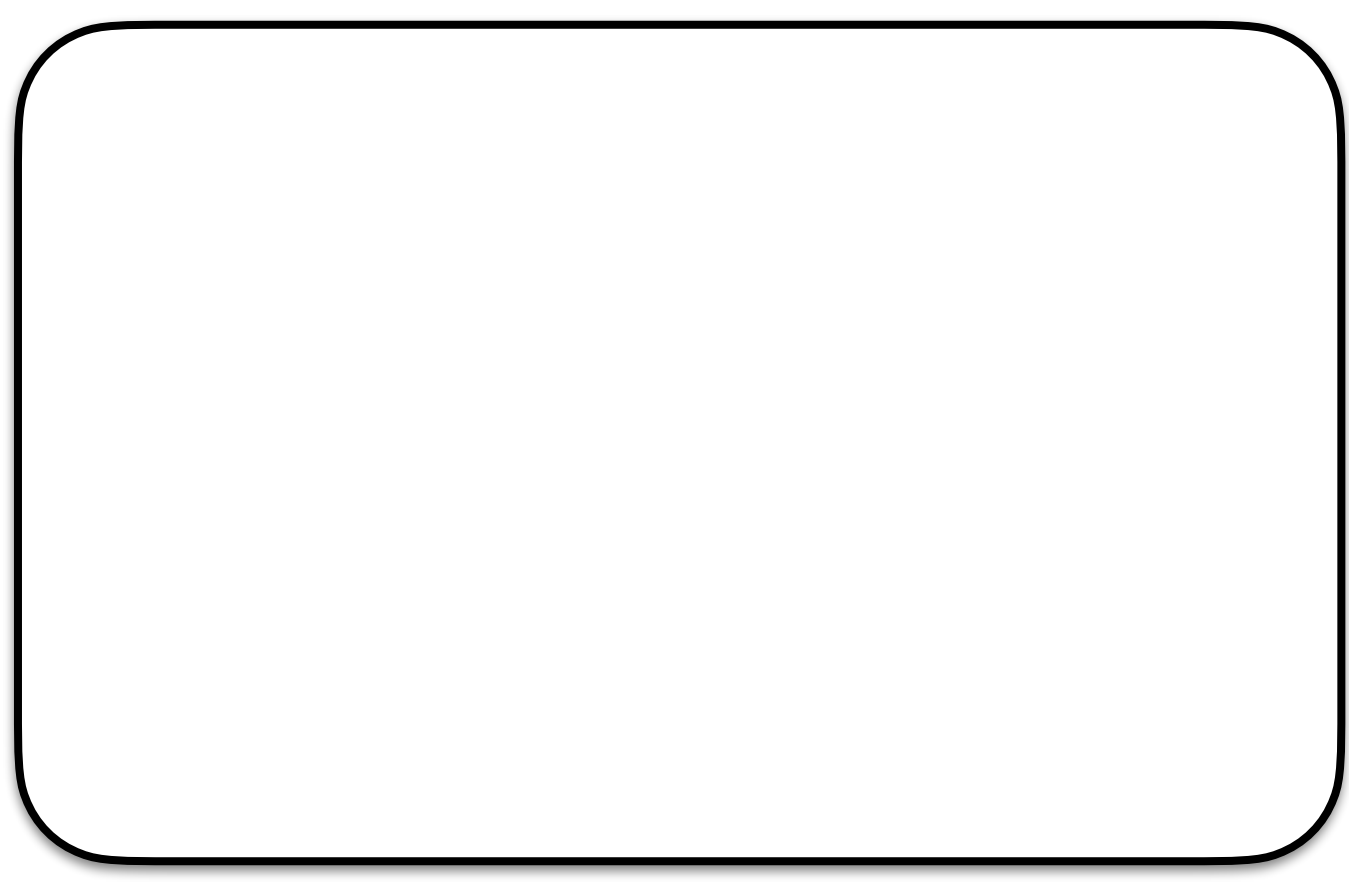

```
when(popular, free) {
```



```
    val r = popular.use();
```

```
    free.use(r)
```

```
when(log) {
```



```
}
```

```
    free.use(r)
```

```
}
```

**Can another behaviour start using a cown
before a behaviour finishes?**











After the last behaviour

What does this get us?

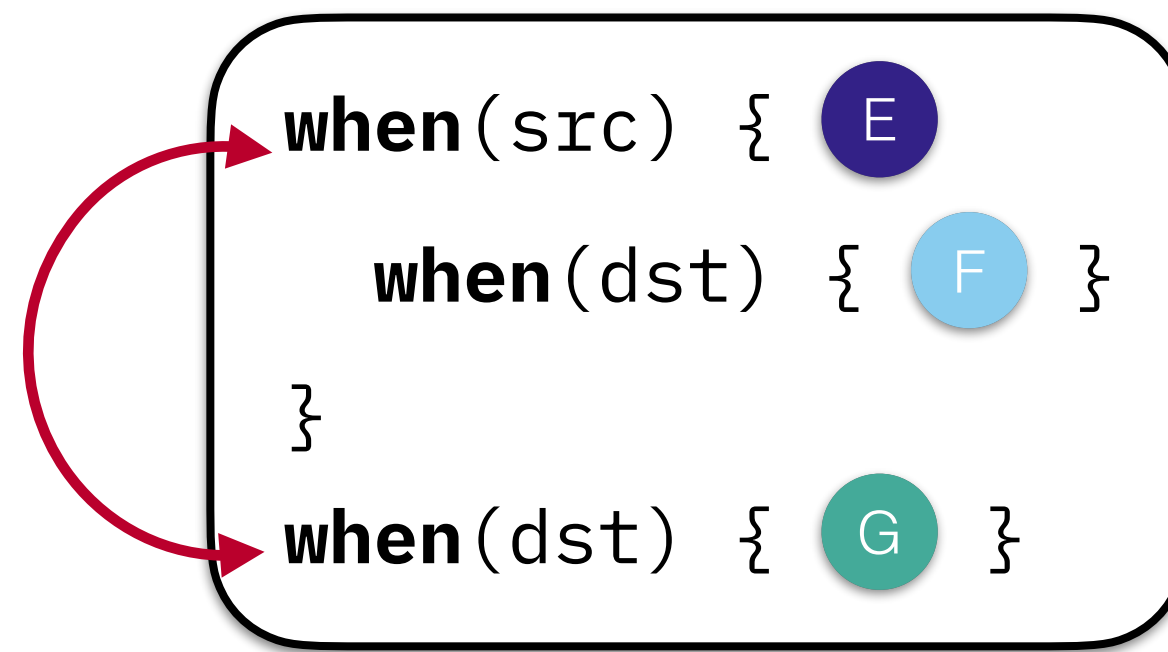

Can we reorder behaviours?

As long as we aren't violating causality

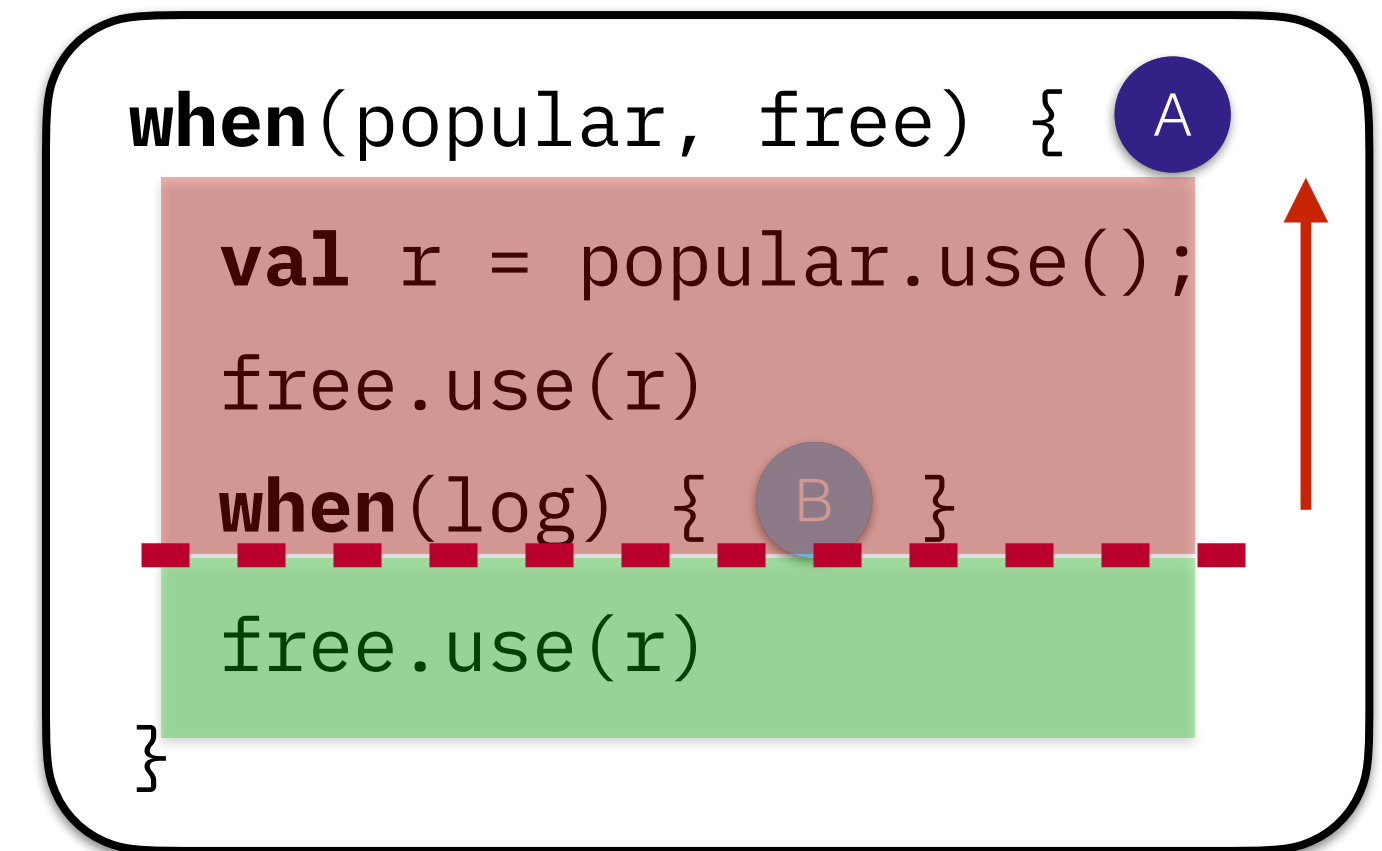

Can another behaviour start using a cow
before a behaviour finishes?

After the last behaviour spawn

We can reason about program transformations



Summary and Future
