

when(dst) {

```
when(src) {
```

dst.frozen = true; }

src.balance += 10; }

```
def main(src: cown[Account], dst: cown[Account]) {
```

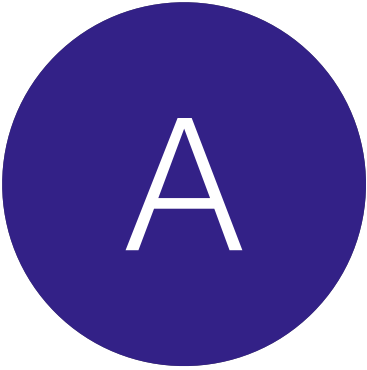
A

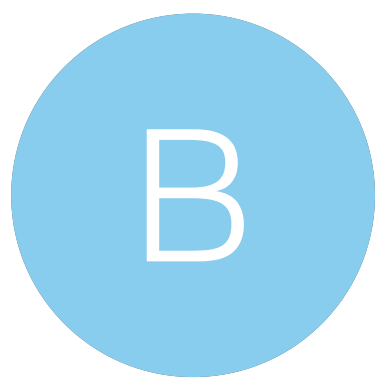
B

```
src.balance += 10;
```

20

BoC: Cowns and Behaviours

```
src.balance += 10;
```

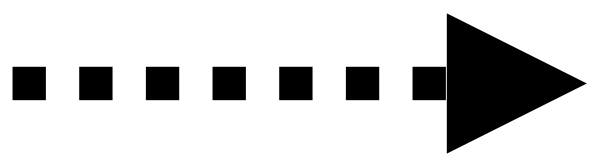

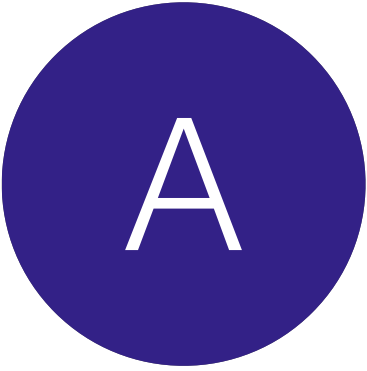
A

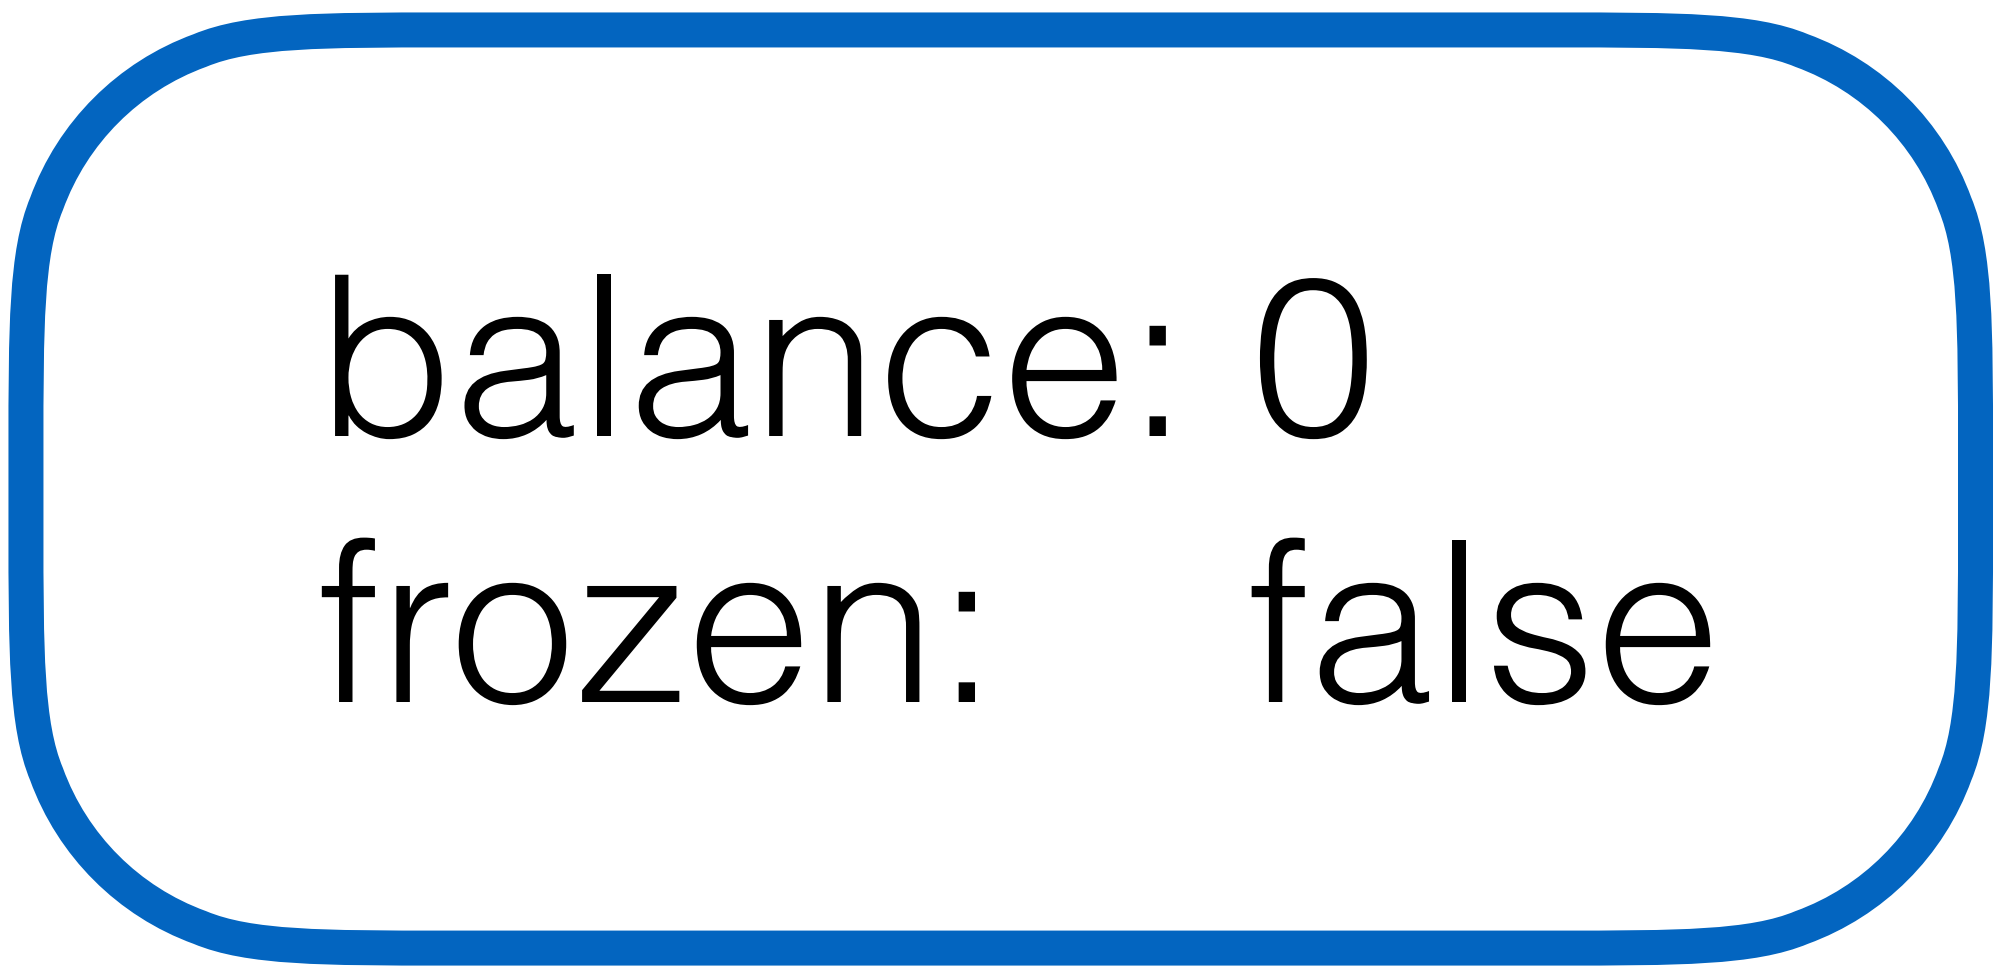
balance: 0
frozen: false

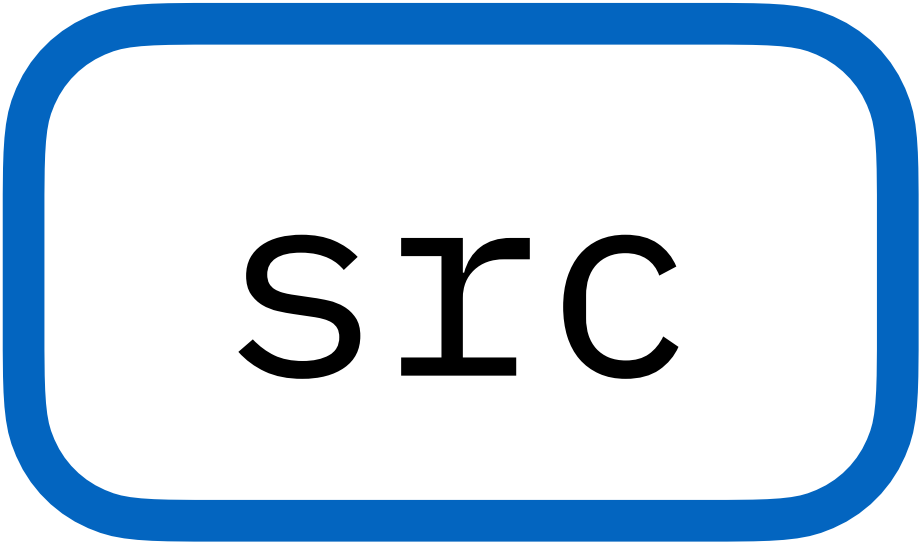
src

When the cowns are available the behaviours can execute with access to the cown's state

Spawning is synchronous but executing is asynchronous

Behaviours which require different cowns can run concurrently

```
dst.frozen = true;
```

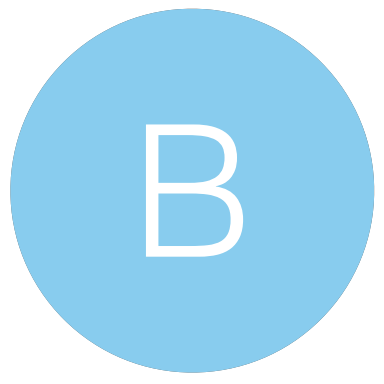
B

balance: 0
frozen: true

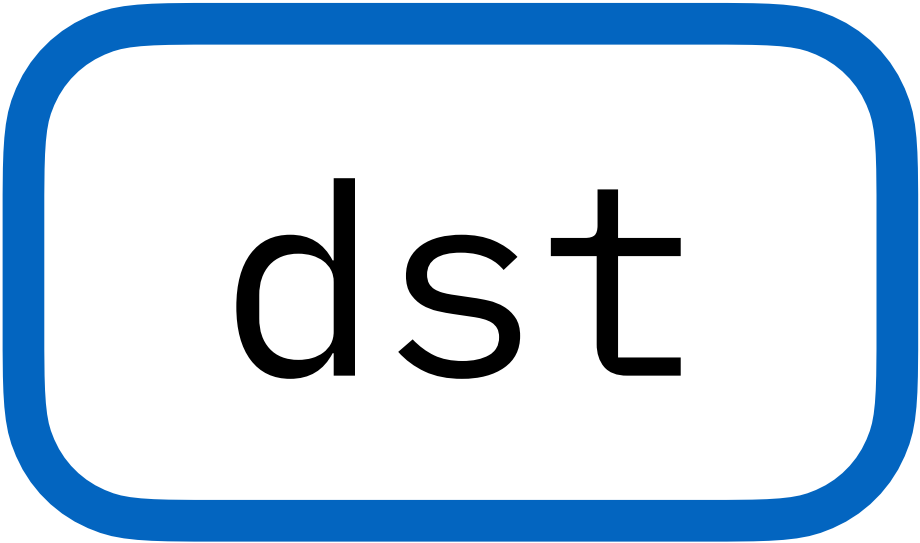
dst

21

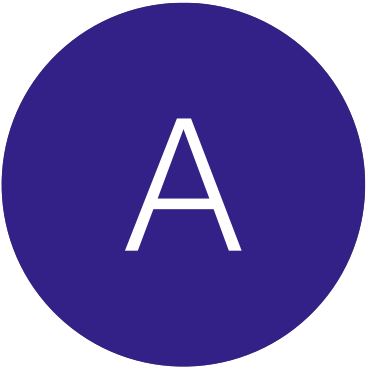
A