









```
when(dst) {  print(dst.balance) }
```

```
when(src) {  print(src.balance) }
```



**when(src) {  src.balance += 10; }**




Is it possible for  then  ?

```
when(dst) {  dst.balance += 10; }
```

What should this program be able to do?









src

dst










D



How can this program execute?

**This out come should be fine but it is not possible under the operational semantics**

```
> ./program
```

```
> src=0, dst=10
```








# What should this program be able to do?

```
when(src) { A src.balance += 10; }  
when(dst) { B dst.balance += 10; }
```

```
when(dst) { C print(dst.balance) }  
when(src) { D print(src.balance) }
```

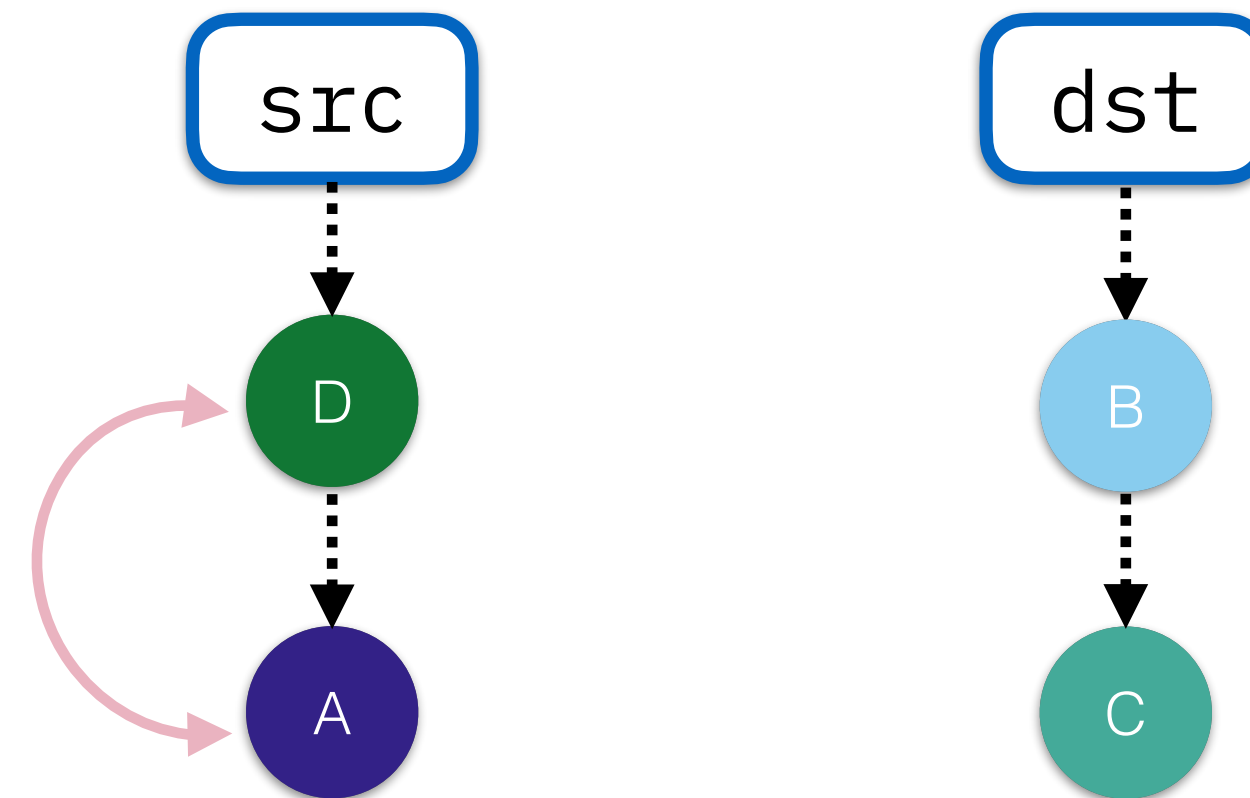

How can this program execute?

Is it possible for **D** then **A** ?

```
> ./program  
> src=0, dst=10
```



This outcome should be fine but it is not possible under the operational semantics

# What should this program be able to do?

---

```
when(src) { A src.balance += 10; }  
when(dst) { B dst.balance += 10; }
```

```
when(dst) { C print(dst.balance) }  
when(src) { D print(src.balance) }
```

---

Order

---

Permitted