








Some orders get in the way

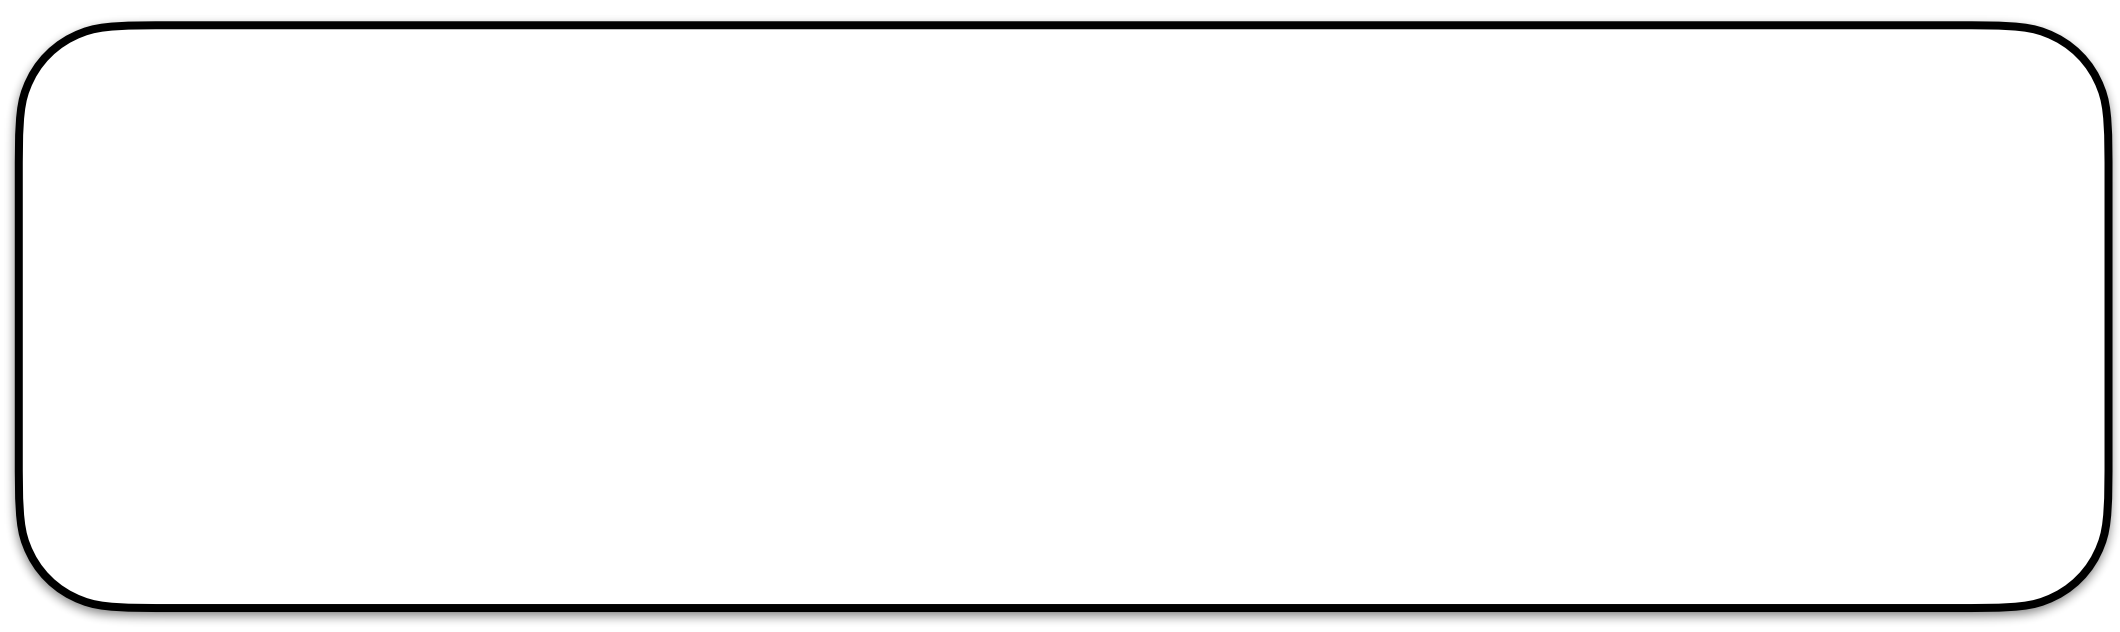

```
when(dst) {  print(dst.balance) }
```


when(src) {  src.balance += 10; }

```
when(dst) {  dst.balance += 10; }
```

when(src) {  src.open();

 print(src.balance) }



Media restricted if we rely on the operational semantics as the design

Can we transform Bo programs to enable more currency and improve performance?






Some orders get in the way

```
when(src) { A src.balance += 10; }  
when(dst) { B dst.balance += 10; }
```

```
when(src) { E src.open();  
            D print(src.balance) }  
when(dst) { C print(dst.balance) }
```

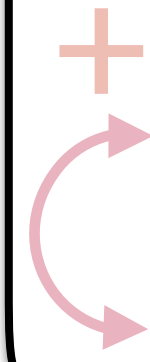

Can we transform BoC programs to enable more concurrency and improve performance?

We are restricted if we rely on the operational semantics as the design ✗



But some orders are the point!
