







dst: frozen == true; }



src:balance += 10; }

when(sirc) }

```
def main(src: Account, dst: Account) {
```









A



B




```
src.balance += 10;
```

What is BoC?





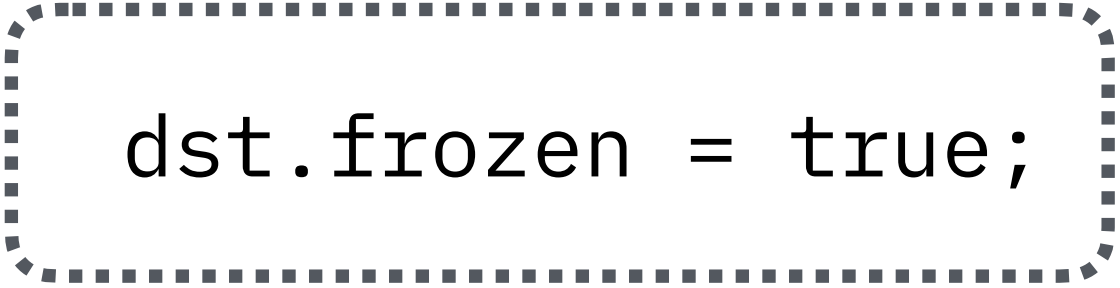

```
dst.frozen = true;
```





A




B



balance: 10

frozen: false





src



balance: 0

frozen: false

dst

When the courts are available the behavior with a case to the court's state

Behaviors which require different wins can run concurrently

