
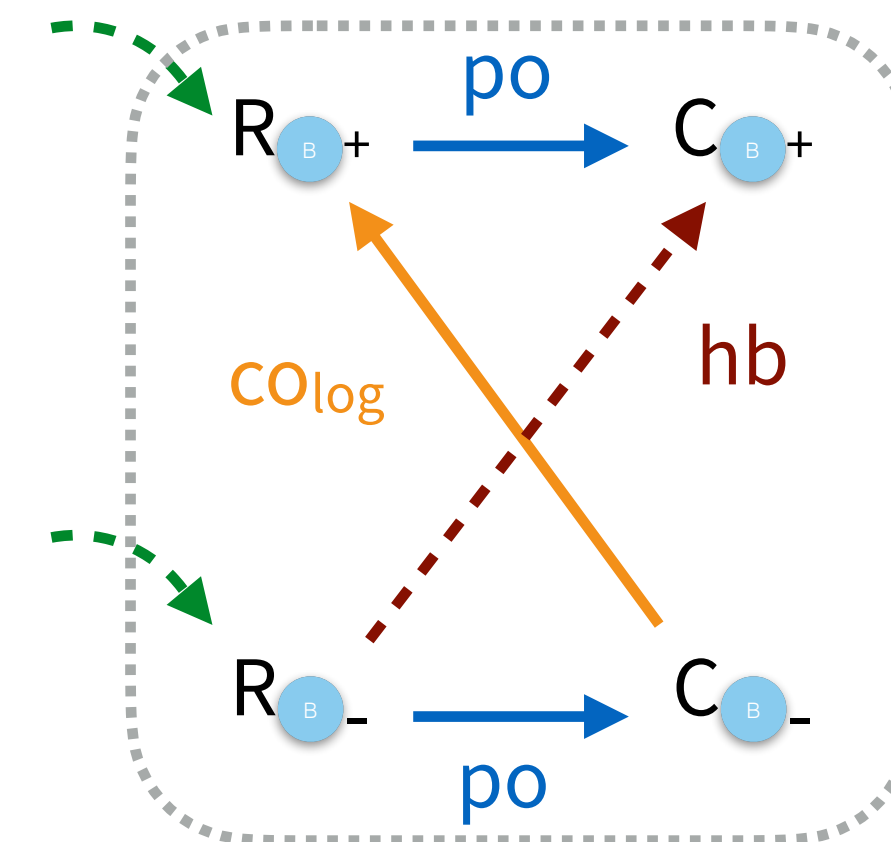


An Axiomatic Concurrency Model

```


def update(account: cown[Account], amount: int) {
  when(account) { A
    if(account.balance + amount > 0) {
      account.balance += amount
      val id = account.id()
      when(log) { B
        log.record(amount)
      }
    }
  }
}

```

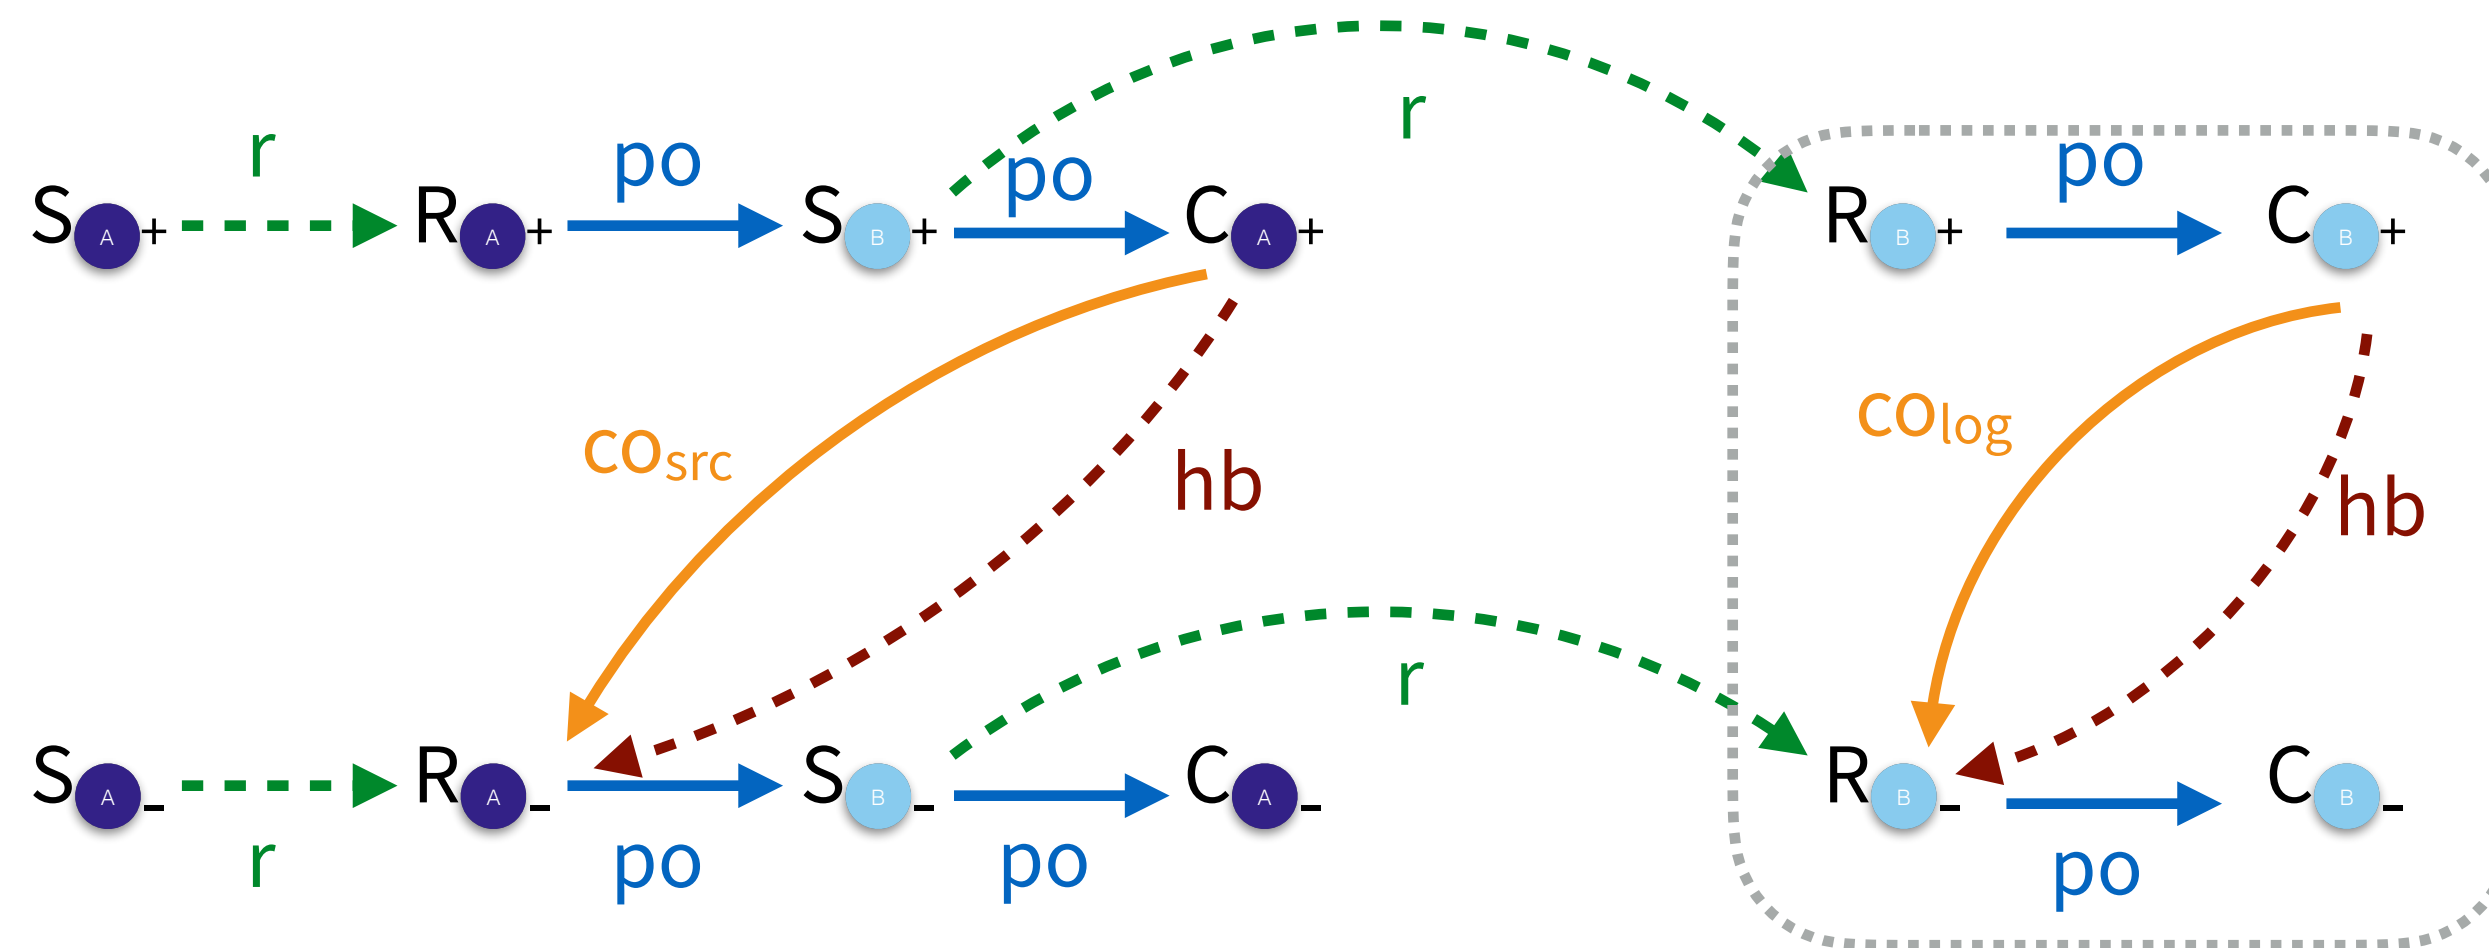


Why does this matter


- The why this happens isn't so important (it lies in choices in the way the semantics are built)
- There are impacts on tooling and optimisation for BoC programs

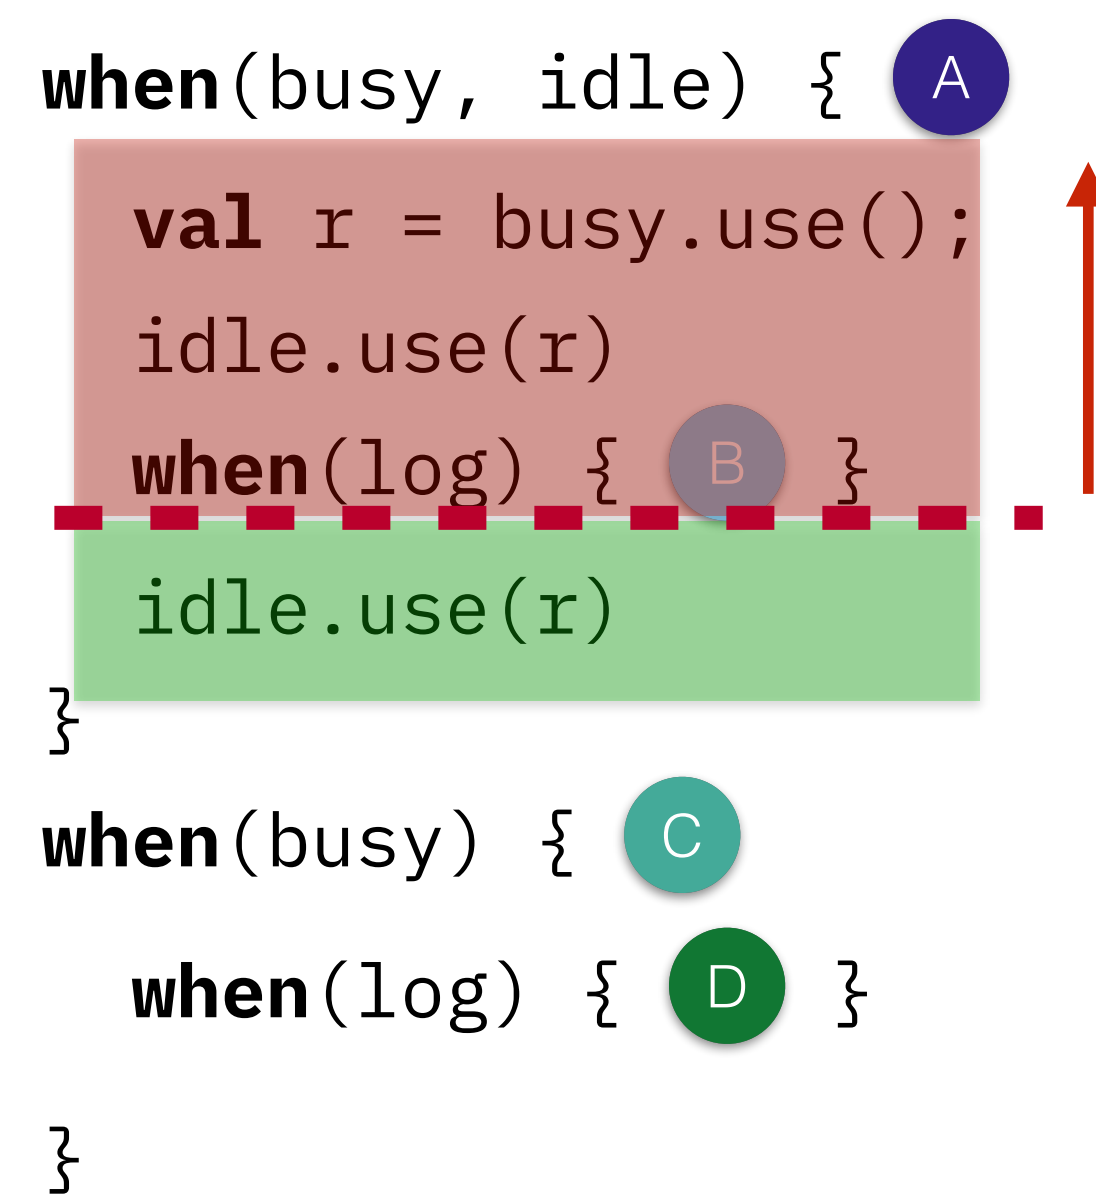

Can we release cowns early?

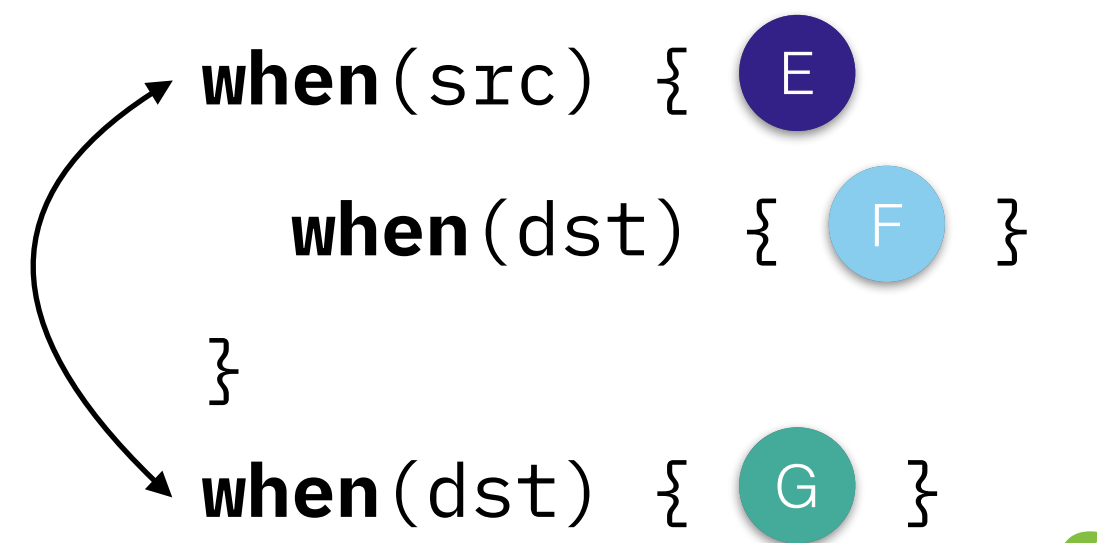

Can we reorder behaviours?

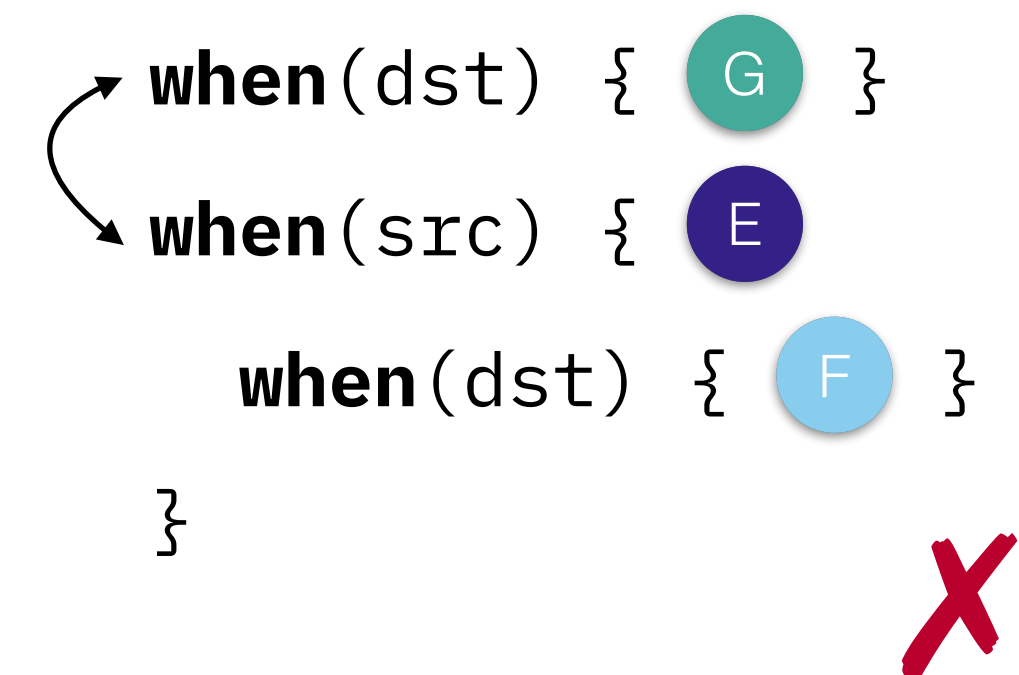

- What does it mean to say all of the executions the semantics provide are even correct?