








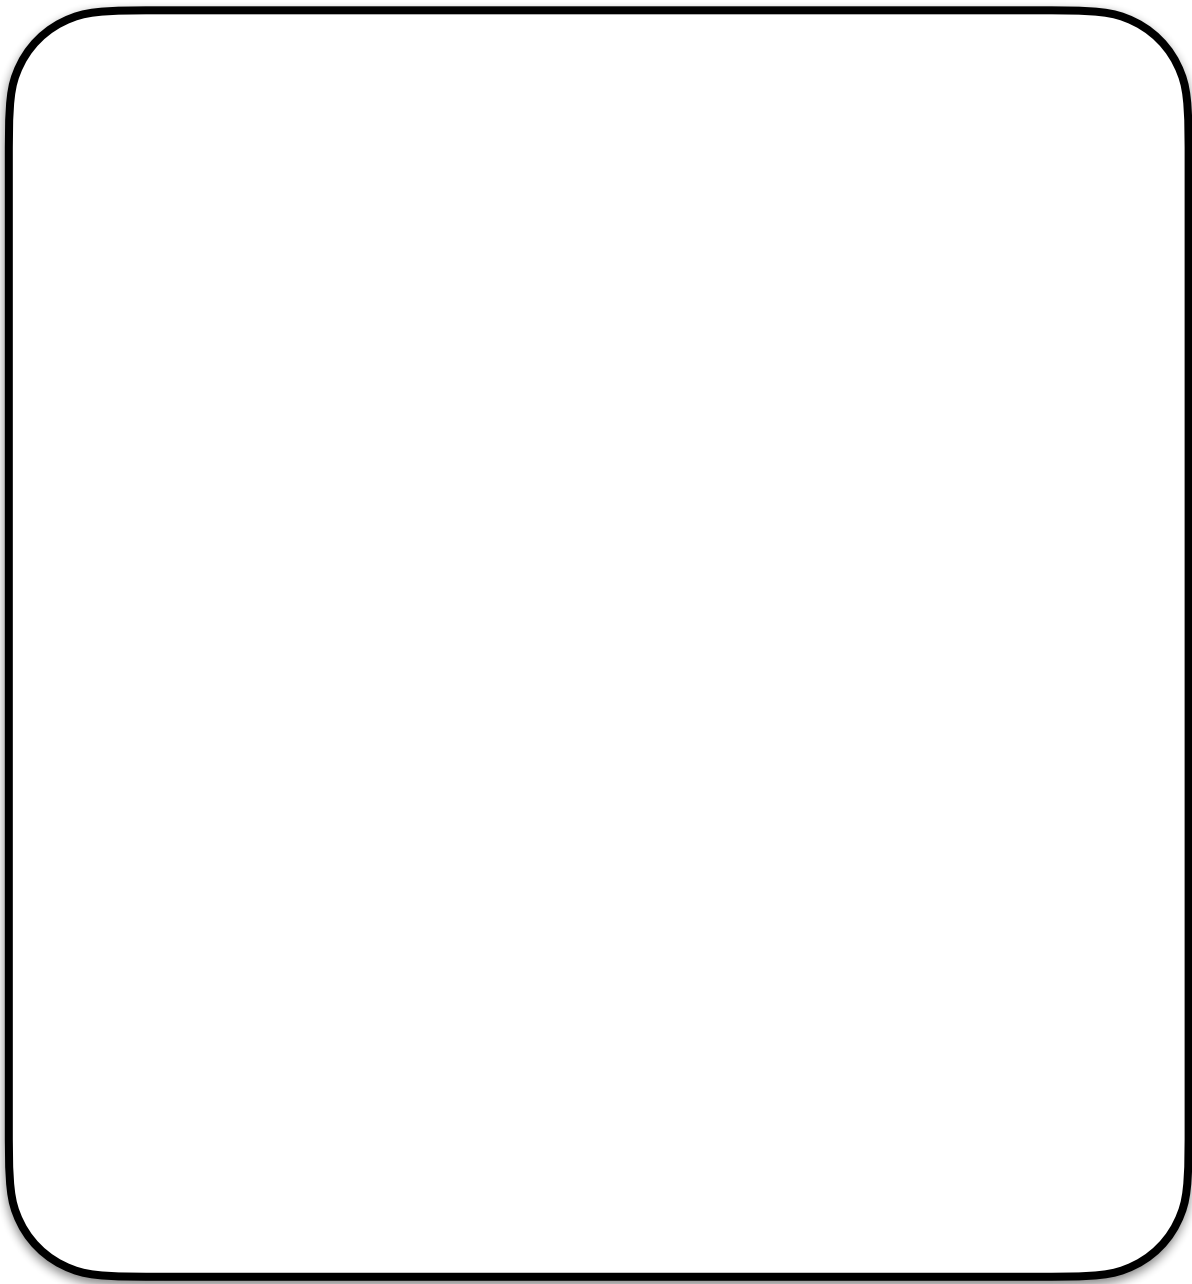

What does this get us?




```
when(busy, idle) {  A
```

```
    val r = busy.use();
```

```
    idle.use(r)
```

```
    when(log) {  B }
```

```
    idle.use(r)
```

```
}
```

```
when(busy) {  C
```

```
    when(log) {  D }
```

```
}
```

when(src) {  E

when(dst) {  F }

}

when(dst) {  G }

when(dst) {  }

when(src) {  }

when(dst) {  }

}

Can we release cows early?



Can we render behavior individual?











After the last behavior span

We can reason about program transformations


As long as we aren't violating causality






What does this get us?

We can reason about program transformations

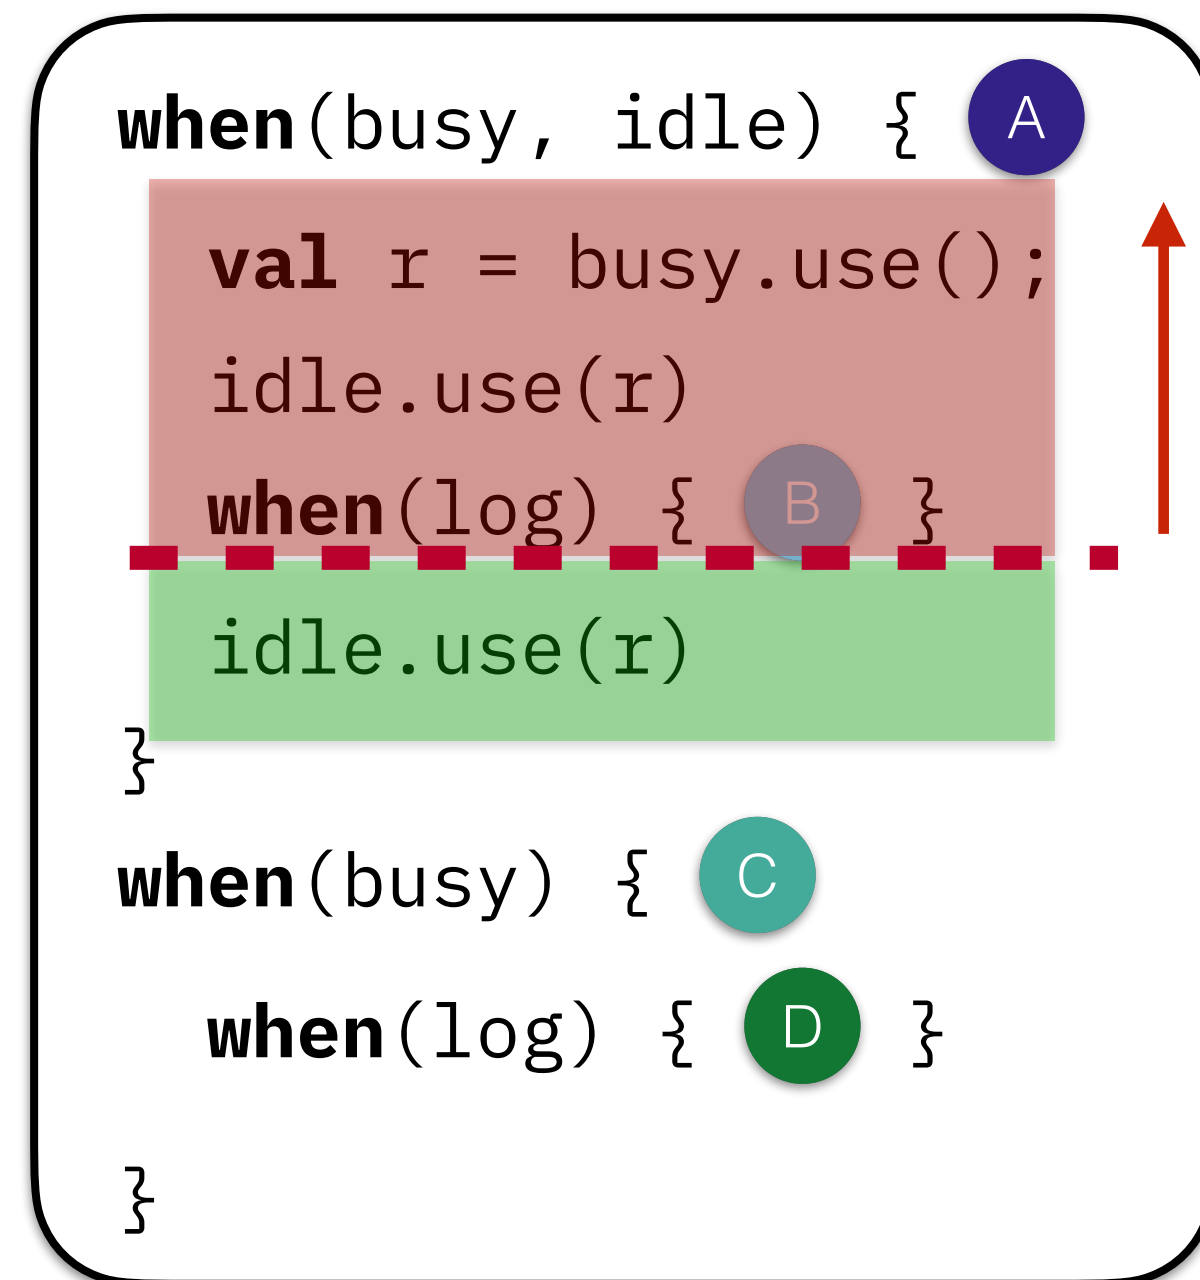


Can we release cows early?

After the last behaviour spawn

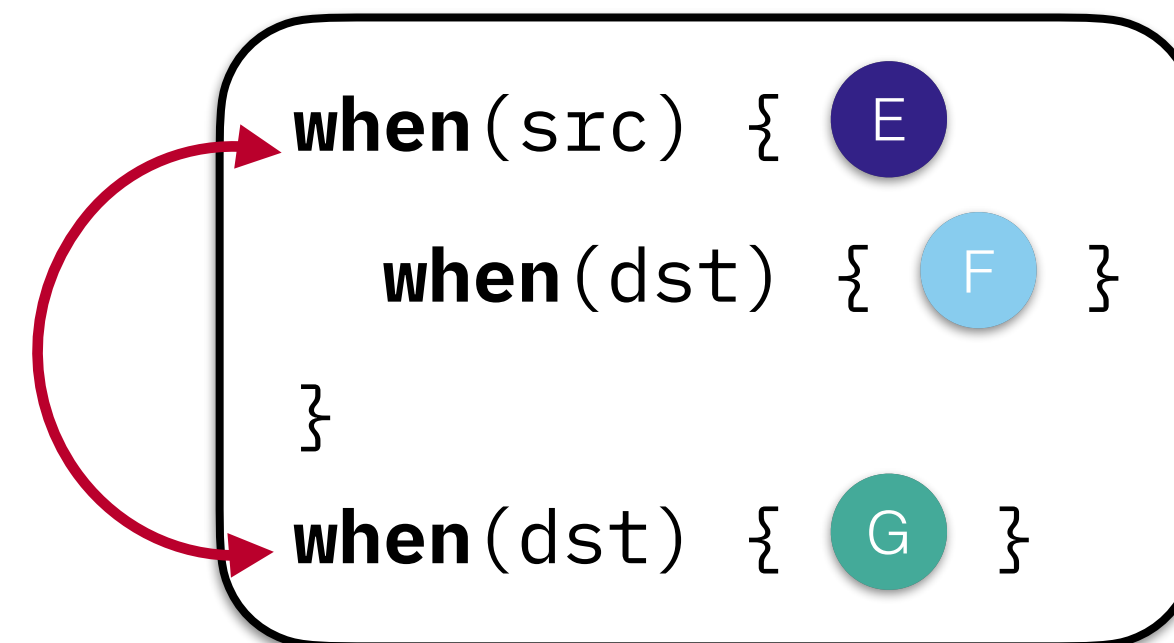

Can we reorder behaviours?

As long as we aren't violating causality

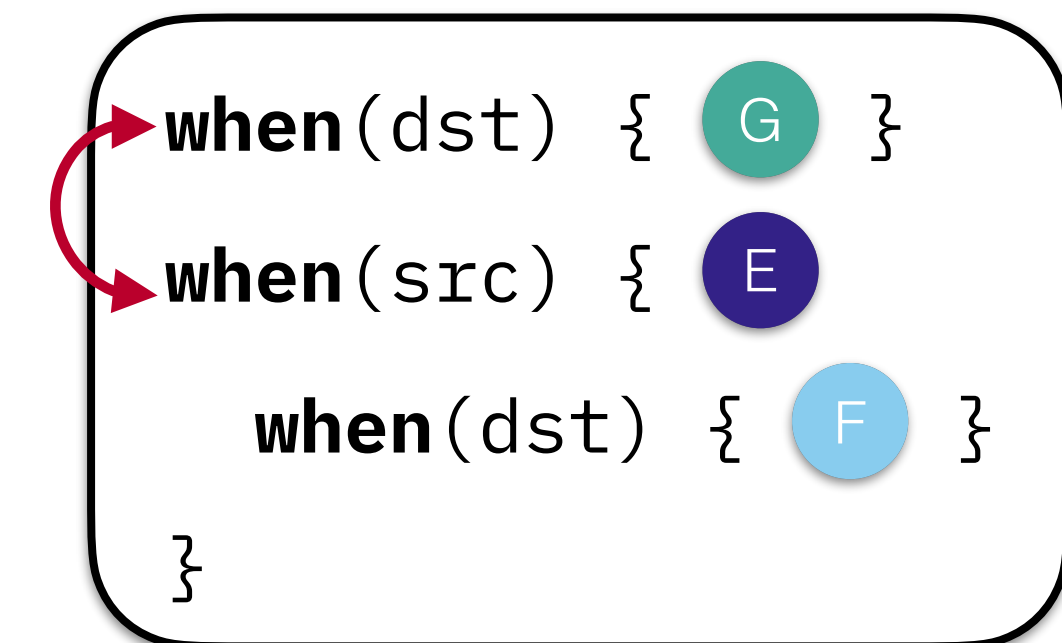



Future and Conclusion
