







The design for behavior driving was missing

when (src) {  **src.balance += 10; }**

when (dst) {  **dst.balance += 10; }**



when(dst) {  **print(dst.balance) }**

when(src) {  **print(src.balance) }**

src=0, dst=0



src=0, dst=10



src=10, dst=0



src=10, dst=10



Order


Permitted





updatepath(src then dst)

Diagnostic path (dst then src)

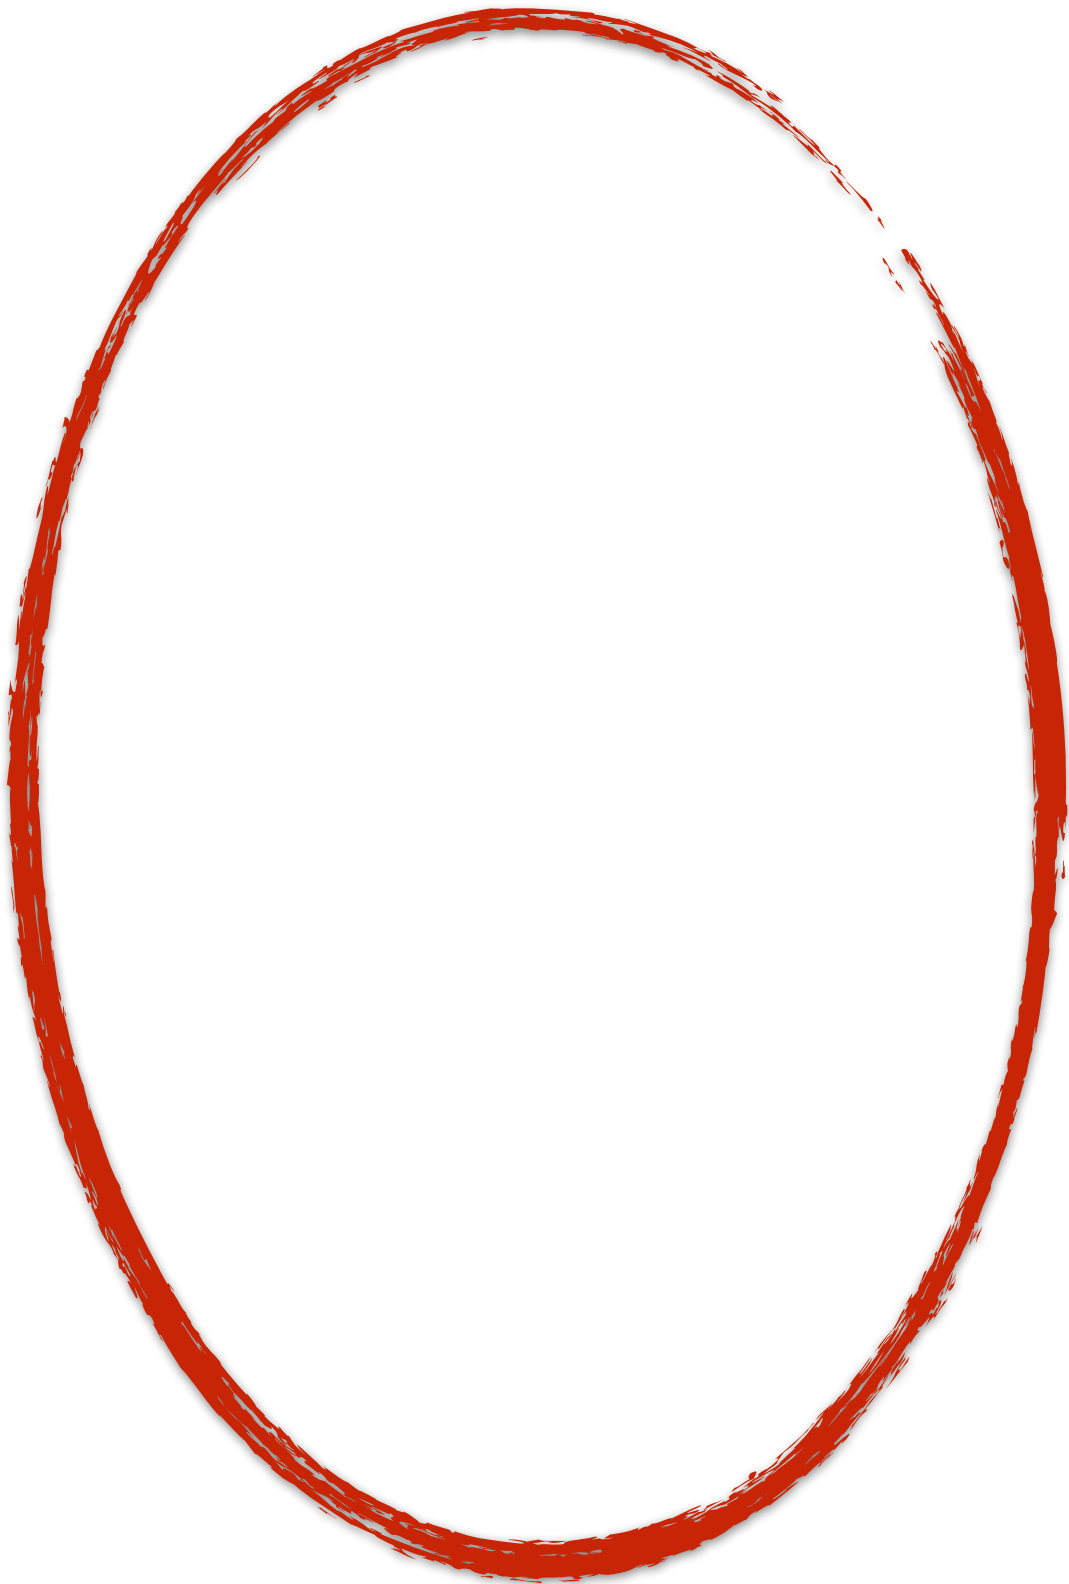


The design for behaviour ordering was missing

Update path (src then dst)

```
when(src) { A src.balance += 10; }  
when(dst) { B dst.balance += 10; }
```

Diagnostic path (dst then src)

```
when(dst) { C print(dst.balance) }  
when(src) { D print(src.balance) }
```

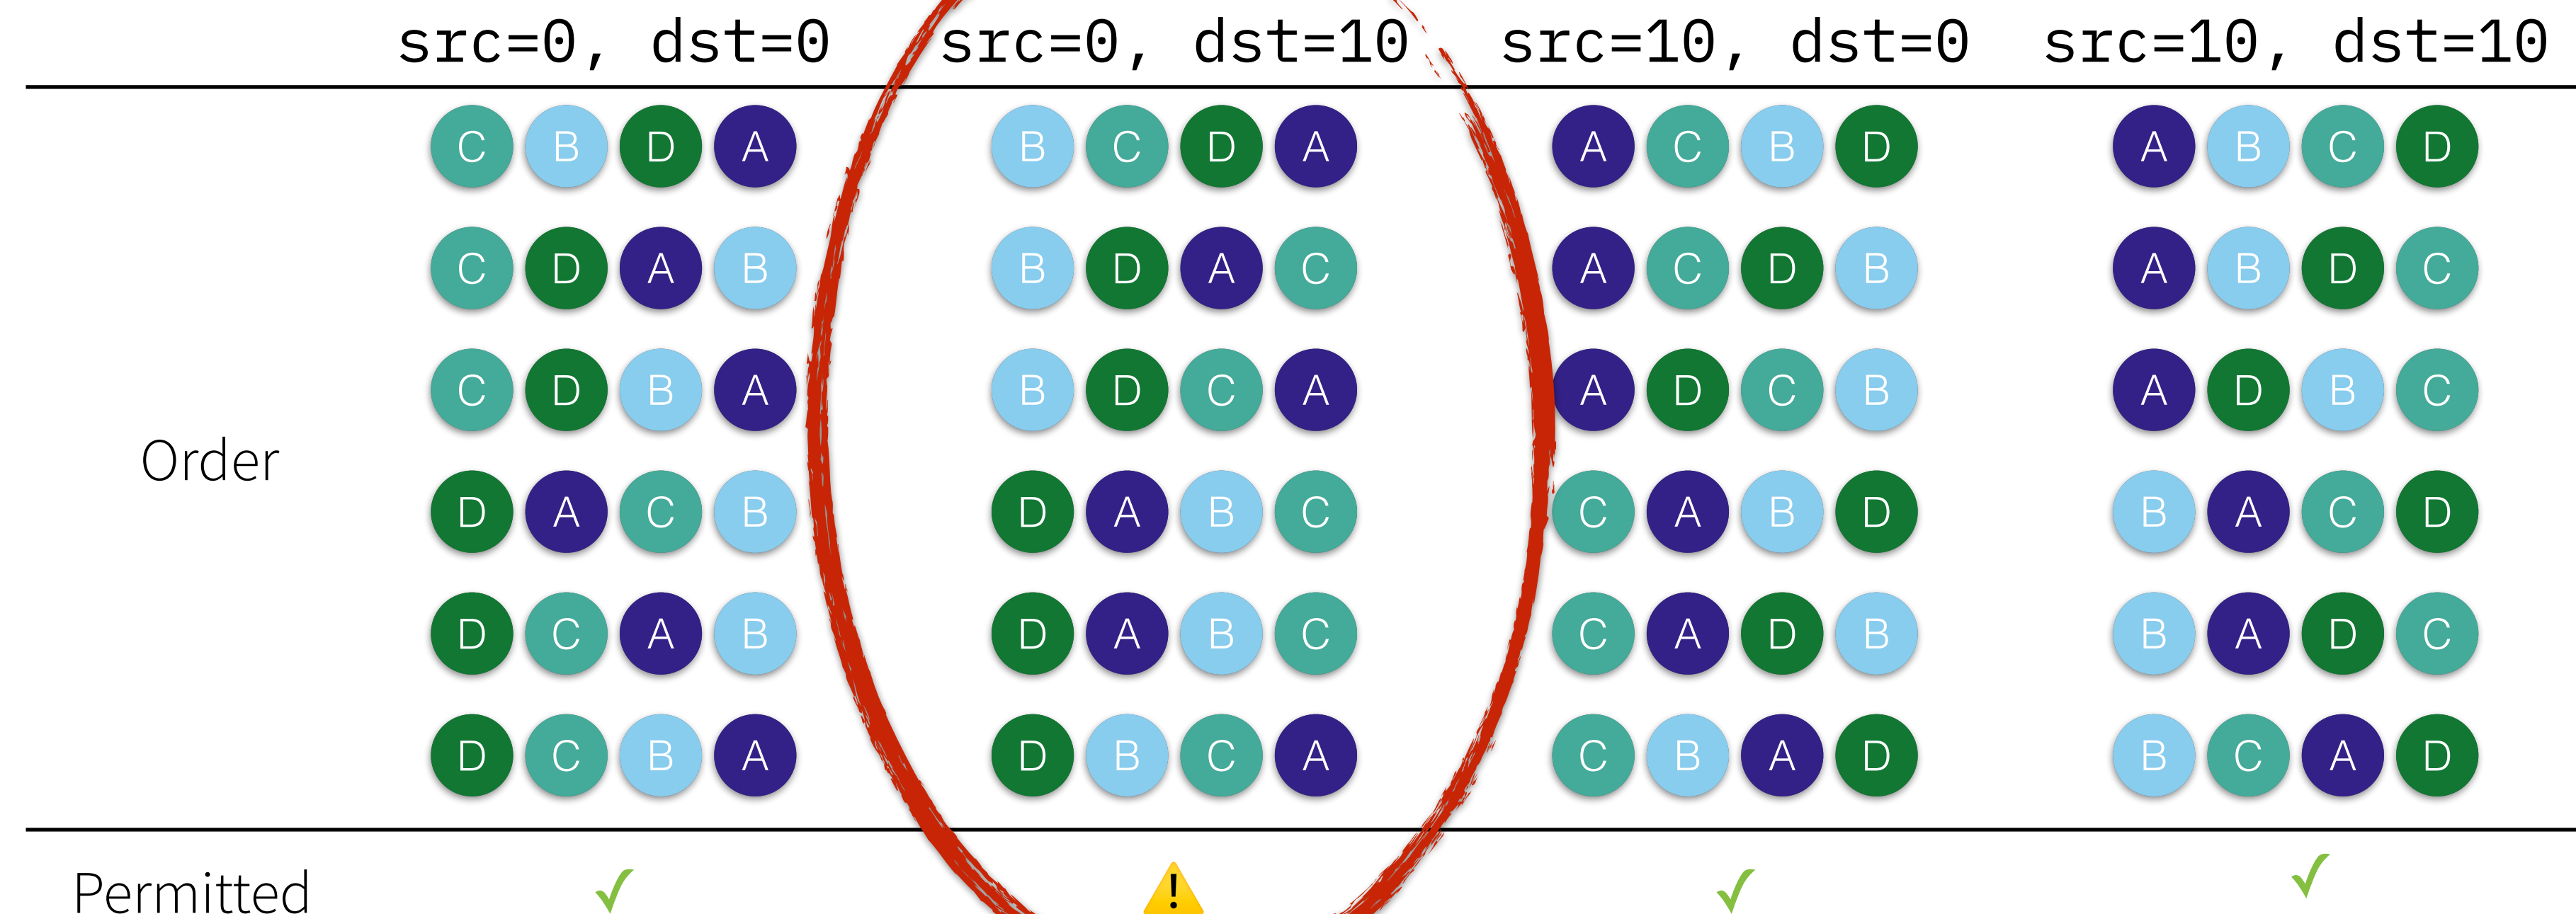



Why does this matter?
