








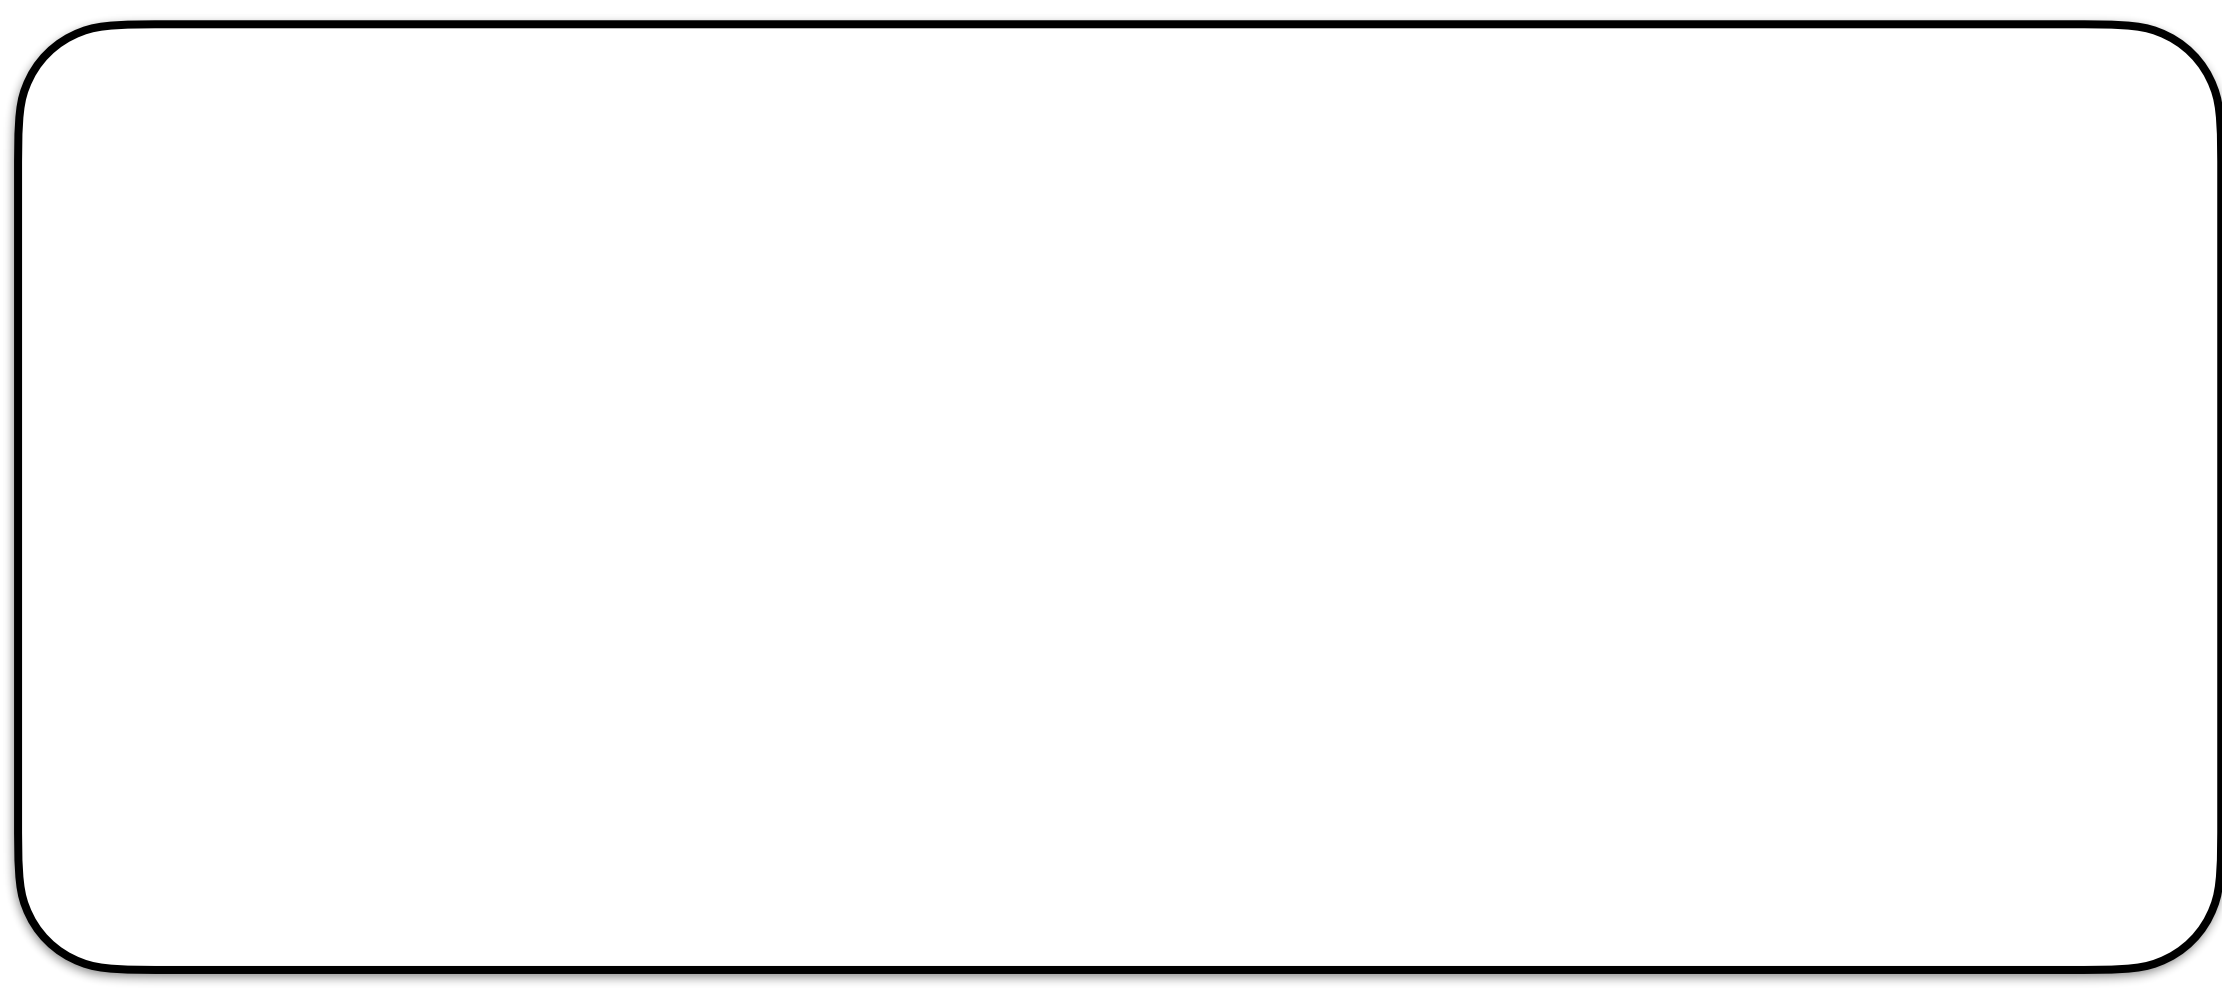

Ordering Design Insights

4

0


```
def update(account: cown[Account], amount: int) {  
  when(account) {    
    if(account.balance + amount > 0) {  
      account.balance += amount  
      val id = account.id()  
      when(log) {  log.record(id, amount) }  
    }  
  }  
}
```

```
update(src, +100)
```

```
update(src, -100)
```

Program structure including nesting should effect possible behavior

when(dst) {  `print(dst.balance)` }

when(src) {  `print(src.balance)` }

updatepath(ircthen dst)

Diagnostic path (dst then src)

when(src) {  src.balance += 10; }

when(dst) {  dst.balance += 10; }

Implementation details such as scheduling and scheduling structures should not

Ordering Design Insights

```
def update(account: cown[Account], amount: int) {  
  when(account) { A  
    if(account.balance + amount > 0) {  
      account.balance += amount  
      val id = account.id()  
      when(log) { B log.record(id, amount) }  
    }  
  }  
}
```

update(src, +100)

update(src, -100)

Program structure including nesting should effect possible behaviour orderings

Update path (src then dst)

```
when(src) { A src.balance += 10; }  
when(dst) { B dst.balance += 10; }
```

Diagnostic path (dst then src)

```
when(dst) { C print(dst.balance) }  
when(src) { D print(src.balance) }
```

Implementation details such as scheduling and scheduling structures should not



What can we do?
