

Assignment 1

Brute Force Attack Estimation

L. Towell,
Student No: 201383538

December 4, 2019

Code repository: [COMP522-Assignment 2](#)

1 Comparison of methods for message authentication

1.1 Hash-functions

What is hashing? How does it work? How does it produce the digest and how can it be produced and what are the disadvantages and advantages of the hashing functions.

Why are hashing functions useful and how can they be combined with other authentication methods. Look at the MessageHashing class in *Appendix A*

1.2 RSA + SHA1 method

combination of the hashing mechanism SHA1 with the RSA algorithm. How does it work, what does it do. *Appendix B and C. Appendix A* is used in order to provide added security and allows the user to ensure that the data has come from the correct person and hasn't been interfered with.

1.3 DSA method

DSA *Appendix D* How does it work, what does it do, why does it do that and so on.

1.4 HMAC-SHA256 method

2 Diffie-Hellman with 4 parties

2.1 Design for the Diffie-Hellman Protocol

Following the principles of the Diffie Hellman Protocol means that in order to read the messages that are being transmitted every party needs to know the public key of all of the other members in the network in order to generate a shared secret key.

The process is largely the same when more parties are added however because more parties have been added it means that more keys need to be generated and shared. Each party starts the process by using the shared prime number (q) and the shared primitive root (α of q).

Each key then generates their public keys using a random integer that they have generated.

$$\begin{aligned}Y_A &= \alpha^{X_A} \bmod q \\Y_B &= \alpha^{X_B} \bmod q \\Y_C &= \alpha^{X_C} \bmod q \\Y_D &= \alpha^{X_D} \bmod q\end{aligned}$$

The above keys are then shared among all members of the network and then then the following calculations are performed in order to calculate the shared secret Keys

$$A \text{ calculates } K = (Y_{BCD})^{X_A} \bmod q$$

B calculates $K = (Y_{ACD})^{X_B} \bmod q$
C calculates $K = (Y_{ABD})^{X_C} \bmod q$
D calculates $K = (Y_{ABC})^{X_D} \bmod q$

Figure 1. is an example of the stages that each member of the network goes through in order to finally reach a shared secret key.

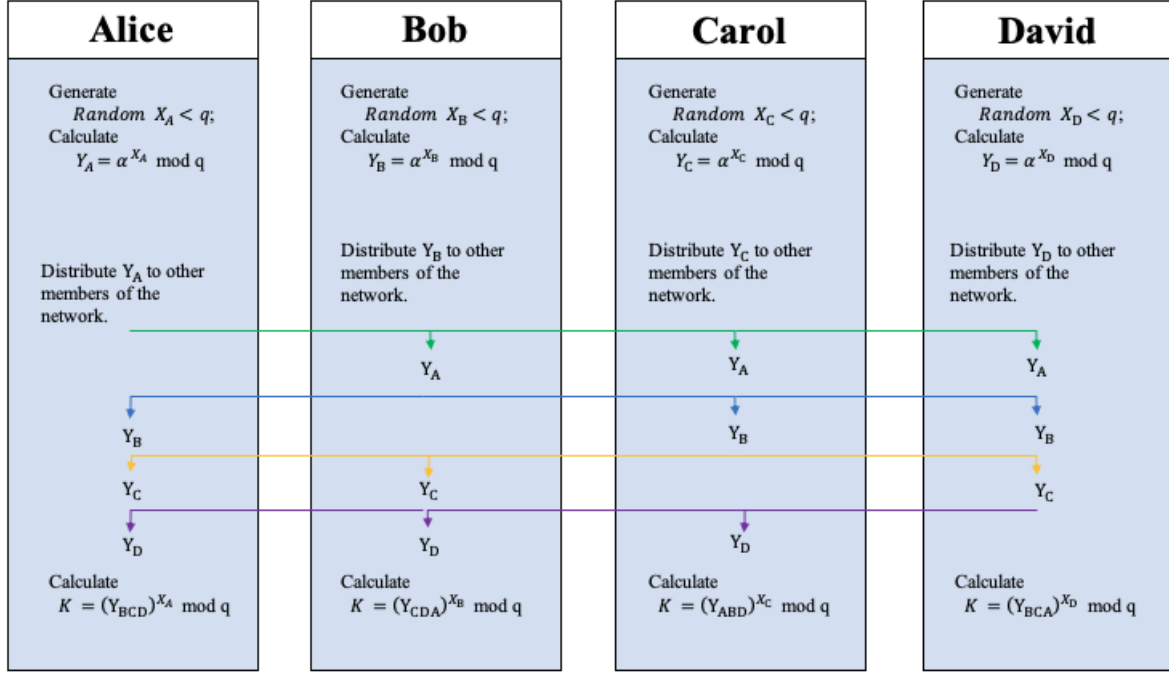


Figure 1: Diagram of how keys are passed between members of network.

2.2 Implementation of the Protocol with 4 Parties

As discussed above in section 2.1 and can be seen from the code in *Appendix D*. I have had to exchange all of the keys amongst each of the members in the network. I have done this through multiple iterations (phases) of the network in order for everyone within the network to have all of the keys needed to successfully generate a shared secret key for decoding messages that are sent. *figure 1.* shows the iteration cycle of how keys are exchanged over multiple iterations.

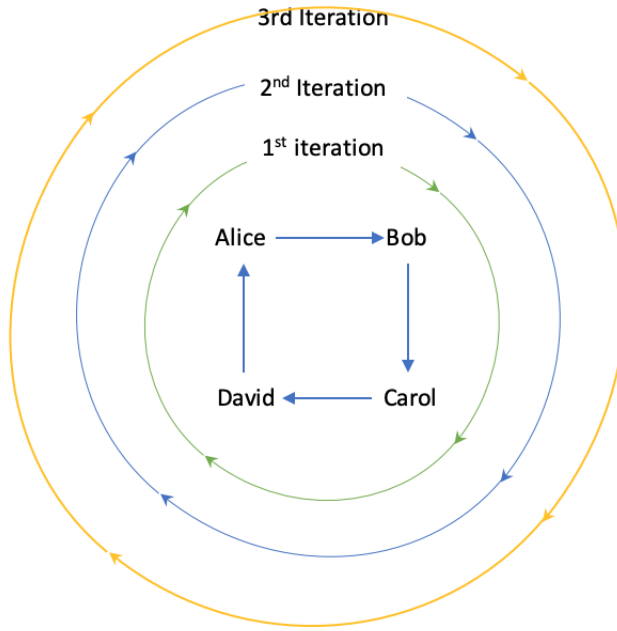


Figure 2: Diagram of how keys are passed between members of network.

Table 1. below details how the keys are gathered within the program. In iteration 0 the only keys that each members have are their own however as we iterate around the network the keys are gathered until every member has every other members public keys. Once every member has all of the other members public keys they are able to calculate the shared secret for the decoding of all messages. This is displayed in the code output via printing the secrets generated by each individual member and then comparing the keys. If the keys do not match then the program will throw an error however if all keys match the output should be the same as *Appendix E*.

	Public Keys held by network members			
N	Alice	Bob	Carol	David
0	A	B	C	D
1	AD	BA	CB	DC
2	ADC	BAD	CBA	DCB
3	ADCB	BADC	CBAD	DCBA

Appendices

A Diffie Hellman 4 Party Key Exchange

```
/*
A Lisitsa, 2019, The code below was taken without any changes from
https://docs.oracle.com/javase/8/docs/technotes/guides/security/crypto/CryptoSpec.html#DH3Ex
*/
/*
 * Copyright (c) 1997, 2017, Oracle and/or its affiliates. All rights reserved.
 *
 * Redistribution and use in source and binary forms, with or without
 * modification, are permitted provided that the following conditions
 * are met:
 *
 * - Redistributions of source code must retain the above copyright
 *   notice, this list of conditions and the following disclaimer.
 *
 * - Redistributions in binary form must reproduce the above copyright
 *   notice, this list of conditions and the following disclaimer in the
 *   documentation and/or other materials provided with the distribution.
 *
 * - Neither the name of Oracle nor the names of its
 *   contributors may be used to endorse or promote products derived
 *   from this software without specific prior written permission.
 *
 * THIS SOFTWARE IS PROVIDED BY THE COPYRIGHT HOLDERS AND CONTRIBUTORS "AS
 * IS" AND ANY EXPRESS OR IMPLIED WARRANTIES, INCLUDING, BUT NOT LIMITED TO,
 * THE IMPLIED WARRANTIES OF MERCHANTABILITY AND FITNESS FOR A PARTICULAR
 * PURPOSE ARE DISCLAIMED. IN NO EVENT SHALL THE COPYRIGHT OWNER OR
 * CONTRIBUTORS BE LIABLE FOR ANY DIRECT, INDIRECT, INCIDENTAL, SPECIAL,
 * EXEMPLARY, OR CONSEQUENTIAL DAMAGES (INCLUDING, BUT NOT LIMITED TO,
 * PROCUREMENT OF SUBSTITUTE GOODS OR SERVICES; LOSS OF USE, DATA, OR
 * PROFITS; OR BUSINESS INTERRUPTION) HOWEVER CAUSED AND ON ANY THEORY OF
 * LIABILITY, WHETHER IN CONTRACT, STRICT LIABILITY, OR TORT (INCLUDING
 * NEGLIGENCE OR OTHERWISE) ARISING IN ANY WAY OUT OF THE USE OF THIS
 * SOFTWARE, EVEN IF ADVISED OF THE POSSIBILITY OF SUCH DAMAGE.
 */
import java.security.*;
import java.security.spec.*;
import javax.crypto.*;
import javax.crypto.spec.*;
import javax.crypto.interfaces.*;
/*
 * This program executes the Diffie-Hellman key agreement protocol between
 * 3 parties: Alice, Bob, and Carol using a shared 2048-bit DH parameter.
 */
public class DHKeyAgreement4 {
    private DHKeyAgreement4() {}
    public static void main(String argv[]) throws Exception {
        // Alice creates her own DH key pair with 2048-bit key size
        System.out.println("ALICE: Generate DH keypair ...");
        KeyPairGenerator aliceKpairGen = KeyPairGenerator.getInstance("DH");
        aliceKpairGen.initialize(2048);
        KeyPair aliceKpair = aliceKpairGen.generateKeyPair();

        //Do you want to see the output from the shared key generation?
        Boolean showKeys = false;

        // This DH parameters can also be constructed by creating a
        // DHParameterSpec object using agreed-upon values
        DHParameterSpec dhParamShared = ((DHPublicKey)aliceKpair.getPublic()).getParams();
    }
}
```

```

// Bob creates his own DH key pair using the same params
System.out.println("BOB: Generate DH keypair ...");
KeyPairGenerator bobKpairGen = KeyPairGenerator.getInstance("DH");
bobKpairGen.initialize(dhParamShared);
KeyPair bobKpair = bobKpairGen.generateKeyPair();
// Carol creates her own DH key pair using the same params
System.out.println("CAROL: Generate DH keypair ...");
KeyPairGenerator carolKpairGen = KeyPairGenerator.getInstance("DH");
carolKpairGen.initialize(dhParamShared);
KeyPair carolKpair = carolKpairGen.generateKeyPair();
// David creates his own DH key pair using the same params
System.out.println("CAROL: Generate DH keypair ...");
KeyPairGenerator davidKpairGen = KeyPairGenerator.getInstance("DH");
davidKpairGen.initialize(dhParamShared);
KeyPair davidKpair = davidKpairGen.generateKeyPair();

// Alice initialize
System.out.println("ALICE: Initialize ...");
KeyAgreement aliceKeyAgree = KeyAgreement.getInstance("DH");
aliceKeyAgree.init(aliceKpair.getPrivate());
// Bob initialize
System.out.println("BOB: Initialize ...");
KeyAgreement bobKeyAgree = KeyAgreement.getInstance("DH");
bobKeyAgree.init(bobKpair.getPrivate());
// Carol initialize
System.out.println("CAROL: Initialize ...");
KeyAgreement carolKeyAgree = KeyAgreement.getInstance("DH");
carolKeyAgree.init(carolKpair.getPrivate());
//David initialize
System.out.println("DAVID: Initialize ...");
KeyAgreement davidKeyAgree = KeyAgreement.getInstance("DH");
davidKeyAgree.init(davidKpair.getPrivate());

System.out.println("Iteration 0: All parties only have their own public keys");

//gets previous persons Key
System.out.println("Iteration 1: All parties pass public key forward one.");
// Alice uses Davids's public key
Key ad = aliceKeyAgree.doPhase(davidKpair.getPublic(), false);
// Bob uses Alice's public key
Key ba = bobKeyAgree.doPhase(aliceKpair.getPublic(), false);
// Carol uses Bob's public key
Key cb = carolKeyAgree.doPhase(bobKpair.getPublic(), false);
// David uses Carol's public key
Key dc = davidKeyAgree.doPhase(carolKpair.getPublic(), false);

//gets previous previous persons key
System.out.println("Iteration 2: All parties pass public key forward two.");
// Alice uses David's result from above
Key adc = aliceKeyAgree.doPhase(dc, false);
// Bob uses Alice's result from above
Key bad = bobKeyAgree.doPhase(ad, false);
// Carol uses Bob's result from above
Key cba = carolKeyAgree.doPhase(ba, false);
//David uses Carols result from above
Key dcb = davidKeyAgree.doPhase(cb, false);

//gets previous previous previous persons Key
System.out.println("Iteration 3: All parties pass public key forward Three.");
// Alice uses David's result from above
aliceKeyAgree.doPhase(dcb, true);

```

```

// Bob uses Alice's result from above
bobKeyAgree.doPhase(adc, true);
// Carol uses Bob's result from above
carolKeyAgree.doPhase(bad, true);
//David uses Carol's result from above
davidKeyAgree.doPhase(cba, true);

System.out.println("All parties have all public keys for everyone in the network");

// Alice, Bob and Carol compute their secrets
System.out.println("Calculating shared secret key.");
byte[] aliceSharedSecret = aliceKeyAgree.generateSecret();
byte[] bobSharedSecret = bobKeyAgree.generateSecret();
byte[] carolSharedSecret = carolKeyAgree.generateSecret();
byte[] davidSharedSecret = davidKeyAgree.generateSecret();

if (showKeys) {
    System.out.println("Alice secret: " + toHexString(aliceSharedSecret));
    System.out.println("Bob secret: " + toHexString(bobSharedSecret));
    System.out.println("Carol secret: " + toHexString(carolSharedSecret));
    System.out.println("David secret: " + toHexString(davidSharedSecret));
}

// Compare Alice and Bobx
if (!java.util.Arrays.equals(aliceSharedSecret, bobSharedSecret))
    throw new Exception("Alice and Bob differ");
System.out.println("Alice and Bob are the same");
// Compare Bob and Carol
if (!java.util.Arrays.equals(bobSharedSecret, carolSharedSecret))
    throw new Exception("Bob and Carol differ");
System.out.println("Bob and Carol are the same");
if (!java.util.Arrays.equals(carolSharedSecret, davidSharedSecret))
    throw new Exception("Carol and David differ");
System.out.println("Carol and David are the same");
}
/*
 * Converts a byte to hex digit and writes to the supplied buffer
 */
private static void byte2hex(byte b, StringBuffer buf) {
    char[] hexChars = { '0', '1', '2', '3', '4', '5', '6', '7', '8',
        '9', 'A', 'B', 'C', 'D', 'E', 'F' };
    int high = ((b & 0xf0) >> 4);
    int low = (b & 0x0f);
    buf.append(hexChars[high]);
    buf.append(hexChars[low]);
}
/*
 * Converts a byte array to hex string
 */
private static String toHexString(byte[] block) {
    StringBuffer buf = new StringBuffer();
    int len = block.length;
    for (int i = 0; i < len; i++) {
        byte2hex(block[i], buf);
        if (i < len-1) {
            buf.append(":");
        }
    }
    return buf.toString();
}
}

```

B Diffie Hellman 4 Party Output

Note: If you would like to print the keys out in order to visually compare them yourself you can change this with the boolean flag in the code base. Change the variable *showKeys* to false and then compile and run the program again.

These Instructions assume you are compiling from the directory that the code file is in.

Compile: `javac ./DHKeyAgreement4.java`

Run: `java DHKeyAgreement4`

Output:

```
ALICE: Generate DH keypair ...
BOB: Generate DH keypair ...
CAROL: Generate DH keypair ...
CAROL: Generate DH keypair ...
ALICE: Initialize ...
BOB: Initialize ...
CAROL: Initialize ...
DAVID: Initialize ...
Iteration 0: All parties only have their own public keys
Iteration 1: All parties pass public key forward one.
Iteration 2: All parties pass public key forward two.
Iteration 3: All parties pass public key forward Three.
All parties have all public keys for everyone in the network
Calculating shared secret key.
Alice and Bob are the same
Bob and Carol are the same
Carol and David are the same
```
