

Nome: Luiza Karen Borges Pimentel


RA: 325116797

PARTE 1

Exercício 01

Objetivo:

Instalar o Git e criar conta no GitHub.

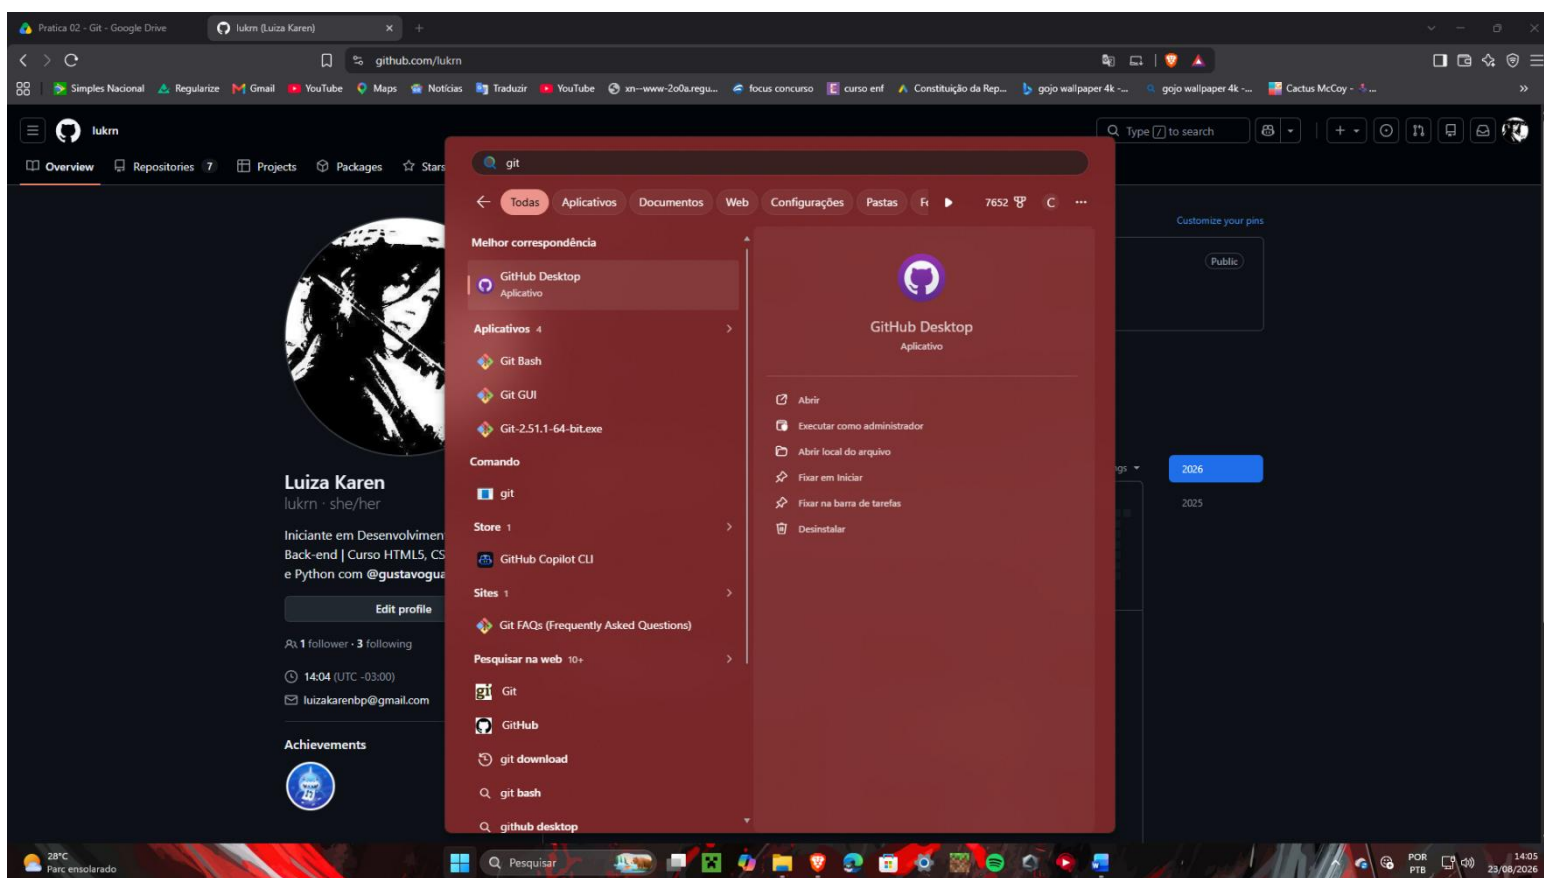

Exercício – 2

Git: configurações iniciais.

```
125% + Criar um Resumo em Áudio
```

```
MINGW64/c/Users/confi
confi@lukrn_pc MINGW64 ~
$ git --version
bash: git--version: command not found

confi@lukrn_pc MINGW64 ~
$ git --version
git version 2.51.1.windows.1

confi@lukrn_pc MINGW64 ~
$ --system
bash: --system: command not found

confi@lukrn_pc MINGW64 ~
$ git config user.name
Luiza Karen

confi@lukrn_pc MINGW64 ~
$ git config user.email
luizakarenbp@gmail.com

confi@lukrn_pc MINGW64 ~
$ git config --global core.editor notepad

confi@lukrn_pc MINGW64 ~
```

```
C:\WINDOWS\system32\cmd.exe Prompt de comando
C:\Users\confi>git config --global user.name "Luiza Karen"

C:\Users\confi>git config user.name
Luiza Karen

C:\Users\confi>git config --global user.email "luizakarenbp@gmail.com"

C:\Users\confi>git config core.editor

C:\Users\confi>git config core.editor
notepad

C:\Users\confi>git config --list
diff.astextplain.textconv=astextplain
filter.lfs.clean=git-lfs clean -- %f
filter.lfs.smudge=git-lfs smudge -- %f
filter.lfs.process=git-lfs filter-process
filter.lfs.required=true
http.sslbackend=schannel
core.autocrlf=true
core.fscache=true
core.symlinks=false
pull.rebase=false
credential.helper=manager
credential.https://dev.azure.com.usehttppath=true
init.defaultbranch=master
filter.lfs.clean=git-lfs clean -- %f
filter.lfs.smudge=git-lfs smudge -- %f
filter.lfs.process=git-lfs filter-process
filter.lfs.required=true
user.name=Luiza Karen
user.email=luizakarenbp@gmail.com
core.editor=notepad
```

Exercício 03

GitHub.

2) Criar uma conta e entrar: <https://github.com/login>.

lukrn
she/her

Iniciante em Desenvolvimento Web e Back-end | Curso HTML5, CSS3, JavaScript e Python com @gustavoguanabara

1 follower · 3 following

14:04 (UTC - 03:00)

luizakarenbp@gmail.com

Achievements

Popular repositories

- html-css** (Public)
Estudo HTML e CSS
- android-logia** (Public)
Site android teste
- Save-drawing-project** (Public)
HTML

17 contributions in the last year

Contribution settings

2026

2025

Aug Sep Oct Nov Dec Jan Feb Mar Apr May Jun Jul Aug

Mon
Wed
Fri

Learn how we count contributions

Less More

Activity overview

Contributed to lukrn/A3JogoComputacional, lukrn/logo_computacional

Code review

87% Commits

13% Pull requests

Issues

Right sidebar:


- Profile
- Repositories
- Stars
- Gists
- Organizations
- Enterprises
- Sponsors
- Settings
- Copilot settings
- Feature preview
- Appearance
- Accessibility
- Try Enterprise (Free)
- Sign out

PARTE 2


Exercício 01

Objetivo:

Sequência que será executada nesta prática:

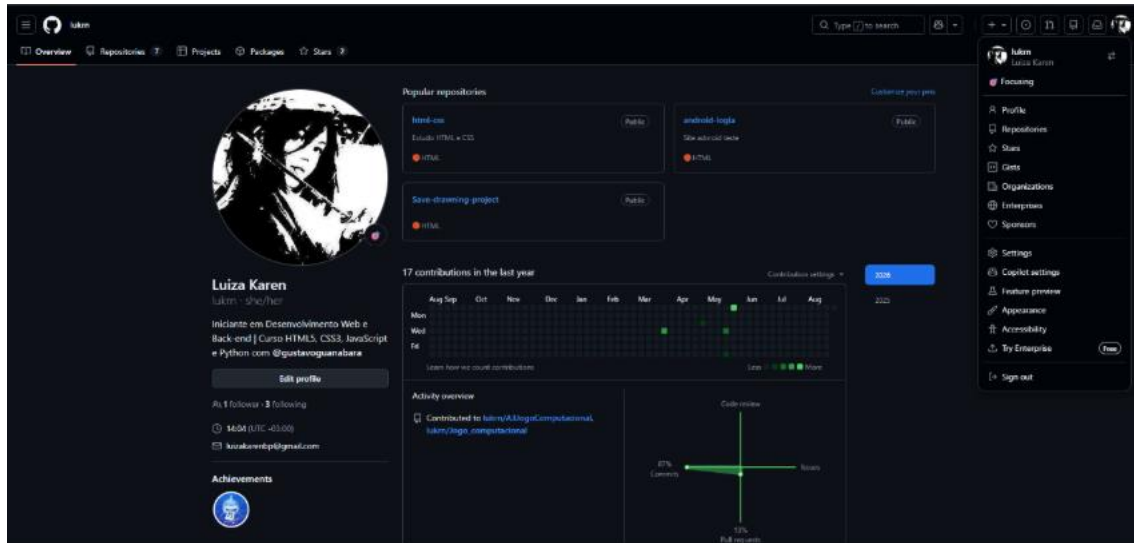


(entra no git)

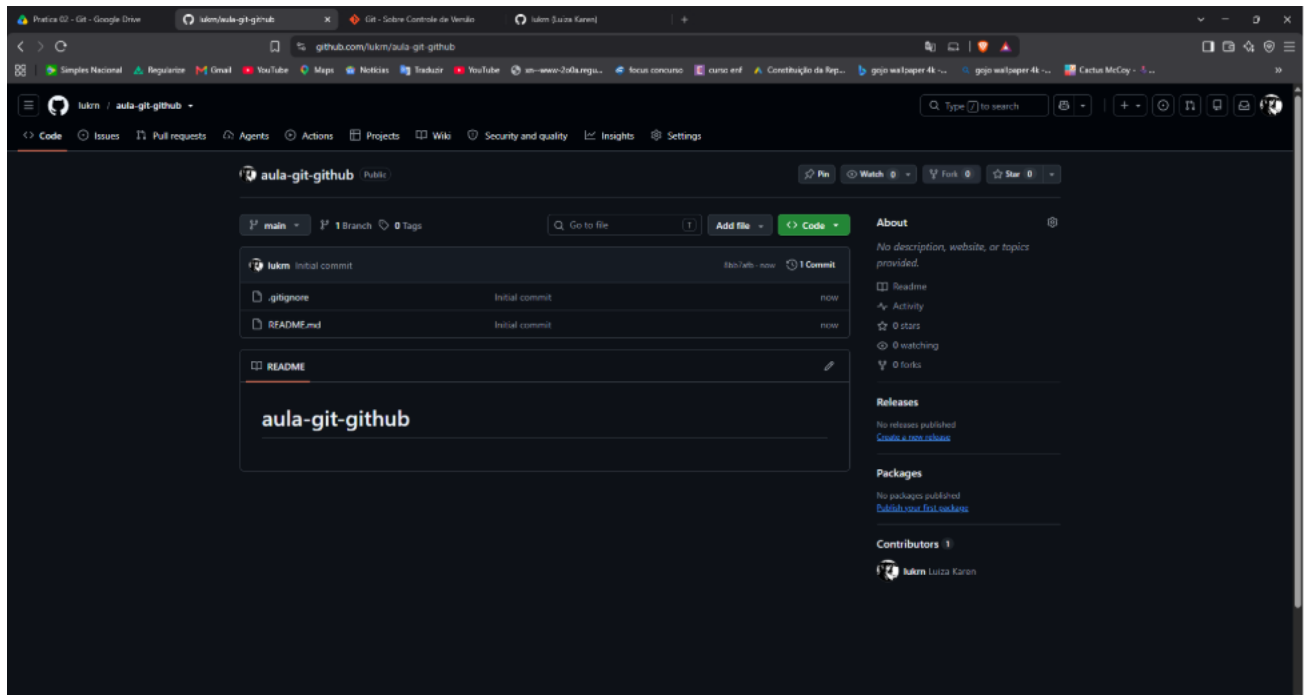

3) Página de criação de novo repositório: <https://github.com/new>. Crie um novo

Exercício 02

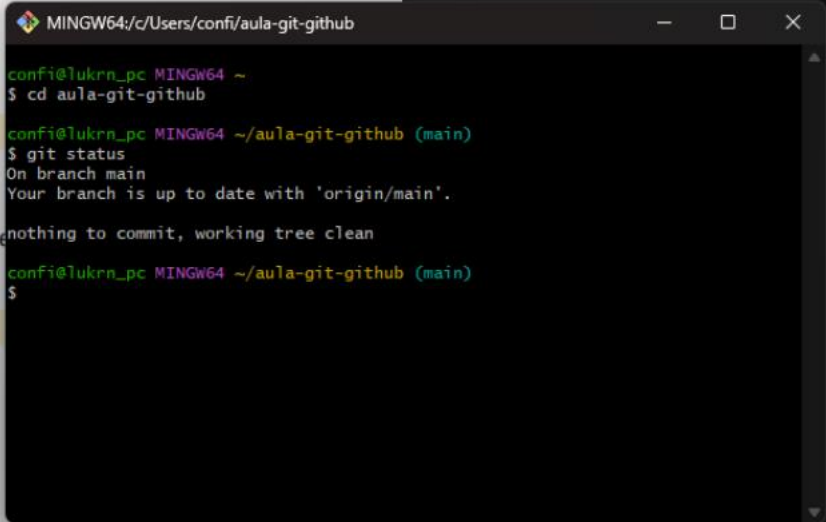

```


MINGW64/c/Users/confi/aula-git-github
confi@lukrn_pc MINGW64 ~
$ cd aula-git-github

confi@lukrn_pc MINGW64 ~/aula-git-github (main)
$ git status
On branch main
Your branch is up to date with 'origin/main'.

nothing to commit, working tree clean

confi@lukrn_pc MINGW64 ~/aula-git-github (main)
$
  
```

Exercício 03

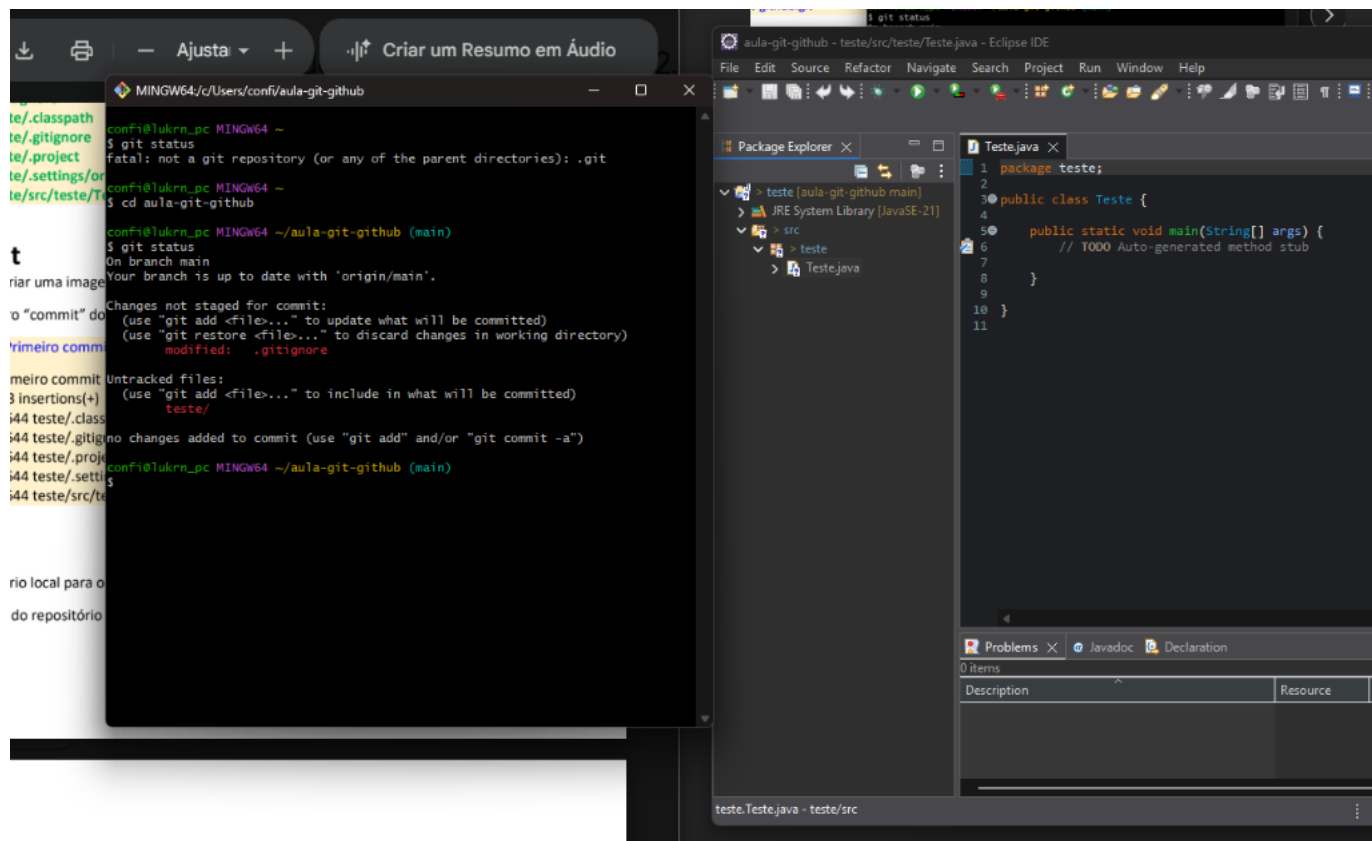

Git: adicionar arquivo a um repositório local e enviar para o repositório remoto.

```
MINGW64/c/Users/confi/aula-git-github
confi@lukrn_pc MINGW64 ~/aula-git-github (main)
$ git ad
git: 'ad' is not a git command. See 'git --help'.

The most similar commands are
  add
  am

confi@lukrn_pc MINGW64 ~/aula-git-github (main)
$ git add
Nothing specified, nothing added.
hint: Maybe you wanted to say 'git add .'
hint: Disable this message with "git config set advice.addEmptyPathsSpec false"

confi@lukrn_pc MINGW64 ~/aula-git-github (main)
$ git add .
warning: in the working copy of '.gitignore', LF will be replaced by CRLF the next time Git touches it
warning: in the working copy of 'teste/.gitignore', LF will be replaced by CRLF the next time Git touches it

confi@lukrn_pc MINGW64 ~/aula-git-github (main)
$ cd .

confi@lukrn_pc MINGW64 ~/aula-git-github (main)
$ git status
On branch main
Your branch is up to date with 'origin/main'.

Changes to be committed:
  (use "git restore --staged <file>..." to unstage)
    modified:   .gitignore
    new file:   teste/.classpath
    new file:   teste/.gitignore
    new file:   teste/.project
    new file:   teste/.settings/org.eclipse.core.resources.prefs
    new file:   teste/.settings/org.eclipse.jdt.core.prefs
    new file:   teste/src/teste/Teste.java

confi@lukrn_pc MINGW64 ~/aula-git-github (main)
$
```

```
MINGW64/c/Users/confi/aula-git-github
On branch main
Your branch is up to date with 'origin/main'.

Changes to be committed:
  (use "git restore --staged <file>..." to unstage)
        modified:   .gitignore
        new file:   teste/.classpath
        new file:   teste/.gitignore
        new file:   teste/.project
        new file:   teste/.settings/org.eclipse.core.resources.prefs
        new file:   teste/.settings/org.eclipse.jdt.core.prefs
        new file:   teste/src/teste/Teste.java


confi@lukrn_pc MINGW64 ~/aula-git-github (main)
$ git commit -m "Primeiro commit do projeto: Java Teste vazia."
[main 8bce705] Primeiro commit do projeto: Java Teste vazia.
 7 files changed, 52 insertions(+)
 create mode 100644 teste/.classpath
 create mode 100644 teste/.gitignore
 create mode 100644 teste/.project
 create mode 100644 teste/.settings/org.eclipse.core.resources.prefs
 create mode 100644 teste/.settings/org.eclipse.jdt.core.prefs
 create mode 100644 teste/src/teste/Teste.java

confi@lukrn_pc MINGW64 ~/aula-git-github (main)
$ git push
Enumerating objects: 15, done.
Counting objects: 100% (15/15), done.
Delta compression using up to 16 threads
Compressing objects: 100% (10/10), done.
Writing objects: 100% (13/13), 1.53 KiB | 1.53 MiB/s, done.
Total 13 (delta 1), reused 0 (delta 0), pack-reused 0 (from 0)
remote: Resolving deltas: 100% (1/1), completed with 1 local object.
To https://github.com/lukrn/aula-git-github.git
   8bb7afb..8bce705  main -> main

confi@lukrn_pc MINGW64 ~/aula-git-github (main)
$ git status
On branch main
Your branch is up to date with 'origin/main'.

nothing to commit, working tree clean

confi@lukrn_pc MINGW64 ~/aula-git-github (main)
$
```

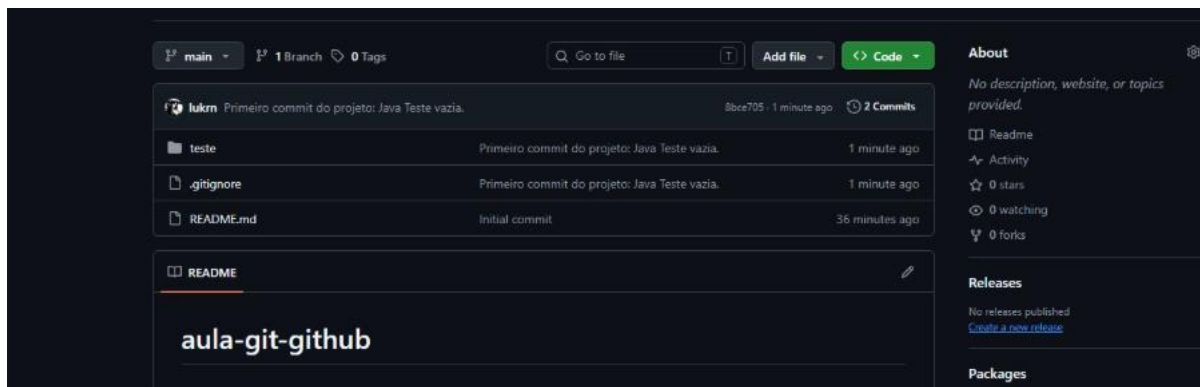

Verificação das pastas no Git hub 🖱


```

confi@lukrn_pc MINGW64 ~/aula-git-github (main)
$ git status
On branch main
Your branch is up to date with 'origin/main'.

Changes to be committed:
  (use "git restore --staged <file>..." to unstage)
        modified:   .gitignore
        new file:   teste/.classpath
        new file:   teste/.gitignore
        new file:   teste/.project
        new file:   teste/.settings/org.eclipse.core.resources.prefs
        new file:   teste/.settings/org.eclipse.jdt.core.prefs
        new file:   teste/src/teste/Teste.java

confi@lukrn_pc MINGW64 ~/aula-git-github (main)
$ git commit -m "Primeiro commit do projeto: Java Teste vazia."
[main 8bce705] Primeiro commit do projeto: Java Teste vazia.
 7 files changed, 52 insertions(+)
 create mode 100644 teste/.classpath
 create mode 100644 teste/.gitignore
 create mode 100644 teste/.project
 create mode 100644 teste/.settings/org.eclipse.core.resources.prefs
 create mode 100644 teste/.settings/org.eclipse.jdt.core.prefs
 create mode 100644 teste/src/teste/Teste.java

confi@lukrn_pc MINGW64 ~/aula-git-github (main)
$ git push
Enumerating objects: 15, done.
Counting objects: 100% (15/15), done.
Delta compression using up to 16 threads
Compressing objects: 100% (10/10), done.
Writing objects: 100% (13/13), 1.53 KiB | 1.53 MiB/s, done.
Total 13 (delta 12), reused 0 (delta 0), pack-reused 0 (from 0)
remote: Resolving deltas: 100% (1/1), completed with 1 local object.
To https://github.com/lukrn/aula-git-github.git
 8bb7afb..8bce705  main -> main

confi@lukrn_pc MINGW64 ~/aula-git-github (main)
$ git status
On branch main
Your branch is up to date with 'origin/main'.

nothing to commit, working tree clean

confi@lukrn_pc MINGW64 ~/aula-git-github (main)
$ git fetch

```

Exercício 04

Git: alterar o diretório remoto e buscar para o repositório local sem realizar o “merge”.

```

MINGW64~/Users/confi/aula-git-github/teste
Untracked files:
  (use "git add <file>..." to include in what will be committed)
        teste/src/teste/.classpath
        teste/src/teste/.project

nothing added to commit but untracked files present (use "git add" to track)

confi@lukrn_pc MINGW64 ~/aula-git-github (main)
$ git add teste2
Fatal: pathspec 'teste2' did not match any files

confi@lukrn_pc MINGW64 ~/aula-git-github (main)
$ git add teste

confi@lukrn_pc MINGW64 ~/aula-git-github (main)
$ cd teste

confi@lukrn_pc MINGW64 ~/aula-git-github/teste (main)
$ ^C

confi@lukrn_pc MINGW64 ~/aula-git-github/teste (main)
$ git add teste/src/teste/.classpath teste/src/teste/.project
warning: could not open directory 'teste/teste/src/teste/': No such file or directory
Fatal: pathspec 'teste/src/teste/.classpath' did not match any files

confi@lukrn_pc MINGW64 ~/aula-git-github/teste (main)
$ git commit -m "Add arquivos e configurações eclipse"
[main 3e387c0] Add arquivos e configurações eclipse
 2 files changed, 22 insertions(+)
 create mode 100644 teste/src/teste/.classpath
 create mode 100644 teste/src/teste/.project

confi@lukrn_pc MINGW64 ~/aula-git-github/teste (main)
$ git push
Enumerating objects: 11, done.
Counting objects: 100% (11/11), done.
Delta compression using up to 16 threads
Compressing objects: 100% (6/6), done.
Writing objects: 100% (7/7), 823 bytes | 823.00 KiB/s, done.
Total 7 (delta 2), reused 0 (delta 0), pack-reused 0 (from 0)
remote: Resolving deltas: 100% (2/2), completed with 2 local objects.
To https://github.com/lukrn/aula-git-github.git
 ff0eb2b..3e387c0  main -> main

confi@lukrn_pc MINGW64 ~/aula-git-github/teste (main)
$ status
bash: status: command not found


confi@lukrn_pc MINGW64 ~/aula-git-github/teste (main)
$ git status
On branch main
Your branch is up to date with 'origin/main'.

nothing to commit, working tree clean

confi@lukrn_pc MINGW64 ~/aula-git-github/teste (main)
$ ^C

confi@lukrn_pc MINGW64 ~/aula-git-github/teste (main)
$

```

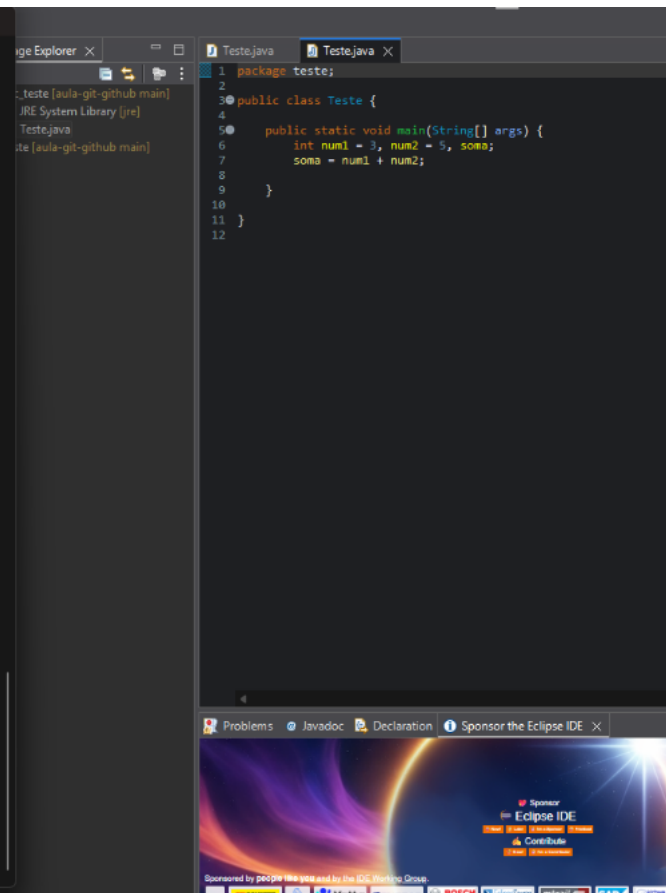

Exercício 05

Git: alterar o diretório remoto, buscar para o



The screenshot shows a GitHub web interface for the repository 'aula-git-github'. The file path is 'teste / src / teste / Teste.java'. The commit hash is '6771a29'. The file is 11 lines long (8 LOC) and 168 bytes. The code is as follows:

```
1 package teste;
2
3 public class Teste {
4
5     public static void main(String[] args) {
6         int num1 = 3, num2 = 5, soma;
7         soma = num1 + num2;
8         System.out.println(soma);
9     }
10
11 }
```

repositório local e realizar o “merge”.

da classe Java Teste no Eclipse e abrir novamente. Observar que as
adas rem

```
MINGW64/c/Users/confi/aula-git-github/teste
confi@lukrn_pc MINGW64 ~/aula-git-github/teste (main)
$ git pull
Already up to date.

confi@lukrn_pc MINGW64 ~/aula-git-github/teste (main)
$ git pull
remote: Enumerating objects: 11, done.
remote: Counting objects: 100% (11/11), done.
remote: Compressing objects: 100% (5/5), done.
remote: Total 6 (delta 4), reused 0 (delta 0), pack-reused 0 (from 0)
Unpacking objects: 100% (6/6), 1.09 KiB | 79.00 KiB/s, done.
From https://github.com/lukrn/aula-git-github
   3e387c0..6771a29  main    -> origin/main
Updating 3e387c0..6771a29
Fast-forward
 teste/src/teste/Teste.java | 2 +-
 1 file changed, 1 insertion(+), 1 deletion(-)

confi@lukrn_pc MINGW64 ~/aula-git-github/teste (main)
$ |
```

```
Teste.java
1 package teste;
2
3 public class Teste {
4
5     public static void main(String[] args) {
6         int num1 = 3, num2 = 5, soma;
7         soma = num1 + num2;
8         System.out.println(soma);
9     }
10 }
11
12
```

E concluído! Testes feitos e tudo concluído com sucesso.

<https://github.com/lukrn/aula-git-github.git>