


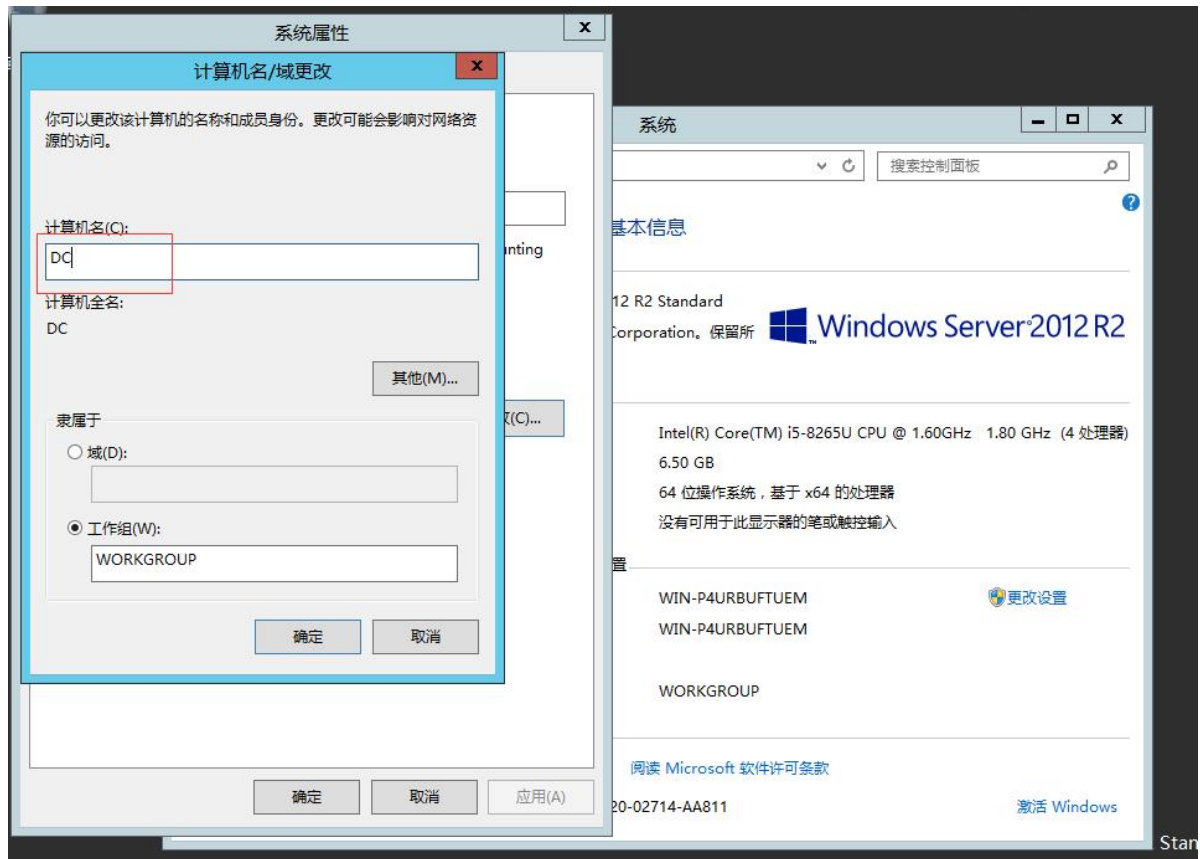




实验一：创建及加入域指导手册


实验环境：windows server 2012 R2 服务器


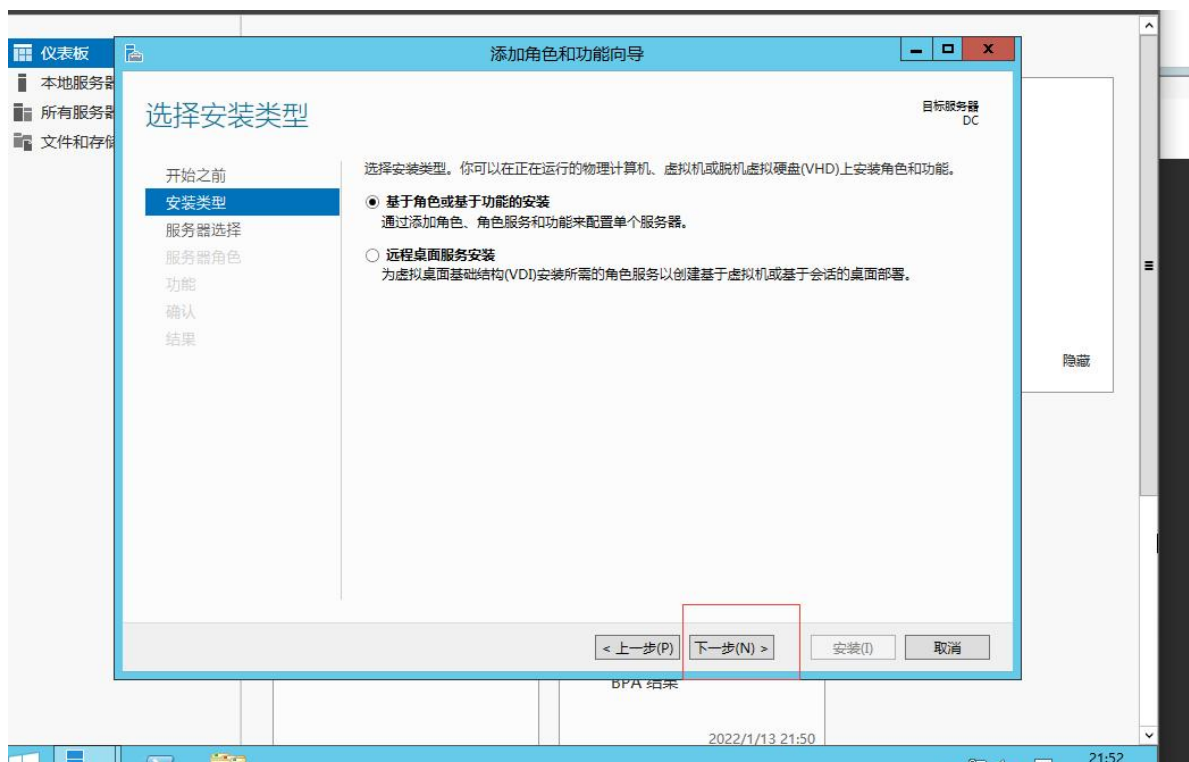


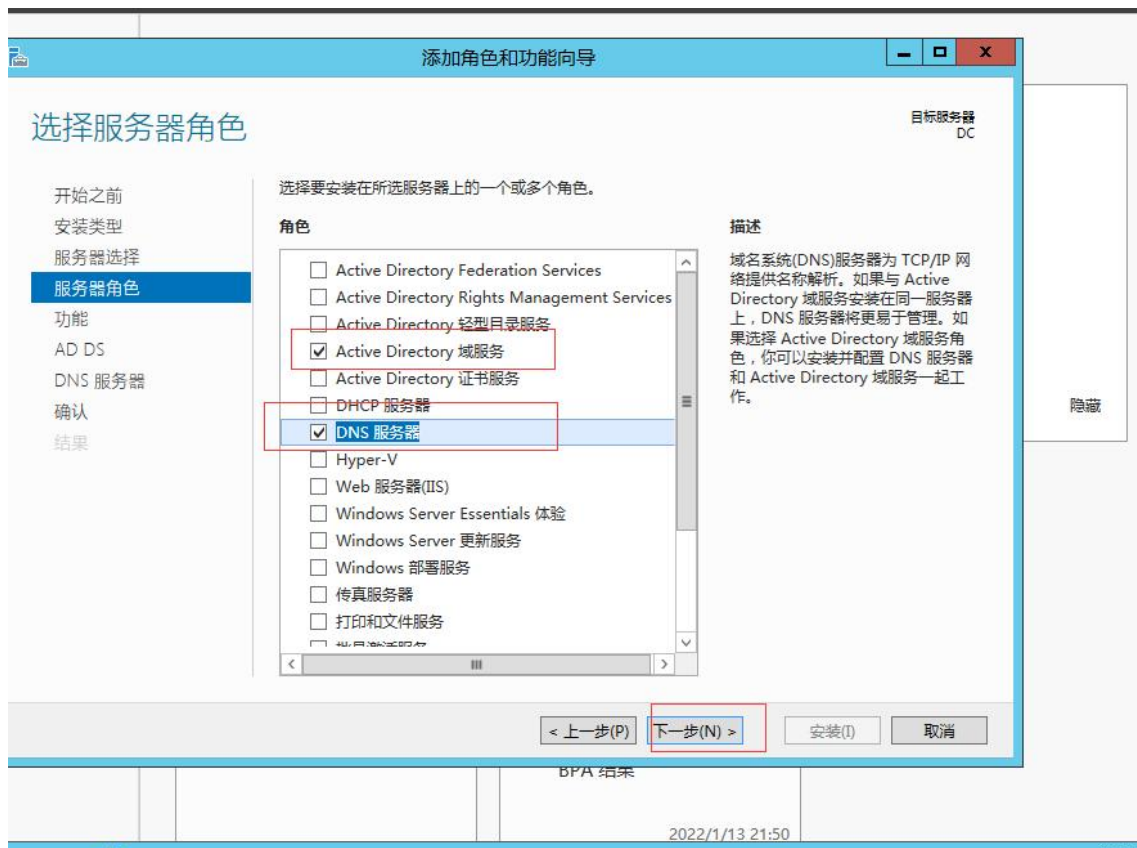


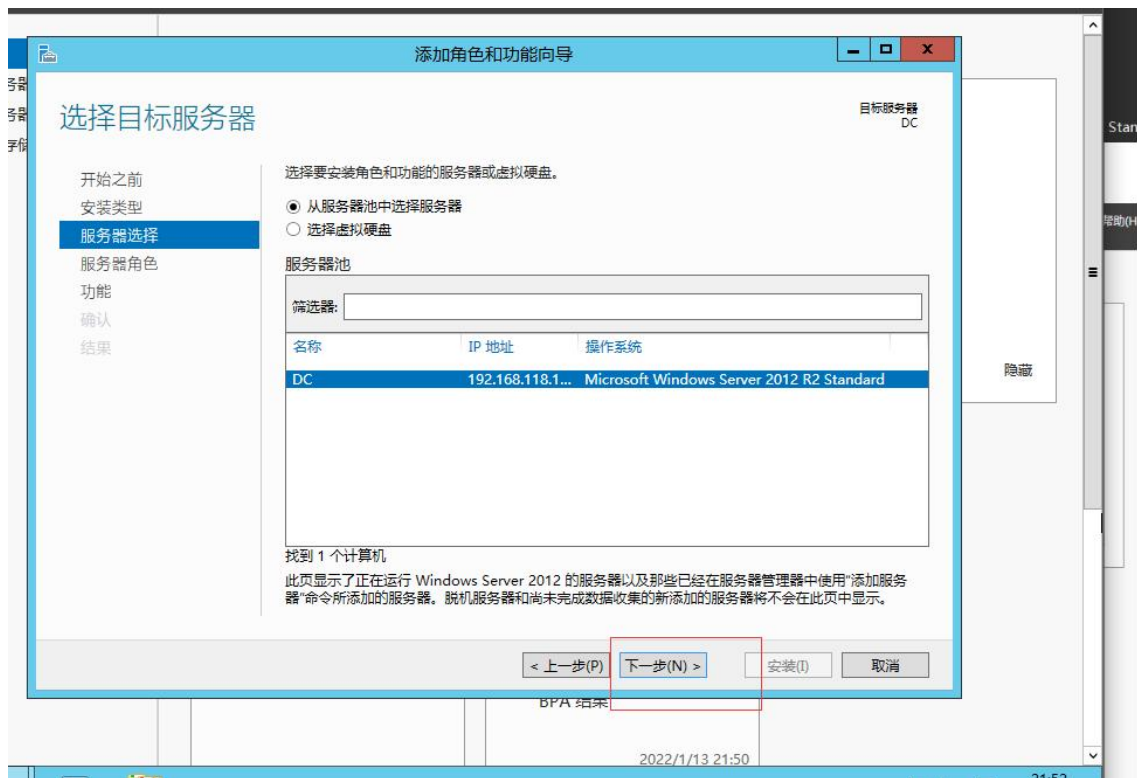


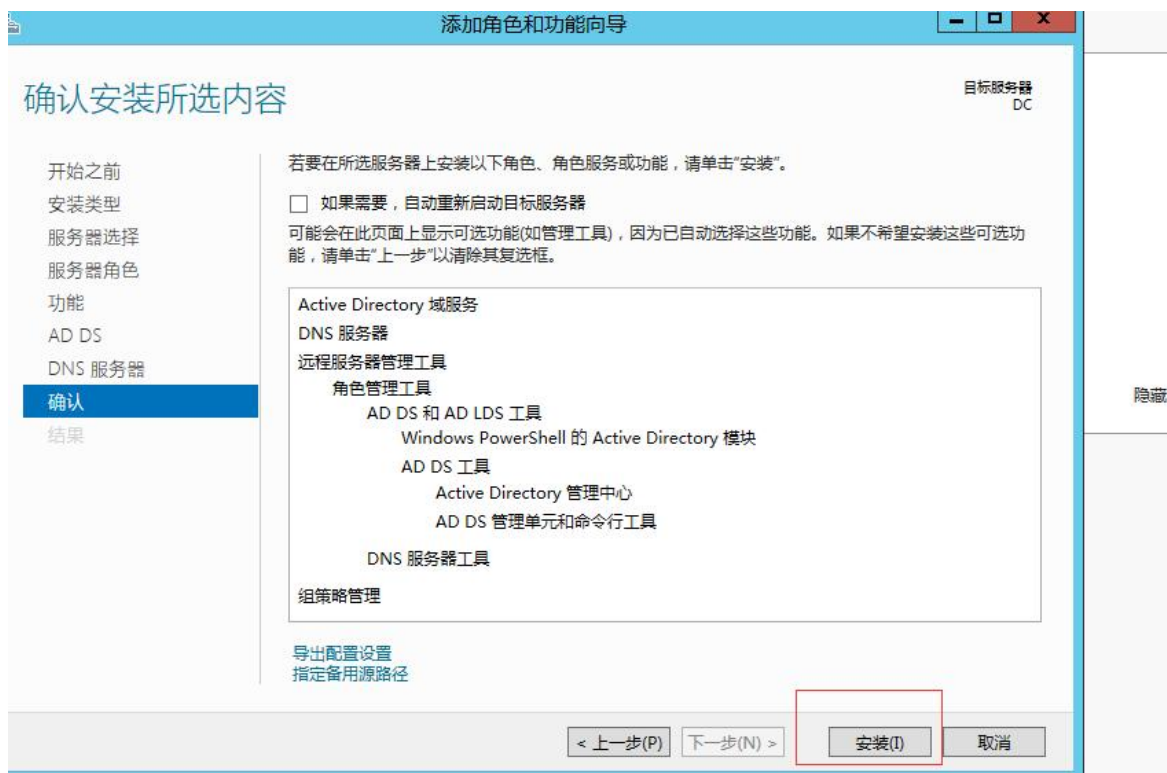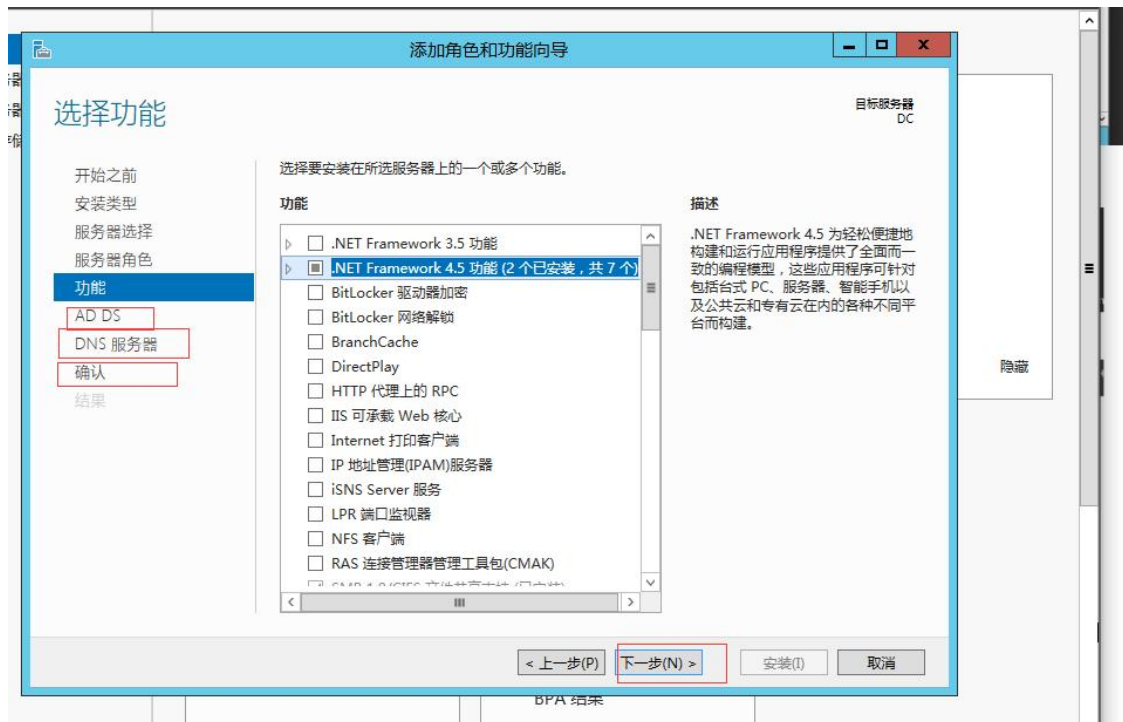

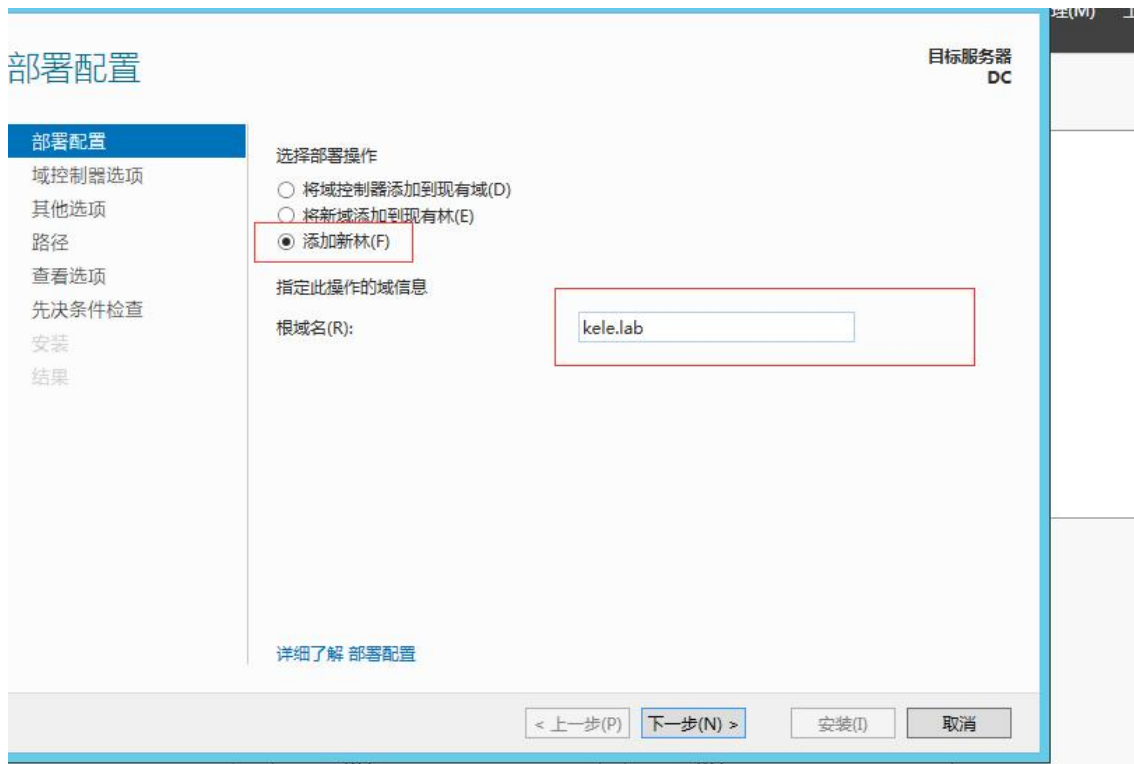

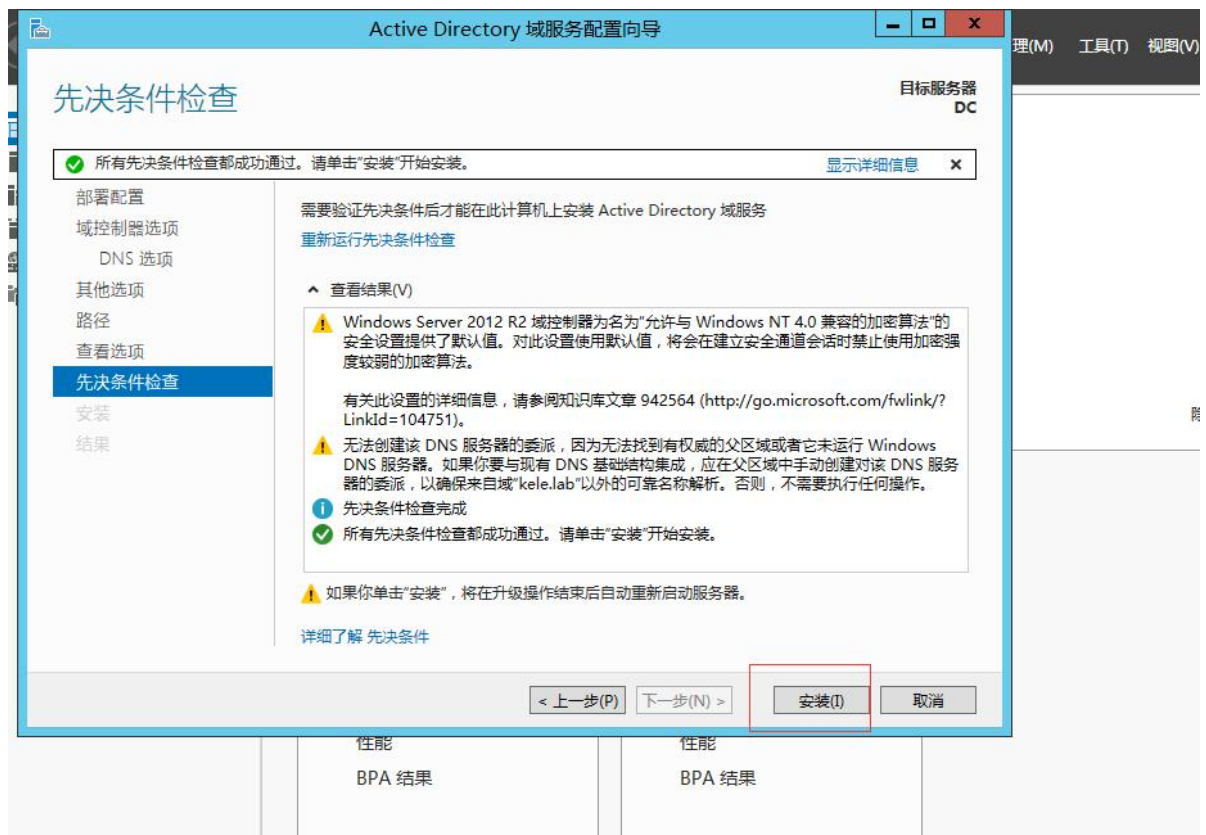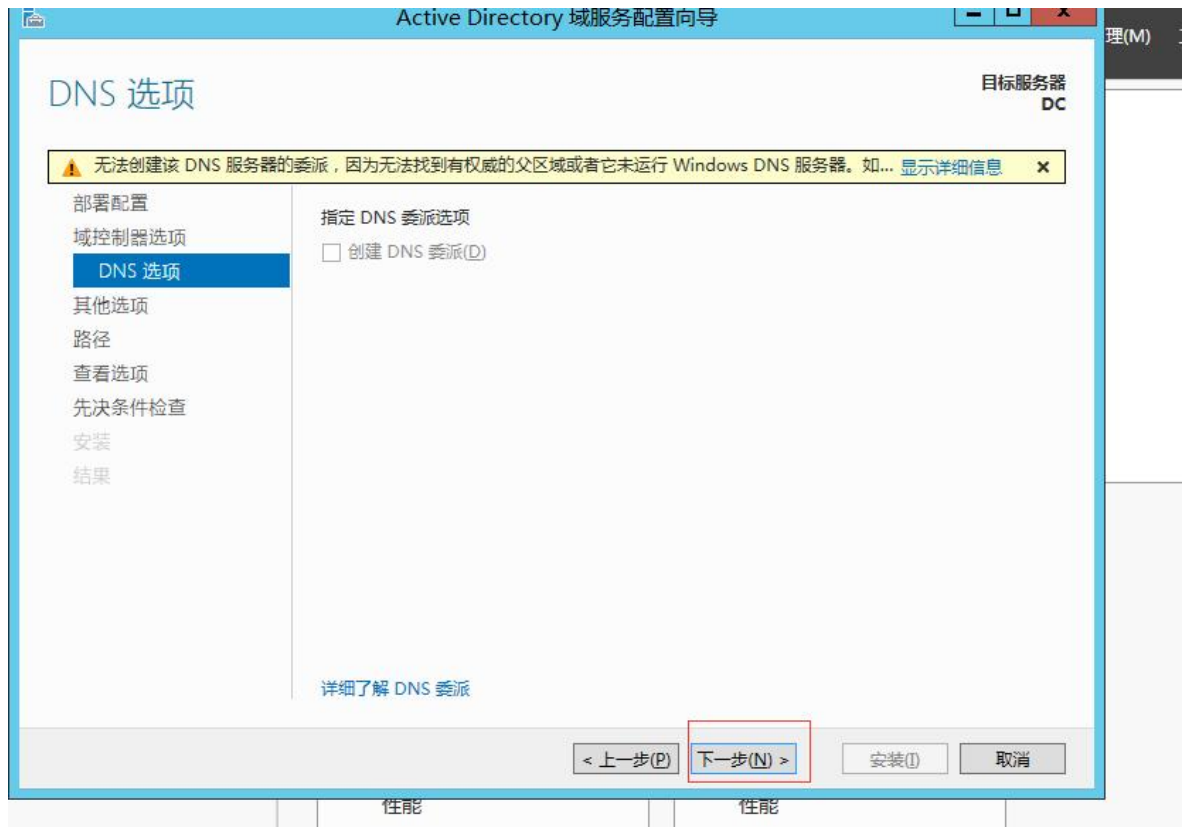

自动重启登陆后

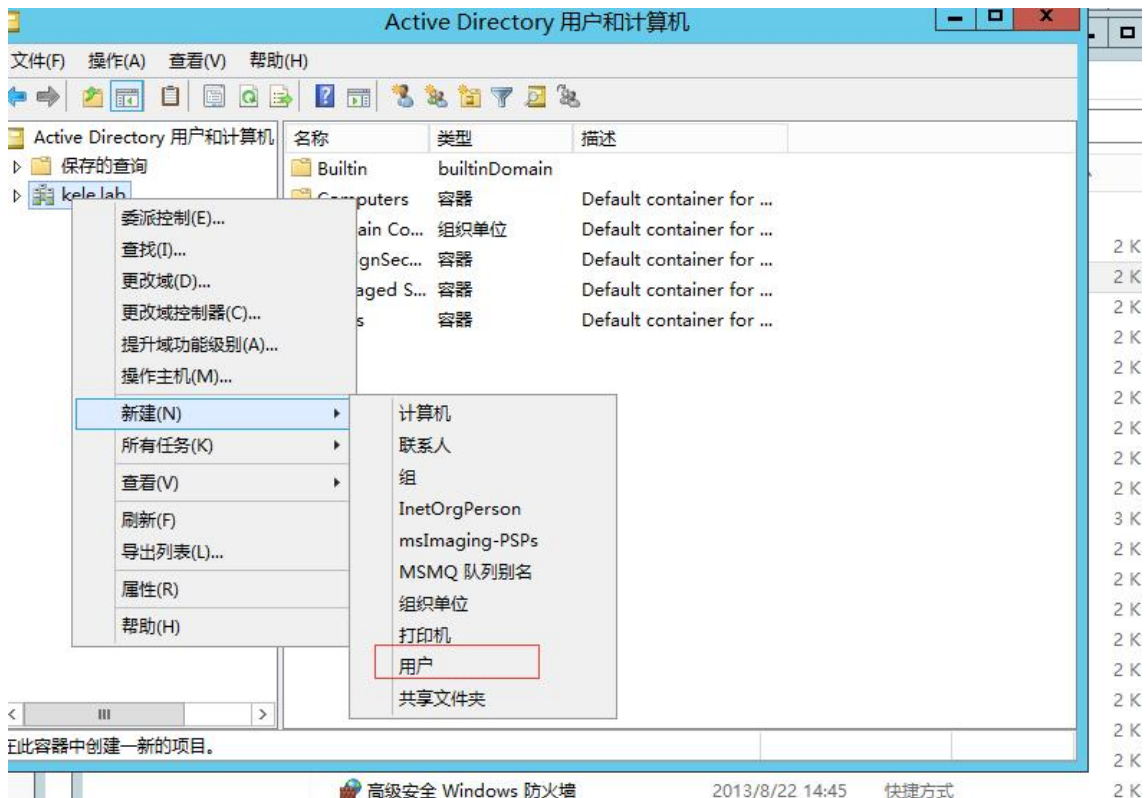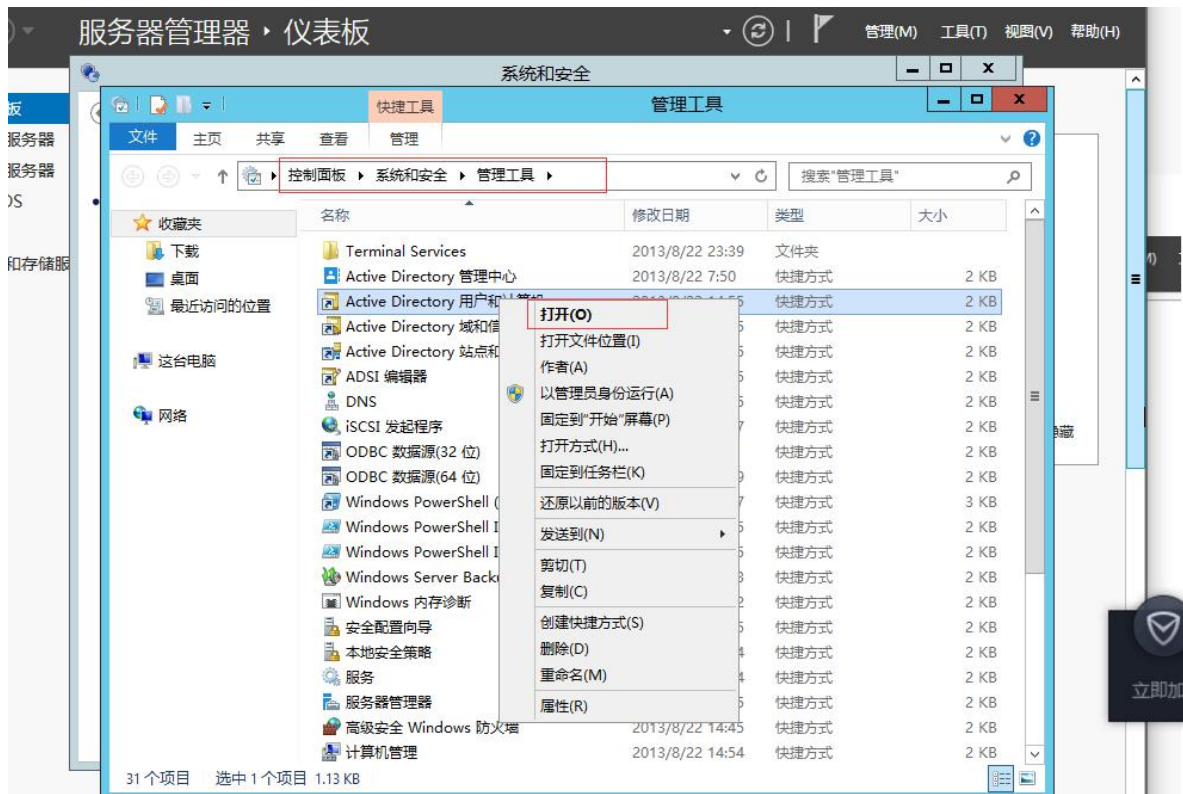

Active Directory 用户和计算机

新建对象 - 用户

创建于: kele.lab/

姓(L): test

名(F): 英文缩写(I):

姓名(A): test

用户登录名(U): test @kele.lab

用户登录名(Windows 2000 以前版本)(W): KELE\ test

< 上一步(B) 下一步(N) > 取消

新建对象 - 用户

创建于: kele.lab/

密码(P):

确认密码(C):

☐ 用户下次登录时须更改密码(M)


☐ 用户不能更改密码(S)



☒ 密码永不过期(W)

☐ 帐户已禁用(O)

< 上一步(B) 下一步(N) > 取消

win10 更改静态 ip 和 dns 服务器

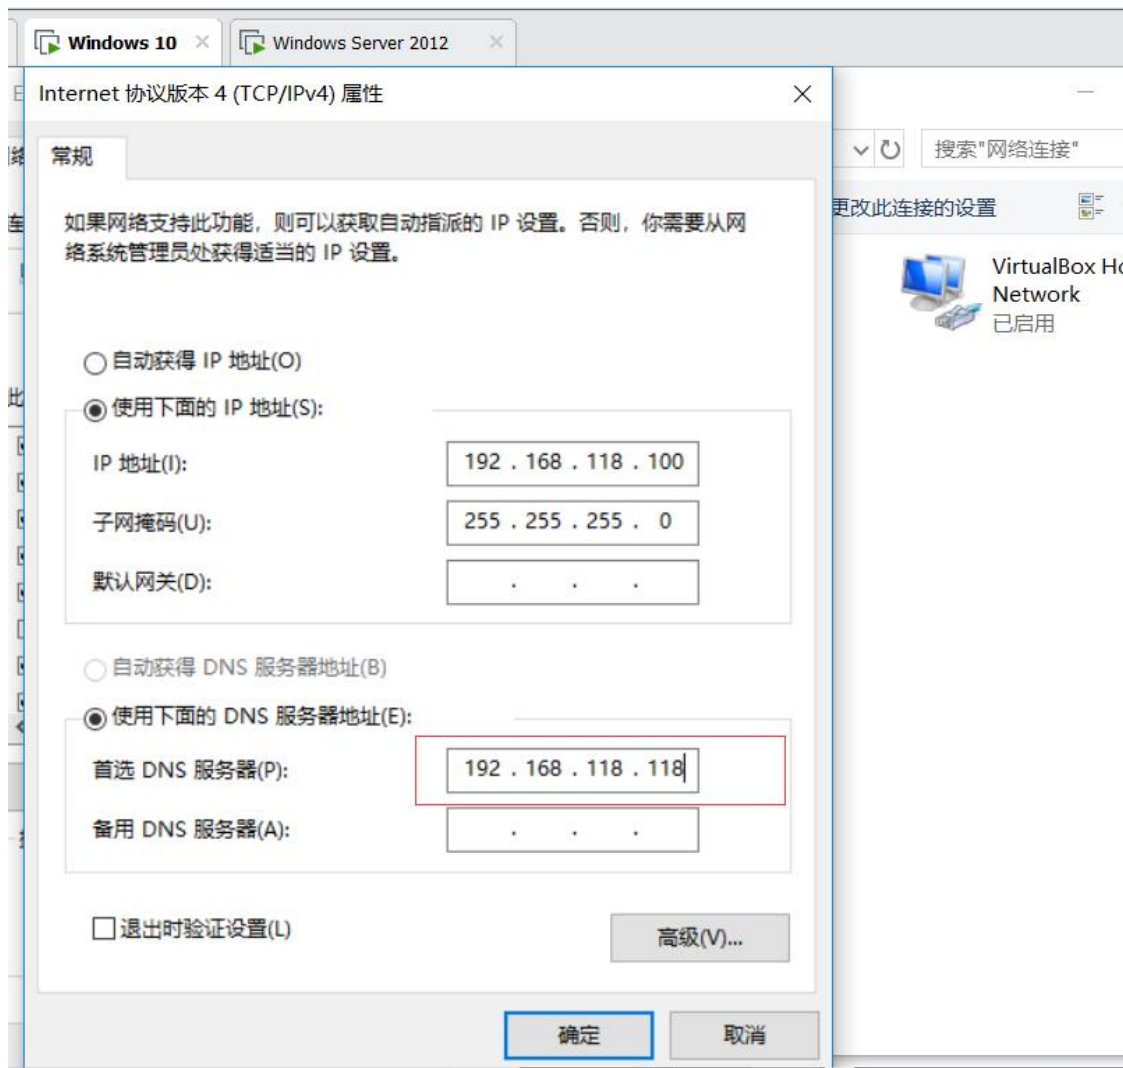

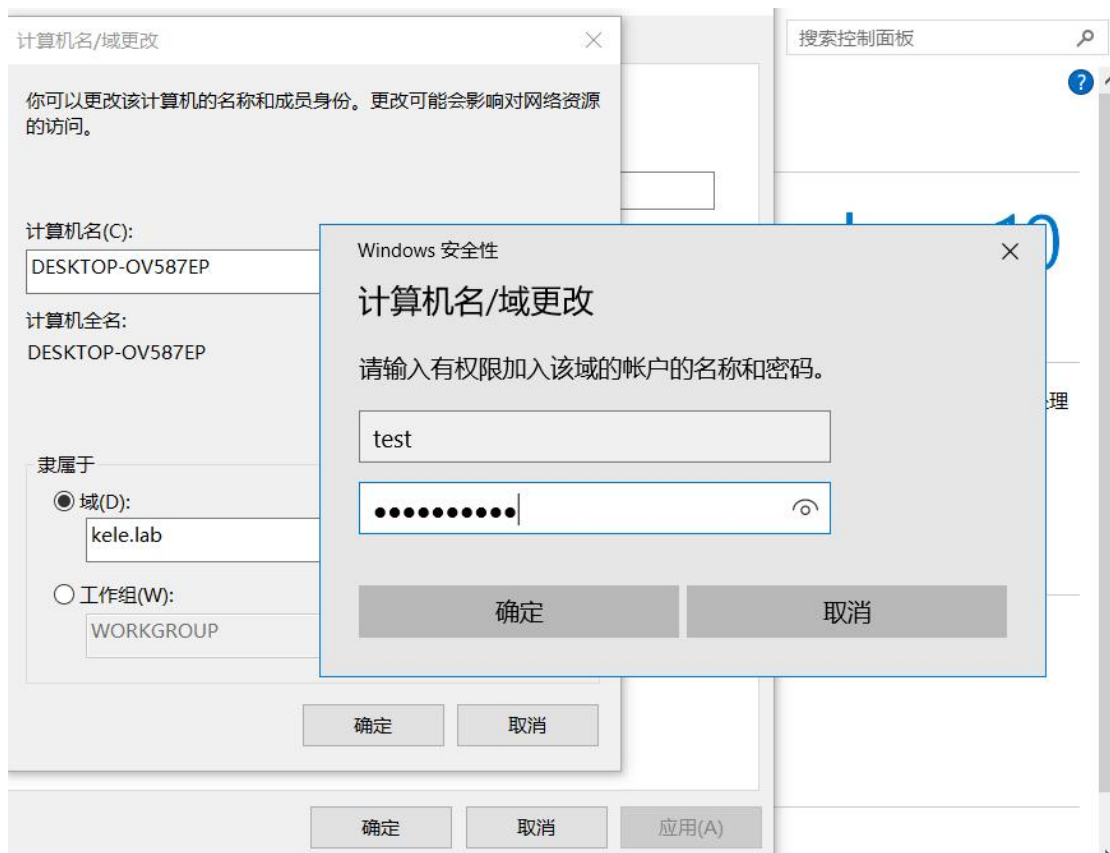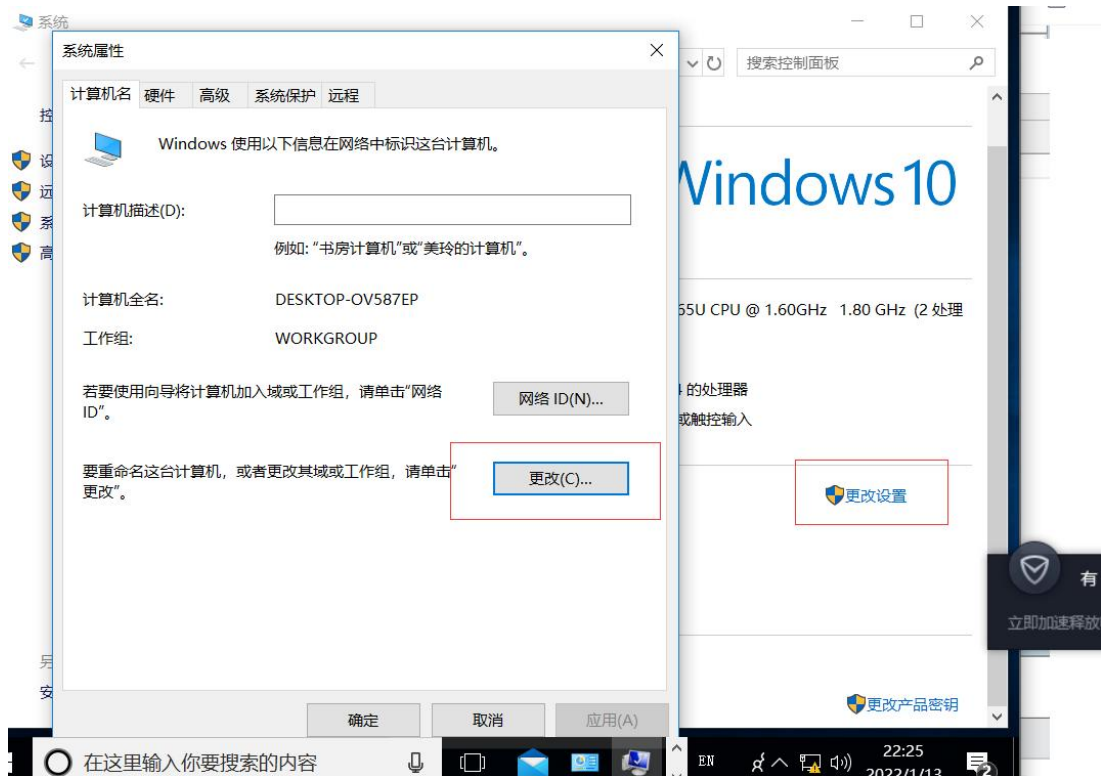

#重启后选择其他用户重新登陆，用户名：域名\用户名（kele\test）
ipconfig/all #得到域名

```
C:\Users\test>ipconfig/all
```

Windows IP 配置

```
主机名 . . . . . : DESKTOP-OV587EP
主 DNS 后缀 . . . . . : kele.lab
节点类型 . . . . . : 混合
IP 路由已启用 . . . . . : 否
WINS 代理已启用 . . . . . : 否
DNS 后缀搜索列表 . . . . . : kele.lab
```

```
以太网适配器 Ethernet0:
```

```
ping kele.lab #确定 ip
```

```
nslookup kele.lab
```

```
C:\Users\test>nslookup kele.lab
```

```
DNS request timed out.
    timeout was 2 seconds.
```

```
服务器: UnKnown
```

```
Address: 192.168.118.132
```

```
名称: kele.lab
```

```
Address: 192.168.118.132
```

```
net user /domain #列出域控中所有用户
```

```
C:\Users\test>net user /domain
```

```
这项请求将在域 kele.lab 的域控制器处理。
```

```
\\DC.kele.lab 的用户帐户
```

```
-----
Administrator
```

```
Guest
```

```
krbtgt
```

```
test
```

```
命令成功完成。
```