

INFO 490 MG:
A. I.
Web-Application Development

MOHIT GUPTA

Week 5 (Part-1):
Deployment

Index

1. Part-1

- a. Deployment
- b. Test API + Charts

2. Part-2 (Separate Slides)

- a. Django auth
- b. Code Cleanup
- c. External Database
- d. Google OAuth

**We'll begin with the in-class
deployment activity!**


Form groups of 3.

**Each peer in the team must be
from different groups.**

1. Deployment

.

**Our output-1 by the
end of deployment.**

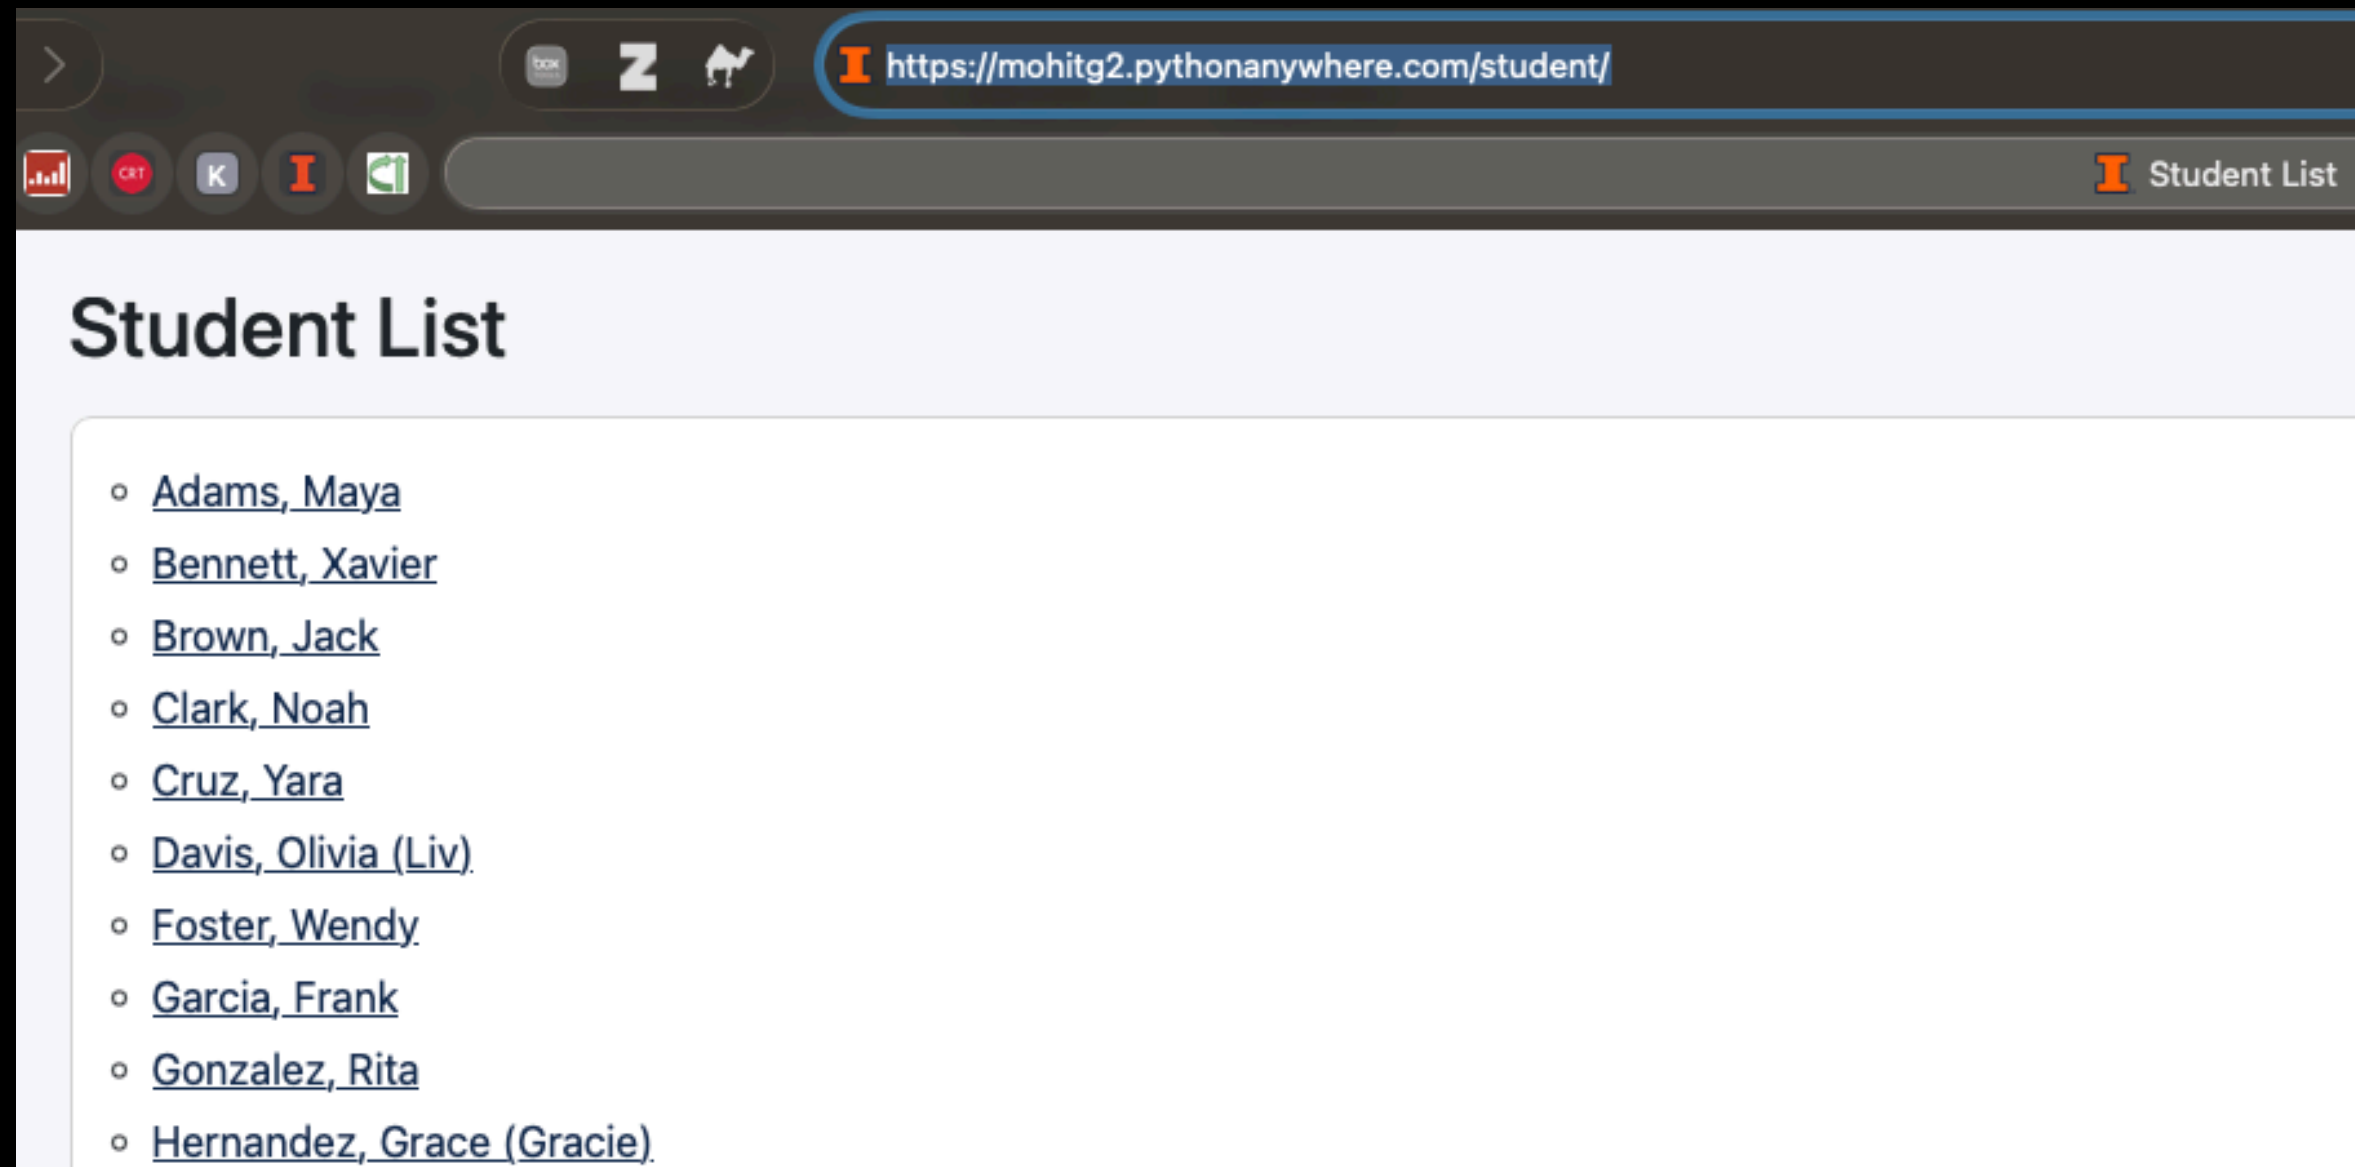

**Either you deploy your own website,
or use this public repository:**

<https://github.com/27guptamohit/illinois.edu-info490-demo.git>

**Let's begin development part of
this section.**

**Let's deploy it on
the production server**

1.a Create Cloud Account

Create your account
on
PythonAnywhere.com

<https://www.pythonanywhere.com/pricing/>



Plans and pricing

Beginner: Free!

A limited account with one web app at `your-username.pythonanywhere.com`, restricted outbound Internet access from your apps, low CPU/bandwidth, no IPython/Jupyter notebook support.

It works and it's a great way to get started!

Create a Beginner account

Education accounts

Are you a teacher looking for a place your students can code Python? You're not alone.

Click through to find out more about our [Education beta](#).

All of our paid plans come with a no-quibble 30-day money-back guarantee — you're billed monthly and you can cancel at any time. The minimum contract length is just one month. You get unrestricted Internet access from your applications, unlimited in-browser Python, Bash and database consoles, and full SSH access to your account. All accounts (including free ones) have screen-sharing with other PythonAnywhere accounts, and free SSL support.

[Send feedback](#) [Forums](#) [Help](#) [Blog](#) [Account](#) [Log out](#)

 **python**anywhere
by ANACONDA

Dashboard Consoles Files Web Tasks Databases

Your email address has been confirmed. You can manage your email preferences from [this page](#). ✕

Dashboard

Welcome, [mohitg2](#)

CPU Usage: 0% used – 0.00s of 100s. Resets in 23 hours, 59 minutes [More info](#)

File storage: 0% full – 60.0 KB of your 512.0 MB quota [More info](#)

Upgrade Account

Recent
Consoles

+ 5 -

You have no recent consoles.

New console:

\$ Bash

>>> Python ▾

More...

Consoles

Consoles are where you can type commands and see the result immediately.

Python consoles just run Python and Bash consoles (sometimes called the command line or terminals) are for system commands.

« Prev

Next »

End tour

Recent
Notebooks

+ 5 -

Your account does not support Jupyter Notebooks. [Upgrade your account](#) to get access!

All
Web apps

You don't have any web apps.

Open Web tab

[Send feedback](#) [Forums](#) [Help](#) [Blog](#) [Account](#) [Log out](#)

 **python**anywhere
by ANACONDA

Dashboard [Consoles](#) [Files](#) [Web](#) [Tasks](#) [Databases](#)

Your email address has been confirmed. You can manage your email preferences from [this page](#). ✕

Dashboard

Welcome, [mohitg2](#)

CPU Usage: 0% used – 0.00s of 100s. Resets in 23 hours, 59 minutes [More Info](#)

File storage: 0% full – 60.0 KB of your 512.0 MB quota [More Info](#)

[Upgrade Account](#)

Recent
Consoles

+5-

You have no recent consoles.

New console:

\$ Bash

>>> Python ▾

More...

Recent
Files

+5-

You have no recently edited files.

+ Open another file

Browse files

Files

If you want to write a program, you'll need to create a file to store it in.

This panel shows files that you've edited recently, and you can click the 'Open another file' button to create a new file, or to edit an existing file.

« Prev

Next »

End tour

Web apps

You don't have any web apps.

[Open Web tab](#)

[Send feedback](#) [Forums](#) [Help](#) [Blog](#) [Account](#) [Log out](#)

 **pythonanywhere**
by ANACONDA

[Dashboard](#) [Consoles](#) [Files](#) [Web](#) [Tasks](#) [Databases](#)

Your email address has been confirmed. You can manage your email preferences from [this page](#). ✕

Dashboard

Welcome, [mohitg2](#)

CPU Usage: 0% used – 0.00s of 100s. Resets in 23 hours, 59 minutes [More Info](#)

File storage: 0% full – 60.0 KB of your 512.0 MB quota [More Info](#)

[Upgrade Account](#)

Recent Consoles

+ 5 -

You have no recent consoles.

Recent Files

+ 5 -

You have no recently edited files.

New console:

\$ Bash

>>> Python ▾

More...

+ Open another file

Browse files

Web apps

You can create websites on PythonAnywhere; click 'Open Web tab' to set one up.

« Prev

Next »

End tour

All Web apps

You don't have any web apps.

Open Web tab

15

[Send feedback](#) [Forums](#) [Help](#) [Blog](#) [Account](#) [Log out](#)

 **pythonanywhere**
by ANACONDA

Dashboard [Consoles](#) [Files](#) [Web](#) [Tasks](#) [Databases](#)

Your email address has been confirmed. You can manage your email preferences from [this page](#). ✕

Dashboard

Welcome, [mohitg2](#)

CPU Usage: 0% used – 0.00s of 100s. Resets in 23 hours, 59 minutes [More Info](#)

File storage: 0% full – 60.0 KB of your 512.0 MB quota [More Info](#)

[Upgrade Account](#)

Recent Consoles

+ 5 -

You have no recent consoles.

New console:

\$ Bash

>>> Python ▾

More...

Recent Notebooks

+ 5 -

Your account does not support Jupyter Notebooks. [Upgrade your account](#) to get access!

All Web apps

You don't have any web apps.

[Open Web tab](#)

Notebooks

Paid PythonAnywhere accounts can create Jupyter Notebooks, a great way to do data analysis.

« Prev

Next »

[End tour](#)

[Send feedback](#) [Forums](#) [Help](#) [Blog](#) [Account](#) [Log out](#)

 **python**anywhere
by ANACONDA

Your email address has been confirmed. You can manage your email preferences from this page.

Dashboard

CPU Usage: 0% used – 0.00s of 100s. Resets in 23 hours, 59 minutes [More Info](#)

File storage: 0% full – 60.0 KB of your 512.0 MB quota [More Info](#)

Recent Consoles

+

5

–

You have no recent consoles.

Recent Files

+

5

–

You have no recently edited files.

Recent Notebooks

+

5

–

Your account does not support Jupyter Notebooks. [Upgrade your account](#) to get access!

All Web apps

+

5

–

You don't have any web apps.

New console:

\$ Bash

>>> Python ▾

More...

+ Open another file

Browse files

Open Web tab

Dashboard

Consoles

Files

Web

Tasks

Databases

The tabs

The 'tabs' up here take you to separate pages where you can see more details about your consoles, files, and web apps, and you can also set up tasks and databases — there's more information on each page.

« Prev


Next »

End tour

**1.b Provide Teacher Access
and add
PythonAnywhere Username
to
ALLOWED_HOSTS**

**Provide me “Teacher Access”
so that I can have
full access to your files to grade your code**

Account > Education > “Enter my username: mohitg2

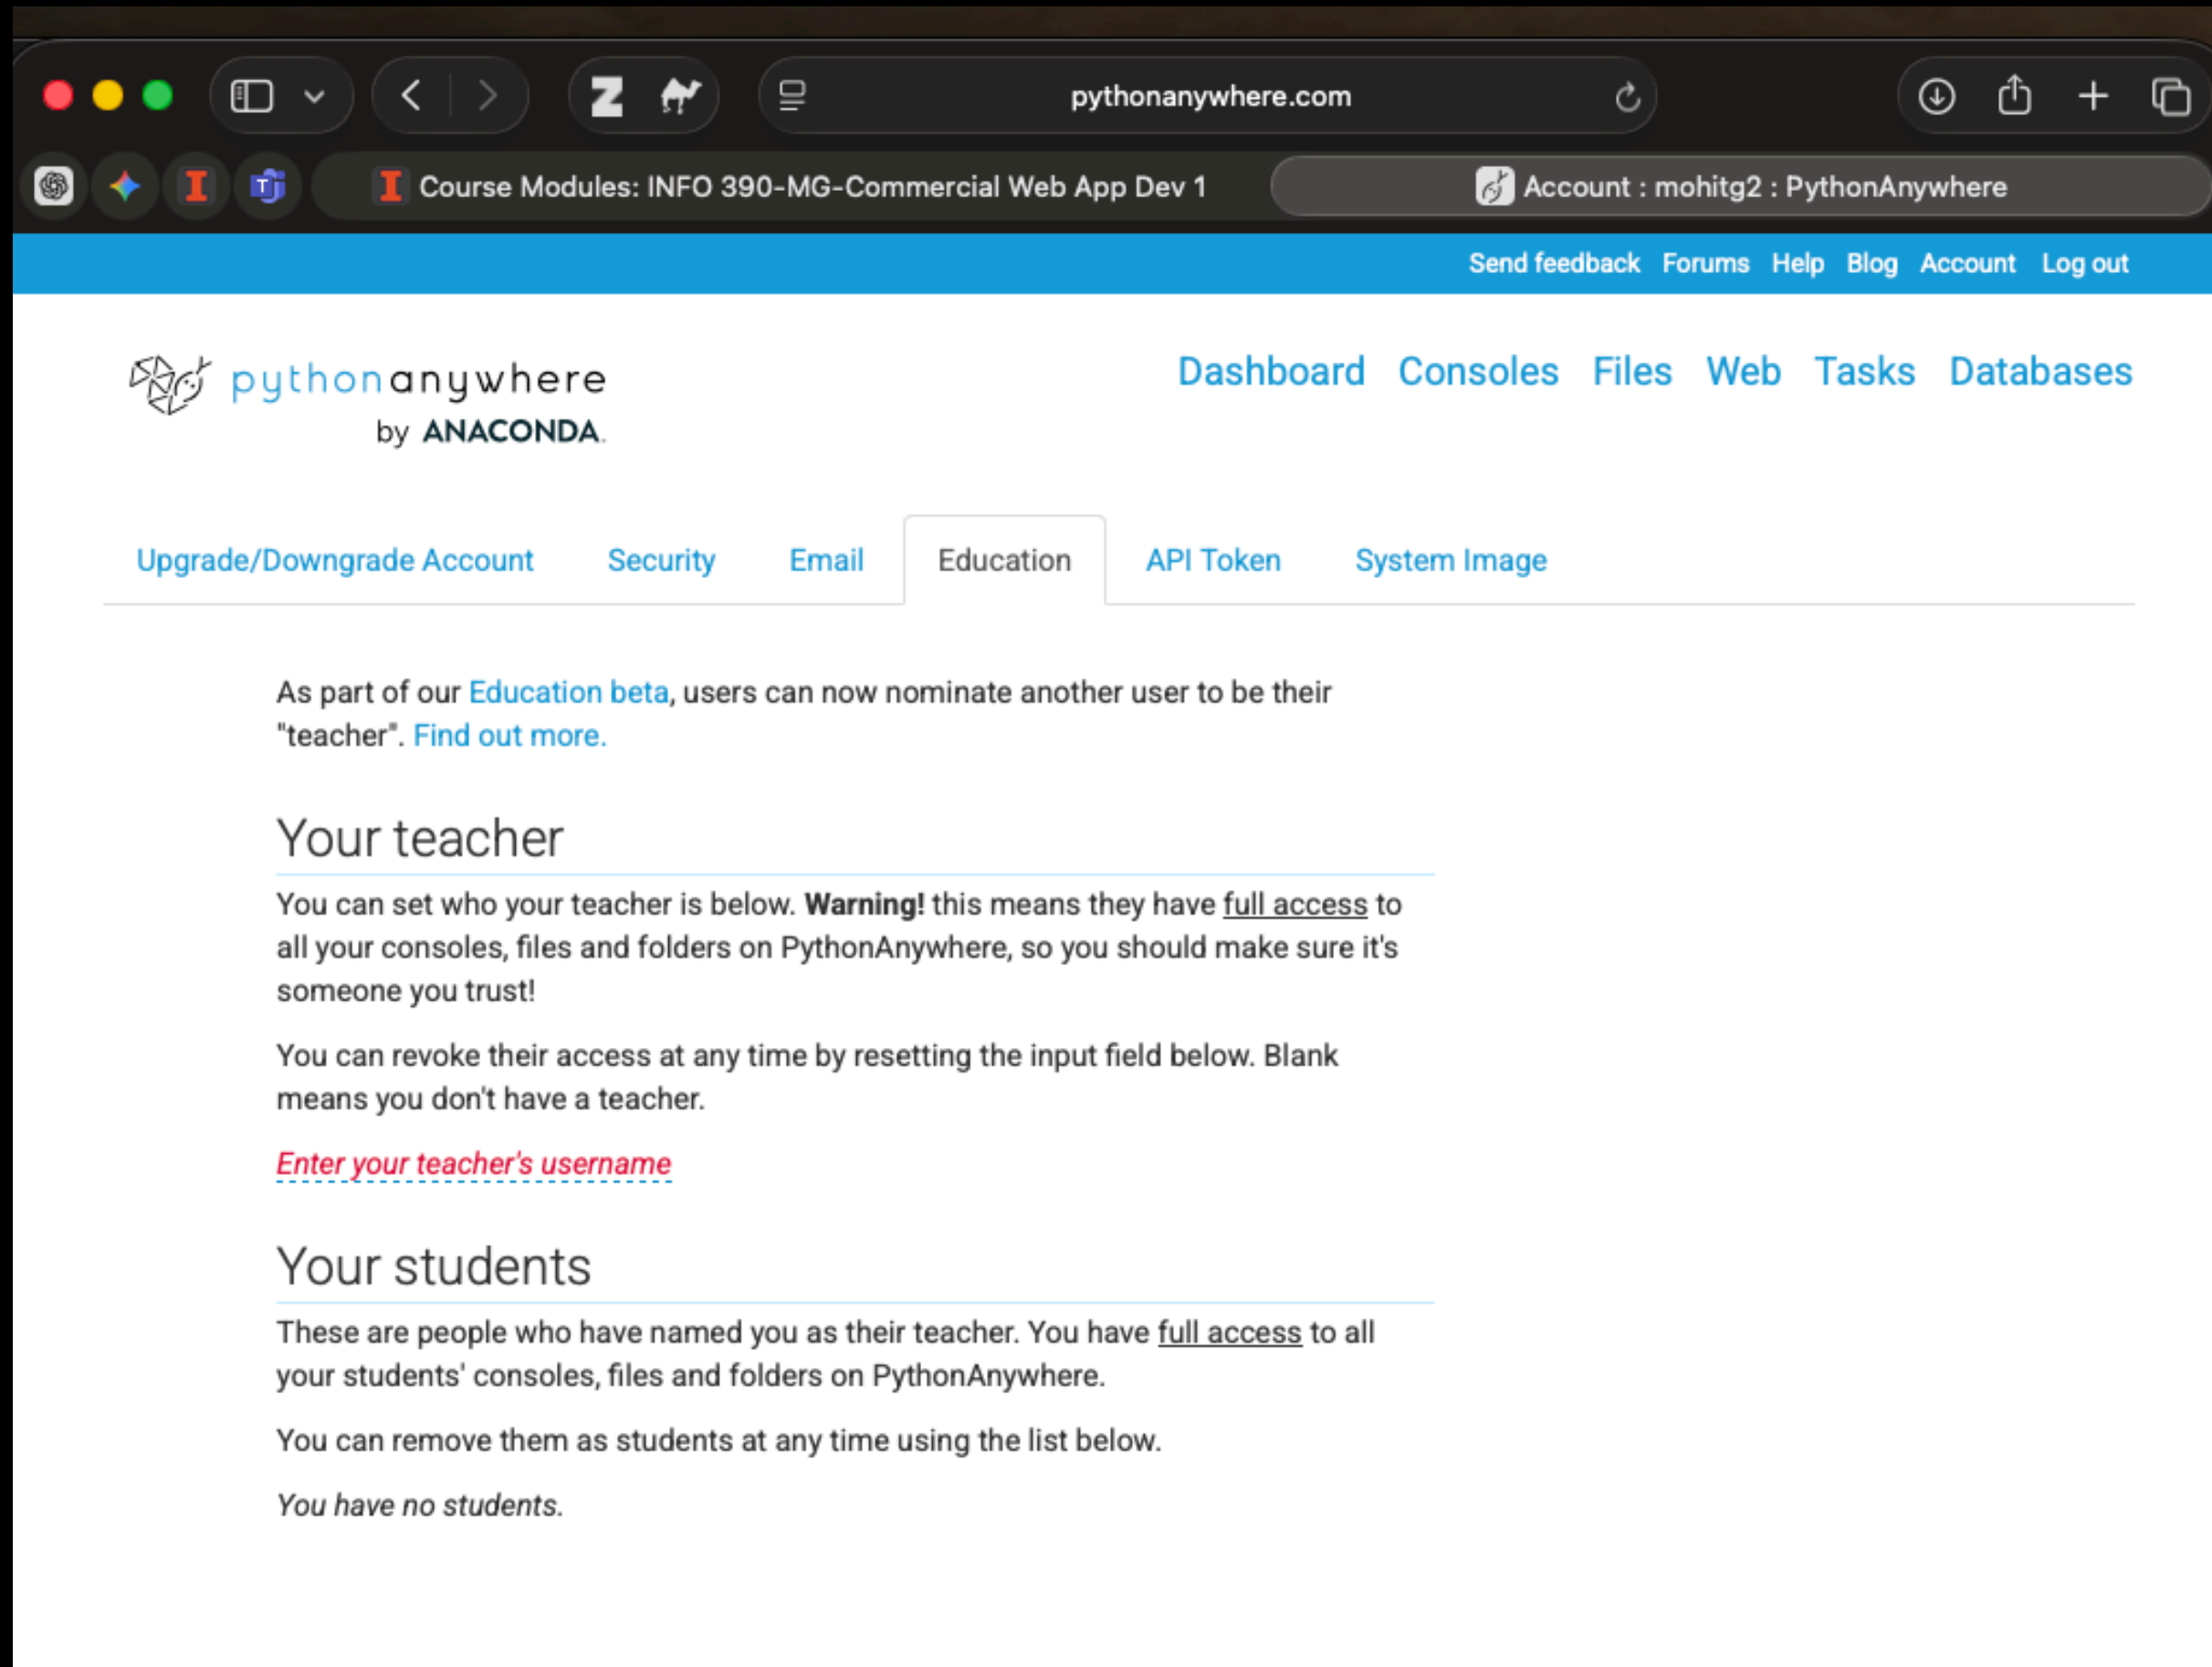

The screenshot shows a web browser window with the URL `pythonanywhere.com`. The browser's address bar shows the page title "Account : mohitg2 : PythonAnywhere". The page has a blue header bar with links: "Send feedback", "Forums", "Help", "Blog", "Account", and "Log out". Below the header, the PythonAnywhere logo is on the left, and navigation links "Dashboard", "Consoles", "Files", "Web", "Tasks", and "Databases" are on the right. A secondary navigation bar contains tabs: "Upgrade/Downgrade Account", "Security", "Email", "Education" (which is selected), "API Token", and "System Image". The main content area has a heading "Your teacher" and a paragraph explaining the "Education beta" feature, where users can nominate a teacher. It includes a warning that the teacher has full access to all consoles, files, and folders. Below this, there is a section for "Your students" with a paragraph explaining that students have full access to the user's resources. The page ends with the text "You have no students."

pythonanywhere
by ANACONDA.

Dashboard Consoles Files Web Tasks Databases

Upgrade/Downgrade Account Security Email **Education** API Token System Image

As part of our [Education beta](#), users can now nominate another user to be their "teacher". [Find out more.](#)

Your teacher

You can set who your teacher is below. **Warning!** this means they have full access to all your consoles, files and folders on PythonAnywhere, so you should make sure it's someone you trust!

You can revoke their access at any time by resetting the input field below. Blank means you don't have a teacher.

Enter your teacher's username

Your students

These are people who have named you as their teacher. You have full access to all your students' consoles, files and folders on PythonAnywhere.

You can remove them as students at any time using the list below.

You have no students.

Now, add your
PythonAnywhere URL
to the list of ALLOWED Hosts.

Open production.py

 pythonanywhere
by ANACONDA.

[/home/mohitg27/illinois.edu-info490-demo/illinois/](#)  settings

[Open Bash console here](#)

Directories

[New directory](#)

[__pycache__/](#) 

Files

 __init__.py	  	2026-02-17 21:57	0 bytes
 base.py	  	2026-02-17 21:57	3.3 KB
 development.py	  	2026-02-17 21:57	525 bytes
 production.py	  	2026-02-17 21:57	490 bytes
 requirements.txt	  	2026-02-17 23:11	339 bytes

[Upload a file](#)
100MiB maximum size

Click on “Web” in a new tab to find out your domain.

Send Feedback Forums Help Blog Account Log out

Dashboard Consoles Files **Web** Tasks Databases

Configuration for [mohitg27.pythonanywhere.com](#)

Reload:

 Reload mohitg27.pythonanywhere.com

Best before date:

We're happy to host your free website – and keep it free – but you'll need to log in at least once every one month and click the "Run until 1 month from today" button below. We'll send you an email a week before the site is disabled so that you don't forget to do that.

This site will be disabled on **Tuesday 17 March 2026**

 Run until 1 month from today

[Paying users'](#) sites stay up forever without any need to log in to keep them running.

Add your domain here.

 `/home/mohitg27/illinois.edu-info490-demo/illinois/settings/production.py`

```
1 # Paste in and as: illinois/settings/production.py
2
3 # We will first import everything from base.py (our new settings.py file that we renamed to base.py)
4 from .base import *
5
6 DEBUG = False
7
8 # Replace it with your name:
9 ALLOWED_HOSTS = ['localhost', '127.0.0.1', 'mohitg27.pythonanywhere.com']
10
11 # Database for the development server
12 DATABASES = {
13     'default': {
14         'ENGINE': 'django.db.backends.sqlite3',
15         # put the DB in project-root/data/db.sqlite3
16         'NAME': BASE_DIR / 'data' / 'db.sqlite3',
17     }
18 }
19
```

1.c Create a console

Console > “Select: Bash”



Start a new console:


Python: [3.13](#) / [3.12](#) / [3.11](#) / [3.10](#) / [3.9](#) IPyth

Other: [Bash](#) | [MySQL](#)

Custom: [+](#)

ls: It will let you see all the files in your current directory

git clone {link to your project folder}: Will copy your entire project here

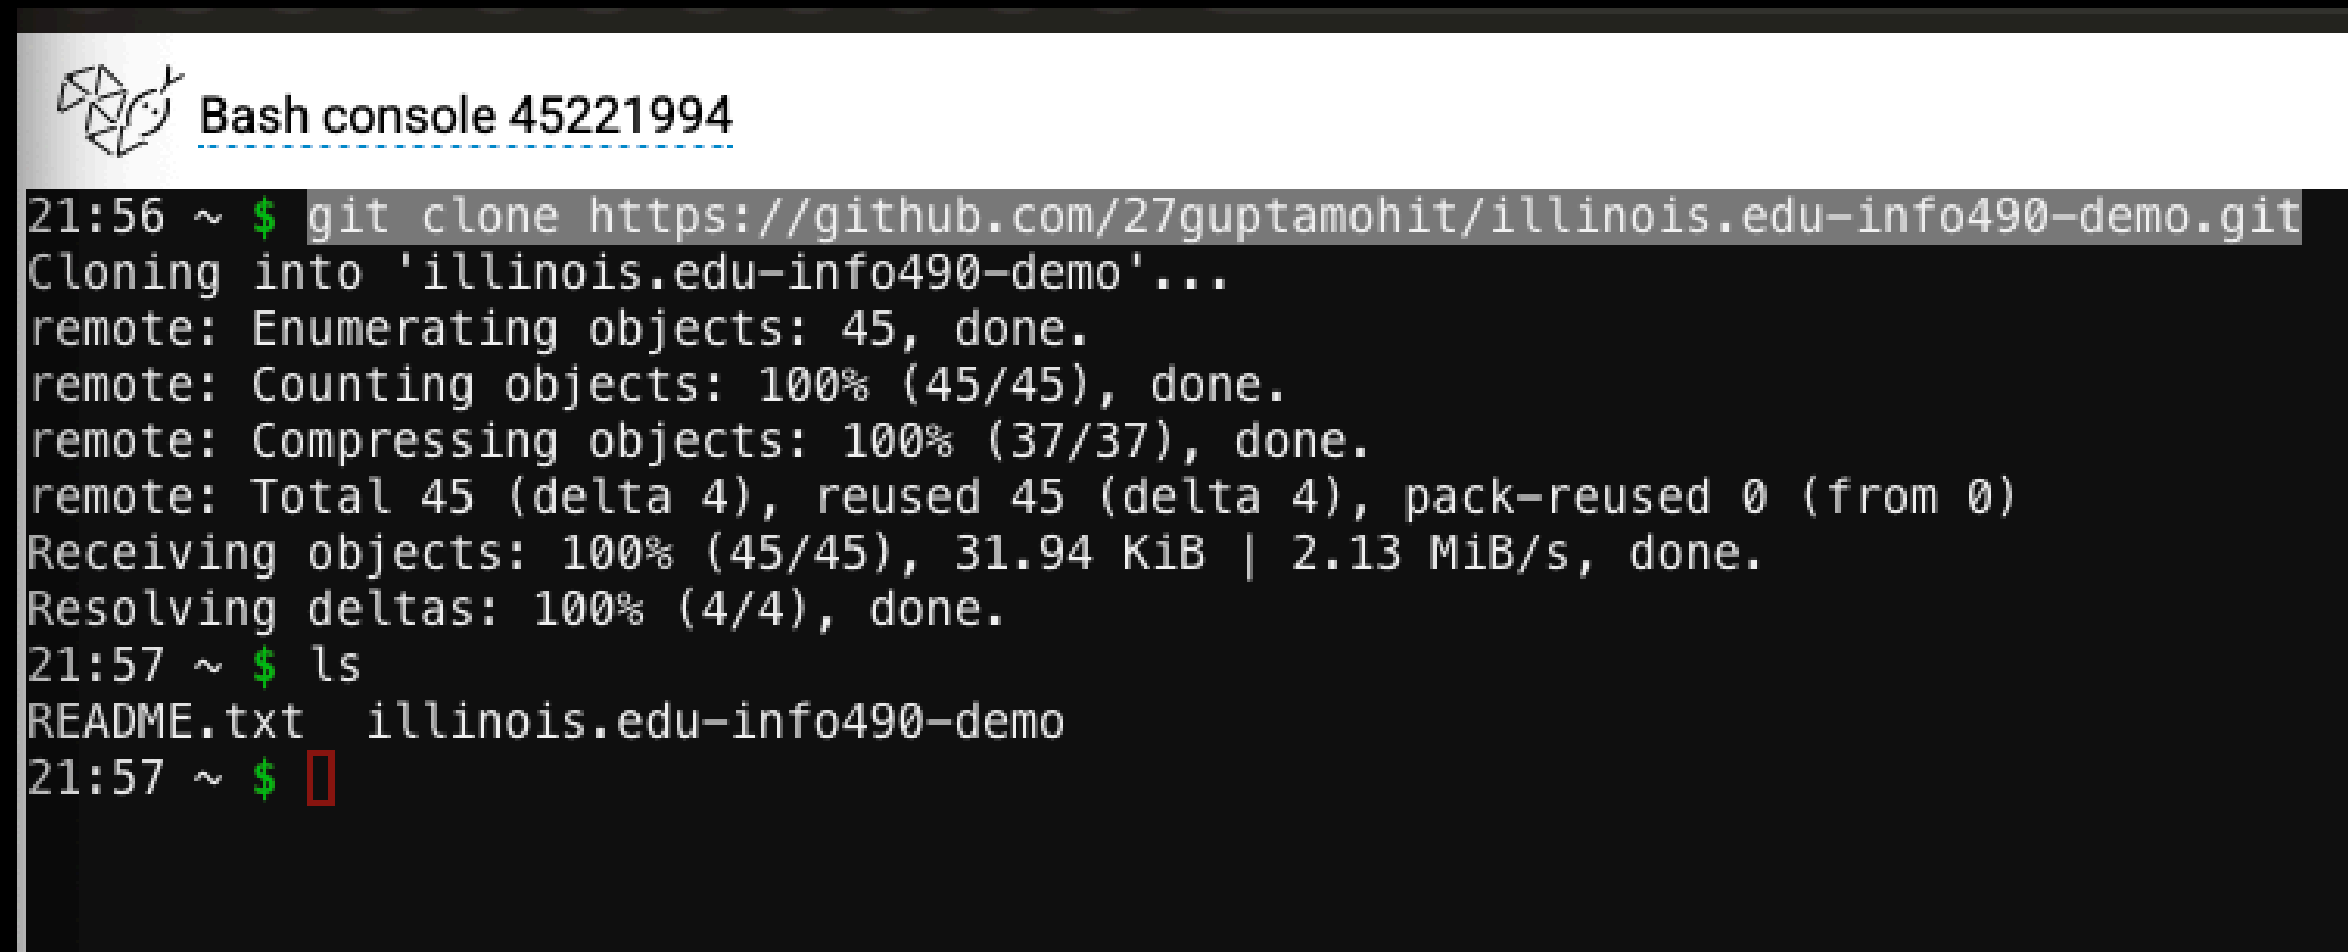A screenshot of a terminal window titled "Bash console 45221994". The terminal shows the execution of a git clone command, followed by progress status messages from the remote repository, and then an ls command showing the contents of the newly cloned directory.

```
Bash console 45221994
21:56 ~ $ git clone https://github.com/27guptamohit/illinois.edu-info490-demo.git
Cloning into 'illinois.edu-info490-demo'...
remote: Enumerating objects: 45, done.
remote: Counting objects: 100% (45/45), done.
remote: Compressing objects: 100% (37/37), done.
remote: Total 45 (delta 4), reused 45 (delta 4), pack-reused 0 (from 0)
Receiving objects: 100% (45/45), 31.94 KiB | 2.13 MiB/s, done.
Resolving deltas: 100% (4/4), done.
21:57 ~ $ ls
README.txt  illinois.edu-info490-demo
21:57 ~ $
```


Our project is cloned successfully.



Bash console 45221994

```
21:56 ~ $ git clone https://github.com/27guptamohit/illinois.edu-info490-demo.git
Cloning into 'illinois.edu-info490-demo'...
remote: Enumerating objects: 45, done.
remote: Counting objects: 100% (45/45), done.
remote: Compressing objects: 100% (37/37), done.
remote: Total 45 (delta 4), reused 45 (delta 4), pack-reused 0 (from 0)
Receiving objects: 100% (45/45), 31.94 KiB | 2.13 MiB/s, done.
Resolving deltas: 100% (4/4), done.
21:57 ~ $ ls
README.txt  illinois.edu-info490-demo
21:57 ~ $
```

Click Files

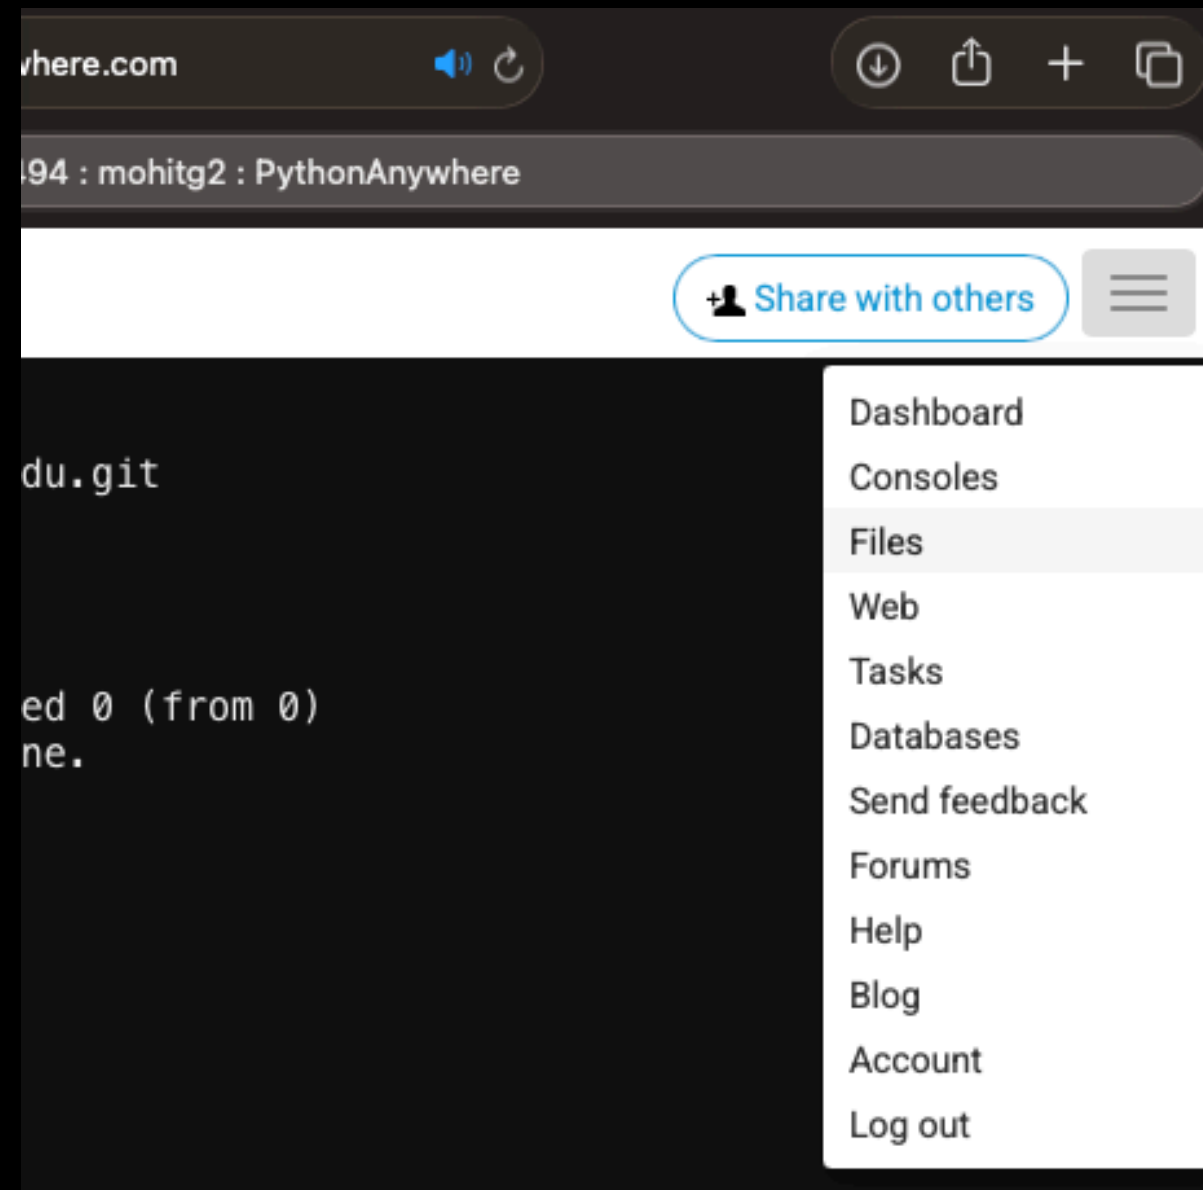

You will see all of your files that you just uploaded here.
Feel free to explore them.

Send Feedback

Forums

Help

Blog

Account

Log out

pythonanywhere

by ANACONDA.

/home/

mohitg27

Dashboard

Consoles

Files

Web

Tasks

Databases

Open Bash console here

0% full

– 612.0 KB of your 512.0 MB quota

More Info

Directories

Enter new directory name

New directory

.cache/

.ipython/

.local/

.virtualenvs/

illinois.edu-info490-demo/

Files

Enter new file name, eg hello.py

New file

.bashrc

2026-02-17 21:29

560 bytes

.gitconfig

2026-02-17 21:29

266 bytes

.profile

2026-02-17 21:29

79 bytes

.pythonstartup.py

2026-02-17 21:29

77 bytes

.vimrc

2026-02-17 21:29

4.6 KB

README.txt

2026-02-17 21:29

232 bytes

Upload a file

100MiB maximum size

30

1.c Add .env file

In the bash console, change directory to your repository.



Bash console 45221994

```
22:05 ~ $ ls
README.txt  illinois.edu-info490-demo
22:05 ~ $ cd illinois.edu-info490-demo
22:05 ~/illinois.edu-info490-demo (main)$ ls
illinois  manage.py  students  templates
22:05 ~/illinois.edu-info490-demo (main)$
```

There is no .env file here so we'll create one.



Bash console 45221994

```
22:06 ~/illinois.edu-info490-demo (main)$ ls  
illinois manage.py students templates  
22:06 ~/illinois.edu-info490-demo (main)$
```

Using
“touch .env”
create a new .env
file.

and


using
“nano .env”

edit the .env file.

```
 Bash console 45221994
22:06 ~/illinois.edu-info490-demo (main)$ ls
illinois manage.py students templates
22:06 ~/illinois.edu-info490-demo (main)$ touch .env
22:10 ~/illinois.edu-info490-demo (main)$ ls
illinois manage.py students templates
22:10 ~/illinois.edu-info490-demo (main)$ ls -a
. .. .env .git .gitignore illinois manage.py students templates
```

```
22:10 ~/illinois.edu-info490-demo (main)$ nano .env
22:13 ~/illinois.edu-info490-demo (main)$
```

Define any random secret key in the editor and exit using “CTRL + X”

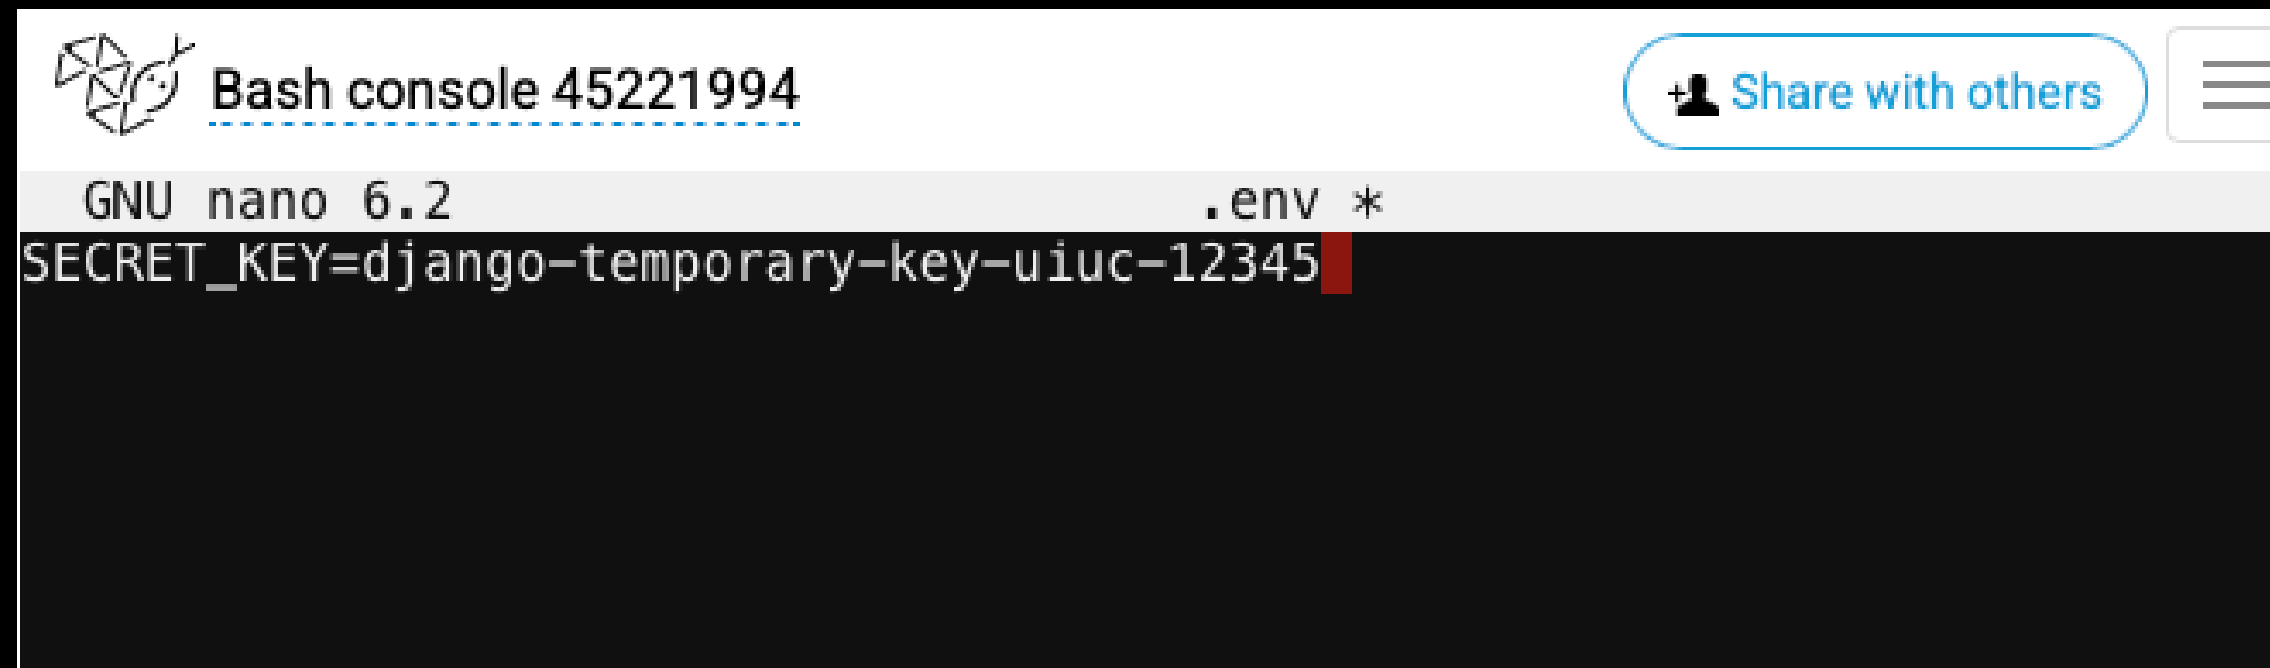

The screenshot shows a web-based Bash console interface. At the top, there's a header bar with a logo on the left, the text "Bash console 45221994" in the center, and a "Share with others" button on the right. Below the header, a status bar indicates "GNU nano 6.2" and ".env *". The main editing area shows the text "SECRET_KEY=django-temporary-key-uiuc-12345" followed by a red cursor. The background of the editor is dark gray.

```
Bash console 45221994
GNU nano 6.2 .env *
SECRET_KEY=django-temporary-key-uiuc-12345
```

1.d Creating the virtual environment

In Week 1-2, I mentioned that we can use Anaconda on our local machine but not on the production-server


We will now prepare to setup an environment on the production-server

- To save all the packages (if you are using your own project), run:

```
pip freeze > illinois/settings/requirements.txt
```

This command will save the name and version of all the packages in your Anaconda Environment into a text file.

Also, CHECK NEXT SLIDE FOR A NOTE

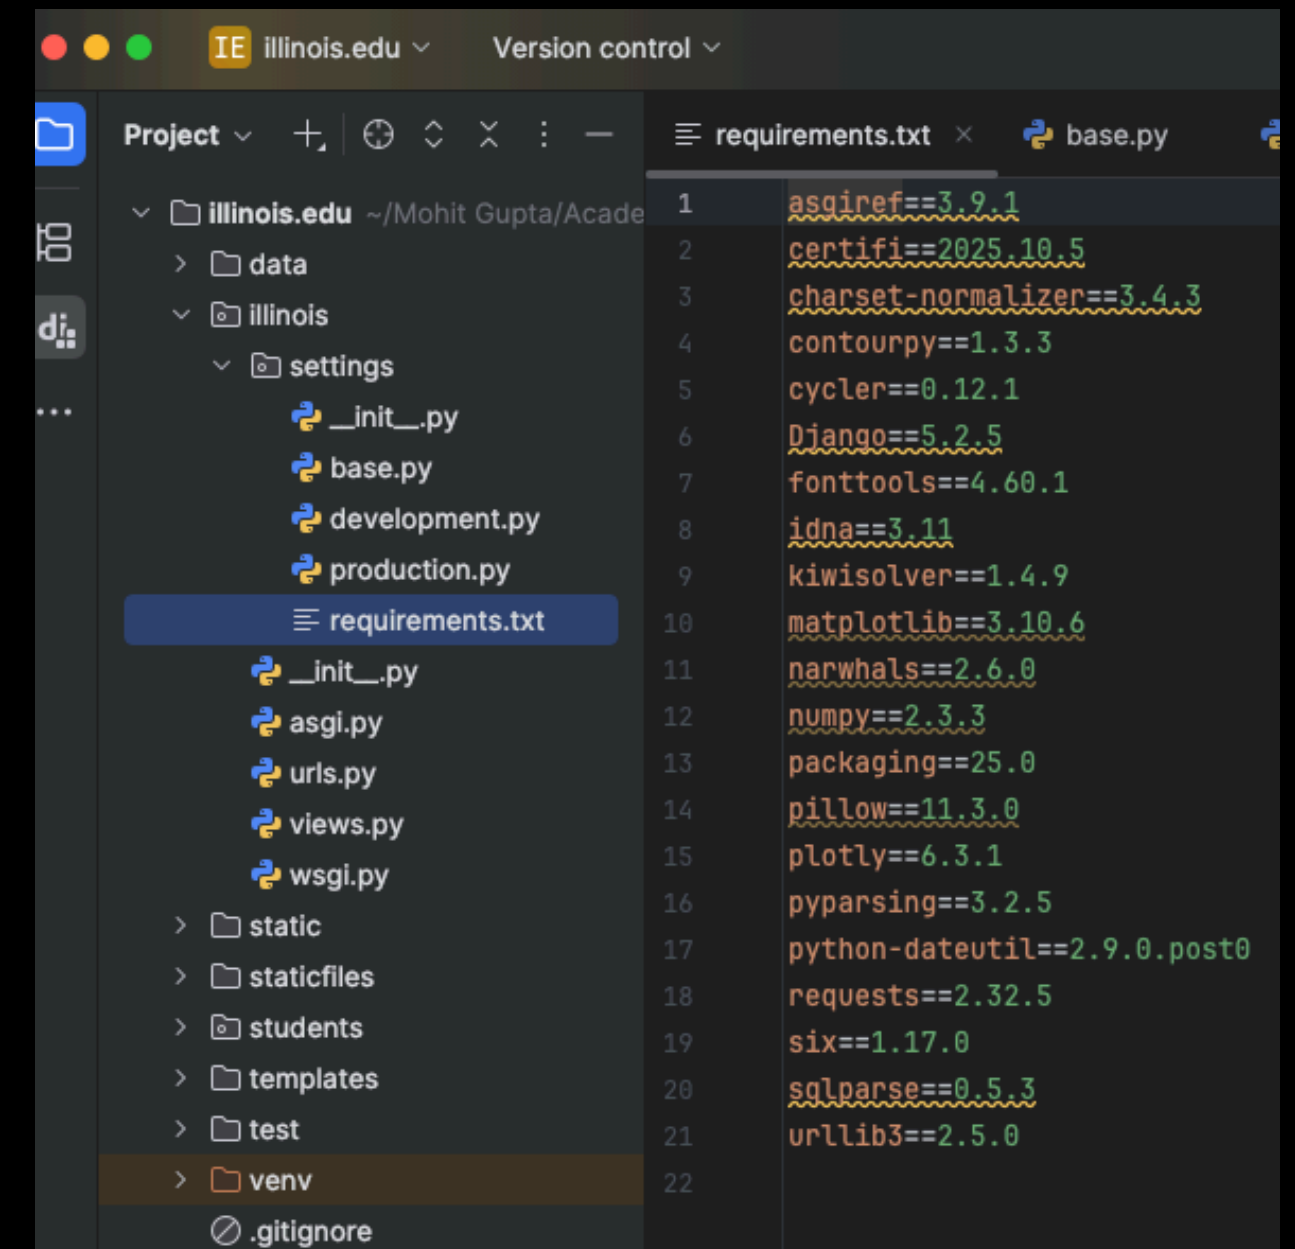

```
requirements.txt
1 asgiref==3.9.1
2 certifi==2025.10.5
3 charset-normalizer==3.4.3
4 contourpy==1.3.3
5 cyclor==0.12.1
6 Django==5.2.5
7 fonttools==4.60.1
8 idna==3.11
9 kiwisolver==1.4.9
10 matplotlib==3.10.6
11 narwhals==2.6.0
12 numpy==2.3.3
13 packaging==25.0
14 pillow==11.3.0
15 plotly==6.3.1
16 pyparsing==3.2.5
17 python-dateutil==2.9.0.post0
18 requests==2.32.5
19 six==1.17.0
20 sqlparse==0.5.3
21 urllib3==2.5.0
22
```

IMPORTANT:

Delete any weird looking package name like this

```
.env base.py requirements.txt x
1 asgiref==3.11.1
2 brotlicffi @ file:///private/var/folders/k1/30mswbxs7r1g6zwn8y4fyt500000gp/T/abs_b5py2dr5ag/croot/brotlicffi_1736182482518/work
3 certifi @ file:///opt/miniconda3/conda-bld/certifi_1763135329285/work/certifi
4 cffi==2.0.0
5 charset-normalizer @ file:///croot/charset-normalizer_1721748349566/work
6 contourpy==1.3.3
7 cryptography==46.0.5
8 cyclер==0.12.1
9 dj-database-url==3.1.0
10 Django==6.0.1
11 django-cors-headers==4.9.0
12 django-enviro==0.12.0
13 django-extensions==4.1
14 django-tailwind==4.2.0
15 django-rest-framework==3.15.2
16 fonttools==4.60.1
17 idna @ file:///Users/builder/cbouss/perseverance-python-buildout/croot/idna_1728585920859/work
18 kiwisolver==1.4.9
19 matplotlib==3.10.6
20 narwhals==2.6.0
21 numpy==2.3.3
```

Once you push these files to GitHub,
you can pull them on the server using “git pull” command.



Bash console 45221994

```
22:29 ~/illinois.edu-info490-demo (main)$ git pull
remote: Enumerating objects: 8, done.
remote: Counting objects: 100% (8/8), done.
remote: Compressing objects: 100% (2/2), done.
remote: Total 5 (delta 3), reused 5 (delta 3), pack-reused 0 (from 0)
Unpacking objects: 100% (5/5), 618 bytes | 5.00 KiB/s, done.
From https://github.com/27guptamohit/illinois.edu-info490-demo
   38077ba..1a91f36  main       -> origin/main
Updating 38077ba..1a91f36
Fast-forward
   illinois/settings/requirements.txt | 18 ++++++
   1 file changed, 18 insertions(+)
   create mode 100644 illinois/settings/requirements.txt
22:30 ~/illinois.edu-info490-demo (main)$
```

Let's create a virtual environment now

> Follow these steps but instead of python3.4, use the python version (probably python 3.13) that you used in your project

CHECK NEXT SLIDE BEFORE TRYING THE CODE.

Create a virtualenv and install Django and any other requirements

In your Bash console, create a virtualenv, naming it after your project, and choosing the version of Python you want to use:

```
$ mkvirtualenv --python=/usr/bin/python3.4 mysite-virtualenv
(mysite-virtualenv)$ pip install django
# or, if you have a requirements.txt:
(mysite-virtualenv)$ pip install -r requirements.txt
```

Now go back to your Console

> “Open the bash console”

> Create a virtual environment to support your Django


- `mkvirtualenv --python=/usr/bin/python3.13 myenv-django`



Bash console 45221994

```
22:31 ~/illinois.edu-info490-demo (main)$ mkvirtualenv --python=/usr/bin/python3.13 myenv-django
created virtual environment CPython3.13.1.final.0-64 in 9794ms
  creator CPython3Posix(dest=/home/mohitg27/.virtualenvs/myenv-django, clear=False, no_vcs_ignore=False, global=False)
  seeder FromAppData(download=False, pip=bundle, via=copy, app_data_dir=/home/mohitg27/.local/share/virtualenv)
    added seed packages: pip==24.3.1
  activators BashActivator,CShellActivator,FishActivator,NushellActivator,PowerShellActivator,PythonActivator
virtualenvwrapper.user_scripts creating /home/mohitg27/.virtualenvs/myenv-django/bin/predeactivate
virtualenvwrapper.user_scripts creating /home/mohitg27/.virtualenvs/myenv-django/bin/postdeactivate
virtualenvwrapper.user_scripts creating /home/mohitg27/.virtualenvs/myenv-django/bin/preactivate
virtualenvwrapper.user_scripts creating /home/mohitg27/.virtualenvs/myenv-django/bin/postactivate
virtualenvwrapper.user_scripts creating /home/mohitg27/.virtualenvs/myenv-django/bin/get_env_details
(myenv-django) 22:34 ~/illinois.edu-info490-demo (main)$
```

Let's install our requirements.txt from the directory where we saved it.

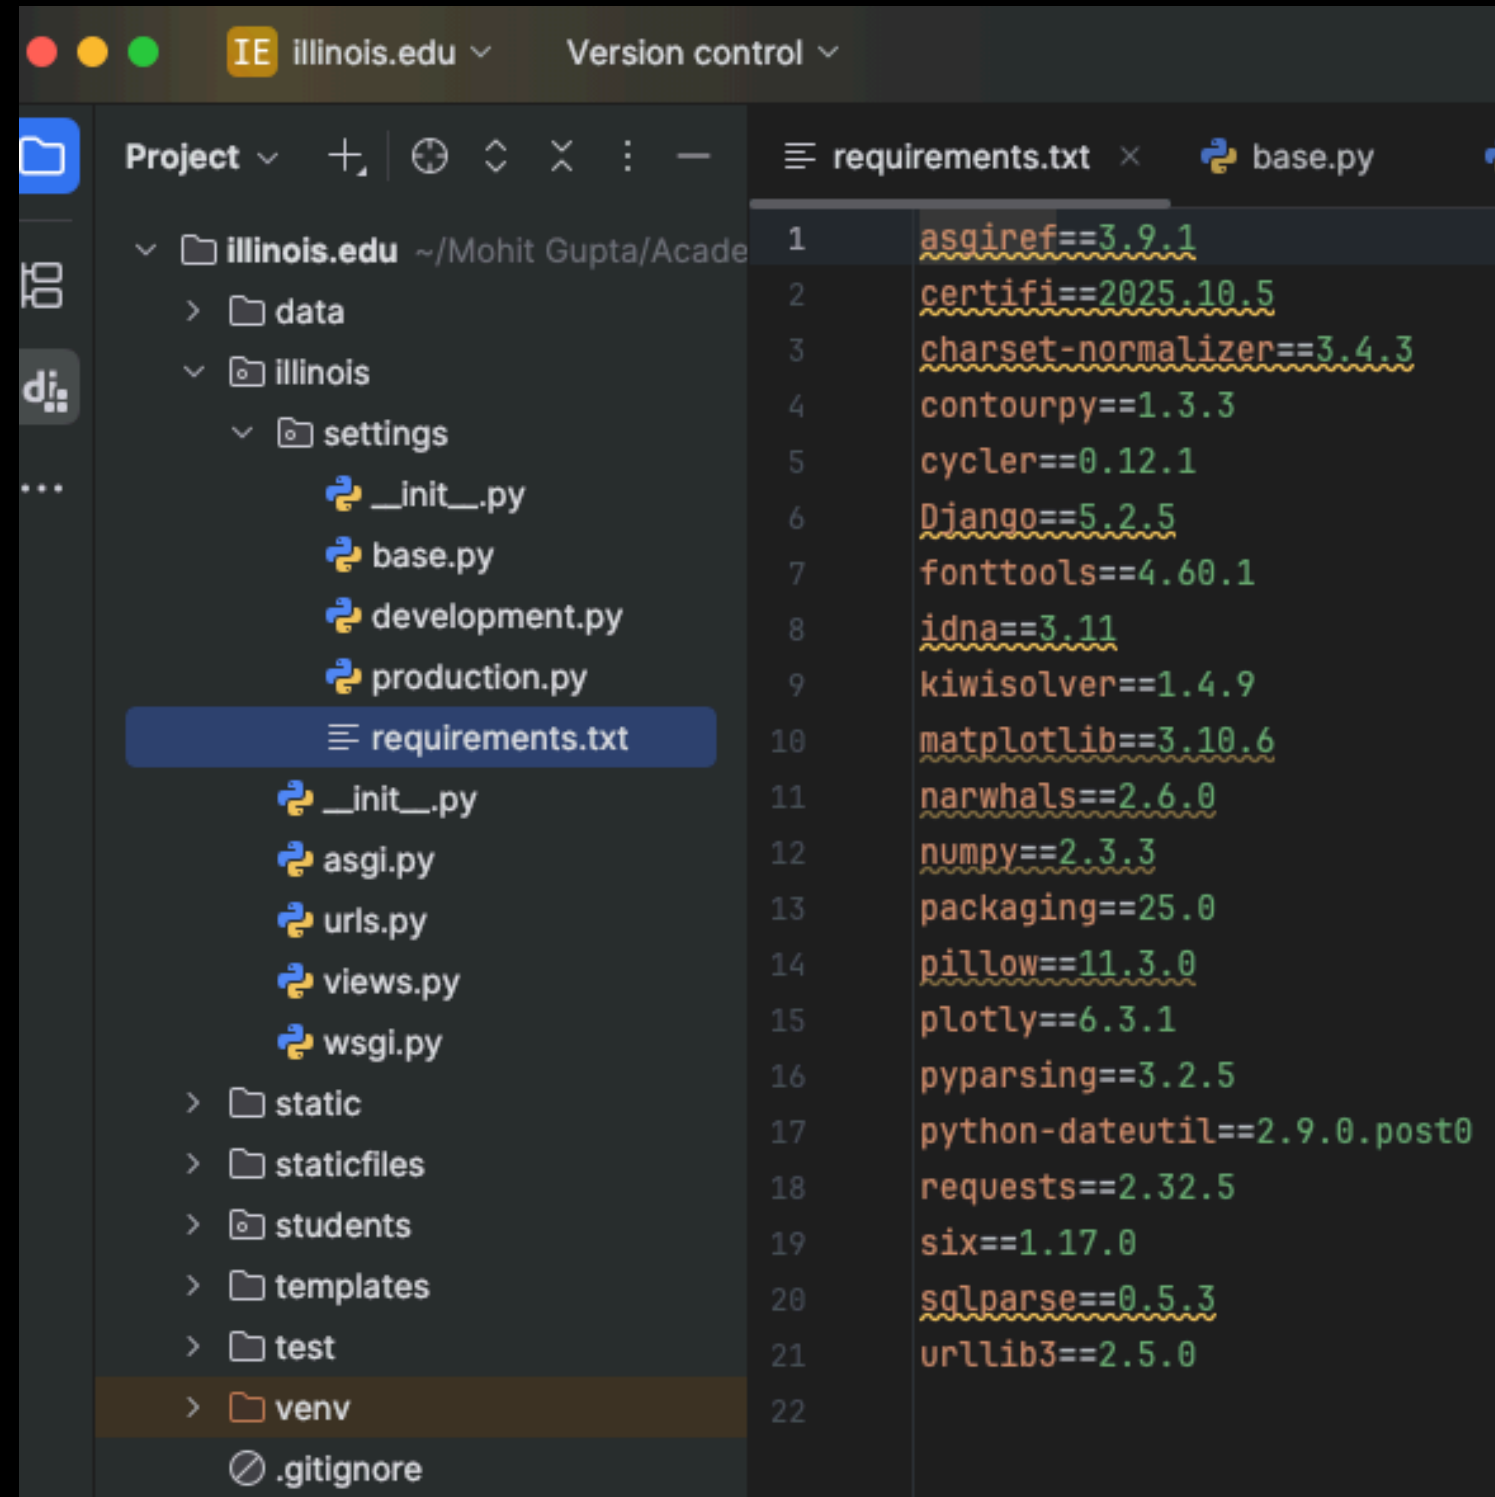

The screenshot shows an IDE window with a project named 'illinois.edu'. The left sidebar displays the project structure, including folders like 'data', 'illinois', 'static', 'staticfiles', 'students', 'templates', 'test', and 'venv', and files like 'requirements.txt', 'base.py', 'development.py', 'production.py', 'urls.py', 'views.py', 'wsgi.py', and 'asgi.py'. The 'requirements.txt' file is selected and its contents are displayed in the main editor area. The file lists various Python dependencies with their versions, such as 'asgiref==3.9.1', 'certifi==2025.10.5', 'charset-normalizer==3.4.3', 'contourpy==1.3.3', 'cycler==0.12.1', 'Django==5.2.5', 'fonttools==4.60.1', 'idna==3.11', 'kiwisolver==1.4.9', 'matplotlib==3.10.6', 'narwhals==2.6.0', 'numpy==2.3.3', 'packaging==25.0', 'pillow==11.3.0', 'plotly==6.3.1', 'pyparsing==3.2.5', 'python-dateutil==2.9.0.post0', 'requests==2.32.5', 'six==1.17.0', 'sqlparse==0.5.3', and 'urllib3==2.5.0'.

```
1 asgiref==3.9.1
2 certifi==2025.10.5
3 charset-normalizer==3.4.3
4 contourpy==1.3.3
5 cycler==0.12.1
6 Django==5.2.5
7 fonttools==4.60.1
8 idna==3.11
9 kiwisolver==1.4.9
10 matplotlib==3.10.6
11 narwhals==2.6.0
12 numpy==2.3.3
13 packaging==25.0
14 pillow==11.3.0
15 plotly==6.3.1
16 pyparsing==3.2.5
17 python-dateutil==2.9.0.post0
18 requests==2.32.5
19 six==1.17.0
20 sqlparse==0.5.3
21 urllib3==2.5.0
22
```

Now go back to your Console



- **pip install -r illinois/settings/requirements.txt**





Bash console 45221994

```
(myenv-django) 22:36 ~/illinois.edu-info490-demo (main)$ pip install -r illinois/settings/requirements.txt
Looking in links: /usr/share/pip-wheels
Collecting contourpy==1.3.3 (from -r illinois/settings/requirements.txt (line 1))
  Downloading contourpy-1.3.3-cp313-cp313-manylinux_2_27_x86_64.whl.metadata (5.5 kB)
Collecting cycler==0.12.1 (from -r illinois/settings/requirements.txt (line 2))
  Downloading cycler-0.12.1-py3-none-any.whl.metadata (3.8 kB)
Collecting django-tailwind==4.2.0 (from -r illinois/settings/requirements.txt (line 3))
  Downloading django_tailwind-4.2.0-py3-none-any.whl.metadata (4.4 kB)
Collecting fonttools==4.60.1 (from -r illinois/settings/requirements.txt (line 4))
  Downloading fonttools-4.60.1-cp313-cp313-manylinux1_x86_64.whl.metadata (5.5 kB)
Collecting kiwisolver==1.4.9 (from -r illinois/settings/requirements.txt (line 5))
  Downloading kiwisolver-1.4.9-cp313-cp313-manylinux2014_x86_64.whl.metadata (6.3 kB)
Collecting matplotlib==3.10.6 (from -r illinois/settings/requirements.txt (line 6))
  Downloading matplotlib-3.10.6-cp313-cp313-manylinux2014_x86_64.whl.metadata (11 kB)
Collecting narwhals==2.6.0 (from -r illinois/settings/requirements.txt (line 7))
  Downloading narwhals-2.6.0-py3-none-any.whl.metadata (11 kB)
Collecting numpy==2.3.3 (from -r illinois/settings/requirements.txt (line 8))
  Downloading numpy-2.3.3-cp313-cp313-manylinux_2_27_x86_64.whl.metadata (62 kB)
Collecting packaging==25.0 (from -r illinois/settings/requirements.txt (line 9))
  Downloading packaging-25.0-py3-none-any.whl.metadata (3.3 kB)
Collecting pillow==11.3.0 (from -r illinois/settings/requirements.txt (line 10))
  Downloading pillow-11.3.0-cp313-cp313-manylinux_2_27_x86_64.whl.metadata (9.0 kB)
Collecting plotly==6.3.1 (from -r illinois/settings/requirements.txt (line 11))
  Downloading plotly-6.3.1-py3-none-any.whl.metadata (8.5 kB)
Collecting PyMySQL==1.1.2 (from -r illinois/settings/requirements.txt (line 12))
  Downloading pymysql-1.1.2-py3-none-any.whl.metadata (4.3 kB)
Collecting pyparsing==3.2.5 (from -r illinois/settings/requirements.txt (line 13))
  Downloading pyparsing-3.2.5-py3-none-any.whl.metadata (5.0 kB)
Collecting python-dateutil==2.9.0.post0 (from -r illinois/settings/requirements.txt (line 14))
  Downloading python_dateutil-2.9.0.post0-py2.py3-none-any.whl.metadata (8.4 kB)
Collecting setuptools==78.1.1 (from -r illinois/settings/requirements.txt (line 15))
  Downloading setuptools-78.1.1-py3-none-any.whl.metadata (6.5 kB)
Collecting six==1.17.0 (from -r illinois/settings/requirements.txt (line 16))
  Downloading six-1.17.0-py2.py3-none-any.whl.metadata (1.7 kB)
Collecting tailwind==3.1.5b0 (from -r illinois/settings/requirements.txt (line 17))
  Downloading tailwind-3.1.5b0-py3-none-manylinux_2_5_x86_64.whl.metadata (1.5 kB)
Collecting wheel==0.45.1 (from -r illinois/settings/requirements.txt (line 18))
  Downloading wheel-0.45.1-py3-none-any.whl.metadata (2.3 kB)
Collecting django>=4.2.20 (from django-tailwind==4.2.0->-r illinois/settings/requirements.txt (line 3))
  Downloading django-6.0.2-py3-none-any.whl.metadata (3.9 kB)
Collecting asgiref>=3.9.1 (from django>=4.2.20->django-tailwind==4.2.0->-r illinois/settings/requirements.txt (line 3))
  Downloading asgiref-3.11.1-py3-none-any.whl.metadata (9.3 kB)
Collecting sqlparse>=0.5.0 (from django>=4.2.20->django-tailwind==4.2.0->-r illinois/settings/requirements.txt (line 3))
  Downloading sqlparse-0.5.5-py3-none-any.whl.metadata (4.7 kB)
Downloading contourpy-1.3.3-cp313-cp313-manylinux_2_27_x86_64.whl (362 kB)
Downloading cycler-0.12.1-py3-none-any.whl (8.3 kB)
Downloading django_tailwind-4.2.0-py3-none-any.whl (19 kB)
Downloading fonttools-4.60.1-cp313-cp313-manylinux1_x86_64.whl (4.9/4.9 MB) 9.0 MB/s eta 0:00:00
Downloading kiwisolver-1.4.9-cp313-cp313-manylinux2014_x86_64.whl (1.5 MB)
  1.5/1.5 MB 6.8 MB/s eta 0:00:00
Downloading matplotlib-3.10.6-cp313-cp313-manylinux2014_x86_64.whl (8.7 MB)
  8.7/8.7 MB 9.8 MB/s eta 0:00:00
Downloading narwhals-2.6.0-py3-none-any.whl (408 kB)
Downloading numpy-2.3.3-cp313-cp313-manylinux_2_27_x86_64.whl (16.6 MB)
  16.6/16.6 MB 11.0 MB/s eta 0:00:00
```


- Click on Web > Add a new web app

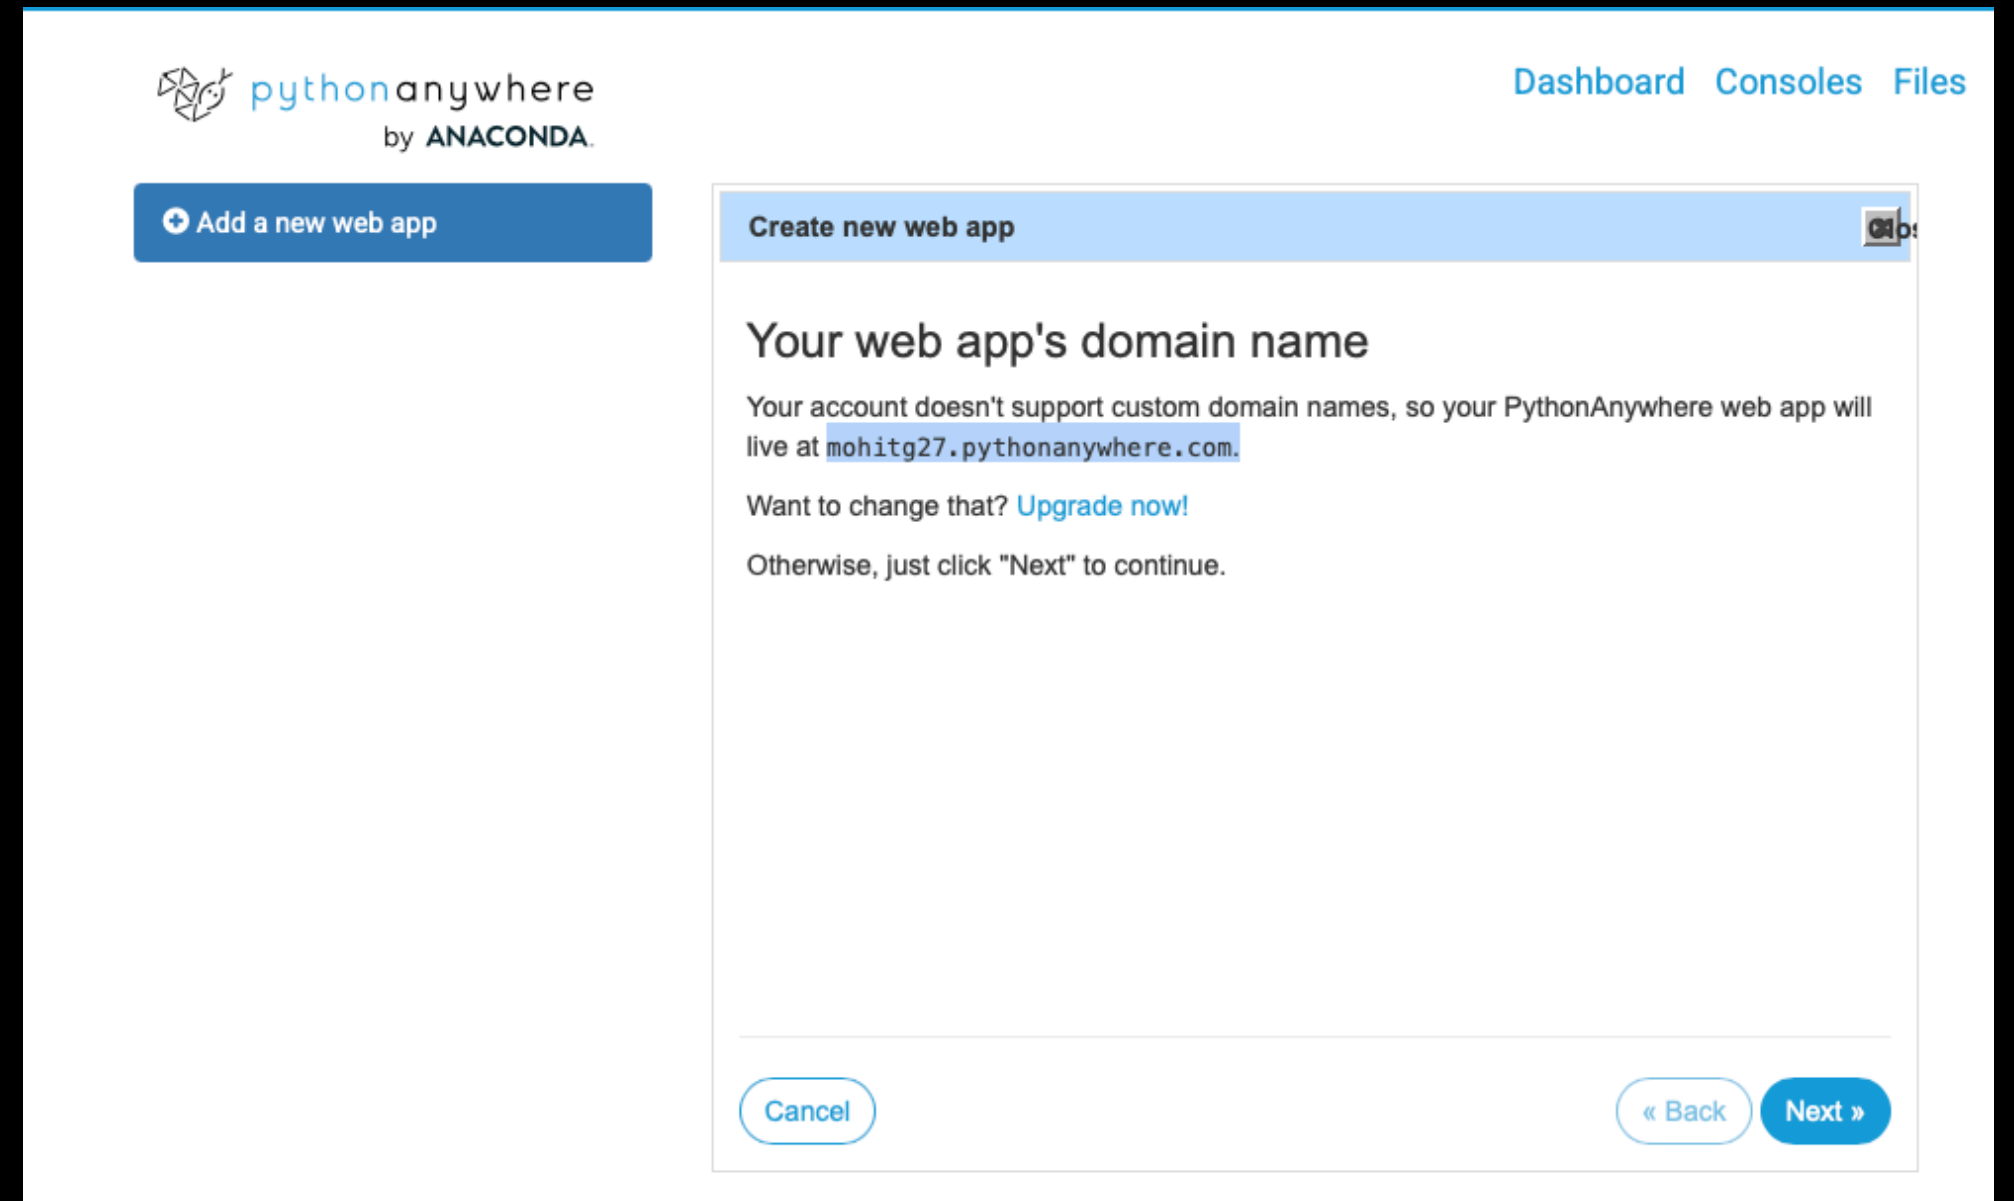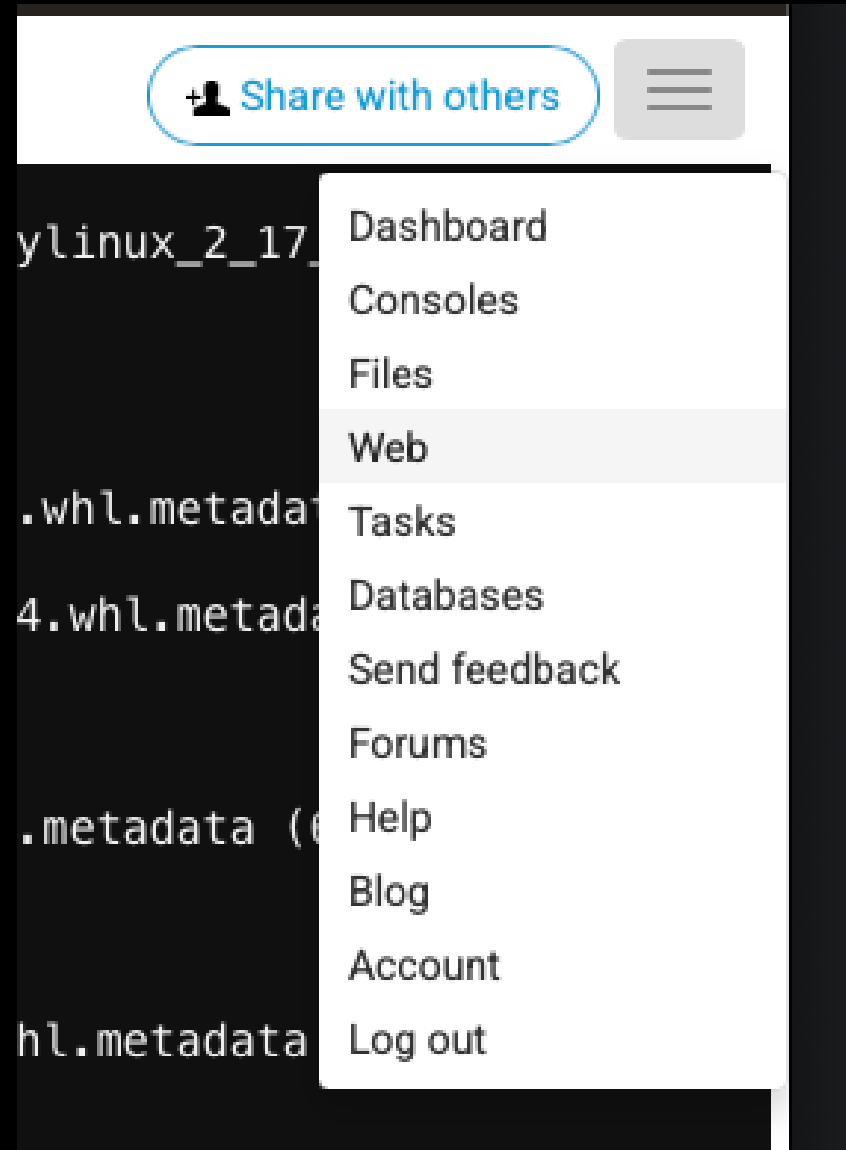

- Click on:
 - Manual Configuration
 - Then the version of Python which you've chosen

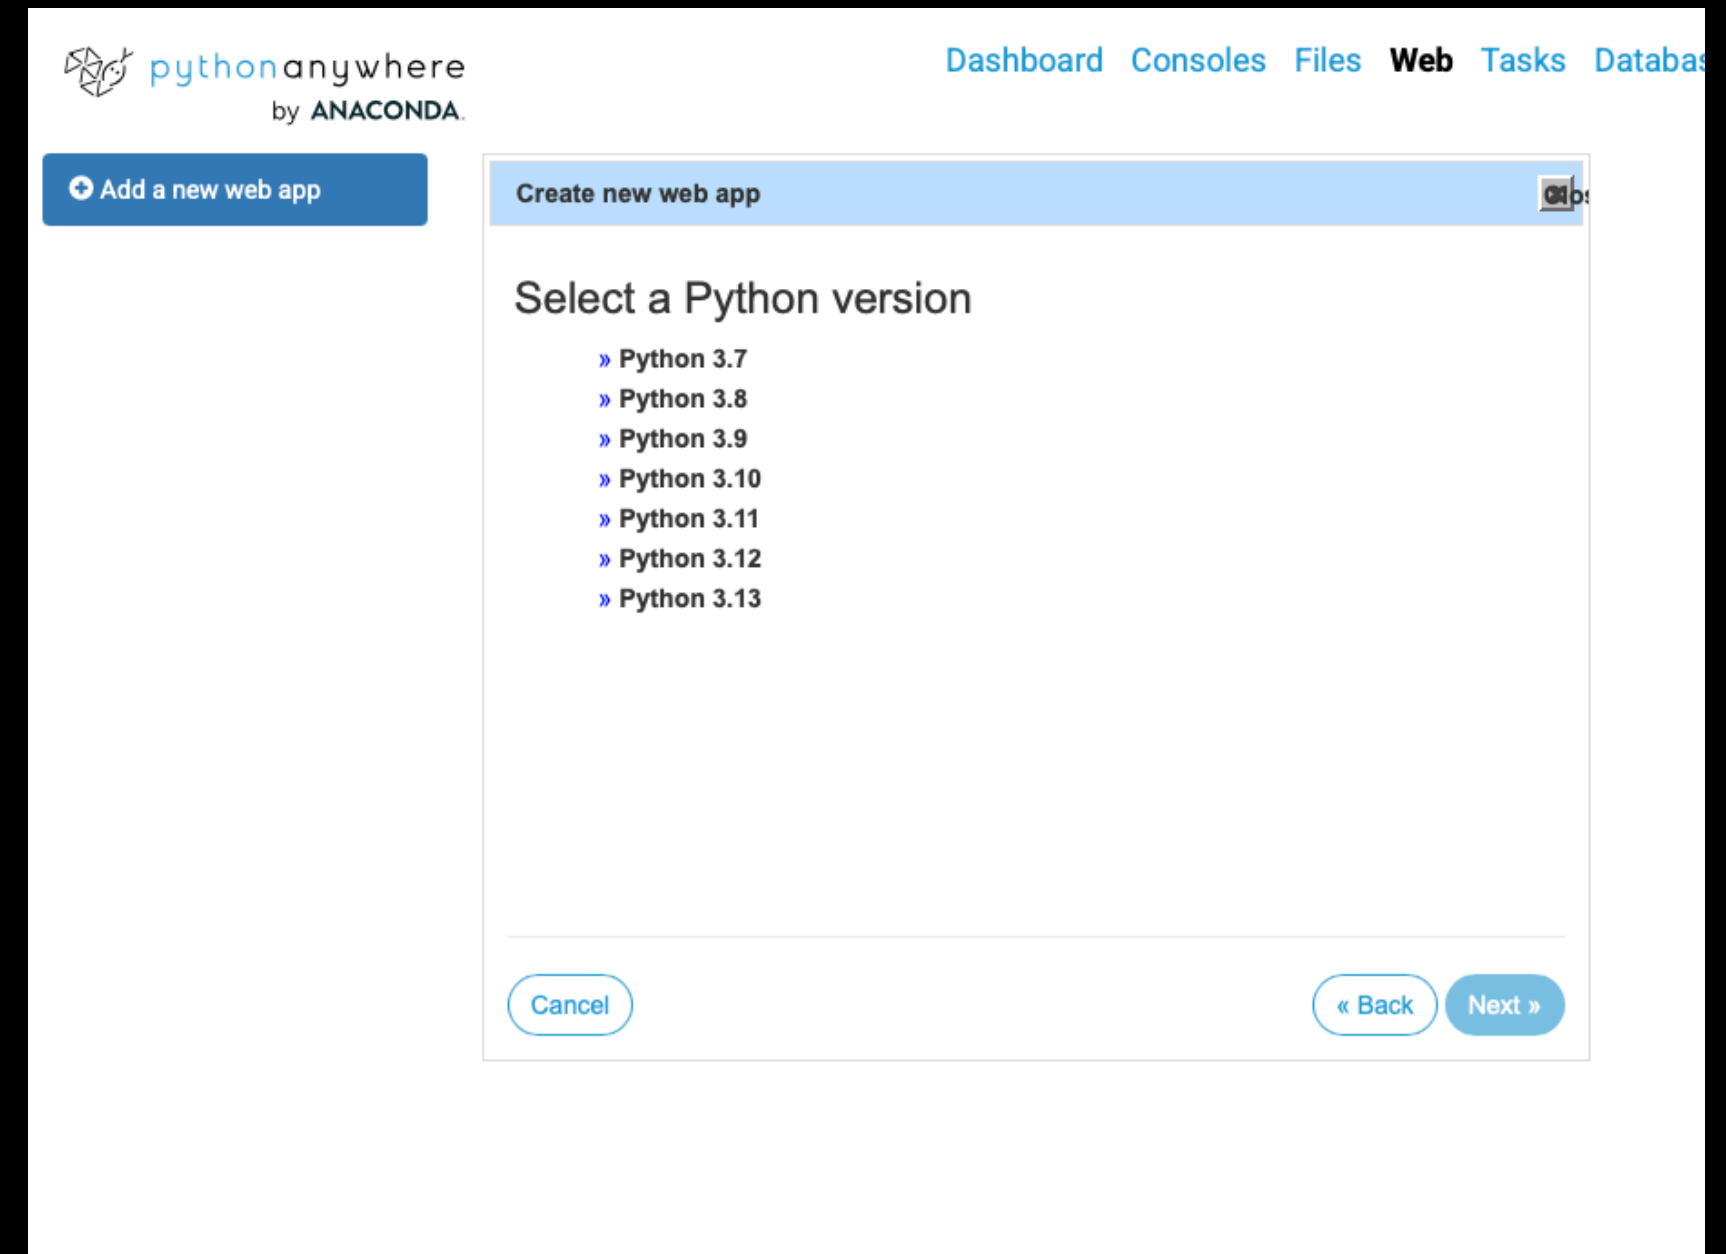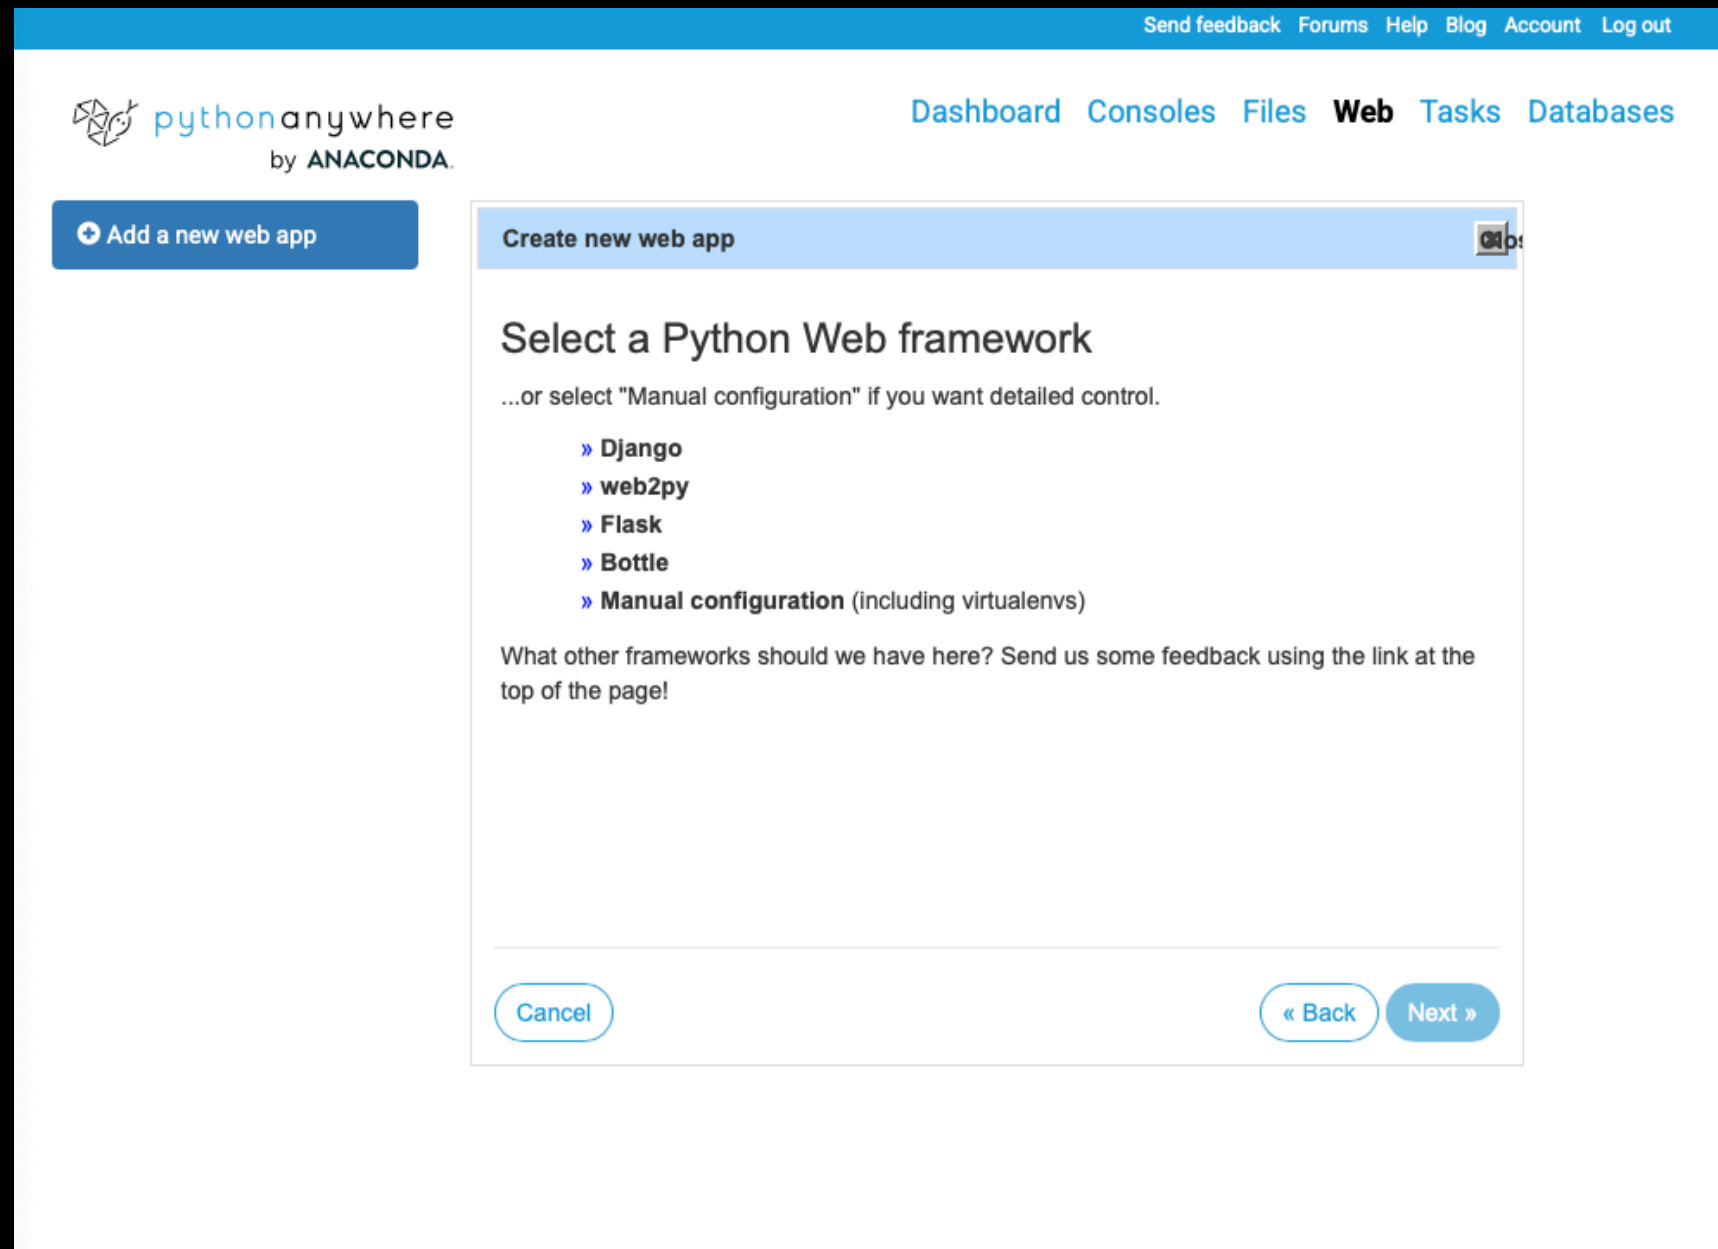

- **Hit Next**

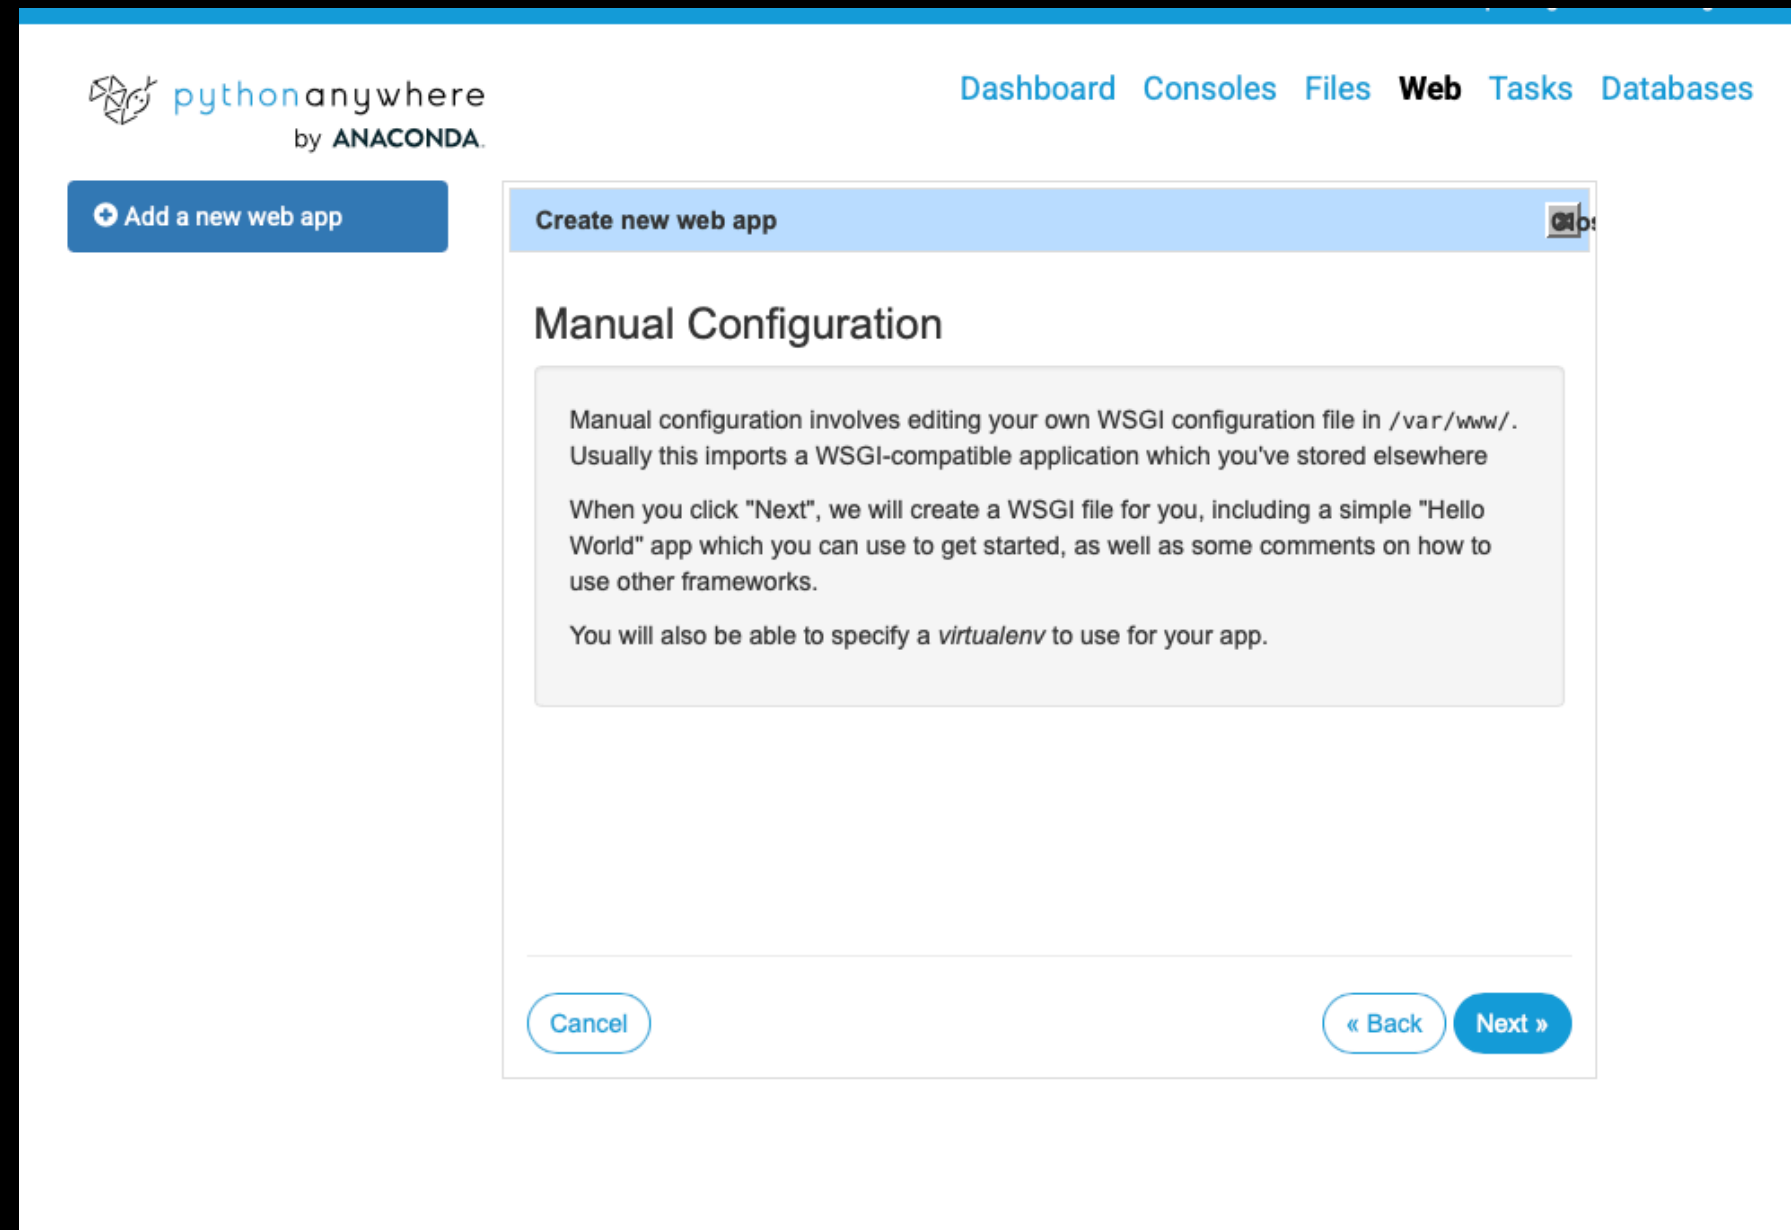

You will get this settings page.

Next step would be to provide the path to your virtual environment.

This is very easy, and this is how you can do it...

pythonanywhere
by ANACONDA.

[Dashboard](#) [Consoles](#) [Files](#) **Web** [Tasks](#) [Databases](#)

All done! Your web app is now set up. Details below. ×

mohitg27.pythonanywhere.com

[+ Add a new web app](#)

Configuration for mohitg27.pythonanywhere.com

Reload:

Reload mohitg27.pythonanywhere.com

Best before date:

We're happy to host your free website -- and keep it free -- but you'll need to log in at least once every one month and click the "Run until 1 month from today" button below. We'll send you an email a week before the site is disabled so that you don't forget to do that.

This site will be disabled on **Tuesday 17 March 2026**

Run until 1 month from today

[Paying users'](#) sites stay up forever without any need to log in to keep them running.

Traffic:

How busy is your site?

This month (previous month)	0	(0)
Today (yesterday)	0	(0)
Hour (previous hour)	0	(0)

Want some more data? [Paying accounts](#) get pretty charts ;-)

Code:

What your site is running.

Source code:	Enter the path to your web app source code	
Working directory:	/home/mohitg27/	Go to directory
WSGI configuration file:	/var/www/mohitg27.pythonanywhere_com_wsgi.py	
Python version:	3.13	✎

Virtualenv:

Use a virtualenv to get different versions of flask, django etc from our default system ones. [More info here](#). You need to **Reload your web app** to activate it; NB - will do nothing

Open 'Files' in a new tab.

> Now locate the virtual environment folder that we just created, and click the name of your environment ("myenv-django")

The screenshot displays the PythonAnywhere web interface. The top navigation bar includes links for Dashboard, Consoles, Files, Web, Tasks, and Databases. The 'Files' tab is active, showing a quota of 86% full (437.9 MB of 512.0 MB). The main content area is divided into two sections: Directories and Files. In the Directories section, a list of folders is shown, including .cache/, .ipython/, .local/, .virtualenvs/, and illinois.edu-info490-demo/. A red arrow points from the .virtualenvs/ folder in the left pane to the myenv-django/ folder in the right pane. The Files section shows a list of files including .bashrc, .gitconfig, .profile, pythonstartup.py, .vimrc, and README.txt. A red arrow also points from the pythonstartup.py file in the left pane to the myenv-django/ folder in the right pane.

pythonanywhere by ANACONDA.
/home/mohitg27

Dashboard Consoles **Files** Web Tasks Databases
Open Bash console here 86% full – 437.9 MB of your 512.0 MB quota More Info

Directories

Enter new directory name New directory

.cache/ .ipython/ .local/ .virtualenvs/ illinois.edu-info490-demo/

Files

Enter new file name, eg hello.py New file

.bashrc .gitconfig .profile pythonstartup.py .vimrc README.txt

2026-02-17 21:29 560 bytes
2026-02-17 21:29 266 bytes
2026-02-17 21:29 79 bytes
2026-02-17 21:29 77 bytes
2026-02-17 21:29 4.6 KB
2026-02-17 21:29 232 bytes

Upload a file
100MiB maximum size

pythonanywhere by ANACONDA.
/home/mohitg2/ .virtualenvs

Directories

Enter new directory name New directory

myenv-django/

Now, in the highlighted text, you'll find the required path:

> /home/mohitg27/.virtualenvs/myenv-django

 **pythonanywhere**
by ANACONDA.

[/home/mohitg27/](#)  [.virtualenvs](#)

Directories

[New directory](#)

[myenv-django/](#) 

Files

[New file](#)

 get_env_details	  	2026-02-17 21:56	133 bytes
 initialize	  	2026-02-17 21:56	94 bytes
 postactivate	  	2026-02-17 21:56	71 bytes
 postdeactivate	  	2026-02-17 21:56	73 bytes
 postmkproject	  	2026-02-17 21:56	64 bytes
 postmkvirtualenv	  	2026-02-17 21:56	71 bytes
 postrmvirtualenv	  	2026-02-17 21:56	108 bytes
 preactivate	  	2026-02-17 21:56	97 bytes
 predeactivate	  	2026-02-17 21:56	74 bytes
 premkproject	  	2026-02-17 21:56	89 bytes
 premkvirtualenv	  	2026-02-17 21:56	128 bytes
 prermvirtualenv	  	2026-02-17 21:56	109 bytes

[Upload a file](#)
100MiB maximum size

Go back to “Web” section and enter that virtual environment’s path here:

> `/home/mohitg27/.virtualenvs/myenv-django`

The screenshot shows the PythonAnywhere web interface. The browser address bar displays 'pythonanywhere.com'. The page has three tabs: '4 : mohitg27 : PythonAnywhere', 'Web app setup : mohitg27 : PythonAnywhere', and '.virtualenvs : /home/mohitg27/.virtualenvs : Directory L'. The main content area is titled 'Code:' and includes a subtitle 'What your site is running.' Below this, there are four configuration items: 'Source code:' with a red link 'Enter the path to your web app source code', 'Working directory:' with a blue link '/home/mohitg27/' and a 'Go to directory' button, 'WSGI configuration file:' with a blue link '/var/www/mohitg27_pythonanywhere_com_wsgi.py', and 'Python version:' with '3.13' and an edit icon. The next section is titled 'Virtualenv:' and includes a subtitle 'Use a virtualenv to get different versions of flask, django etc from our default system ones. More info here. You need to Reload your web app to activate it; NB - will do nothing if the virtualenv does not exist.' Below this is a blue link '/home/mohitg27/.virtualenvs/myenv-django' and a button 'Start a console in this virtualenv'. The final section is titled 'Log files:' and includes a subtitle 'The first place to look if something goes wrong.' Below this are three log links: 'Access log: mohitg27.pythonanywhere.com.access.log', 'Error log: mohitg27.pythonanywhere.com.error.log', and 'Server log: mohitg27.pythonanywhere.com.server.log'. At the bottom, it says 'Log files are periodically rotated. You can find old logs here: /var/log'.

Code:

What your site is running.

Source code: [Enter the path to your web app source code](#)

Working directory: </home/mohitg27/> [Go to directory](#)

WSGI configuration file: /var/www/mohitg27_pythonanywhere_com_wsgi.py

Python version: 3.13 [Edit](#)

Virtualenv:

Use a virtualenv to get different versions of flask, django etc from our default system ones. [More info here](#). You need to **Reload your web app** to activate it; NB - will do nothing if the virtualenv does not exist.

</home/mohitg27/.virtualenvs/myenv-django>

[Start a console in this virtualenv](#)

Log files:

The first place to look if something goes wrong.

Access log: <mohitg27.pythonanywhere.com.access.log>

Error log: <mohitg27.pythonanywhere.com.error.log>

Server log: <mohitg27.pythonanywhere.com.server.log>

Log files are periodically rotated. You can find old logs here: </var/log>

Now, pythonanywhere recommends us their own wsgi file that we are going to use it.

<https://help.pythonanywhere.com/pages/DeployExistingDjangoProject/>

Edit your WSGI file

One thing that's important here: your Django project (if you're using a recent version of Django) will have a file inside it called `wsgi.py`. This is *not* the one you need to change to set things up on PythonAnywhere – the system here ignores that file.

Instead, the WSGI file to change is the one that has a link inside the "Code" section of the **Web tab** – it will have a name something like

`/var/www/yourusername_pythonanywhere_com_wsgi.py` Or `/var/www/www_yourdomain_com_wsgi.py`.

Click on the WSGI file link, and it will take you to an editor where you can change it.

Delete everything except the Django section and then uncomment that section. Your WSGI file should look something like this:

```
# ++++++ DJANGO ++++++
# To use your own Django app use code like this:
import os
import sys

# assuming your Django settings file is at '/home/myusername/mysite/mysite/settings.py'
path = '/home/myusername/mysite'
if path not in sys.path:
    sys.path.insert(0, path)

os.environ['DJANGO_SETTINGS_MODULE'] = 'mysite.settings'

## Uncomment the lines below depending on your Django version
##### then, for Django >=1.5:
from django.core.wsgi import get_wsgi_application
application = get_wsgi_application()
##### or, for older Django <=1.4
#import django.core.handlers.wsgi
#application = django.core.handlers.wsgi.WSGIHandler()
```

- Be sure to substitute the correct path to your project, the folder that contains `manage.py`, which you noted above.
- Don't forget to substitute in your own username too!
- Also make sure you put the correct value for `DJANGO_SETTINGS_MODULE`.
- This guide assumes you're using a recent version of Django, so leave the old `wsgi.WSGIHandler()` code commented out, or better still, delete it.

Save the file, then go and hit the **Reload** button for your domain. (You'll find one at the top right of the wsgi file editor, or you can go back to the main web tab)

Now, we can directly open the WSGI configuration on this link and edit it there. So click on the highlighted link in your “Web” navigation page

Code:

What your site is running.

Source code:	Enter the path to your web app source code	
Working directory:	/home/mohitg27/	Go to directory
WSGI configuration file:	/var/www/mohitg27_pythonanywhere_com_wsgi.py	
Python version:	3.13	

Virtualenv:

Use a virtualenv to get different versions of flask, django etc from our default system ones. [More info here](#). You need to **Reload your web app** to activate it; NB - will do nothing if the virtualenv does not exist.

[/home/mohitg27/.virtualenvs/myenv-django](#)

[Start a console in this virtualenv](#)

Now scroll down to the highlighted section and make the changes as shown on the right screenshot. After the changes, **save the file**.

- Read all comments carefully

```
/var/www/mohitg2_pythonanywhere_com_wsgi.py
71 #from my_wsgi_file import application # noqa
72
73
74 # ++++++ DJANGO ++++++
75 # To use your own django app use code like this:
76 #import os
77 #import sys
78 #
79 ## assuming your django settings file is at '/home/mohitg2/mysite/mysite/settings.py'
80 ## and your manage.py is at '/home/mohitg2/mysite/manage.py'
81 #path = '/home/mohitg2/mysite'
82 #if path not in sys.path:
83 #    sys.path.append(path)
84 #
85 #os.environ['DJANGO_SETTINGS_MODULE'] = 'mysite.settings'
86 #
87 ## then:
88 #from django.core.wsgi import get_wsgi_application
89 #application = get_wsgi_application()
90
91
92
93 # ++++++ FLASK ++++++
94 # Flask works like any other WSGI-compatible framework, we just need
95 # to import the application. Often Flask apps are called "app" so we
96 # may need to rename it during the import:
97 #
98 #
99 #import sys
100 #
101 ## The "/home/mohitg2" below specifies your home
102 ## directory -- the rest should be the directory you uploaded your Flask
103 ## code to underneath the home directory. So if you just ran
104 ## "git clone git@github.com:myusername/myproject.git"
105 ## ...or uploaded files to the directory "myproject", then you should
```

```
76 import os
77 import sys
78
79 # assuming your django settings file is at '/home/mohitg27/mysite/mysite/settings.py'
80 # and your manage.py is at '/home/mohitg27/mysite/manage.py'
81
82 # Step 1 of 2
83 # INFO 490 Students:
84 # Enter the name of your directory here
85 path = '/home/mohitg27/illinois.edu-info490-demo'
86
87 if path not in sys.path:
88     sys.path.append(path)
89
90 # Step 2 of 2
91 # INFO 490 Students:
92 # Enter the location of your production.py file
93 os.environ['DJANGO_SETTINGS_MODULE'] = 'illinois.settings.production'
94
95 # then:
96 from django.core.wsgi import get_wsgi_application
97 application = get_wsgi_application()
98
```

1.e Checking the Database Health

Given that we pushed the database on GitHub, it should show here upon running the showmigrations command.



Bash console 45221994

```
(myenv-django) 23:11 ~/illinois.edu-info490-demo (main)$ python manage.py showmigrations --settings=illinois.settings.production
```

admin

```
[X] 0001_initial
[X] 0002_logentry_remove_auto_add
[X] 0003_logentry_add_action_flag_choices
```

auth

```
[X] 0001_initial
[X] 0002_alter_permission_name_max_length
[X] 0003_alter_user_email_max_length
[X] 0004_alter_user_username_opts
[X] 0005_alter_user_last_login_null
[X] 0006_require_contenttypes_0002
[X] 0007_alter_validators_add_error_messages
[X] 0008_alter_user_username_max_length
[X] 0009_alter_user_last_name_max_length
[X] 0010_alter_group_name_max_length
[X] 0011_update_proxy_permissions
[X] 0012_alter_user_first_name_max_length
```

contenttypes

```
[X] 0001_initial
[X] 0002_remove_content_type_name
```

sessions

```
[X] 0001_initial
```

students

```
[X] 0001_initial
[X] 0002_alter_enrollment_options_alter_section_options_and_more
```

```
(myenv-django) 23:12 ~/illinois.edu-info490-demo (main)$
```

- Make sure that all the migrations are applied.
- They'll appear as [X] check-marks to indicate that they are applied.

Suppose that they are not applied.

- **You would follow similar migration steps like we did in Week 1 to create models.**
- **IMPORTANT:**
 - **Ensure that the folder where you'll save the data exists.**

1.f Run collect staticfiles

Why we do CollectStatic

In production, Django isn't responsible for serving files like .css, .png, or .js but your web server (like Nginx, Apache, or Gunicorn + WhiteNoise) handles that.

To make it easy, Django gives you one simple command (`collectstatic`) to:

- gather everything from `students/static/`, `staticfiles/`, and each app's `/static/`
- put them in one central directory
- make them ready to deploy efficiently

▼	illinois.edu	~/Mohit Gupta/Acade	82
>	data		83
>	illinois		84
▼	static		85
▼	css		86
	illinois_logo.png		87
	normalize.css		88
	skeleton.css		89
	style.css		90
▼	staticfiles		91
>	admin		92
▼	css		93
	illinois_logo.png		94
	normalize.css		95
	skeleton.css		96
	style.css		97
>	students		98
>	templates		99
			100
			101

```
base.py x development.py production.py
80 USE_TZ = True
81
82 # 9) STATIC
83 STATIC_URL = '/static/'
84 STATICFILES_DIRS = [BASE_DIR / 'static']
85
86 # static for (the build output)
87 STATIC_ROOT = BASE_DIR / 'staticfiles'
88
```

- `static/` → where we keep your editable assets (like `style.css`, logos, etc.).

```
(venv) mohitgupta@Mohits-MacBook-Pro-2267 illinois.edu % python manage.py collectstatic
You have requested to collect static files at the destination
location as specified in your settings.

This will overwrite existing files!
Are you sure you want to do this?

Type 'yes' to continue, or 'no' to cancel: yes
```

- `staticfiles/` → Django's `collectstatic` output folder, used only for deployment.

- **Run collect staticfiles**

`./manage.py collectstatic --settings=illinois.settings.production`



Bash console 45221994

```
(myenv-django) 23:19 ~/illinois.edu-info490-demo (main)$ python manage.py collectstatic --settings=illinois.settings.production
134 static files copied to '/home/mohitg27/illinois.edu-info490-demo/illinois/ui-ux/staticfiles'.
(myenv-django) 23:19 ~/illinois.edu-info490-demo (main)$
```

1.g Serving Static Files

(Final Setting Step)

- This is the location where our staticfiles are now created:


Navigate to it:




Bash console 45221994

```
(myenv-django) 23:19 ~/illinois.edu-info490-demo (main)$ python manage.py collectstatic --settings=illinois.settings.production
134 static files copied to '/home/mohitg27/illinois.edu-info490-demo/illinois/ui-ux/staticfiles'.
(myenv-django) 23:19 ~/illinois.edu-info490-demo (main)$
```

- Open the “Files” navigation.
- Then locate the staticfiles
- Then open that folder and checkout the path on top
- Copy that address which should look like:
 - `/home/mohitg27/illinois.edu-info490-demo/illinois/ui-ux/staticfiles`

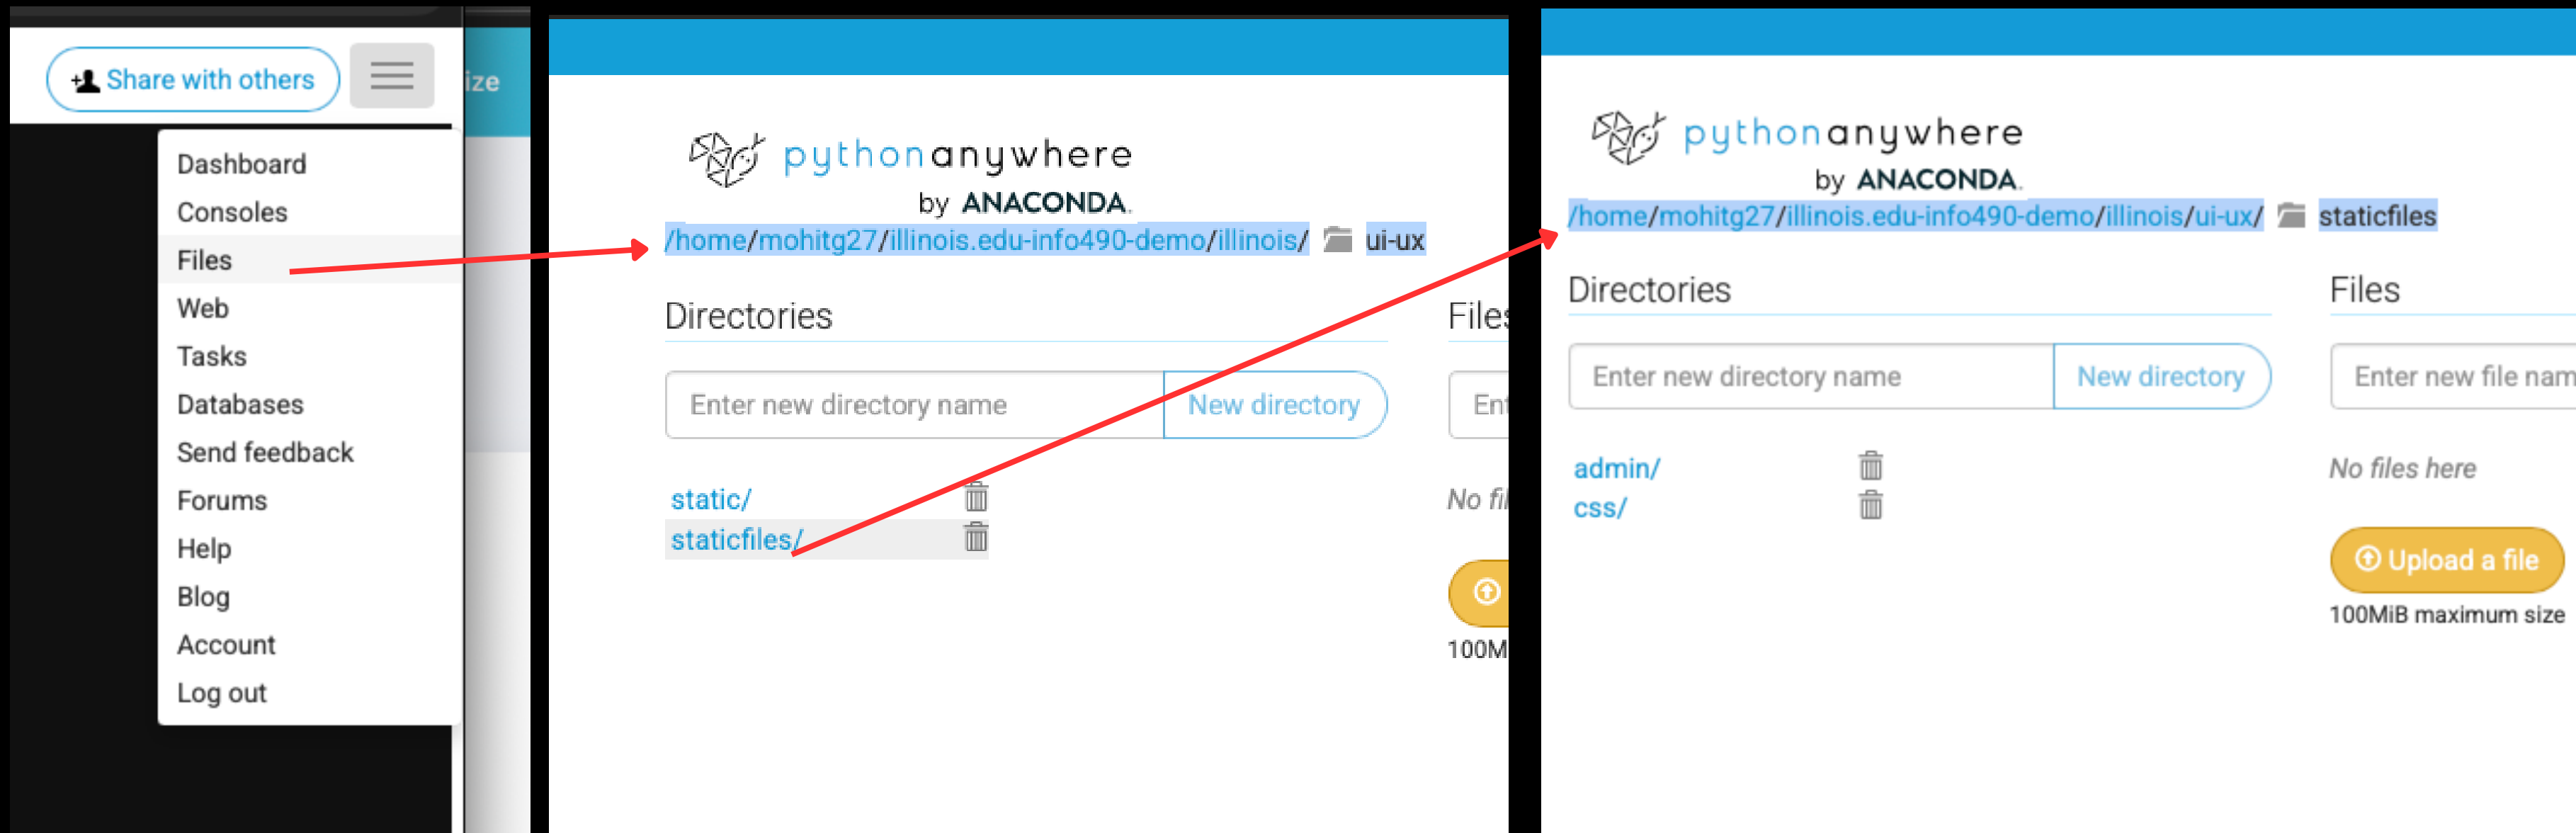

- Open the “Web” navigation, and change the following:
- URL: /static/
- Directory: {your path where staticfiles are located}

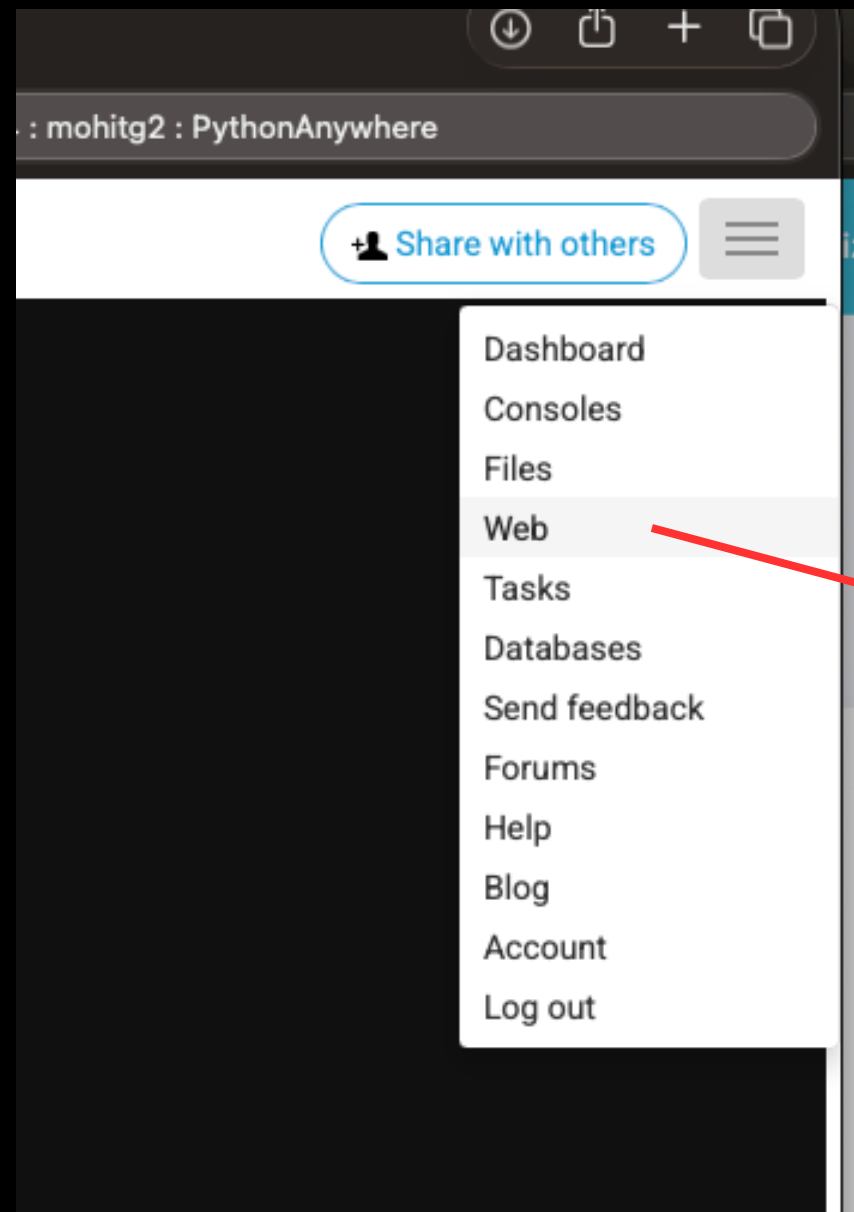

Static files:

Files that aren't dynamically generated by your code, like CSS, JavaScript or uploaded files, can be served much faster straight off the disk if you specify them here. You need to **Reload your web app** to activate any changes you make to the mappings below.

URL	Directory	Delete
Enter URL	Enter path	

Security:

An HTTPS certificate is needed so that people can access your site securely. We automatically provide a certificate for mohitg2.pythonanywhere.com.

HTTPS certificate: Automatically provided for this hostname

- This is how the final edit should look like:

Static files:

Files that aren't dynamically generated by your code, like CSS, JavaScript or uploaded files, can be served much faster straight off the disk if you specify them here. You need to **Reload your web app** to activate any changes you make to the mappings below.

URL	Directory	Delete
/static/	/home/mohitg27/illinois.edu-info490-demo/illinois/ui-ux/staticfiles	
Enter URL	Enter path	

1.h Let's run our website

- Press this button to apply the settings

- Now use the mentioned url to open our website

Send FeedbackForumsHelpBlogAccountLog o

pythonanywhere
by ANACONDA.

DashboardConsolesFiles**Web**TasksDatabase

All done! Your web app is now set up. Details below.

mohitg27.pythonanywhere.com

+ Add a new web app

Configuration for mohitg27.pythonanywhere.com

Reload:

Reload mohitg27.pythonanywhere.com

Best before date:

We're happy to host your free website -- and keep it free -- but you'll need to log in at least once every one month and click the "Run until 1 month from today" button below. We'll send you an email a week before the site is disabled so that you don't forget to do that.

This site will be disabled on **Tuesday 17 March 2026**

Run until 1 month from today

Paying users' sites stay up forever without any need to log in to keep them running.

Traffic:

How busy is your site?

This month (previous month)	0	(0)
Today (yesterday)	0	(0)
Hour (previous hour)	0	(0)

Want some more data? [Paying accounts](#) get pretty charts ;-)

Code:

What your site is running.

Source code:


Working directory:

Enter the path to your web app source code

/home/mohitg27/

Go to directory

- We did it!
- Our website is now live.

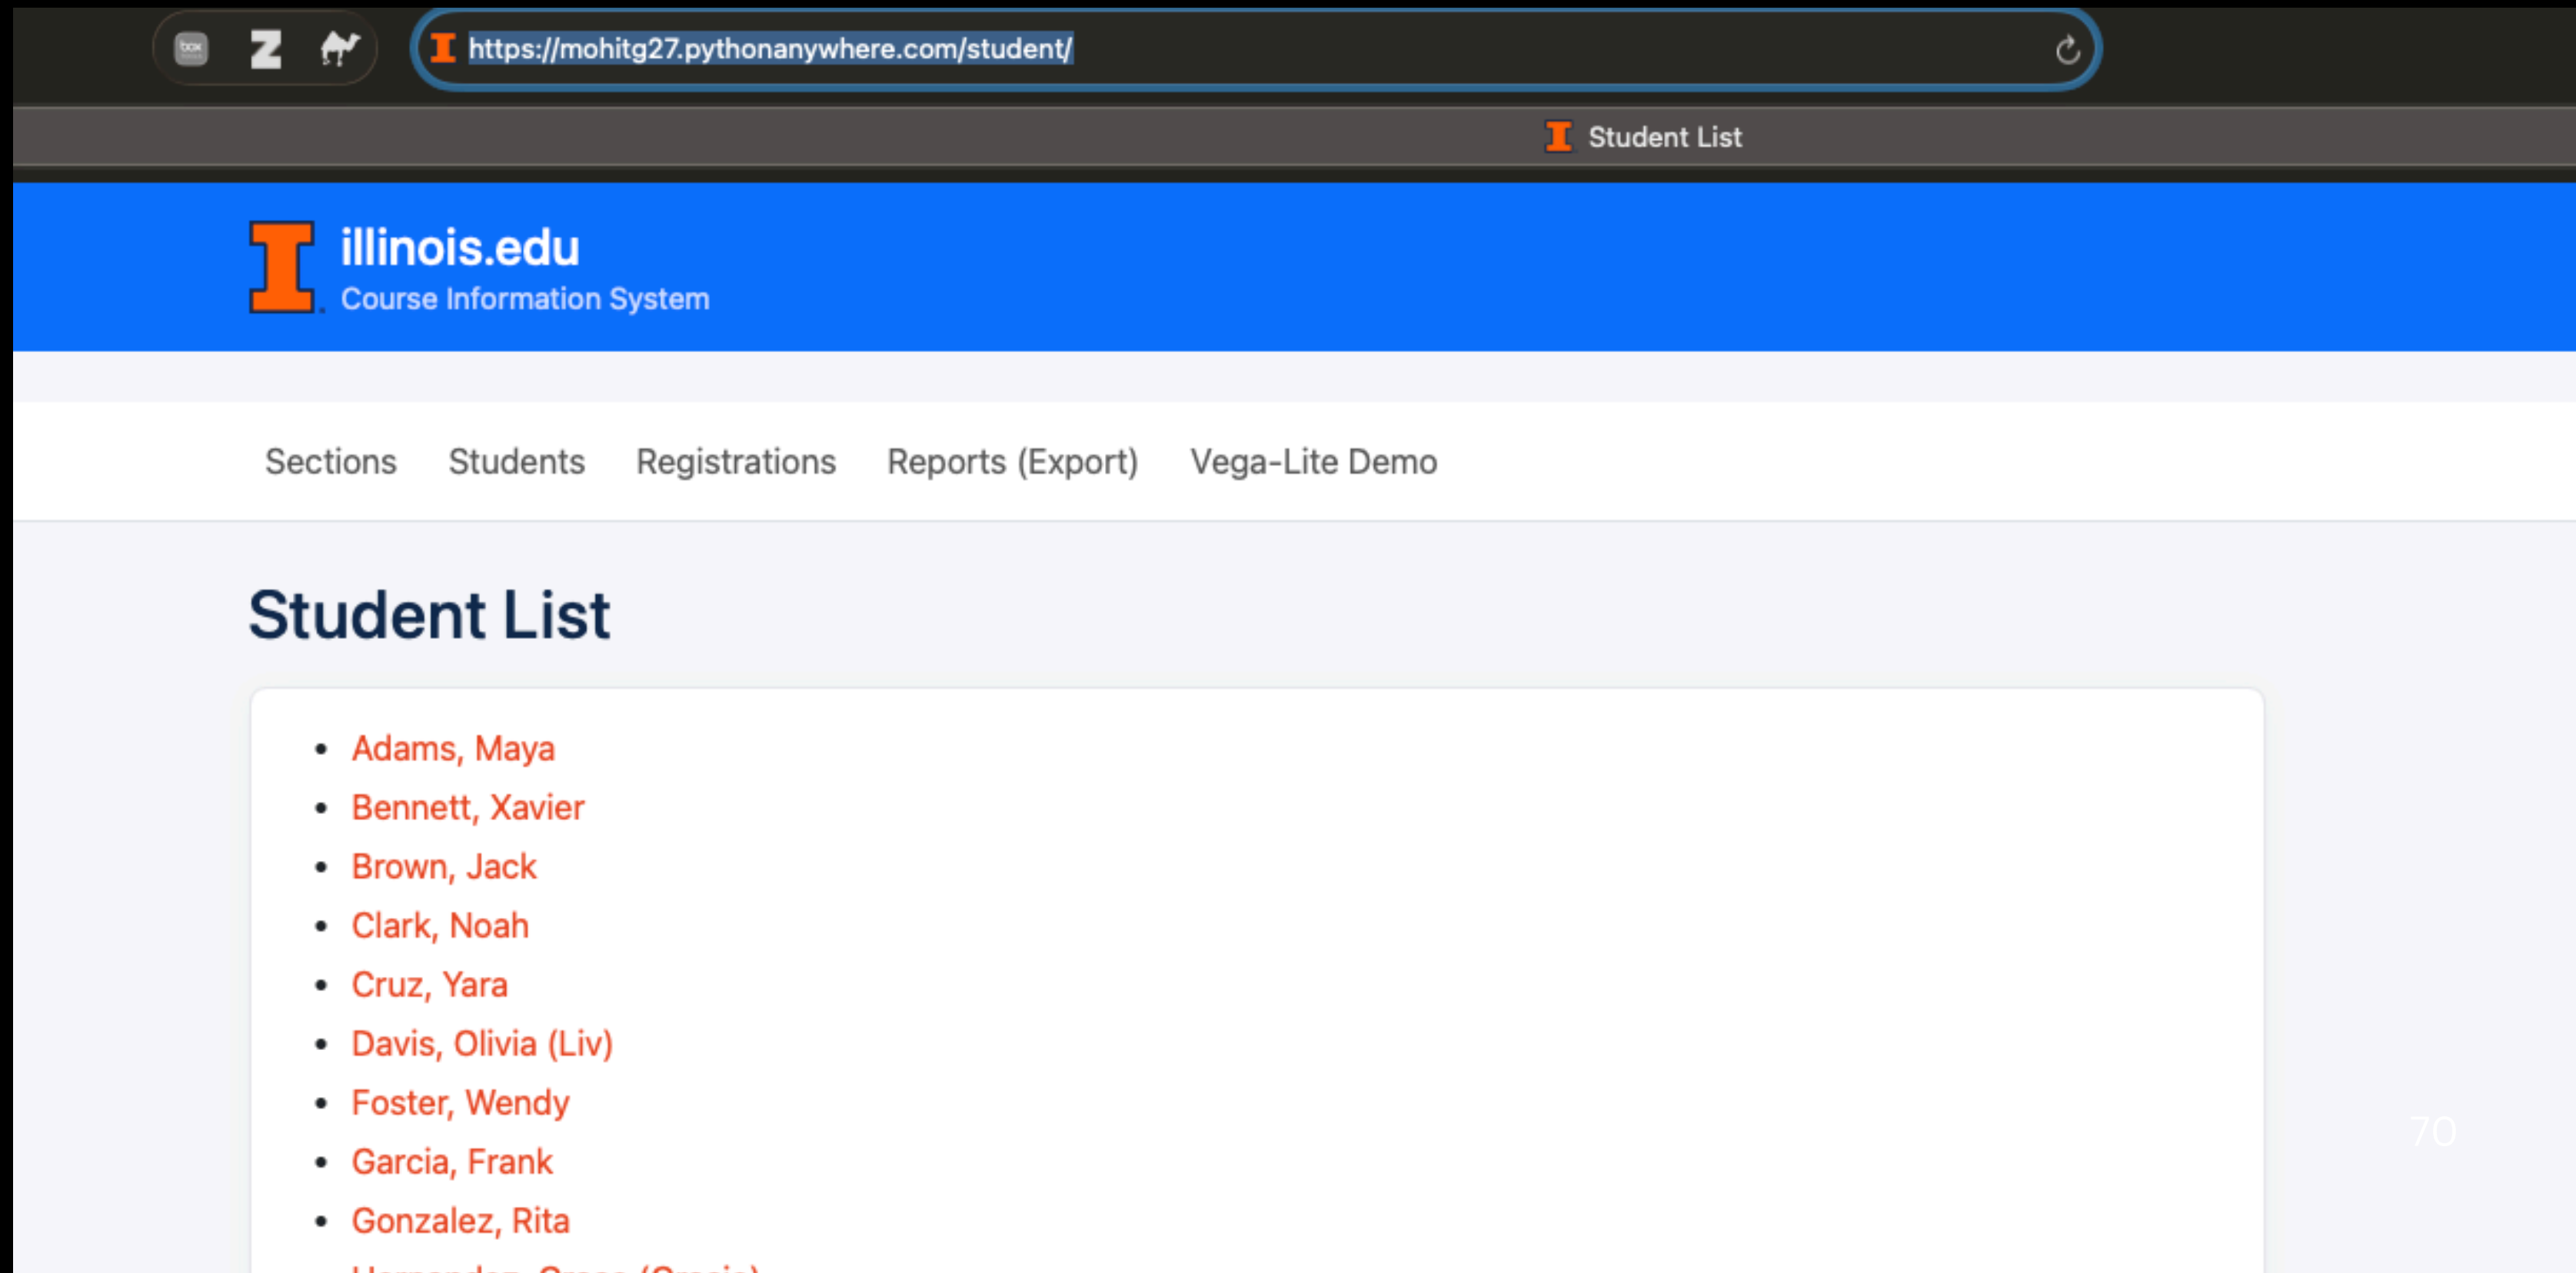

2.API + Vega-Lite Charts

(Activity Section)

Open an API link:

<https://mohitg27.pythonanywhere.com/api/function-students/>



<https://mohitg27.pythonanywhere.com/api/sections/students/>

<https://mohitg27.pythonanywhere.com/api/sections/enrollments/>

<https://mohitg27.pythonanywhere.com/api/class-students/>


<https://mohitg27.pythonanywhere.com/api/weather/>

Our APIs work!

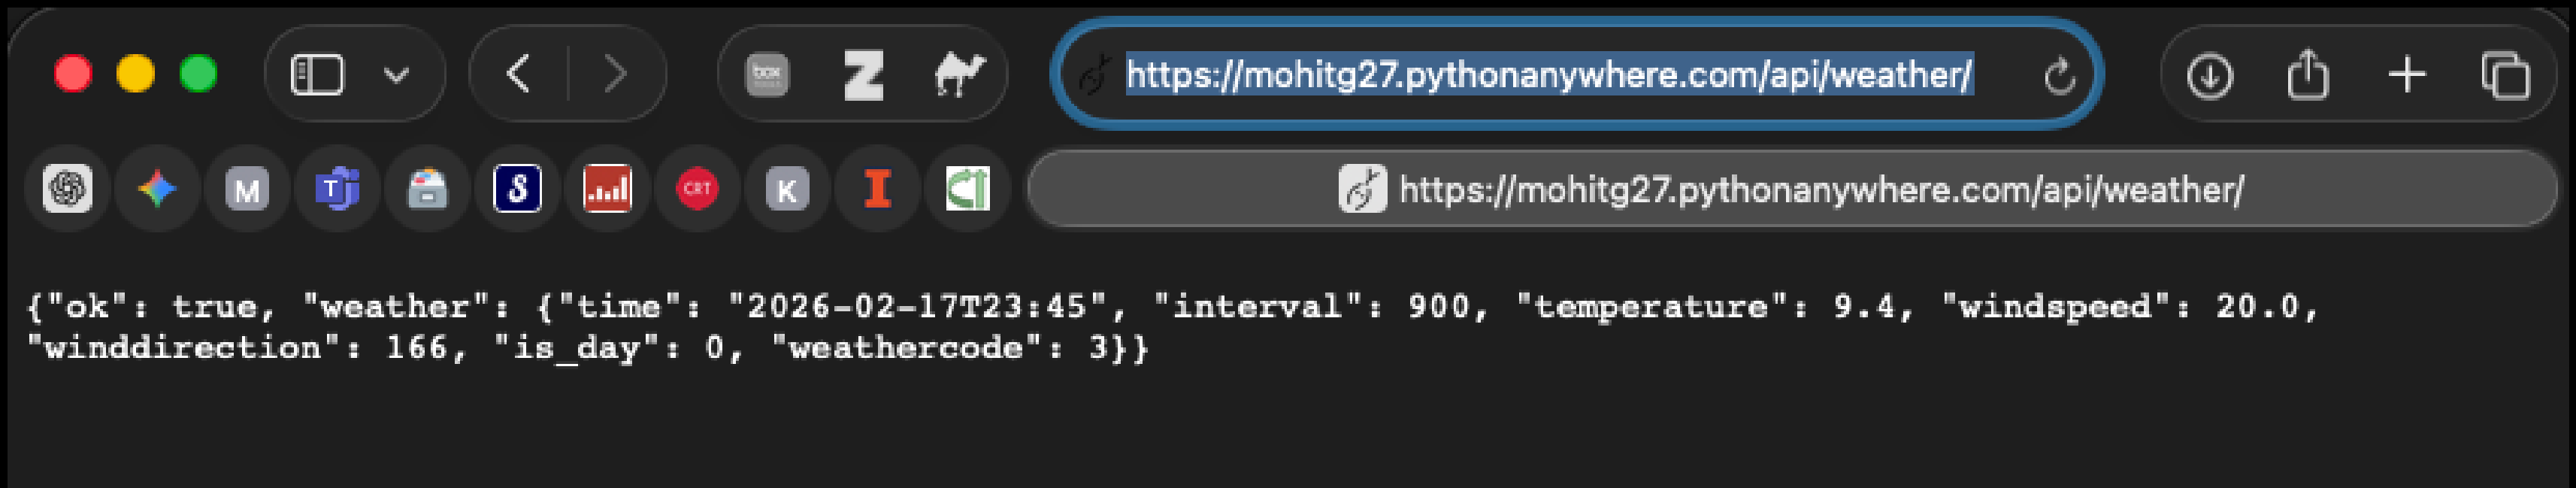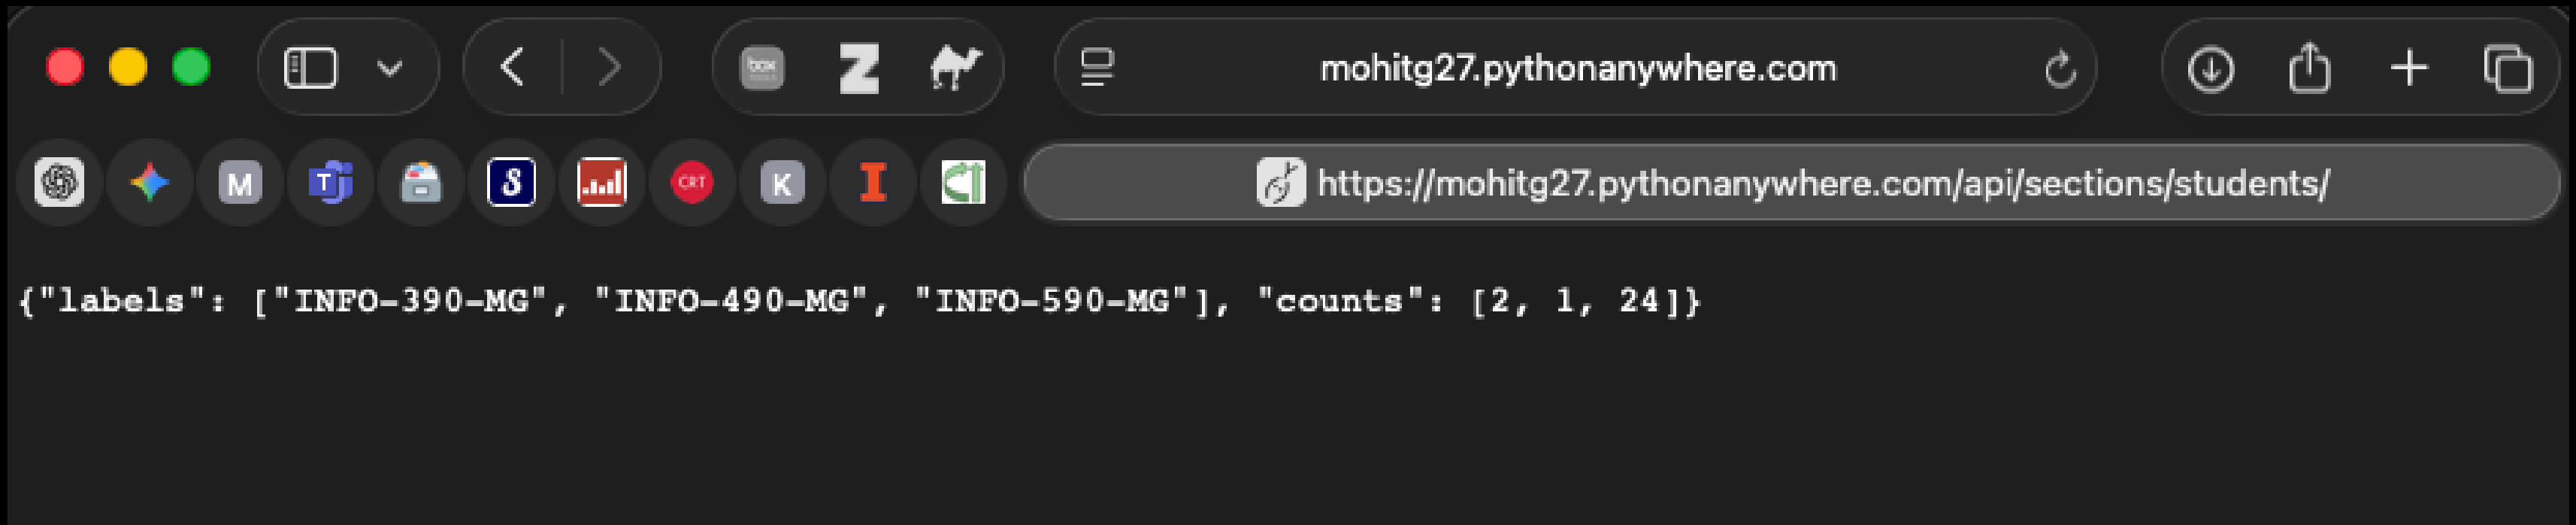

**Let's try to pull the data
from the live API
into the Vega-Lite code
and visualize it.**

**Open Vega-lite's editor:
<https://vega.github.io/editor/>**

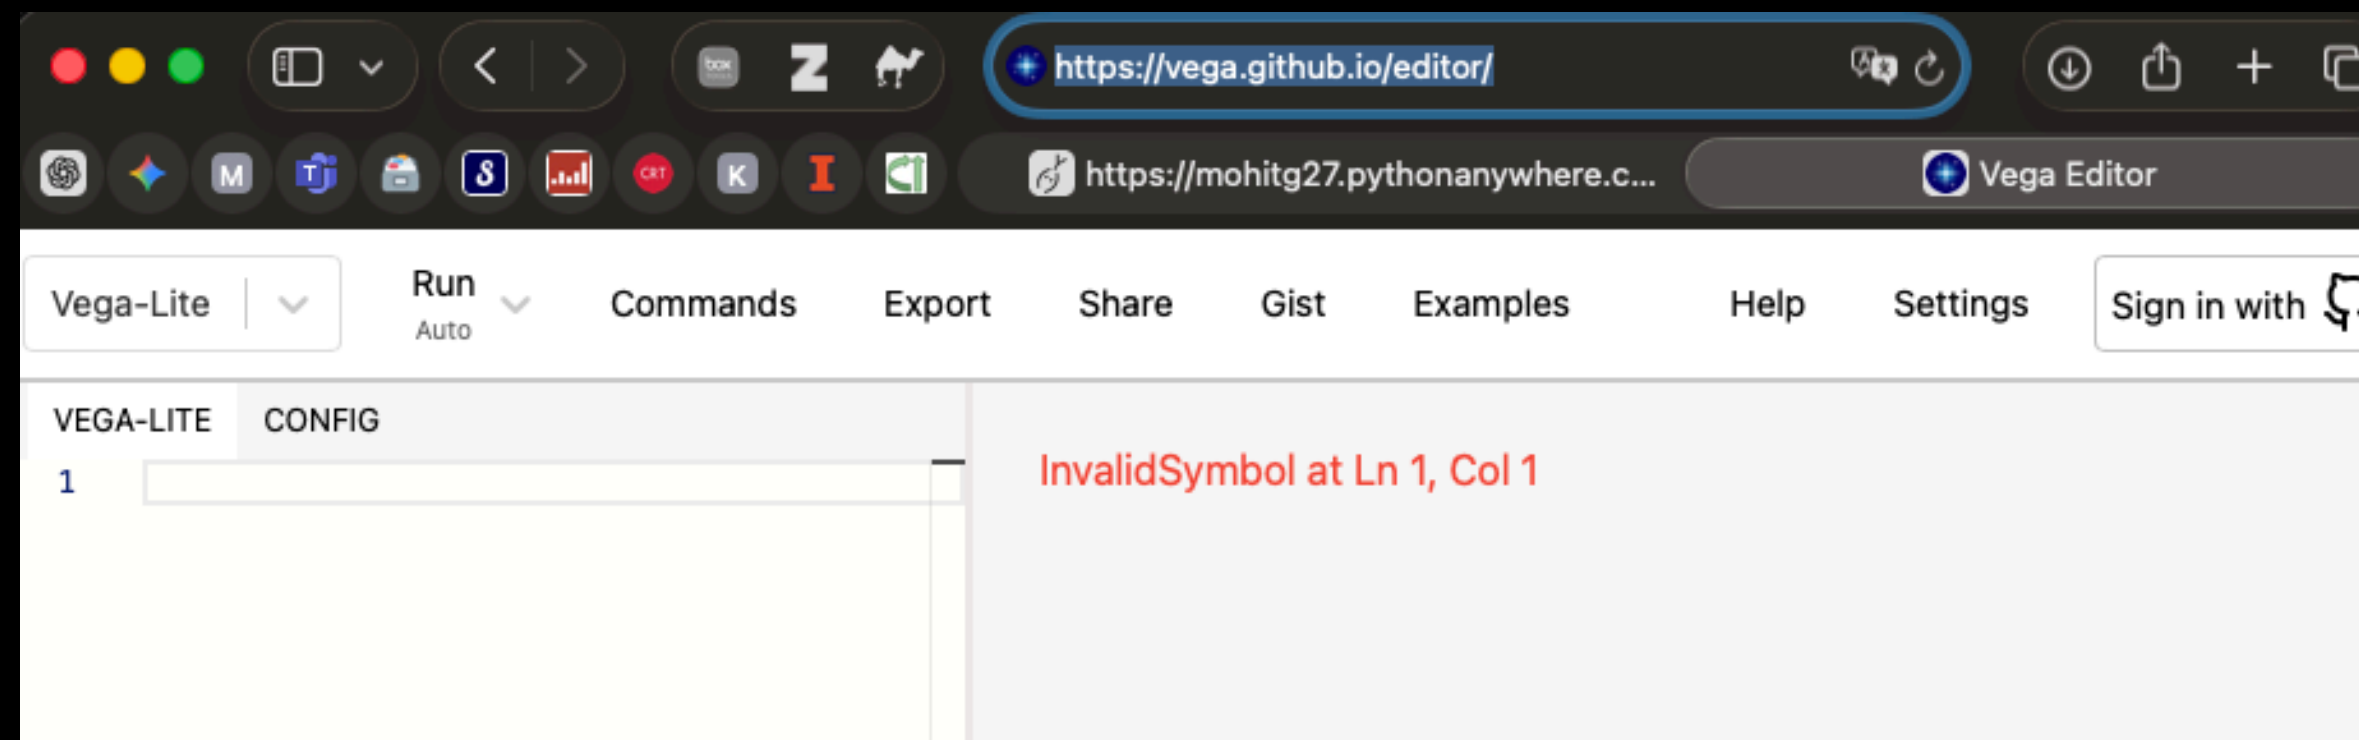


Try this in Vega-Editor (code present in notes:)

```
{
  "$schema": "https://vega.github.io/schema/vega-lite/v5.json",
  "description": "Students per section (from API).",
  "data": {
    "url": "https://mohitg27.pythonanywhere.com/api/sections/students/",
    "format": { "type": "json" }
  },
  "transform": [
    { "flatten": ["labels", "counts"], "as": ["section", "count"] },
    { "calculate": "toNumber(datum.count)", "as": "count" }
  ],
  "mark": { "type": "bar", "tooltip": true },
  "encoding": {
    "x": { "field": "section", "type": "nominal", "axis": { "title": "Section", "labelAngle": -20 } },
    "y": { "field": "count", "type": "quantitative", "axis": { "title": "Students" } }
  },
  "title": "Students per Section"
}
```


```
1 # This is the code for vega editor. Enter your username in the line 7.
2
```

Browser interface showing the URL `mohitg27.pythonanywhere.com` and the API endpoint `https://mohitg27.pythonanywhere.com/api/sections/students/`. The response is a JSON object:

```
{"labels": ["INFO-390-MG", "INFO-490-MG", "INFO-590-MG"], "counts": [2, 1, 24]}
```

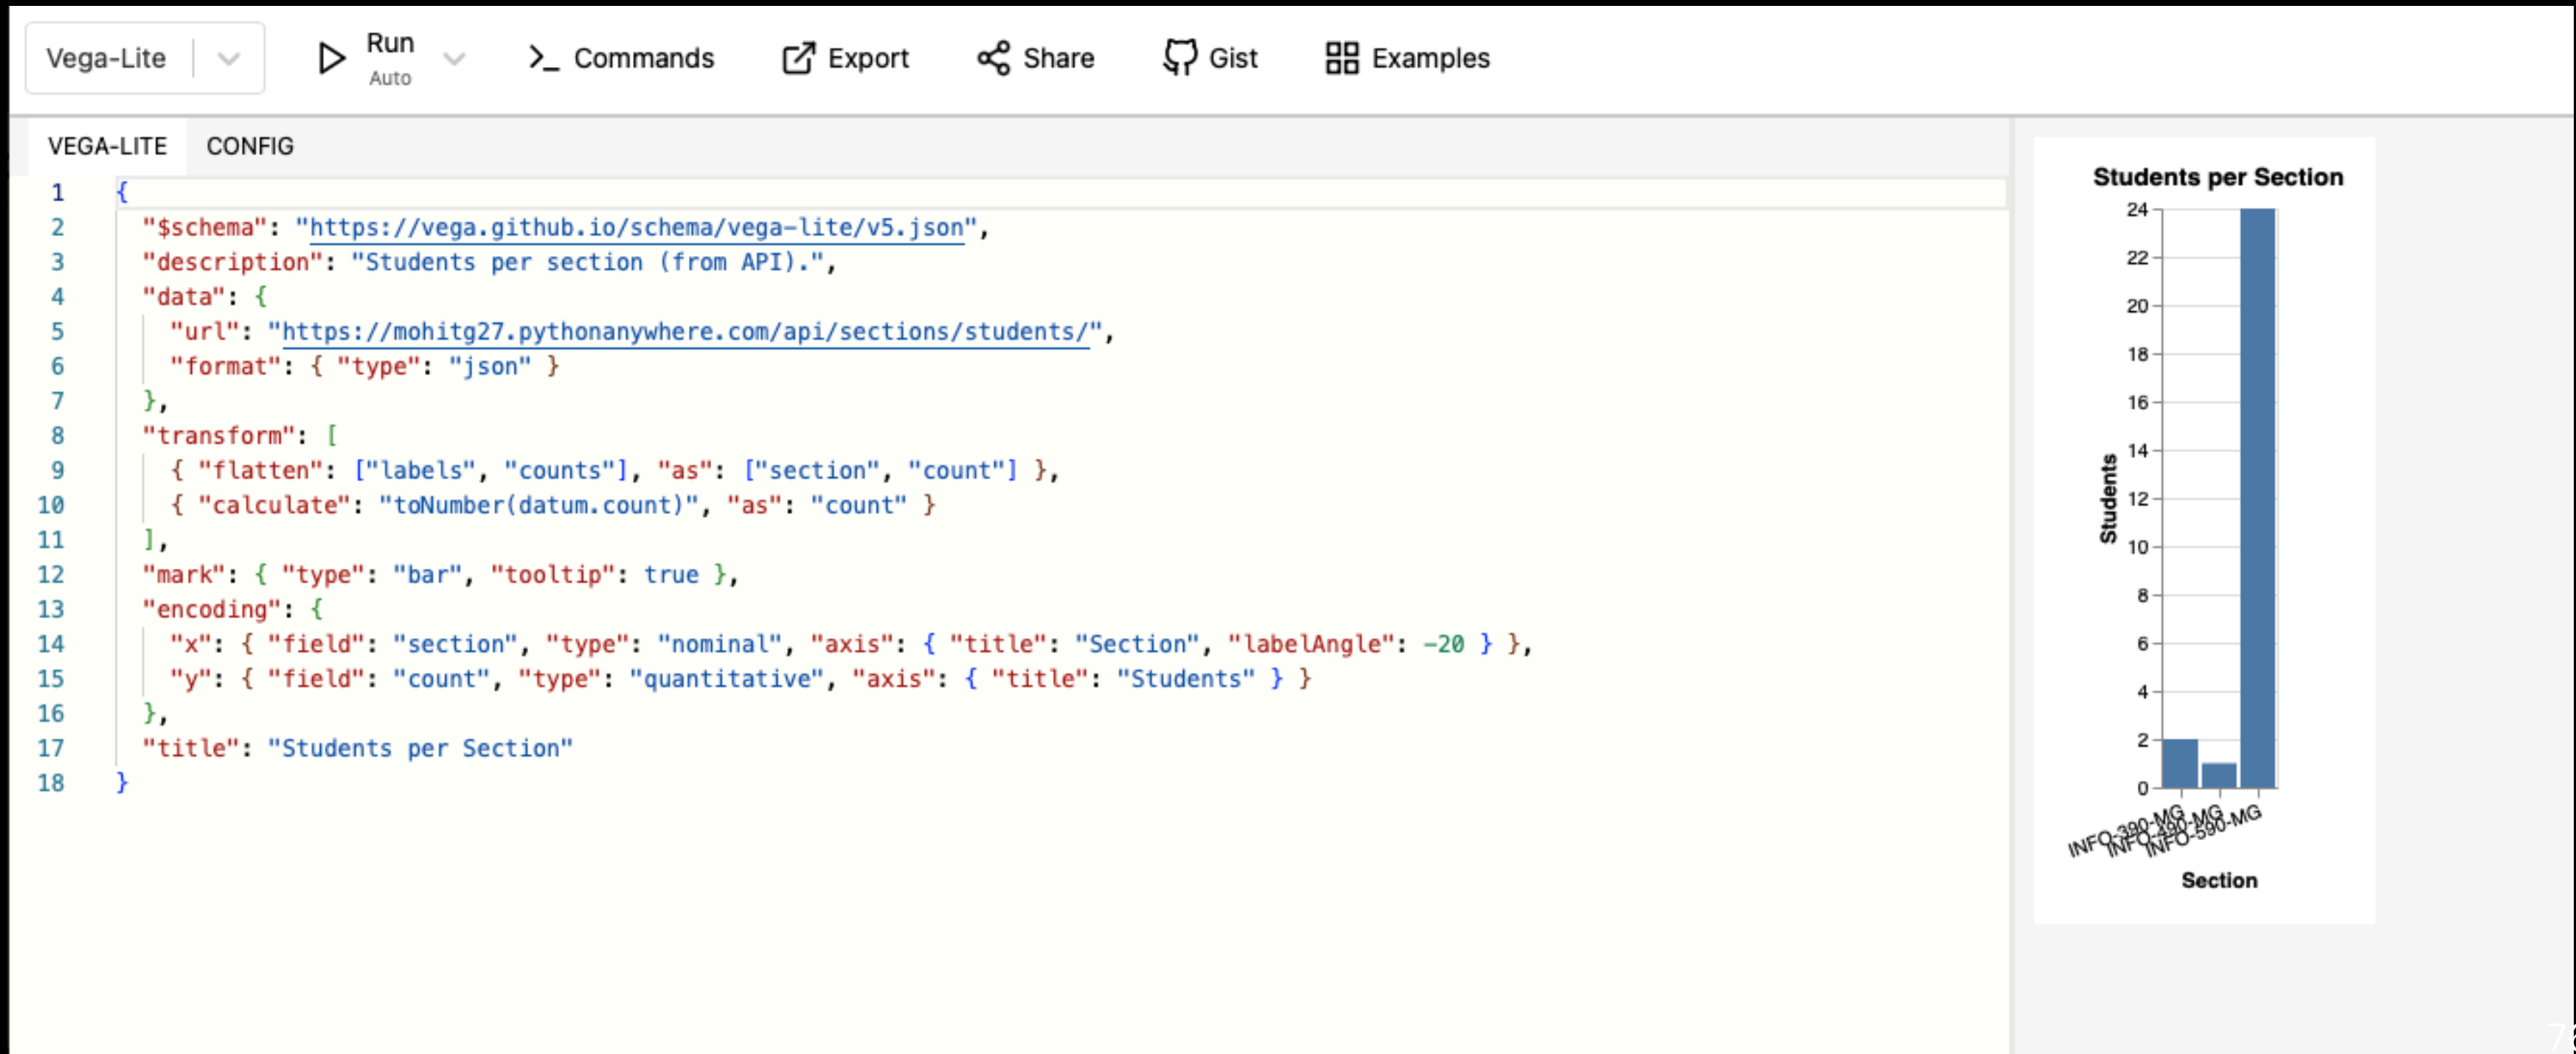


- To make it work, it is important for us to let others access our api data.
- I added a bonus section here in 4.2 in the 'notes'

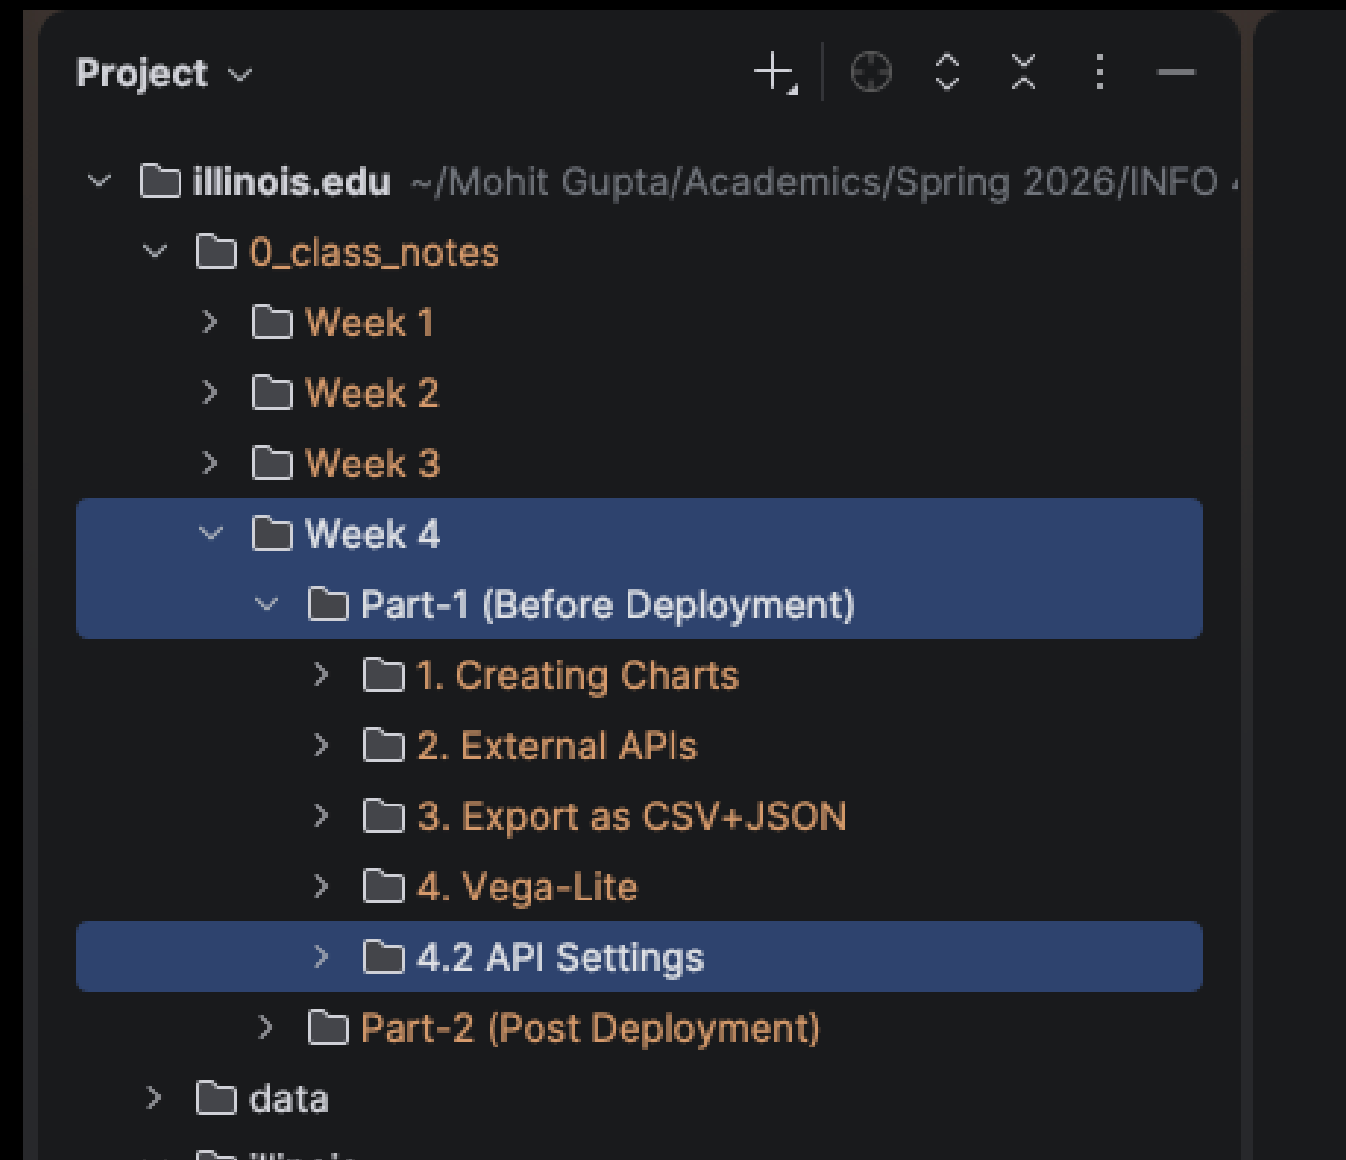

- **Without implementing the 'django-cors-headers,' vega-lite's editor or any other such service won't be able to access your api data.**
- **And your output would look something like what is on the next page.**

Output without corsheader (code present in notes)

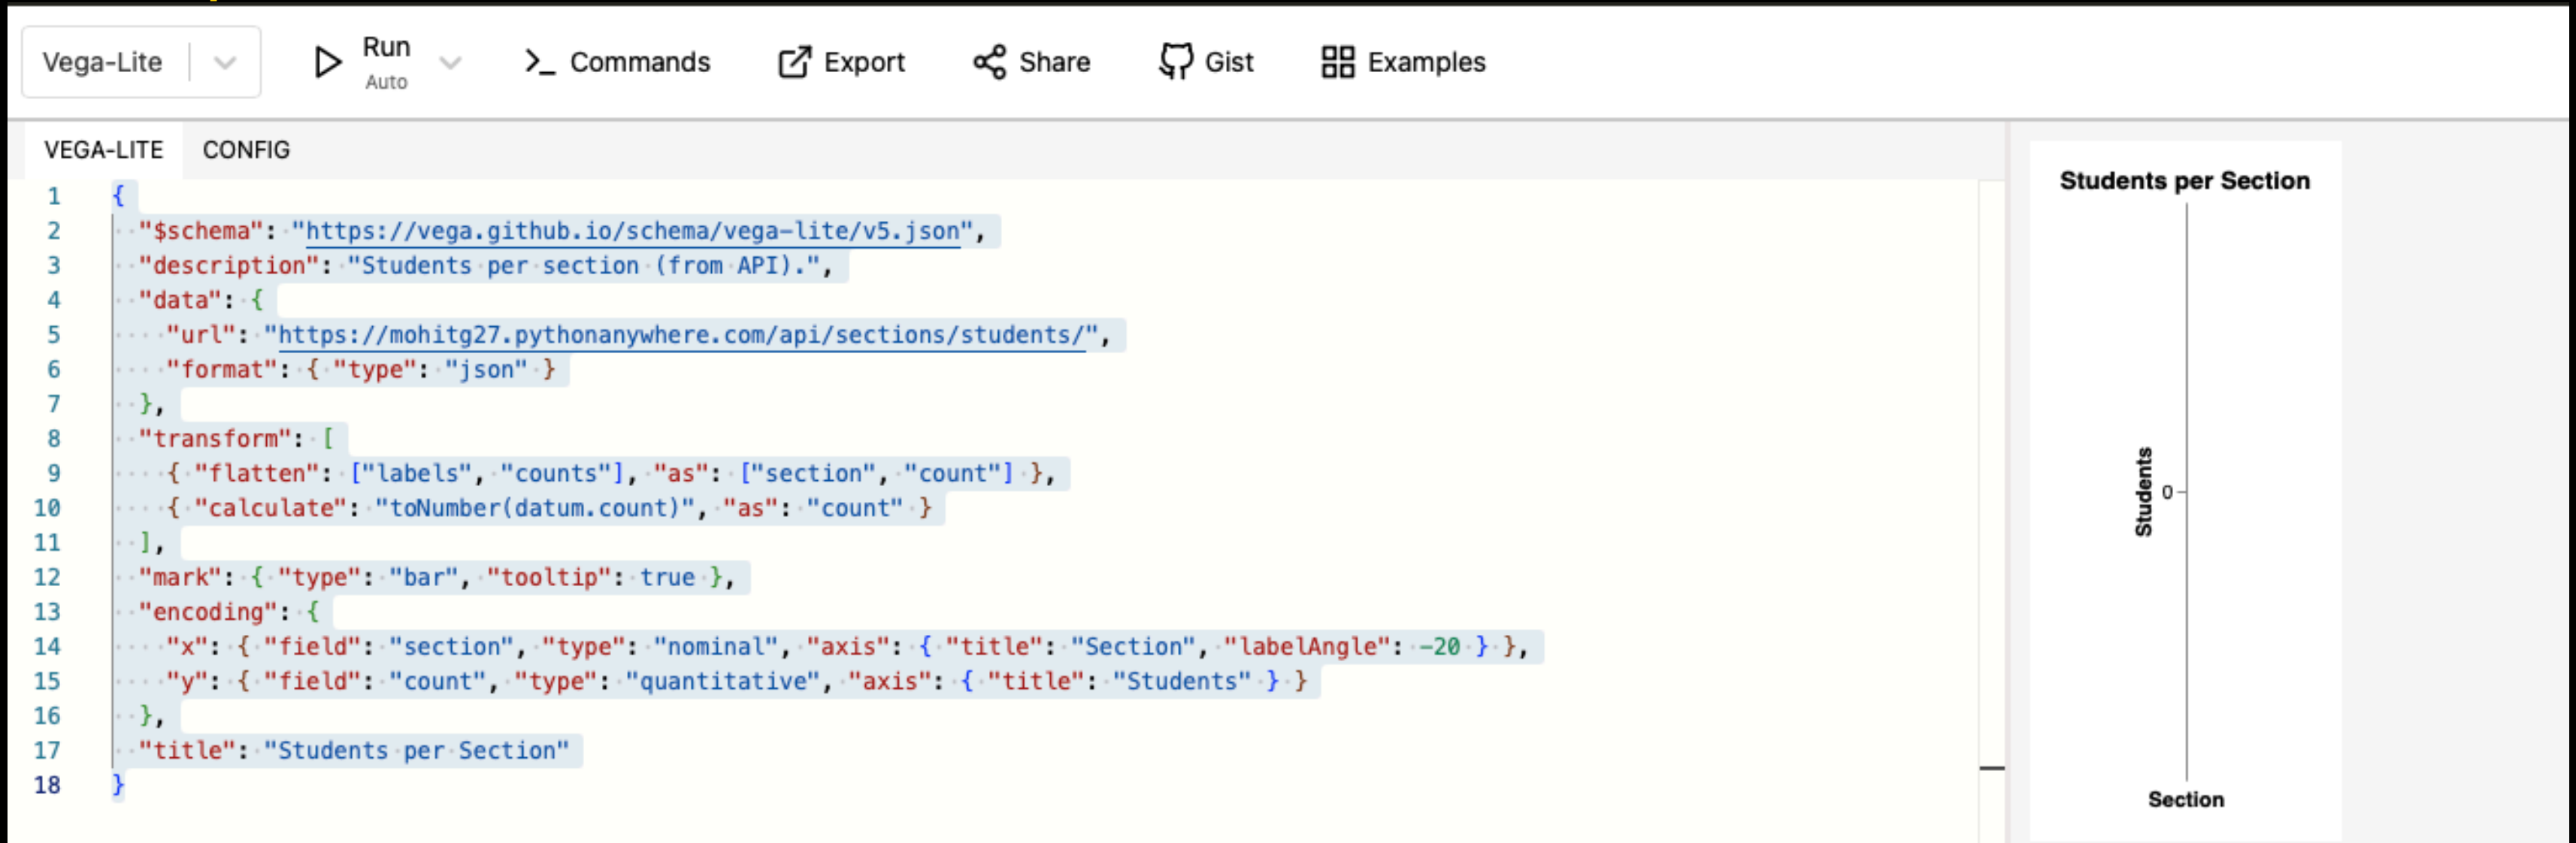

≡ 4_2_4.txt ×

```
1 # This is the code for vega editor. Enter your username in the line 7.
2
```

2.b What is CORS?

or

Cross-Origin Resource Sharing

CORS stands for:

Cross-Origin Resource Sharing

- **Cross-Origin** → Requests coming from a different domain
- **Resource** → Data (like JSON, API responses, images, etc.)
- **Sharing** → Allowing access

So CORS is a browser security mechanism that controls:

Whether a website is allowed to access resources from another website.

What is the purpose of CORS_ALLOWED_ORIGINS?

CORS controls which external websites are allowed to send requests to your backend API.

Without CORS configured:

If a different website (like Vega Editor) tries to fetch your API data, the browser will block it with.

Our backend:

- <https://mohitg27.pythonanywhere.com>

But our API data request origin:

- <https://vega.github.io>

Since they are different origins, the browser blocks the request unless your backend explicitly allows it using CORS settings.

When do you need CORS?

You need it when:

- **Your frontend and backend are on different domains**
- **You are using:**
 - **React**
 - **Vue**
 - **Vega Editor**
 - **Postman (browser version)**
 - **Any external JS client**

You do NOT need it for:


- **Server-to-server requests**
- **Django templates rendered directly**

Also,

What if you made changes to your code on PyCharm and you want to reflect that on your live website?

- Ensure that you've pushed those changes to your main github branch.**

- Go to your Bash Console
- Do a “git pull”
- Go to “Web” Navigation
- Reload the website

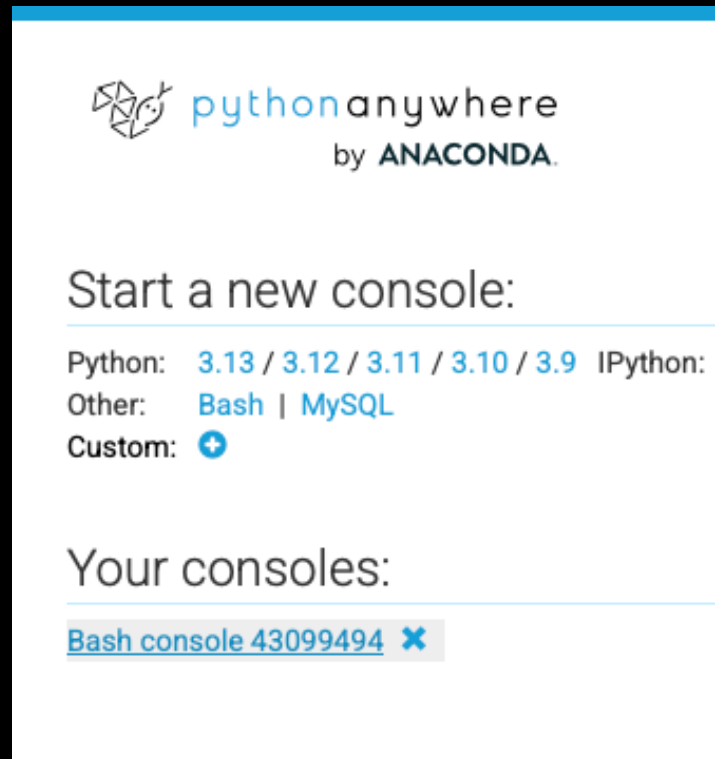


pythonanywhere
by ANACONDA.

Start a new console:


Python: [3.13](#) / [3.12](#) / [3.11](#) / [3.10](#) / [3.9](#) IPython:
Other: [Bash](#) | [MySQL](#)
Custom: [+](#)

Your consoles:

[Bash console 43099494](#) ✕

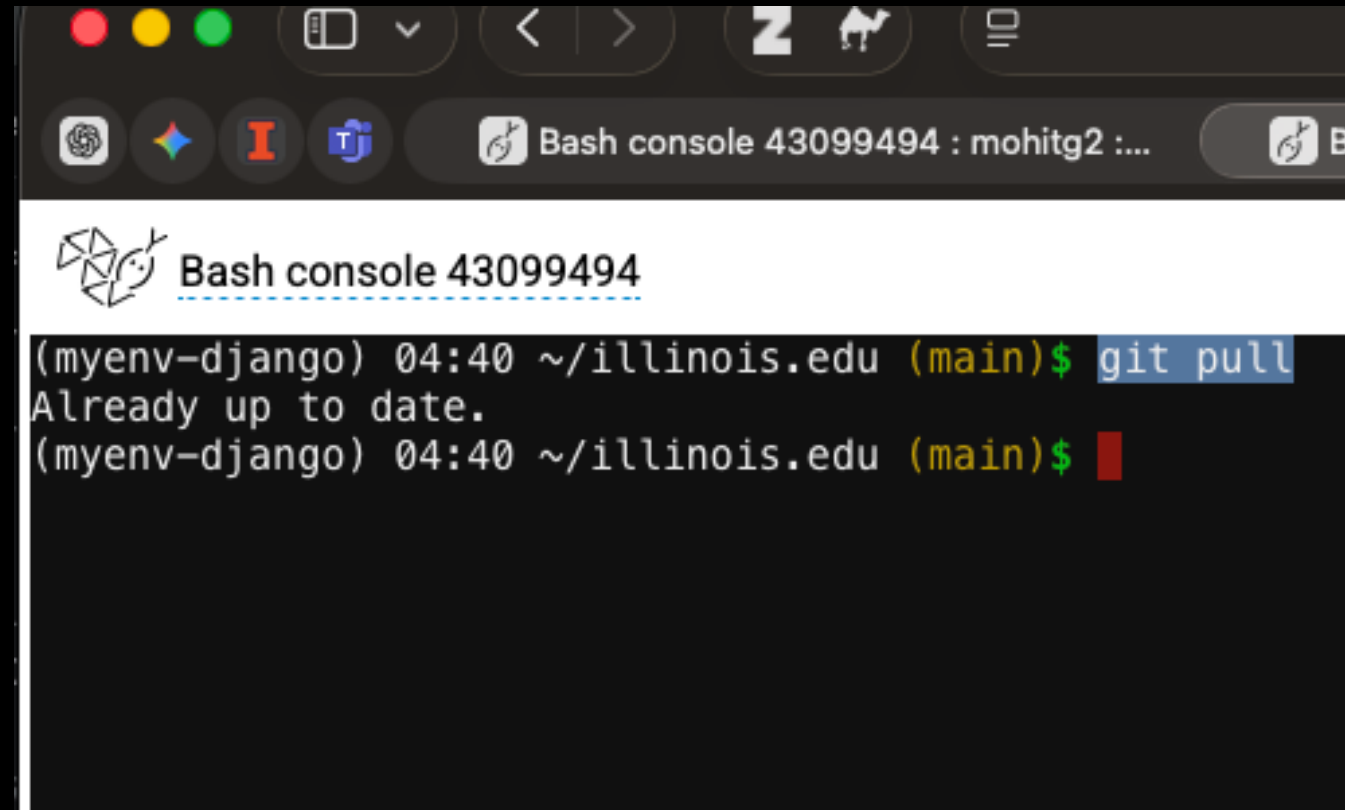

```
(myenv-django) 04:40 ~/illinois.edu (main)$ git pull
Already up to date.
(myenv-django) 04:40 ~/illinois.edu (main)$
```

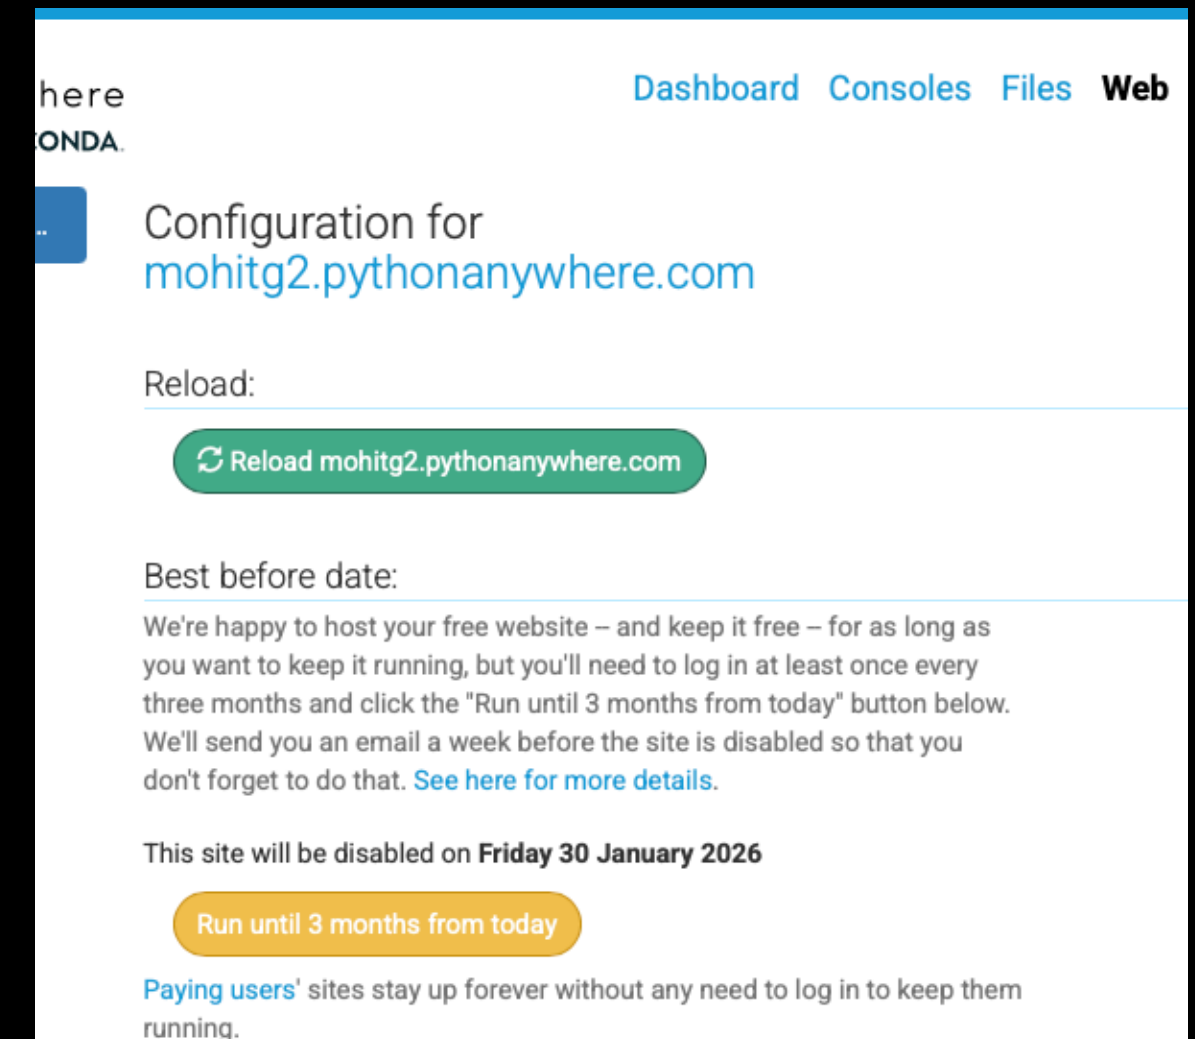

here
ONDA.

Dashboard Consoles Files **Web**

Configuration for mohitg2.pythonanywhere.com

Reload:

[Reload mohitg2.pythonanywhere.com](#)

Best before date:

We're happy to host your free website – and keep it free – for as long as you want to keep it running, but you'll need to log in at least once every three months and click the "Run until 3 months from today" button below. We'll send you an email a week before the site is disabled so that you don't forget to do that. [See here for more details.](#)

This site will be disabled on **Friday 30 January 2026**

[Run until 3 months from today](#)

[Paying users'](#) sites stay up forever without any need to log in to keep them running.

THAT'S ALL
THIS SECTION