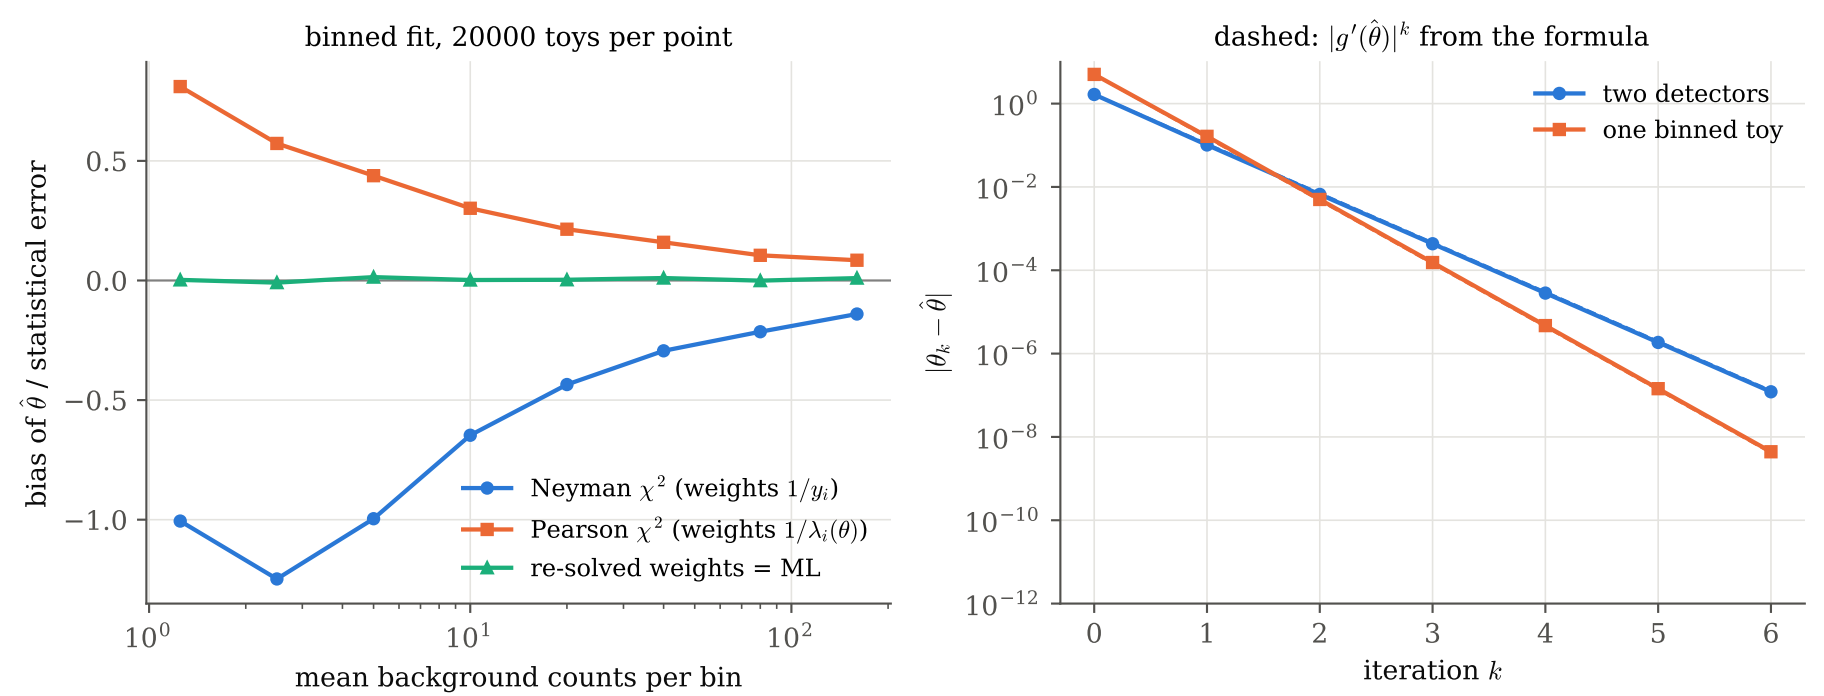
binned fit, 20000 toys per point
bias of $\hat{\theta}$ / statistical error
0.5
0.0
−0.5
−1.0
10^0
10^1
10^2
mean background counts per bin
Neyman χ^2 (weights $1/y_i$)
Pearson χ^2 (weights $1/\lambda_i(\theta)$)
re-solved weights = ML
dashed: $|g'(\hat{\theta})|^k$ from the formula
$|\theta_k - \hat{\theta}|$
10^0
10^{-2}
10^{-4}
10^{-6}
10^{-8}
10^{-10}
10^{-12}
0
1
2
3
4
5
6
iteration k
two detectors
one binned toy