

首先小凡感谢群主豪哥、群友的栽培

此范例由 `vue-cli` , 加入 `bootstrap` , `jquery`

01. `npm run dev`

02. 先看执行结果

可以看到

<http://localhost:8080>

`bootstrap` 成功了

`jquery` 功能：点击段落，消失，（`dom` 操作）也成功




要实作上图功能，要修改下面三个档案

已有图片及 代码注纪录

最后,也可以不改代码，

直接将 **vue01-cli-bootstrap and jquery (台湾 小凡).zip**，解压，即用

### 03./src/index.html

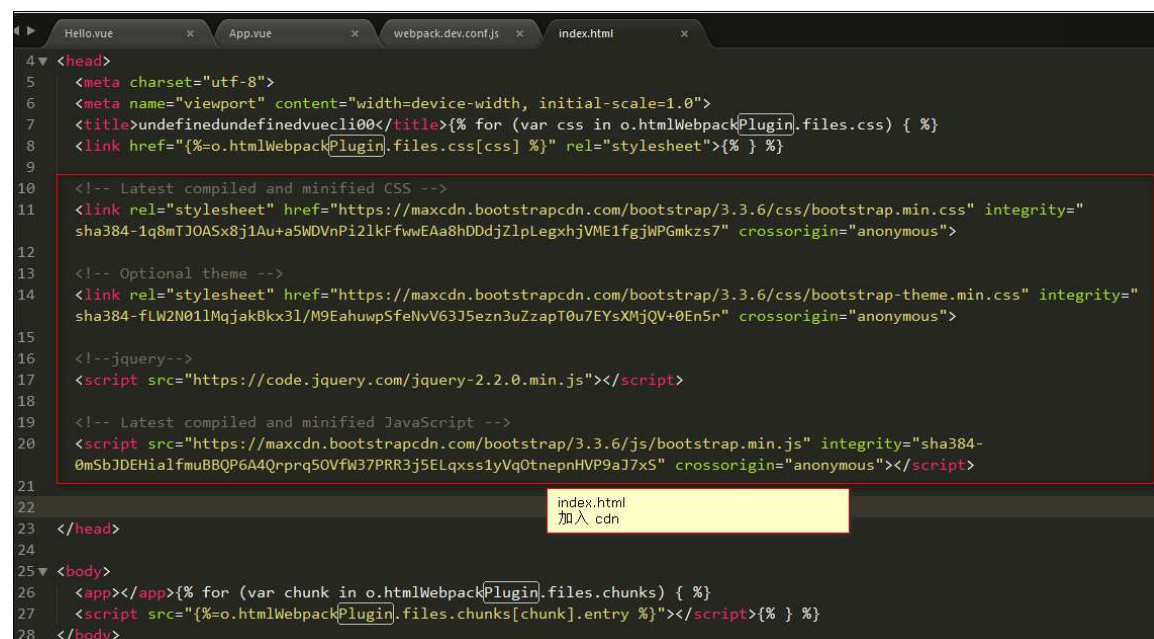

```
4 <head>
5   <meta charset="utf-8">
6   <meta name="viewport" content="width=device-width, initial-scale=1.0">
7   <title>undefinedundefinedvuecli00</title>{% for (var css in o.htmlWebpackPlugin.files.css) { %}
8   <link href="{%=o.htmlWebpackPlugin.files.css[css] %}" rel="stylesheet">{% } %}
9
10  <!-- Latest compiled and minified CSS -->
11  <link rel="stylesheet" href="https://maxcdn.bootstrapcdn.com/bootstrap/3.3.6/css/bootstrap.min.css" integrity="
12  sha384-1q8mTJOASx8j1Au+a5WDVnPi2lkFfwwEAa8hDDdjZlpLegxhjVME1fgjWPGmkzs7" crossorigin="anonymous">
13
14  <!-- Optional theme -->
15  <link rel="stylesheet" href="https://maxcdn.bootstrapcdn.com/bootstrap/3.3.6/css/bootstrap-theme.min.css" integrity="
16  sha384-flW2n011MqjakBkx31/M9EahuwPsfEhV63J5ezn3uZzapT0u7EYsXMjQV+0En5r" crossorigin="anonymous">
17
18  <!-- jQuery -->
19  <script src="https://code.jquery.com/jquery-2.2.0.min.js"></script>
20
21  <!-- Latest compiled and minified JavaScript -->
22  <script src="https://maxcdn.bootstrapcdn.com/bootstrap/3.3.6/js/bootstrap.min.js" integrity="sha384-
23  0mSbJDEHialfmuB6A4Qrprq50Vfw37PRR3j5ELQxss1yVqOtnepnHVP9aJ7xS" crossorigin="anonymous"></script>
24
25 </head>
26
27 <body>
28   <app></app>{% for (var chunk in o.htmlWebpackPlugin.files.chunks) { %}
29   <script src="{%=o.htmlWebpackPlugin.files.chunks[chunk].entry %}"></script>{% } %}
30 </body>
```

<!DOCTYPE html>

<html>

<head>

<meta charset="utf-8">

<meta name="viewport" content="width=device-width, initial-scale=1.0">

<title>undefinedundefinedvuecli00</title>{% for (var css in o.htmlWebpackPlugin.files.css) { %}

<link href="{%=o.htmlWebpackPlugin.files.css[css] %}" rel="stylesheet">{% } %}

```
<!-- Latest compiled and minified CSS -->
<link rel="stylesheet"
href="https://maxcdn.bootstrapcdn.com/bootstrap/3.3.6/css/bootstrap.min.css"
integrity="sha384-1q8mTJOASx8j1Au+a5WDVnPi2lkFfwwEAa8hDDdjZlpLegxhjVME1fgjWPGmkzs7"
crossorigin="anonymous">

<!-- Optional theme -->
<link rel="stylesheet"
href="https://maxcdn.bootstrapcdn.com/bootstrap/3.3.6/css/bootstrap-theme.min.css"
integrity="sha384-fLW2N01lMqjakBkx3l/M9EahuwpsfeNvV63J5ezn3uZzapT0u7EYsXMjQV+0En5r"
crossorigin="anonymous">

<!--jquery-->
<script src="https://code.jquery.com/jquery-2.2.0.min.js"></script>

<!-- Latest compiled and minified JavaScript -->
<script src="https://maxcdn.bootstrapcdn.com/bootstrap/3.3.6/js/bootstrap.min.js"
integrity="sha384-0mSbJDEHialfmubBBQ6A4Qrprq5OVfW37PRR3j5ELqxss1yVqOtnepnHVP9aJ7xS"
crossorigin="anonymous"></script>

</head>

<body>
  <app></app>{% for (var chunk in o.htmlWebpackPlugin.files.chunks) { %}
    <script src="{%=o.htmlWebpackPlugin.files.chunks[chunk].entry %}"></script>{% } %}
</body>

</html>
```

04. /build/webpack.dev.conf.js

Update red line

Global register

```
16 // necessary for the html plugin to work properly
17 // when serving the html from in-memory
18 config.output.publicPath = '/'
19
20 config.plugins = (config.plugins || []).concat([
21   // generate HTML on the fly
22   new HtmlWebpackPlugin({
23     filename: 'index.html',
24     template: 'src/index.html',
25     $: "jquery",
26     jQuery: "jquery",
27     "window.jQuery": "jquery"
28   })
29 ])
30
31 module.exports = config
32
```

```
var config = require('./webpack.base.conf')
var HtmlWebpackPlugin = require('html-webpack-plugin')
```

```
// eval-source-map is faster for development
config.devtool = 'eval-source-map'
```

```
config.devServer = {
  // allow access over local network
  host: '0.0.0.0',
  // enable HTML5 history routing
  historyApiFallback: true,
  // suppress useless text
  noInfo: true,
}
```

```
// necessary for the html plugin to work properly
// when serving the html from in-memory
```

```
config.output.publicPath = '/'
```

```
config.plugins = (config.plugins || []).concat([  
  // generate HTML on the fly  
  new HtmlWebpackPlugin({  
    filename: 'index.html',  
    template: 'src/index.html',  
    $: "jquery",  
    jQuery: "jquery",  
    "window.jQuery": "jquery"  
  })  
])
```

```
module.exports = config
```

## 05. /src/App.vue

```
<template>
  <div id="app">
    
    <hello></hello>
  </div>
  <!--bootstrap -->
  <div class="jumbotron">
    <h1>Jumbotron heading</h1>
    <p class="lead">Cras justo odio, dapibus ac facilisis in, egestas eget quam. Fusce dapibus, tellus ac
cursus commodo, tortor mauris condimentum nibh, ut fermentum massa justo sit amet risus.</p>
    <p><a class="btn btn-lg btn-success" href="#" role="button">Sign up today</a></p>
  </div>
  <!--bootstrap -->

  <!--jquery test p-->
  <p>If you click on me, I will disappear.</p>
  <p>Click me away!</p>
  <p>Click me too!</p>
  <!--jquery test p-->

</template>

<script>
import Hello from './components/Hello'
import $ from 'jquery'

export default {
  components: {
    Hello
  }
}

$(document).ready(function () {
  $('p').click(function () {
    $(this).hide()
  })
})

</script>
```

```
<style>
body {
  font-family: Helvetica, sans-serif;
}
</style>
```