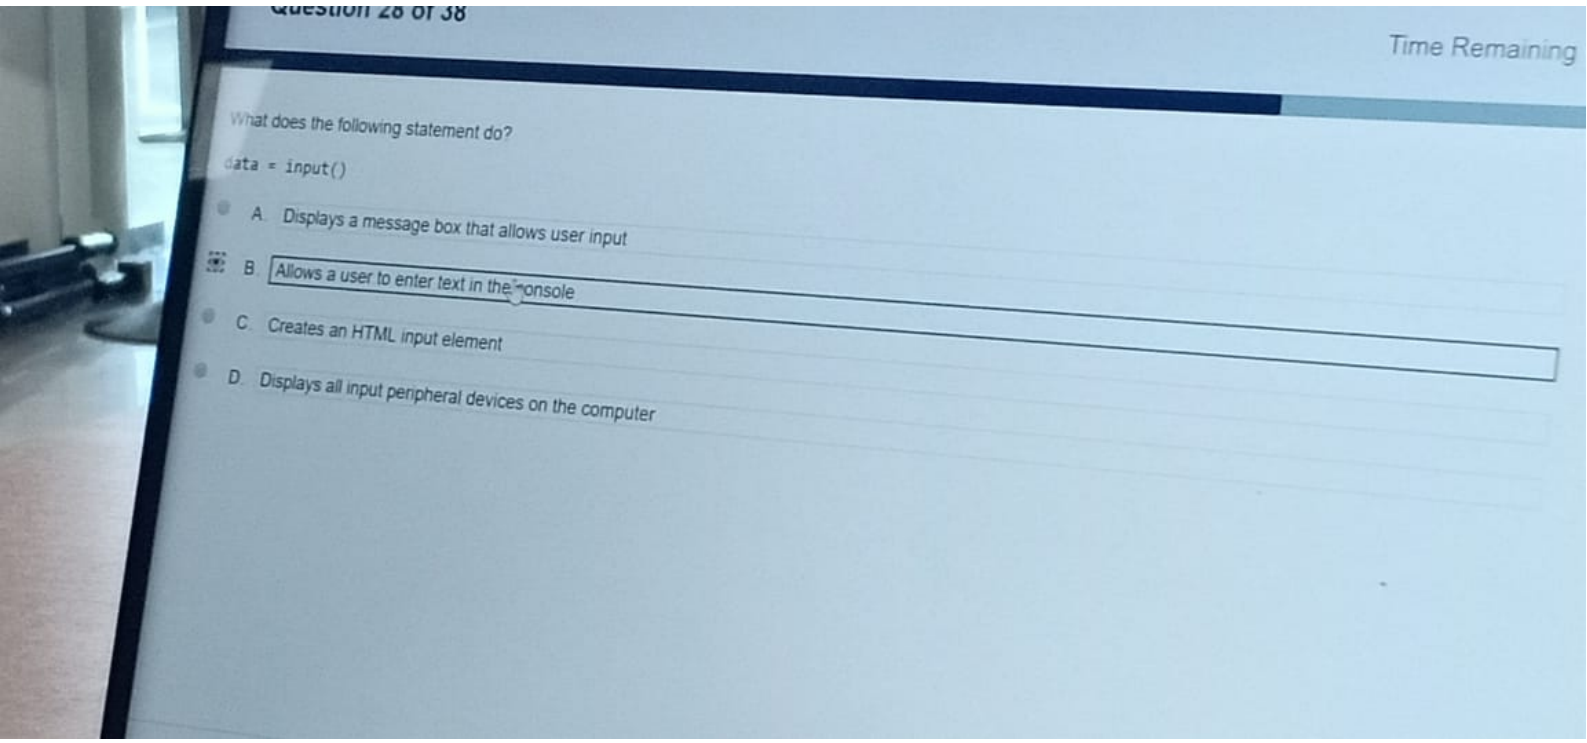
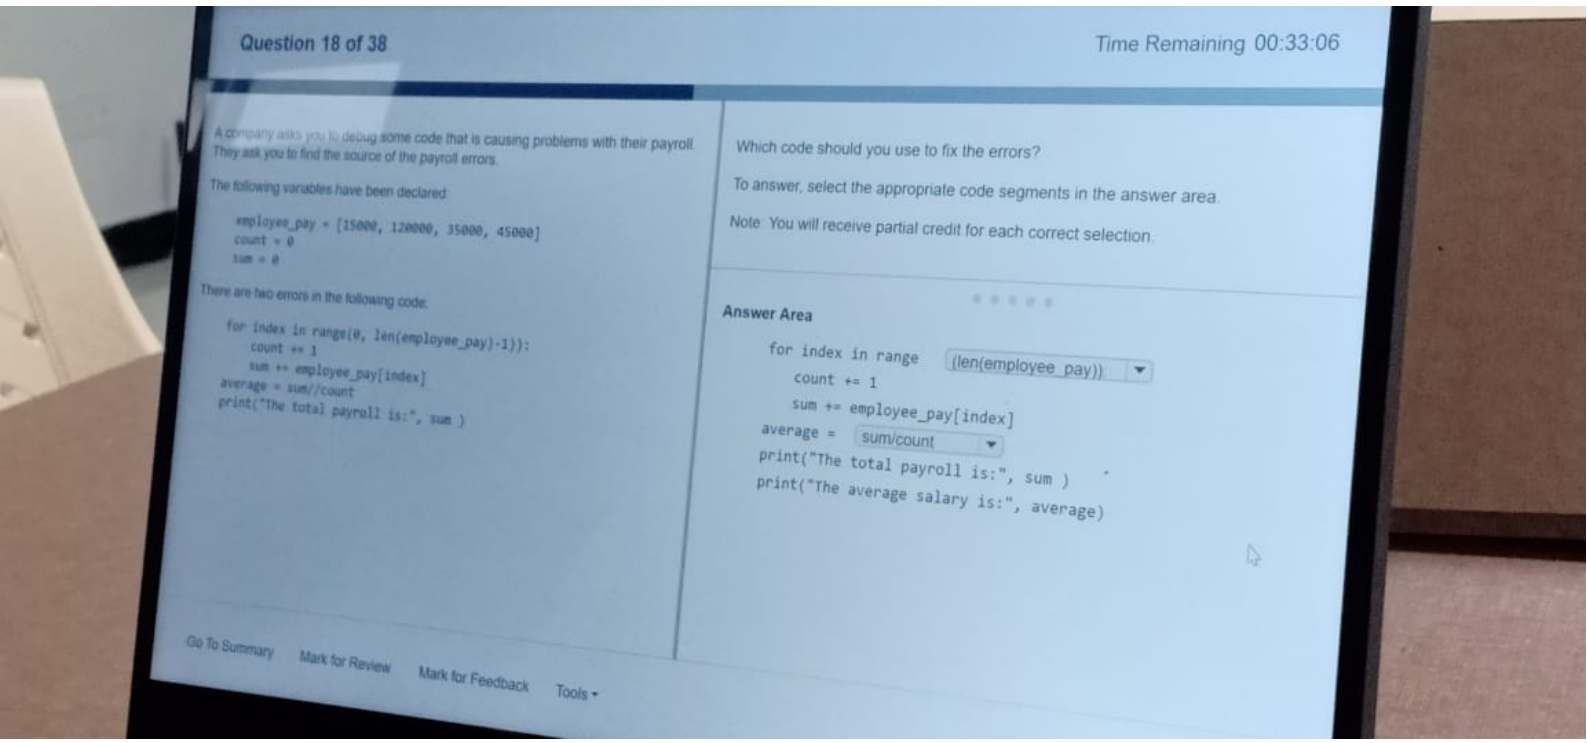

Question 28 of 38
Time Remaining
What does the following statement do?
data = input()
A. Displays a message box that allows user input
B. Allows a user to enter text in the console
C. Creates an HTML input element
D. Displays all input peripheral devices on the computer


Question 18 of 38
Time Remaining 00:33:06
A company asks you to debug some code that is causing problems with their payroll. They ask you to find the source of the payroll errors.
The following variables have been declared:
employee_pay = [15000, 120000, 35000, 45000]
count = 0
sum = 0
There are two errors in the following code:
for index in range(0, len(employee_pay)-1):
count += 1
sum += employee_pay[index]
average = sum//count
print("The total payroll is:", sum)
Which code should you use to fix the errors?
To answer, select the appropriate code segments in the answer area.
Note: You will receive partial credit for each correct selection.
Answer Area
for index in range (len(employee_pay)):
count += 1
sum += employee_pay[index]
average = sum/count
print("The total payroll is:", sum)
print("The average salary is:", average)
Go To Summary
Mark for Review
Mark for Feedback
Tools

A company needs help updating their file system. You must create a simple file-manipulation program that performs the following actions:

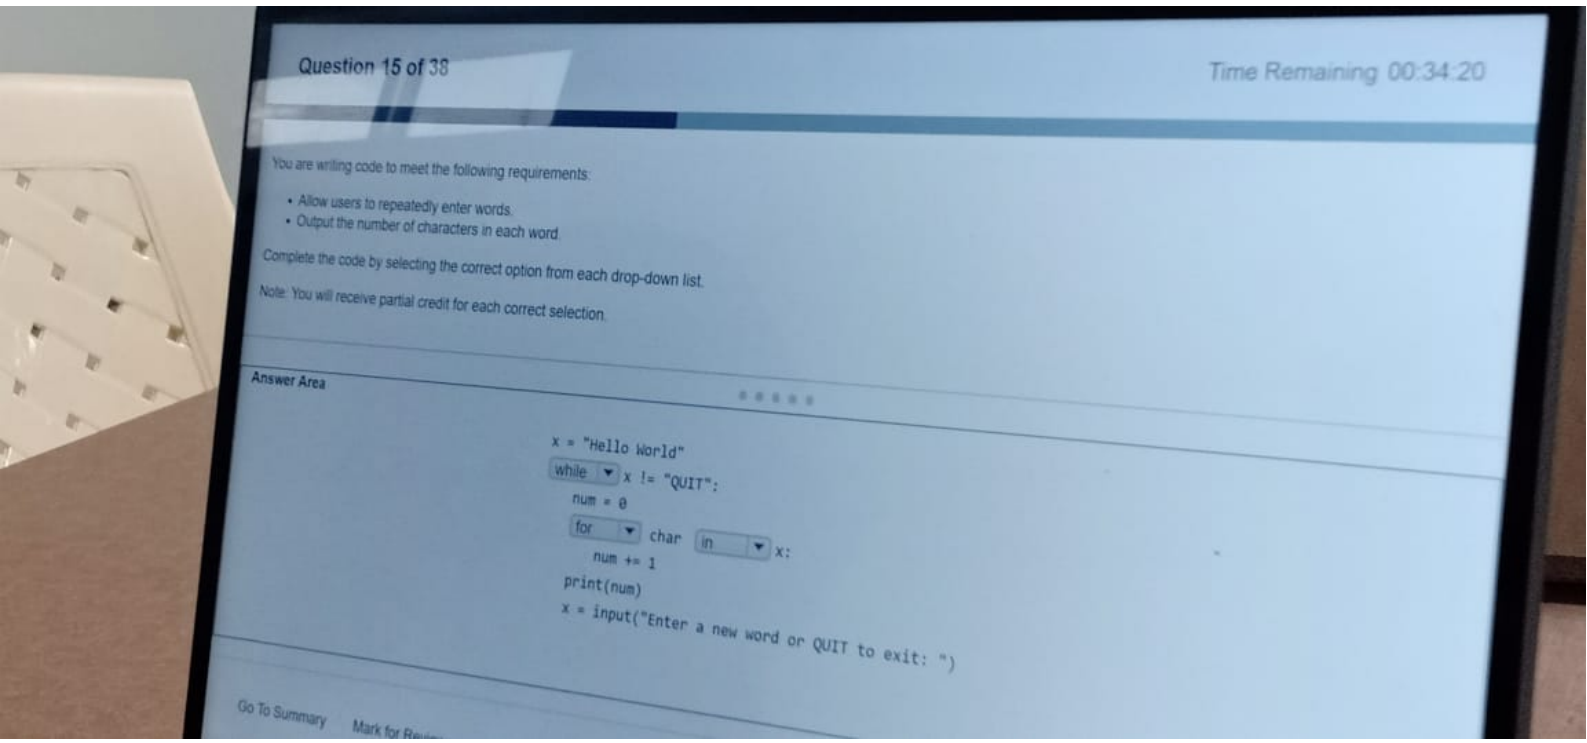
- Checks to see whether a file exists.
- If the file exists, displays its contents.

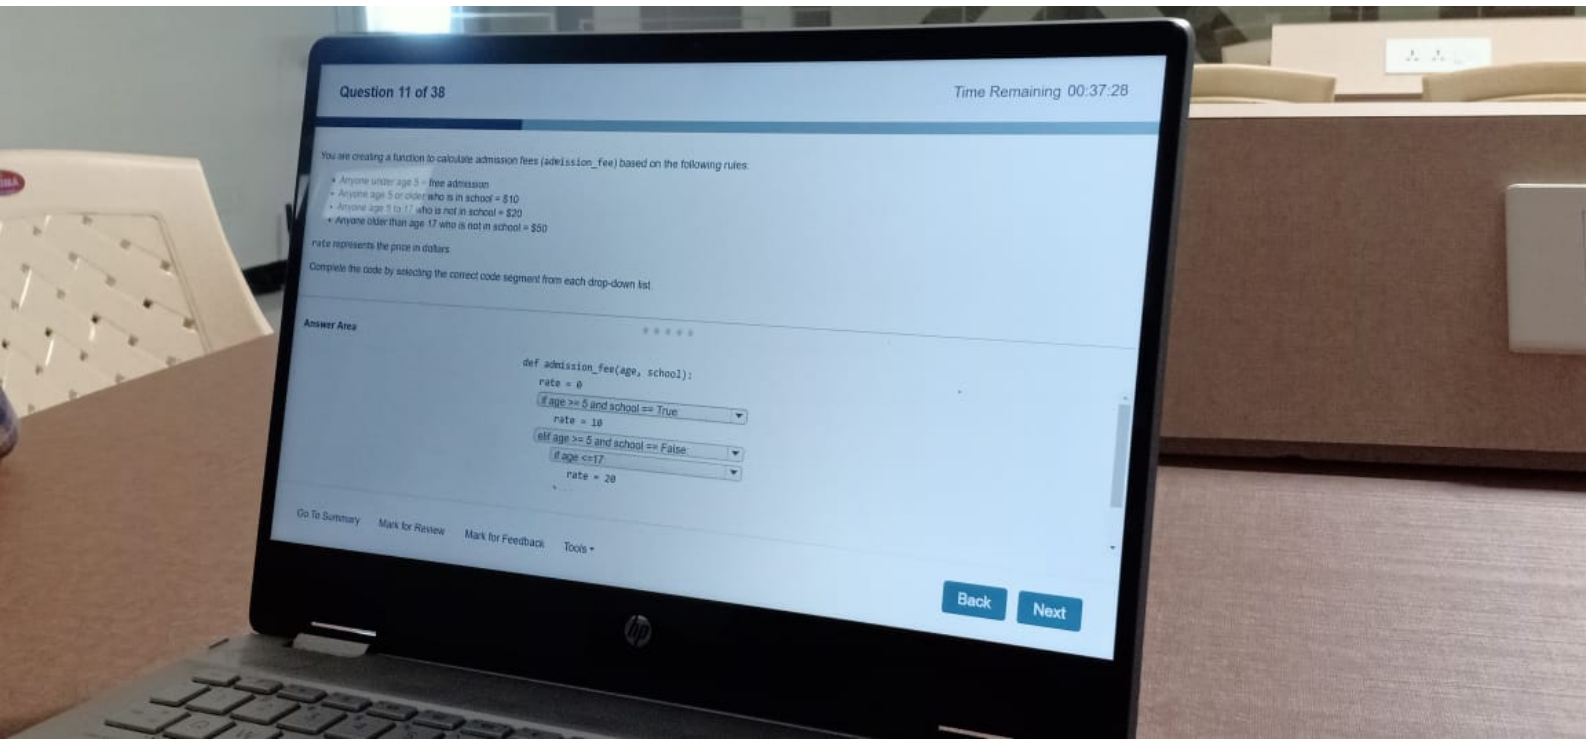
Complete the code by selecting the correct code segment from each drop-down list.

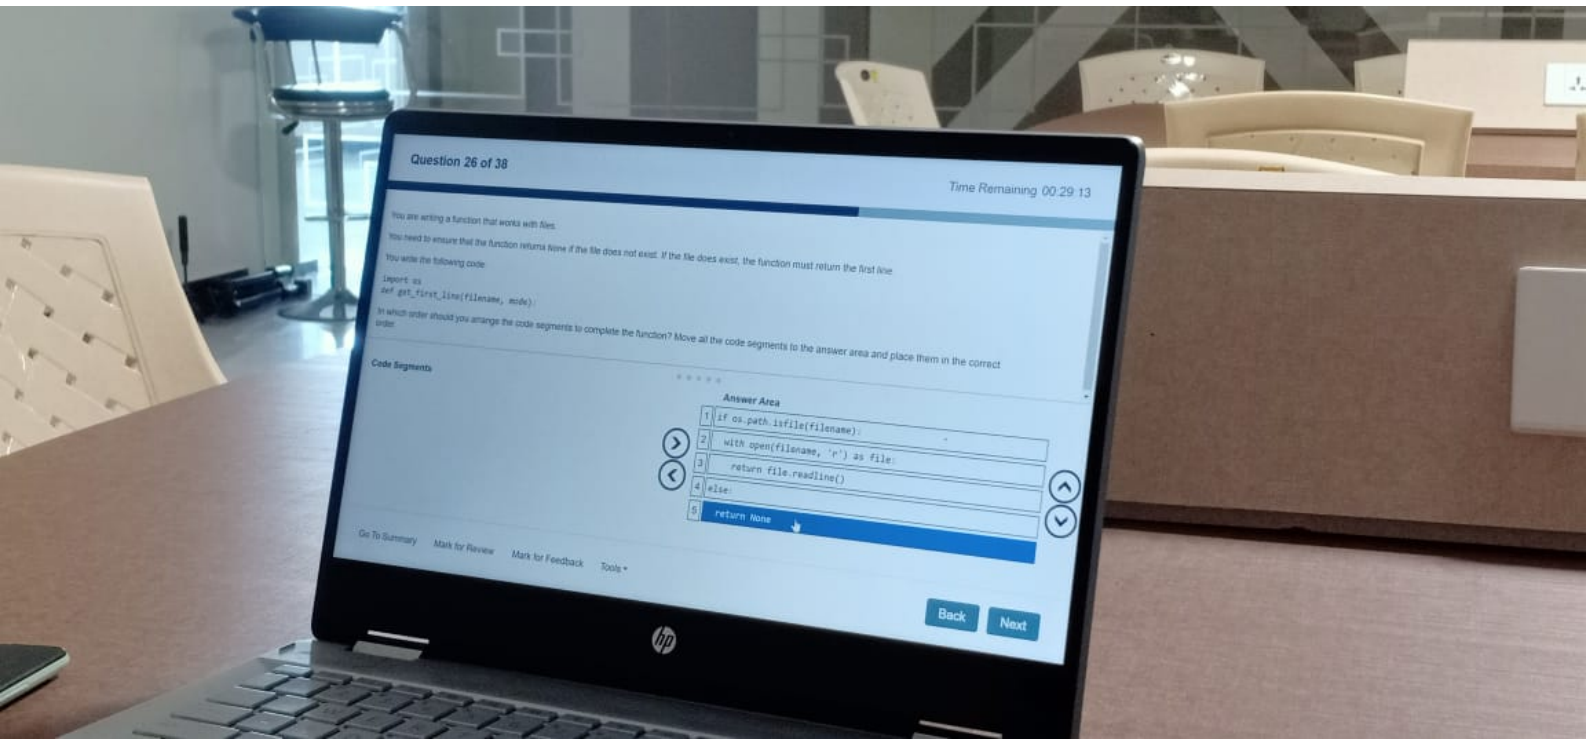
Note: You will receive partial credit for each correct selection.

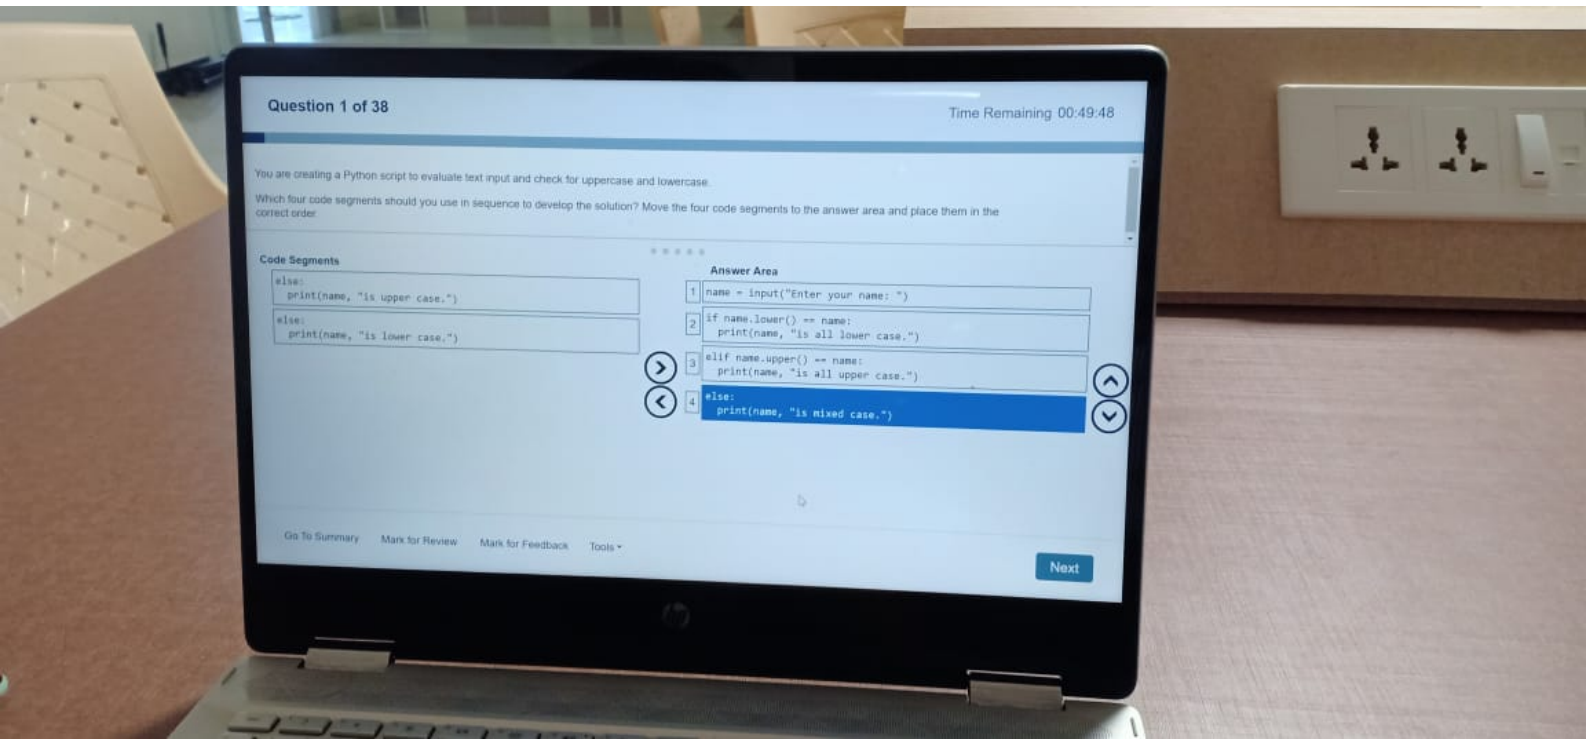
Answer Area

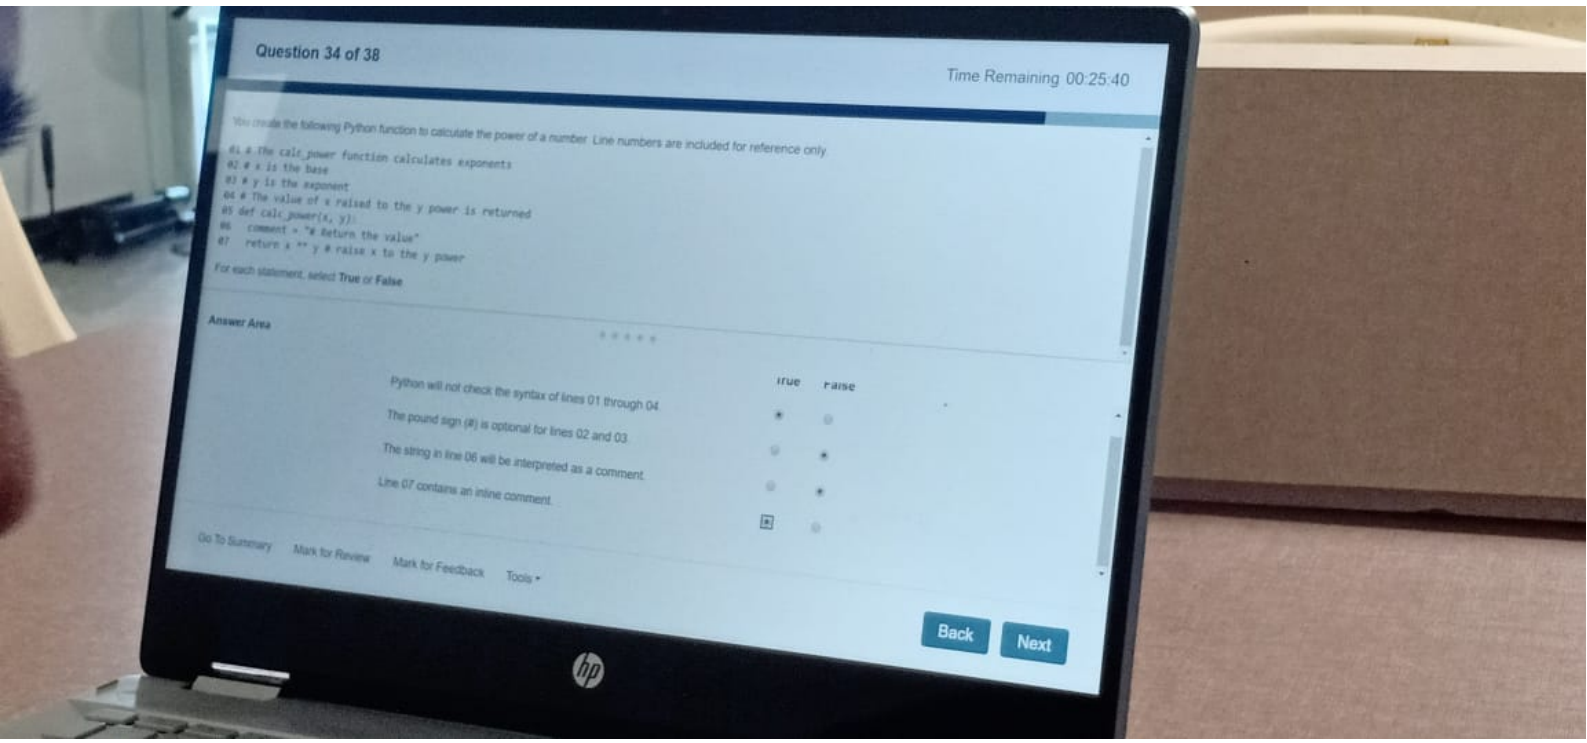
```
import os
if [os.path.isfile('myFile.txt'):]
    file = open('myFile.txt')
    [print(file.read())]
    file.close()
```

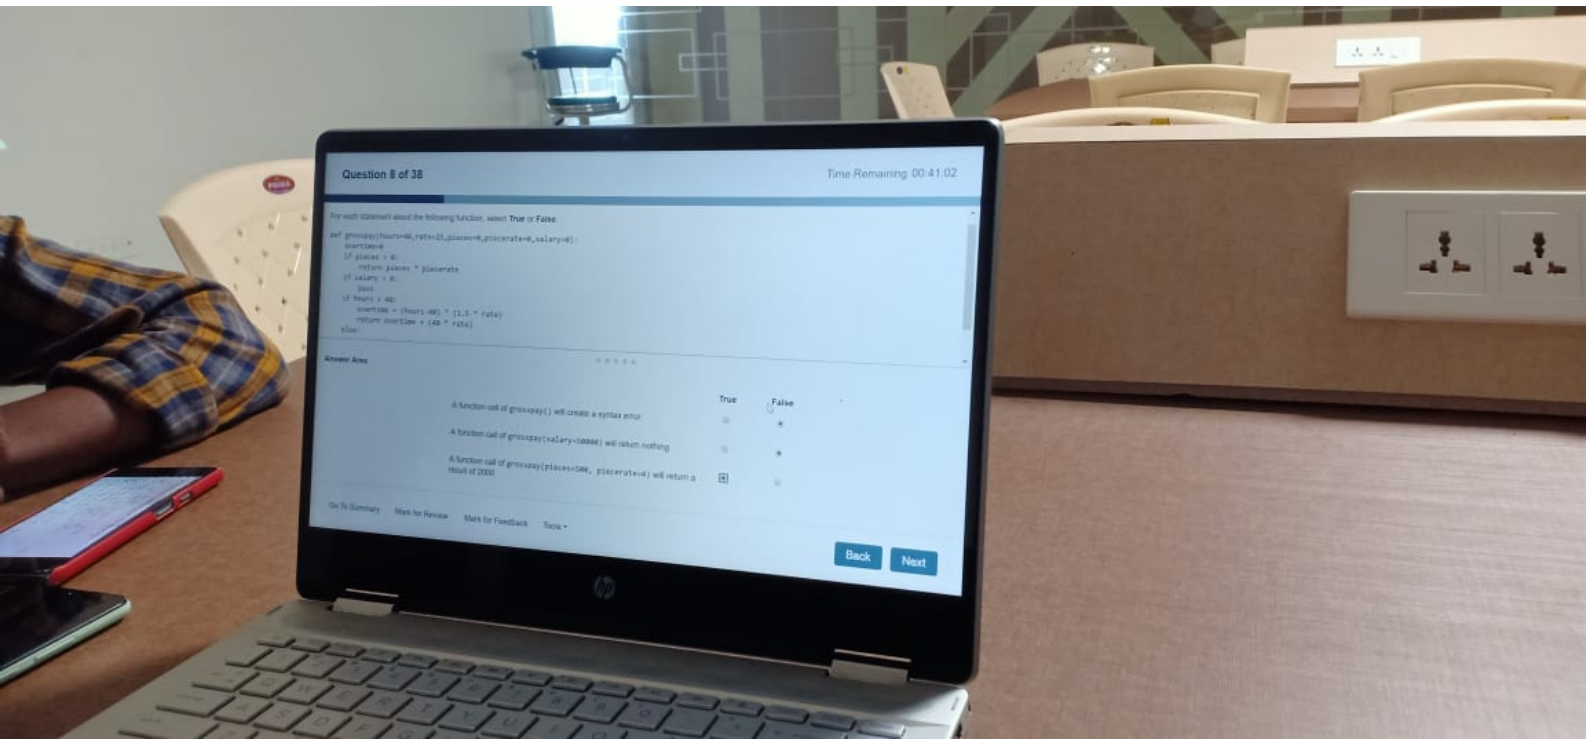

Question 15 of 38
Time Remaining 00:34:20
You are writing code to meet the following requirements:
• Allow users to repeatedly enter words.
• Output the number of characters in each word.
Complete the code by selecting the correct option from each drop-down list.
Note: You will receive partial credit for each correct selection.
Answer Area
x = "Hello World"
while x != "QUIT":
num = 0
for char in x:
num += 1
print(num)
x = input("Enter a new word or QUIT to exit: ")
Go To Summary

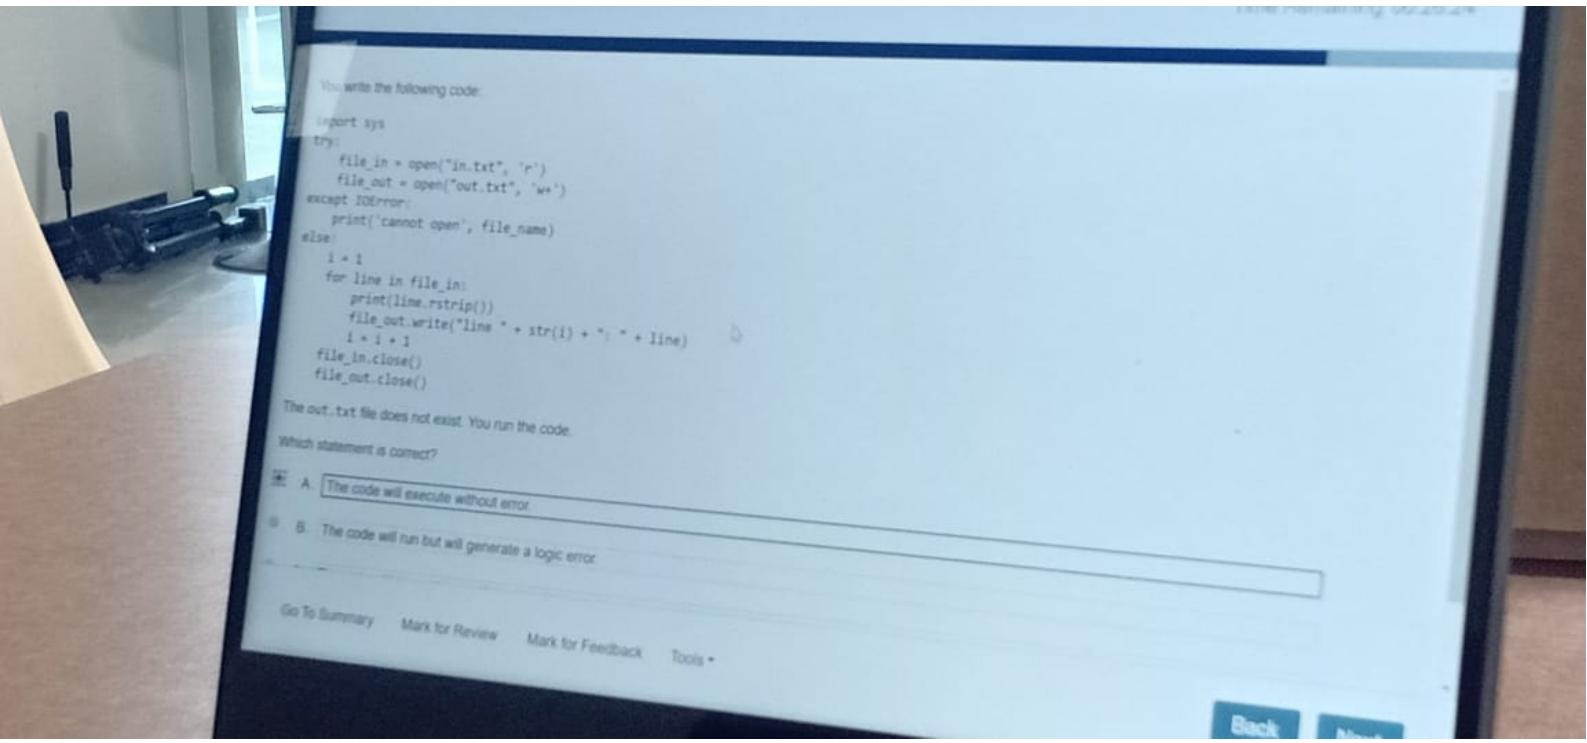

Question 11 of 38
Time Remaining 00:37:28
You are creating a function to calculate admission fees (admission_fee) based on the following rules:
Anyone under age 5 - free admission
Anyone age 5 or older who is in school = $10
Anyone age 5 to 17 who is not in school = $20
Anyone older than age 17 who is not in school = $50
rate represents the price in dollars
Complete the code by selecting the correct code segment from each drop-down list.
Answer Area
def admission_fee(age, school):
rate = 0
if age >= 5 and school == True:
rate = 10
elif age >= 5 and school == False:
if age <=17:
rate = 20
Go To Summary
Mark for Review
Mark for Feedback
Tools
Back
Next

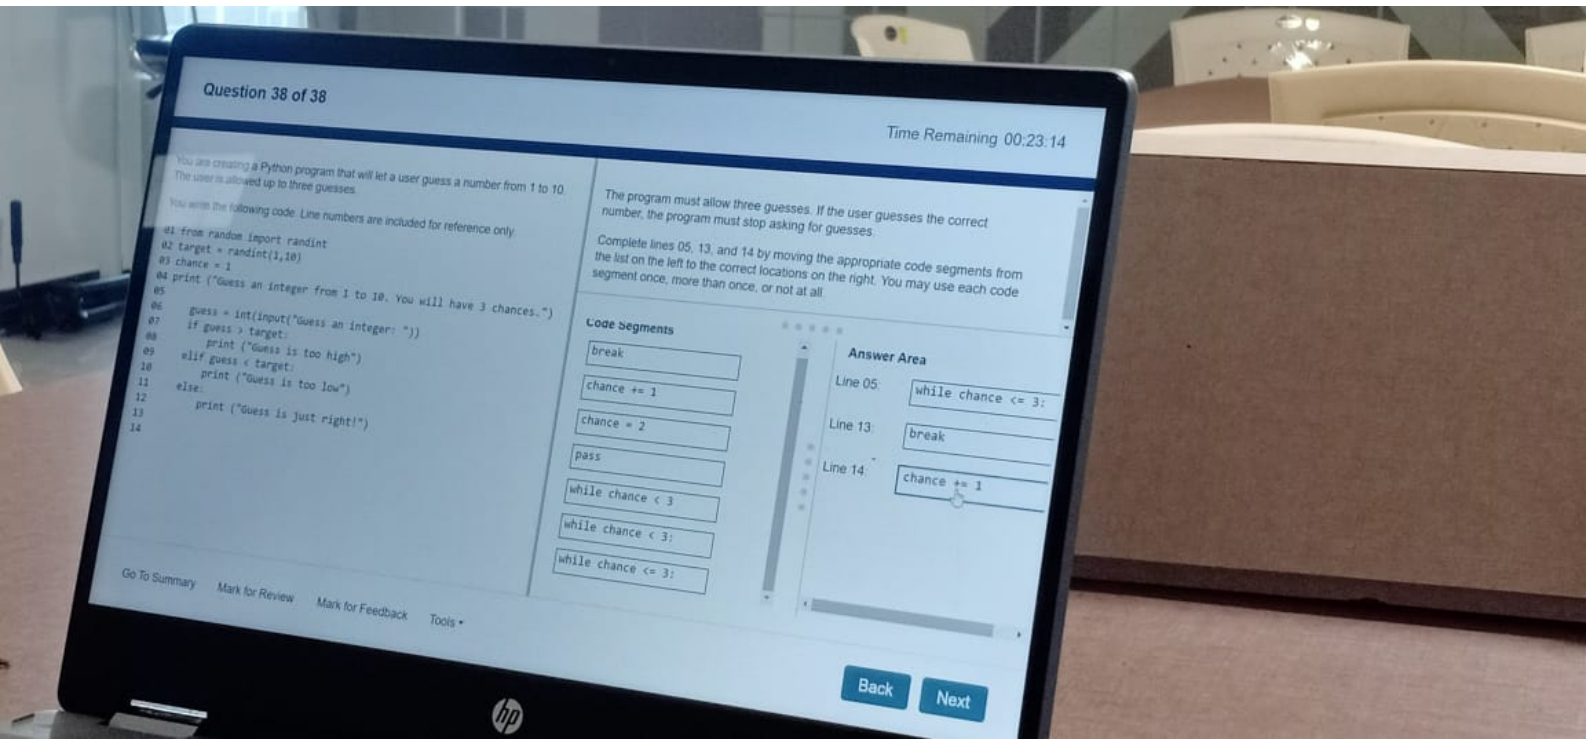

Question 26 of 38
Time Remaining 00:29:13
You are writing a function that works with files.
You need to ensure that the function returns None if the file does not exist. If the file does exist, the function must return the first line
You write the following code:
import os
def get_first_line(filename, mode):
In which order should you arrange the code segments to complete the function? Move all the code segments to the answer area and place them in the correct order.
Code Segments
Answer Area
1 if os.path.isfile(filename):
2 with open(filename, 'r') as file:
3 return file.readline()
4 else:
5 return None
Go To Summary
Mark for Review
Mark for Feedback
Tools
Back
Next

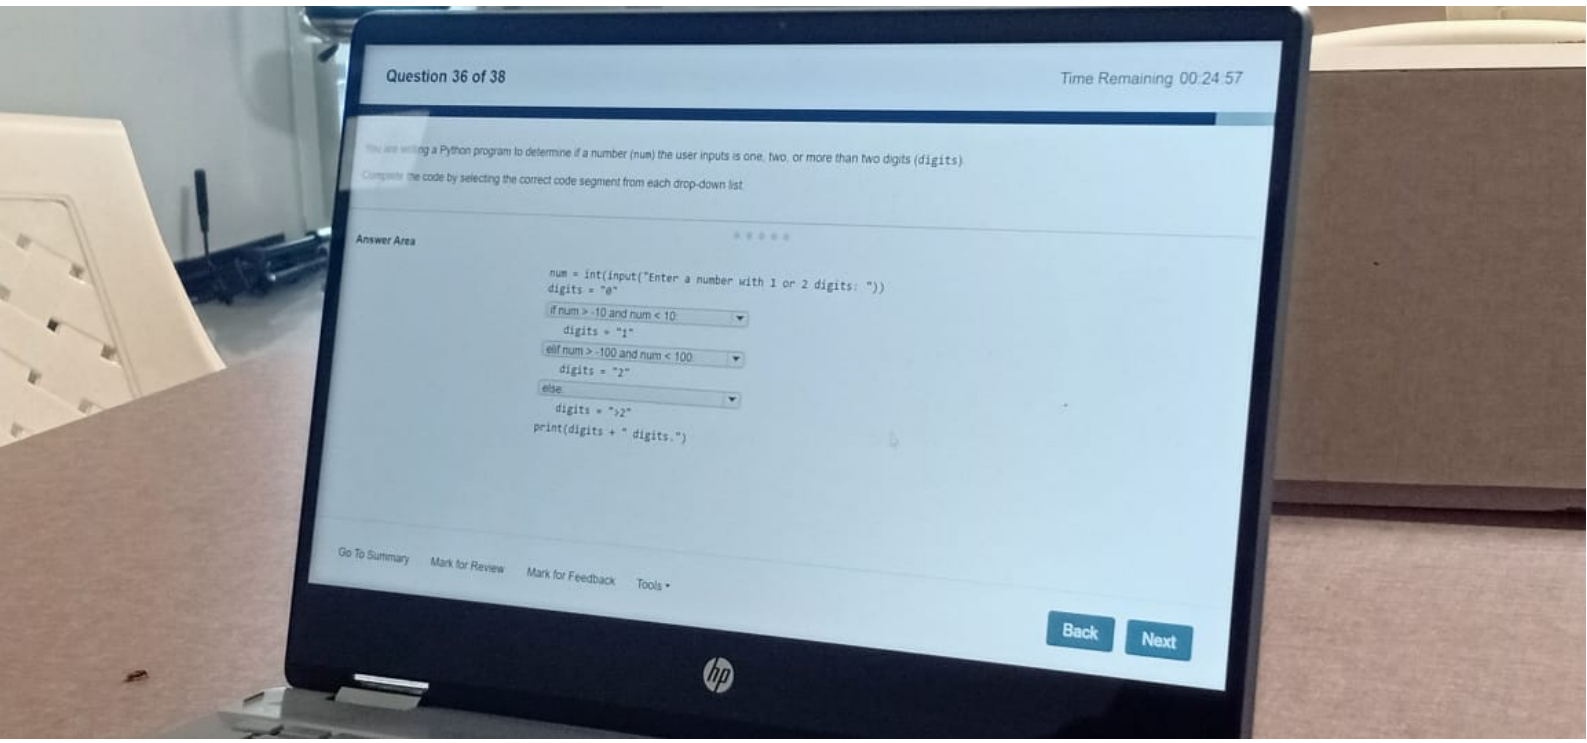

Question 1 of 38
Time Remaining 00:49:48
You are creating a Python script to evaluate text input and check for uppercase and lowercase.
Which four code segments should you use in sequence to develop the solution? Move the four code segments to the answer area and place them in the correct order.
Code Segments
else:
print(name, "is upper case.")
else:
print(name, "is lower case.")
Answer Area
1 name = input("Enter your name: ")
2 if name.lower() == name:
print(name, "is all lower case.")
3 elif name.upper() == name:
print(name, "is all upper case.")
4 else:
print(name, "is mixed case.")
Go To Summary
Mark for Review
Mark for Feedback
Tools
Next

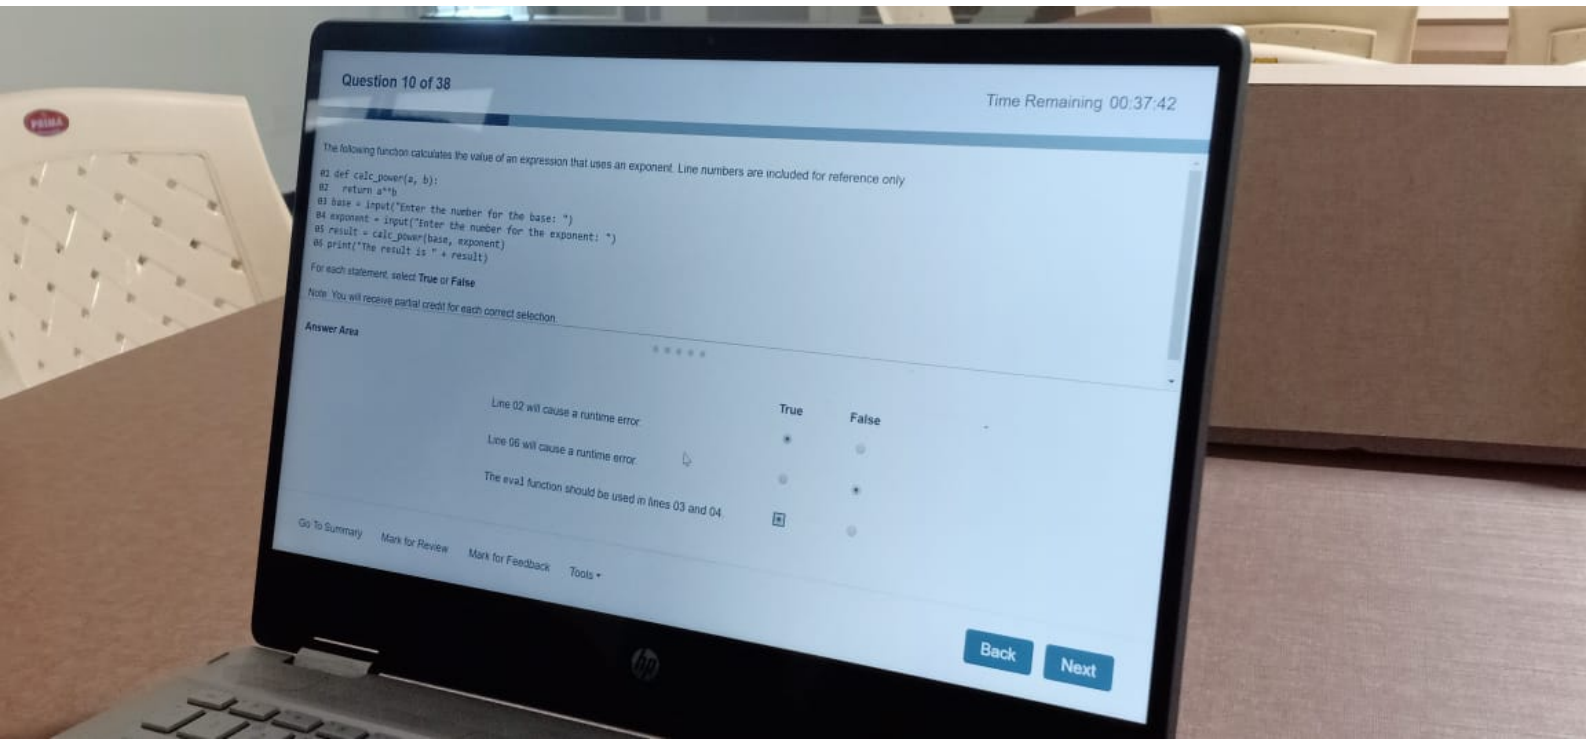

Question 34 of 38
Time Remaining 00:25:40
You create the following Python function to calculate the power of a number. Line numbers are included for reference only.
01 # The calc_power function calculates exponents
02 # x is the base
03 # y is the exponent
04 # The value of x raised to the y power is returned
05 def calc_power(x, y):
06 comment = "# Return the value"
07 return x ** y # raise x to the y power
For each statement, select True or False.
Answer Area
True
False
Python will not check the syntax of lines 01 through 04.
The pound sign (#) is optional for lines 02 and 03.
The string in line 06 will be interpreted as a comment.
Line 07 contains an inline comment.
Go To Summary
Mark for Review
Mark for Feedback
Tools
Back
Next

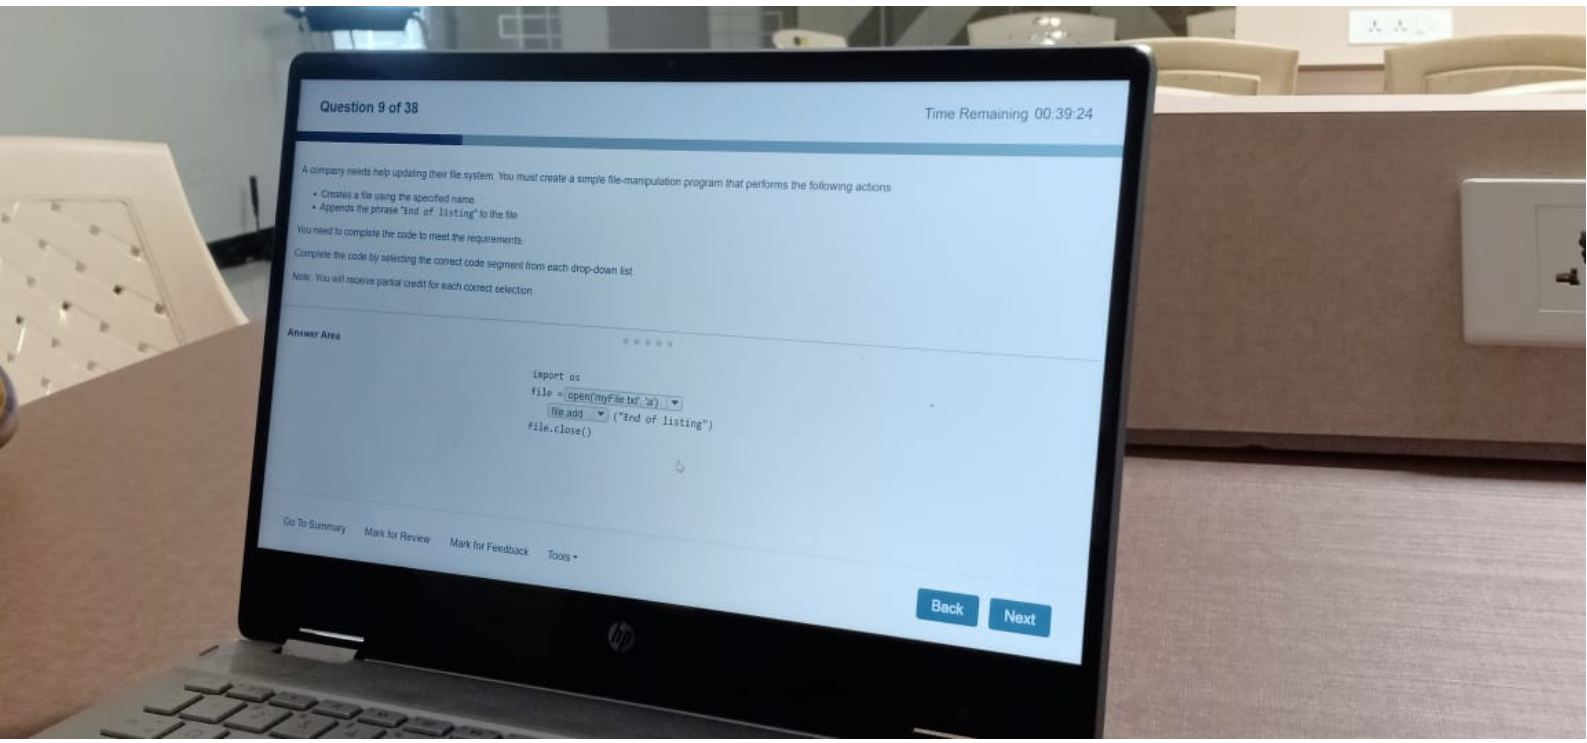

Question 8 of 38
Time Remaining: 00:41:02
For each statement about the following function, select True or False.
def grosspay(hours=40,rate=15,pieces=0,piecerate=0,salary=0):
overtime=0
if pieces > 0:
return pieces * piecerate
if salary > 0:
pass
if hours > 40:
overtime = (hours-40) * (1.5 * rate)
return overtime + (40 * rate)
else:
Answer Area
True
False
A function call of grosspay() will create a syntax error
A function call of grosspay(salary=50000) will return nothing
A function call of grosspay(pieces=500, piecerate=4) will return a result of 2000
Go To Summary
Mark for Review
Mark for Feedback
Tools
Back
Next

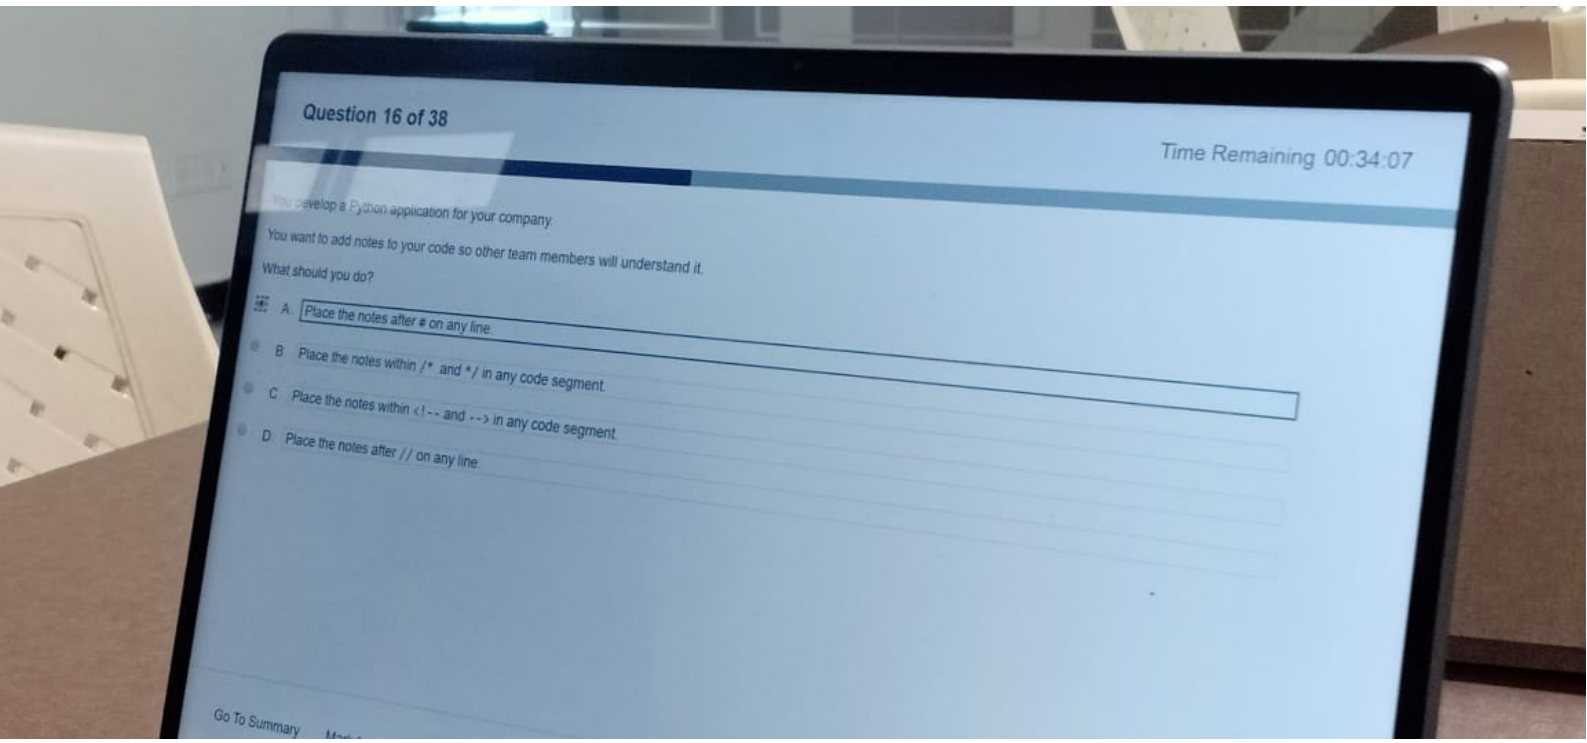

You write the following code:
import sys
try:
file_in = open("in.txt", 'r')
file_out = open("out.txt", 'w+')
except IOError:
print('cannot open', file_name)
else:
i = 1
for line in file_in:
print(line.rstrip())
file_out.write("line " + str(i) + ": " + line)
i = i + 1
file_in.close()
file_out.close()
The out.txt file does not exist. You run the code.
Which statement is correct?
A. The code will execute without error.
B. The code will run but will generate a logic error.
Go To Summary
Mark for Review
Mark for Feedback
Tools
Back

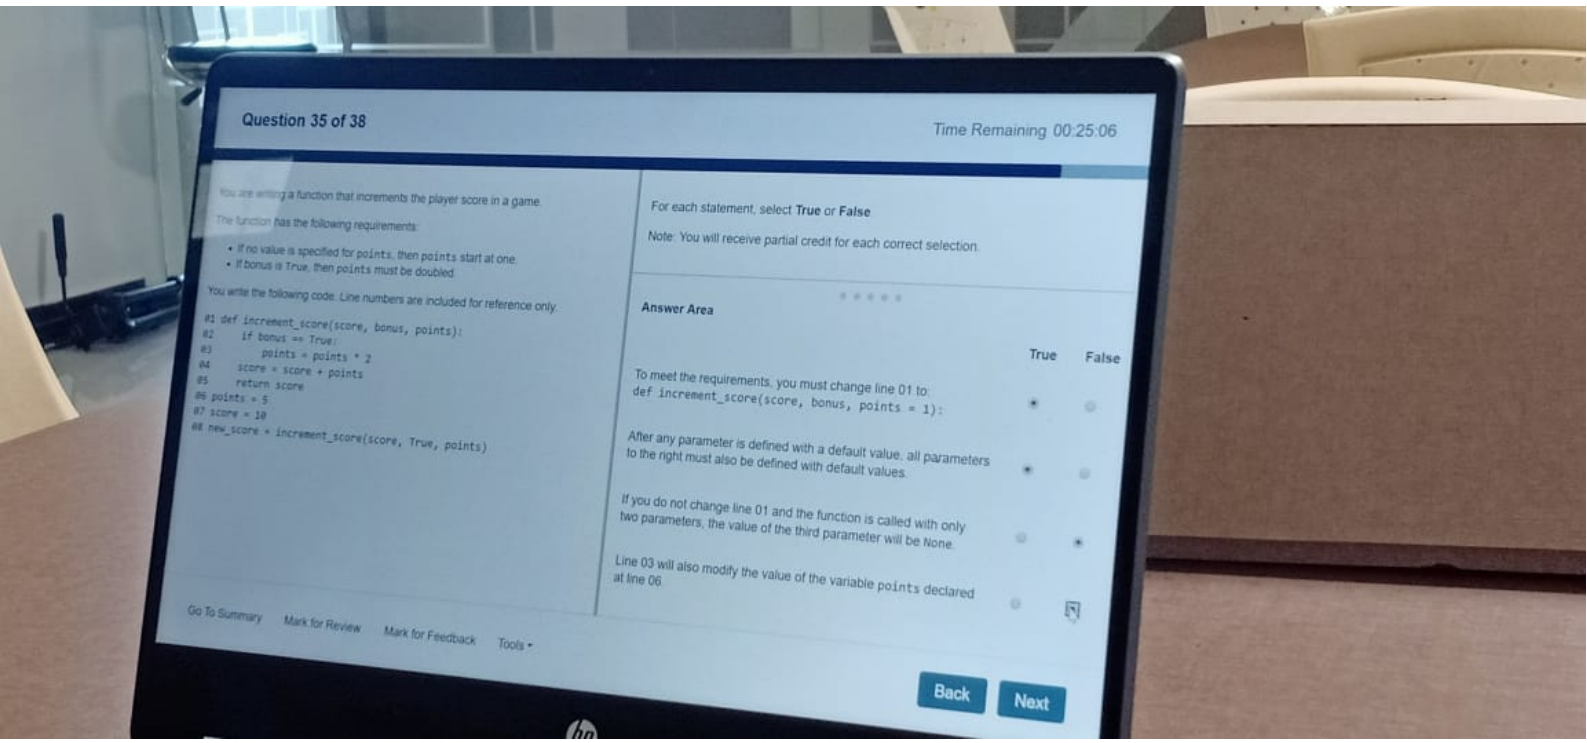

Question 38 of 38
Time Remaining 00:23:14
You are creating a Python program that will let a user guess a number from 1 to 10. The user is allowed up to three guesses.
You write the following code. Line numbers are included for reference only.
01 from random import randint
02 target = randint(1,10)
03 chance = 1
04 print ("Guess an integer from 1 to 10. You will have 3 chances.")
05
06 guess = int(input("Guess an integer: "))
07 if guess > target:
08 print ("Guess is too high")
09 elif guess < target:
10 print ("Guess is too low")
11 else:
12 print ("Guess is just right!")
13
14
The program must allow three guesses. If the user guesses the correct number, the program must stop asking for guesses.
Complete lines 05, 13, and 14 by moving the appropriate code segments from the list on the left to the correct locations on the right. You may use each code segment once, more than once, or not at all.
Code Segments
break
chance += 1
chance = 2
pass
while chance < 3
while chance < 3:
while chance <= 3:
Answer Area
Line 05:
while chance <= 3:
Line 13:
break
Line 14:
chance += 1
Go To Summary
Mark for Review
Mark for Feedback
Tools
Back
Next


Question 36 of 38
Time Remaining 00:24:57
ng a Python program to determine if a number (num) the user inputs is one, two, or more than two digits (digits).
he code by selecting the correct code segment from each drop-down list.
Answer Area
num = int(input("Enter a number with 1 or 2 digits: "))
digits = "0"
if num > -10 and num < 10:
digits = "1"
elif num > -100 and num < 100:
digits = "2"
else:
digits = ">2"
print(digits + " digits.")
Go To Summary
Mark for Review
Mark for Feedback
Tools
Back
Next


Question 10 of 38
Time Remaining 00:37:42
The following function calculates the value of an expression that uses an exponent. Line numbers are included for reference only
01 def calc_power(a, b):
02 return a**b
03 base = input("Enter the number for the base: ")
04 exponent = input("Enter the number for the exponent: ")
05 result = calc_power(base, exponent)
06 print("The result is " + result)
For each statement, select True or False
Note: You will receive partial credit for each correct selection.
Answer Area
True
False
Line 02 will cause a runtime error.
Line 06 will cause a runtime error.
The eval function should be used in lines 03 and 04.
Go To Summary
Mark for Review
Mark for Feedback
Tools
Back
Next


Question 9 of 38
Time Remaining 00:39:24
A company needs help updating their file system. You must create a simple file-manipulation program that performs the following actions
• Creates a file using the specified name
• Appends the phrase "End of listing" to the file
You need to complete the code to meet the requirements.
Complete the code by selecting the correct code segment from each drop-down list.
Note: You will receive partial credit for each correct selection.
Answer Area
import os
file = open('myFile.txt','a')
file.add ("End of listing")
file.close()
Go To Summary
Mark for Review
Mark for Feedback
Tools
Back
Next


Question 16 of 38
Time Remaining 00:34:07
You develop a Python application for your company.
You want to add notes to your code so other team members will understand it.
What should you do?
A. Place the notes after # on any line.
B. Place the notes within /* and */ in any code segment.
C. Place the notes within <!-- and --> in any code segment.
D. Place the notes after // on any line.
Go To Summary


Question 35 of 38
Time Remaining 00:25:06
You are writing a function that increments the player score in a game.
The function has the following requirements:
• If no value is specified for points, then points start at one.
• If bonus is True, then points must be doubled.
You write the following code. Line numbers are included for reference only.
01 def increment_score(score, bonus, points):
02 if bonus == True:
03 points = points * 2
04 score = score + points
05 return score
06 points = 5
07 score = 10
08 new_score = increment_score(score, True, points)
For each statement, select True or False.
Note: You will receive partial credit for each correct selection.
Answer Area
True
False
To meet the requirements, you must change line 01 to: def increment_score(score, bonus, points = 1):
After any parameter is defined with a default value, all parameters to the right must also be defined with default values.
If you do not change line 01 and the function is called with only two parameters, the value of the third parameter will be None.
Line 03 will also modify the value of the variable points declared at line 06
Go To Summary
Mark for Review
Mark for Feedback
Tools
Back
Next

Time Remaining

You work on a team that is developing a game.

You need to write code that generates a random number that meets the following requirements:

- The number is a multiple of 5.
- The lowest number is 5.
- The highest number is 100.

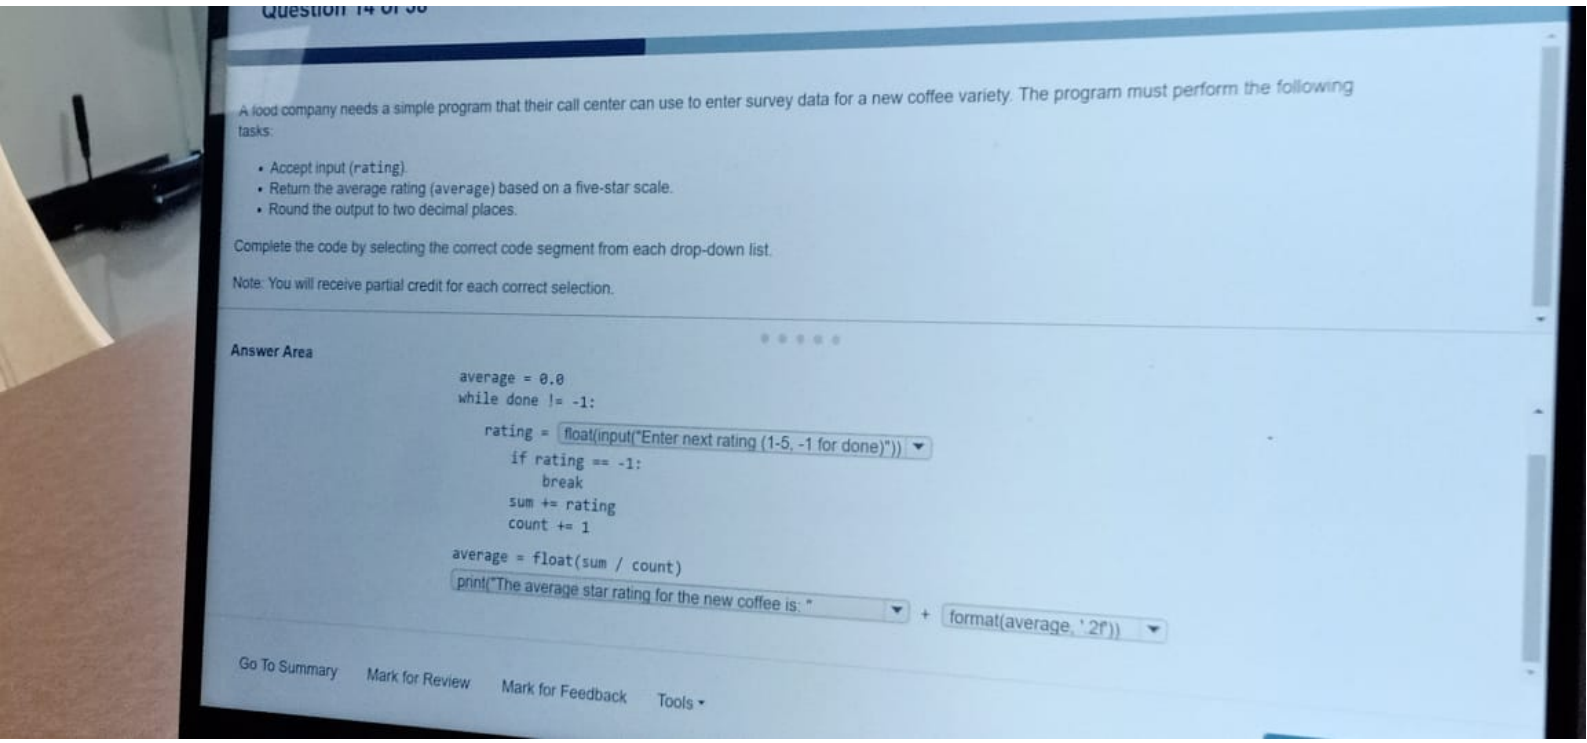
Which two code segments will meet the requirements? Each correct answer presents a complete solution. (Choose 2.)

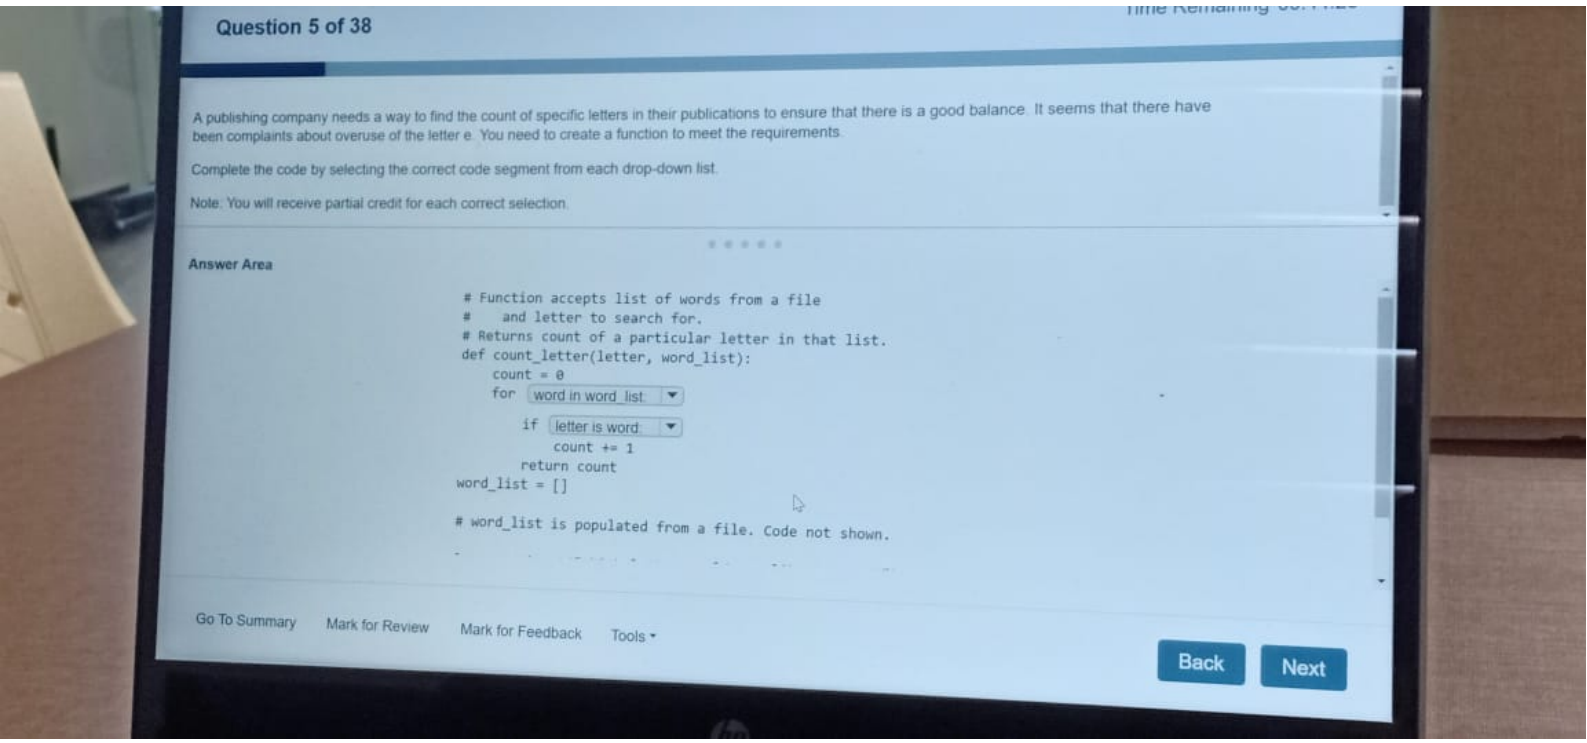
☒ A.
```
from random import randrange
print(randrange(5, 105, 5))
```

☐ B.
```
from random import randint
print(randint(0, 20) * 5)
```

☐ C.
```
from random import randrange
print(randrange(0, 100, 5))
```

☒ D.
```
from random import randint
print(randint(1, 20) * 5)
```


Question 14 of 30
A food company needs a simple program that their call center can use to enter survey data for a new coffee variety. The program must perform the following tasks:
• Accept input (rating).
• Return the average rating (average) based on a five-star scale.
• Round the output to two decimal places.
Complete the code by selecting the correct code segment from each drop-down list.
Note: You will receive partial credit for each correct selection.
Answer Area
average = 0.0
while done != -1:
rating = float(input("Enter next rating (1-5, -1 for done)"))
if rating == -1:
break
sum += rating
count += 1
average = float(sum / count)
print("The average star rating for the new coffee is: " + format(average, '.2f'))
Go To Summary
Mark for Review
Mark for Feedback
Tools


Question 5 of 38
A publishing company needs a way to find the count of specific letters in their publications to ensure that there is a good balance. It seems that there have been complaints about overuse of the letter e. You need to create a function to meet the requirements.
Complete the code by selecting the correct code segment from each drop-down list.
Note. You will receive partial credit for each correct selection.
Answer Area
Function accepts list of words from a file
and letter to search for.
Returns count of a particular letter in that list.
def count_letter(letter, word_list):
count = 0
for word in word_list:
if letter is word:
count += 1
return count
word_list = []
word_list is populated from a file. Code not shown.
Go To Summary
Mark for Review
Mark for Feedback
Tools
Back
Next

Tutorial

- This exam has **38** questions.
- The maximum exam time is **50** minutes.

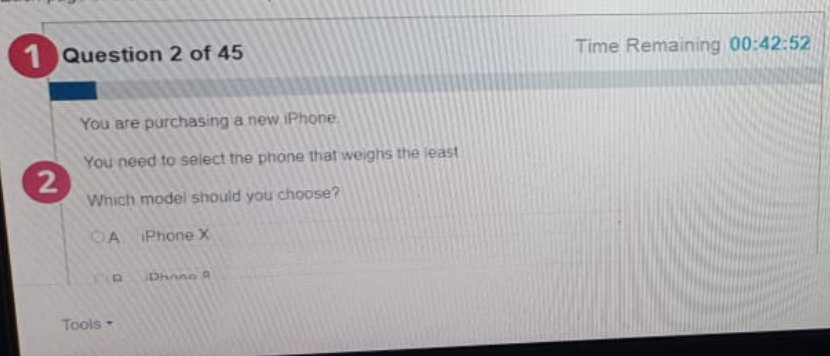
Exam Process

The exam experience follows this process:

1. **Tutorial.** The tutorial (this page) provides helpful information about the exam environment. **Read the tutorial carefully.** When you are ready to begin taking the exam, select **Start Exam**.
2. **Exam Questions.** The exam timer starts and the questions appear. You can move forward and back through them, answer them, and mark them for review or feedback.
3. **Exam Summary.** The exam summary indicates the questions you have answered, not answered, marked for review, and marked for feedback. You can review and change your answers. The exam timer stops and your answers are submitted when you select **Finish Exam**.
4. **Feedback.** You can leave feedback about the exam and individual questions. When you finish leaving feedback, select **Exit Exam** to display your score report.

Exam Interface and Controls

Each page of the exam has three panes.



You write the following code:

```
import datetime
d = datetime.datetime(2017, 4, 7)
print('{:%B-%d-%y}'.format(d))
```

You run the program.

What is the output?

- A. 04-07-2017
- B. 04-07-17
- C. April-07-17
- D. 2017-April-07

Question 3 of 38

Time Remaining 00:21:46

You are creating an eCommerce script that accepts input from the user and outputs the data in a comma-delimited format.

You write the following code to accept input:

```
item = input("Enter the item name: ")
sales = input("Enter the quantity: ")
```

The output must meet the following requirements:

- Enclose strings in double quotes.
- Do not enclose numbers in quotes or other characters.
- Separate items by commas.

You need to complete the code to meet the requirements.

Which two code segments could you use? Each correct answer presents a complete solution. (Choose 2.)

☒ A. `print('"' + item + '",' + sales)`

☒ B. `print('"{0}",{1}'.format(item, sales))`

☐ C. `print(item + ',' + sales)`

☐ D. `print("{0},{1}".format(item, sales))`

Go To Summary | Mark for Review | Mark for Feedback | Tools

Back | Next

Question 5 of 38

Time Remaining 00:21:42

A company decides to give a bonus to all employees who make $150,000 or less per year. The following formula applies to each employee based on their base salary and a flat bonus:

New salary = current salary × 103% + a $500 bonus

You write code that reads the employee salaries into a variable named `salary_list`.

You need to complete the code that applies an increase to each eligible employee's salary.

Complete the code by selecting the correct code segment from each drop-down list.

Note: You will receive partial credit for each correct selection.

Answer Area

```
#Each salary in the list is updated based on increase. Employees making
#$150,000 or more will not get a raise.
#Salary list is populated from employee database, code not shown.
for index in range(len(salary_list)):
    if salary_list[index] >= 150000:
        continue
    salary_list[index] = (salary_list[index] * 1.03) + 500
```

Go To Summary | Mark for Review | Mark for Feedback | Tools

Back | Next

Question 12 of 38

Time Remaining 00:21:28

You are creating a Python program that compares numbers.

You write the following code. Line numbers are included for reference only.

```
01 num1 = eval(input ("Please enter the first number: "))
02 num2 = eval(input ("Please enter the second number: "))
03 if num1 == num2:
04     print("The two numbers are equal.")
05 if num1 <= num2:
06     print("Number 1 is less than number 2.")
07 if num1 > num2:
08     print("Number 1 is greater than number 2.")
09 if num2 = num1:
10     print("The two numbers are the same.")
```

You need to ensure that the comparisons are accurate.

For each statement, select **True** or **False**.

Note: You will receive partial credit for each correct selection.

Answer Area

	True	False
The `print` statement at line 04 will print only if the two numbers are equal in value.	●	○
The `print` statement at line 06 will print only if `num1` is less than `num2`.	○	●
The `print` statement at line 08 will print only if `num1` is greater than `num2`.	●	○
The statement at line 09 is an invalid comparison.	●	○

Go To Summary | Mark for Review | Mark for Feedback | Tools

Back | Next

Question 13 of 38

Time Remaining 00:21:26

You develop a Python application for your company.

You want to add notes to your code so other team members will understand it.

What should you do?

A. Place the notes within `<!--` and `-->` in any code segment.

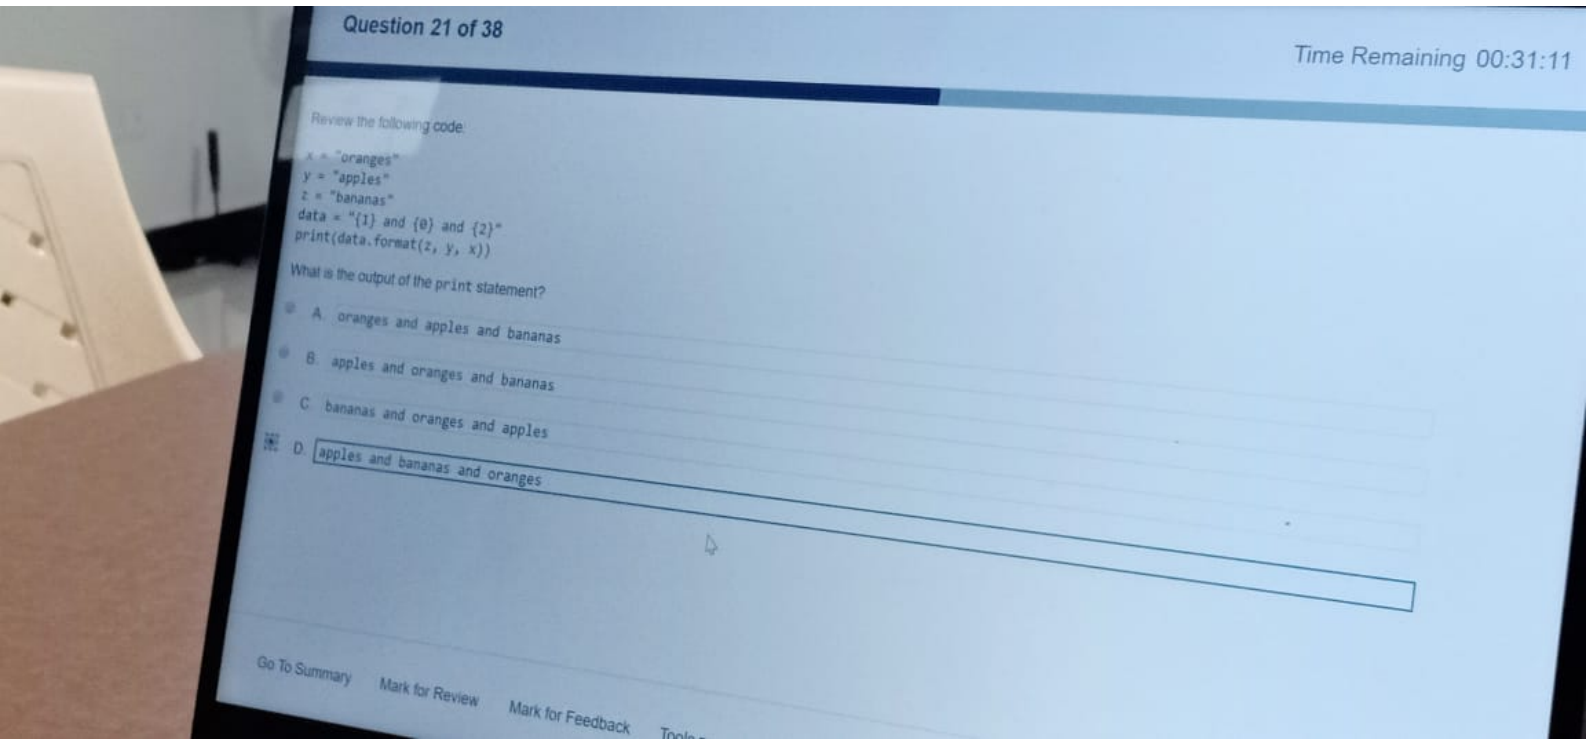
B. Place the notes after `#` on any line.

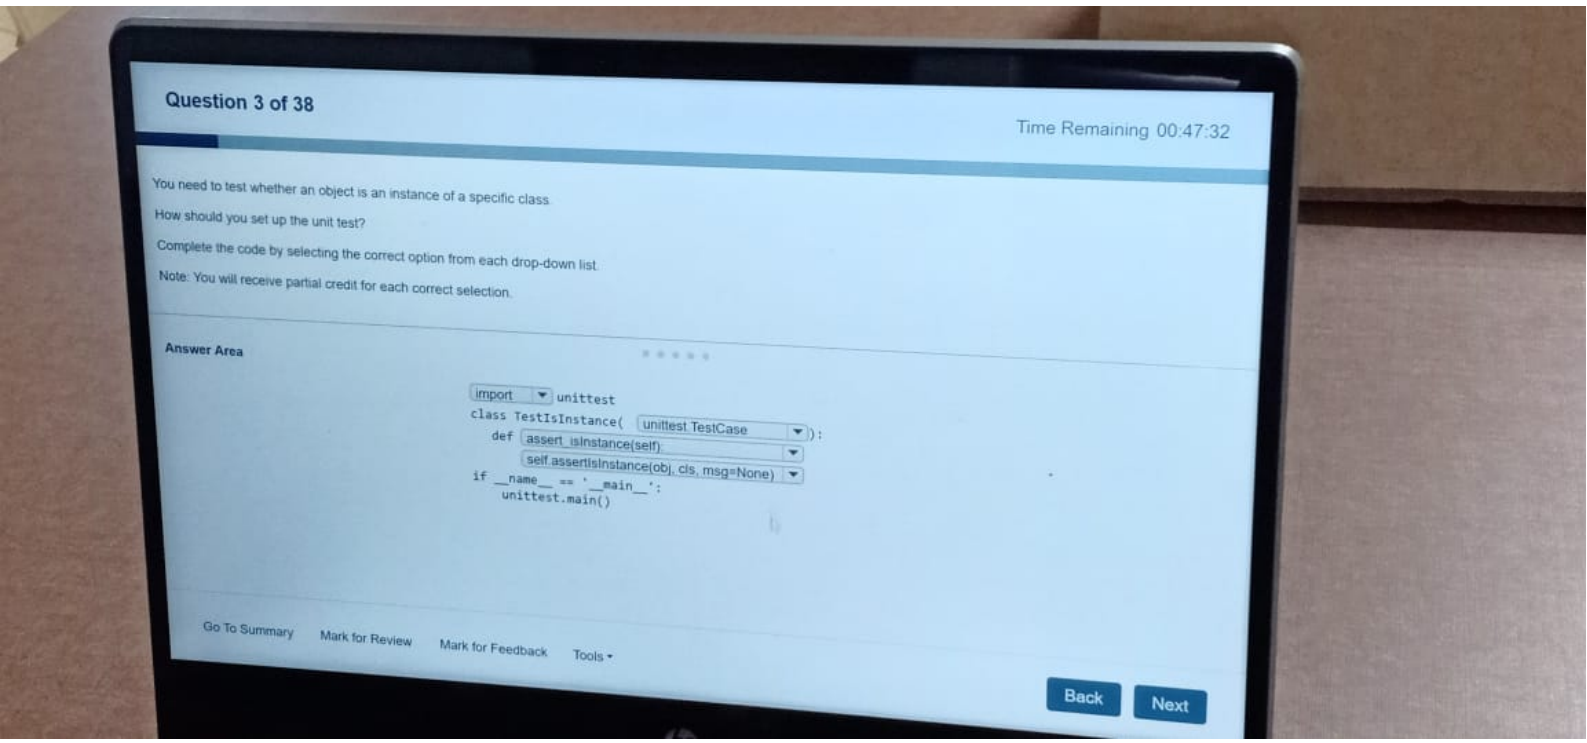
C. Place the notes after `//` on any line.

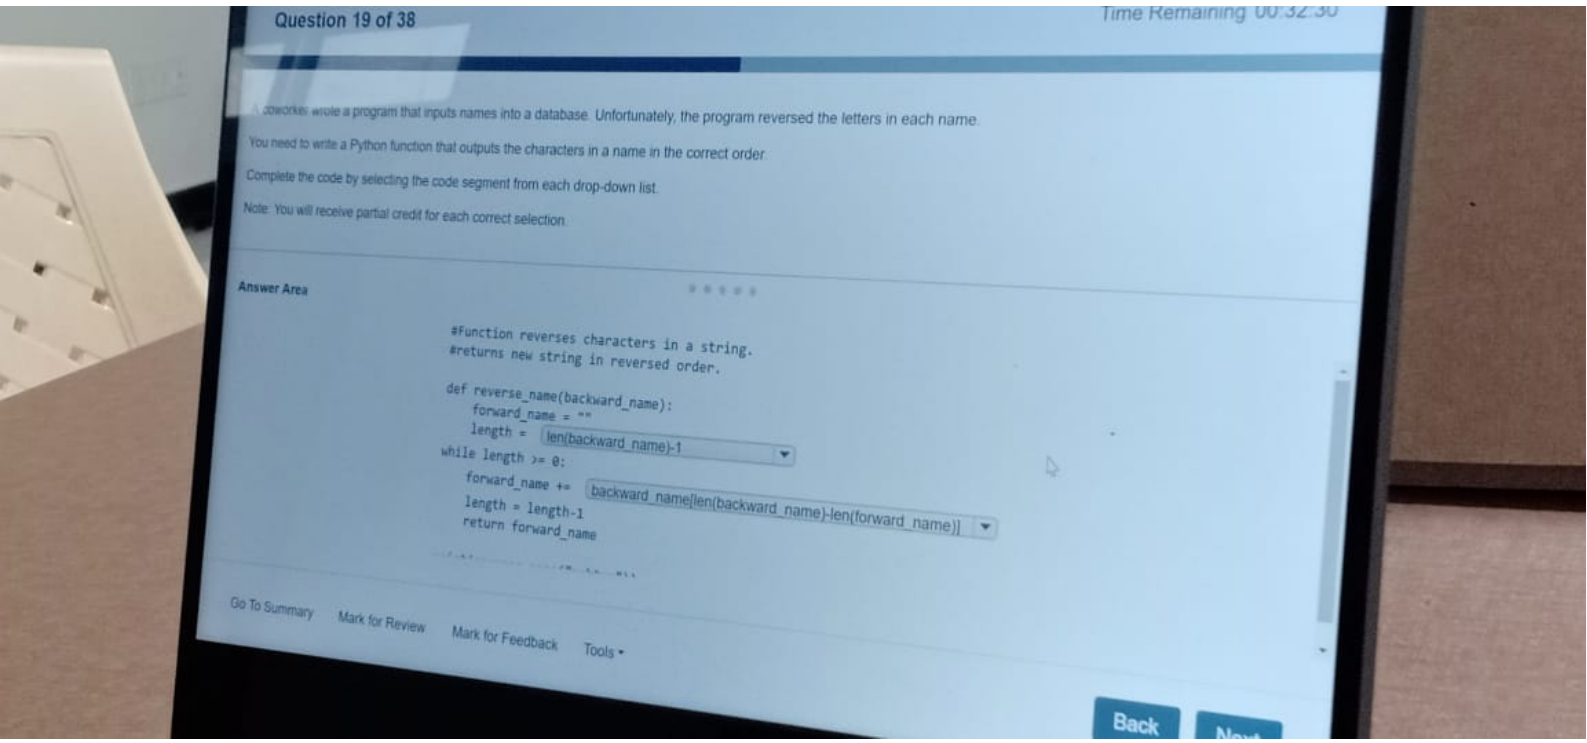
D. Place the notes within `/*` and `*/` in any code segment.

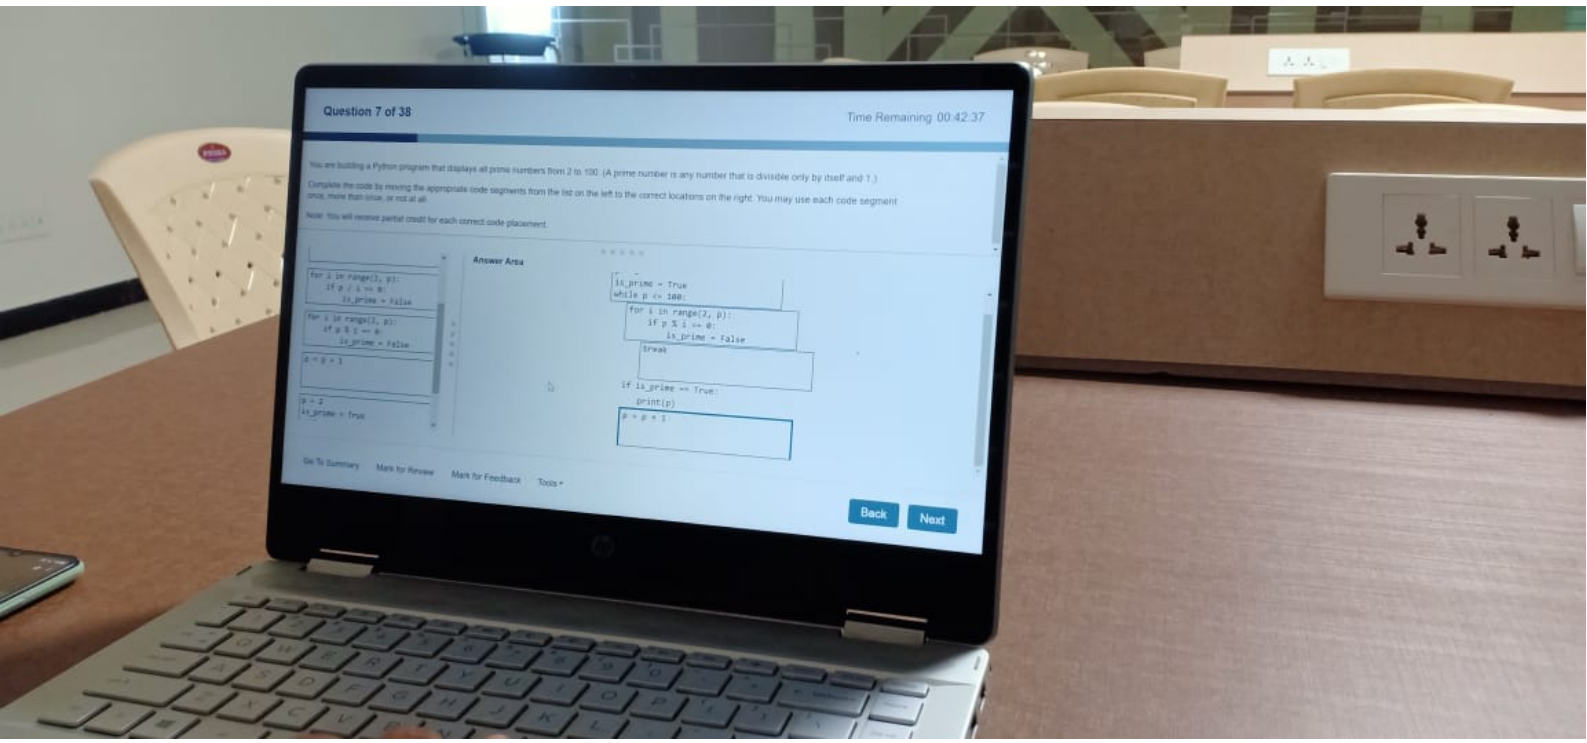
Go To Summary | Mark for Review | Mark for Feedback | Tools

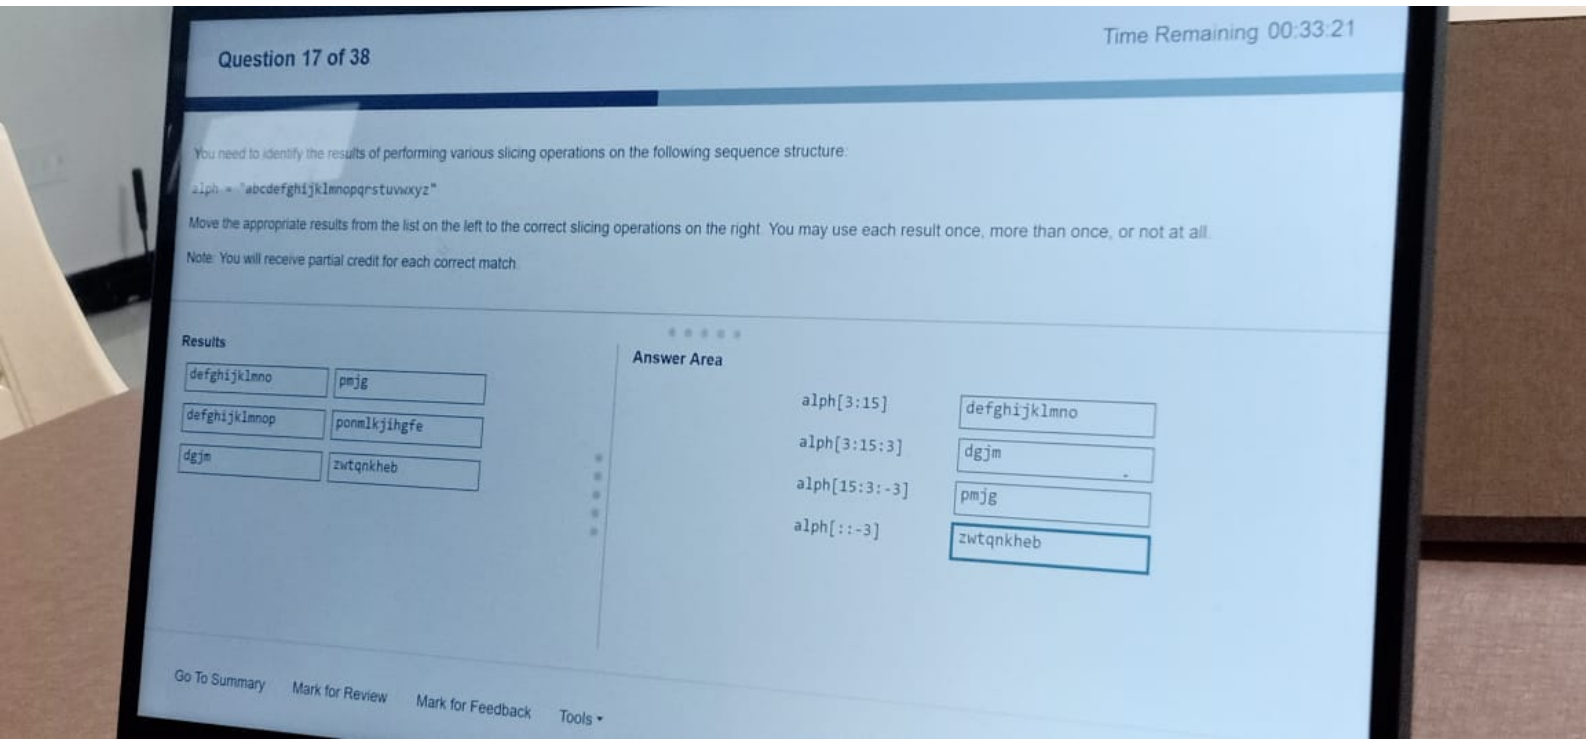
Back | Next


Question 21 of 38
Time Remaining 00:31:11
Review the following code:
x = "oranges"
y = "apples"
z = "bananas"
data = "{1} and {0} and {2}"
print(data.format(z, y, x))
What is the output of the print statement?
A. oranges and apples and bananas
B. apples and oranges and bananas
C. bananas and oranges and apples
D. apples and bananas and oranges
Go To Summary
Mark for Review
Mark for Feedback


Question 3 of 38
Time Remaining 00:47:32
You need to test whether an object is an instance of a specific class.
How should you set up the unit test?
Complete the code by selecting the correct option from each drop-down list.
Note: You will receive partial credit for each correct selection.
Answer Area
import unittest
class TestIsInstance(unittest.TestCase):
def assert_isInstance(self):
self.assertIsInstance(obj, cls, msg=None)
if __name__ == '__main__':
unittest.main()
Go To Summary
Mark for Review
Mark for Feedback
Tools
Back
Next


Question 19 of 38
Time Remaining 00:32:30
A coworker wrote a program that inputs names into a database. Unfortunately, the program reversed the letters in each name.
You need to write a Python function that outputs the characters in a name in the correct order.
Complete the code by selecting the code segment from each drop-down list.
Note: You will receive partial credit for each correct selection.
Answer Area
#Function reverses characters in a string.
#returns new string in reversed order.
def reverse_name(backward_name):
forward_name = ""
length = len(backward_name)-1
while length >= 0:
forward_name += backward_name[len(backward_name)-len(forward_name)]
length = length-1
return forward_name
Go To Summary
Mark for Review
Mark for Feedback
Tools
Back


Question 7 of 38
Time Remaining 00:42:37
You are building a Python program that displays all prime numbers from 2 to 100. (A prime number is any number that is divisible only by itself and 1.)
Complete the code by moving the appropriate code segments from the list on the left to the correct locations on the right. You may use each code segment once, more than once, or not at all.
Note: You will receive partial credit for each correct code placement.
Answer Area
for i in range(2, p):
if p / i == 0:
is_prime = False
for i in range(2, p):
if p % i == 0:
is_prime = False
p = p + 1
p = 2
is_prime = True
is_prime = True
while p <= 100:
for i in range(2, p):
if p % i == 0:
is_prime = False
break
if is_prime == True:
print(p)
p = p + 1
Go To Summary
Mark for Review
Mark for Feedback
Tools
Back
Next


Question 17 of 38
Time Remaining 00:33:21
You need to identify the results of performing various slicing operations on the following sequence structure:
alph = "abcdefghijklmnopqrstuvwxyz"
Move the appropriate results from the list on the left to the correct slicing operations on the right. You may use each result once, more than once, or not at all.
Note: You will receive partial credit for each correct match.
Results
defghijklmno
pmjg
defghijklmnop
ponmlkjihgfe
dgjm
zwtqnkheb
Answer Area
alph[3:15]
defghijklmno
alph[3:15:3]
dgjm
alph[15:3:-3]
pmjg
alph[::-3]
zwtqnkheb
Go To Summary
Mark for Review
Mark for Feedback
Tools

Question 4 of 38

Time Remaining 00:21:44

You need to identify the results of performing various slicing operations on the following sequence structure:

```
alph = "abcdefghijklmnopqrstuvwxyz"
```

Move the appropriate results from the list on the left to the correct slicing operations on the right. You may use each result once, more than once, or not at all.

Note: You will receive partial credit for each correct match.

Results

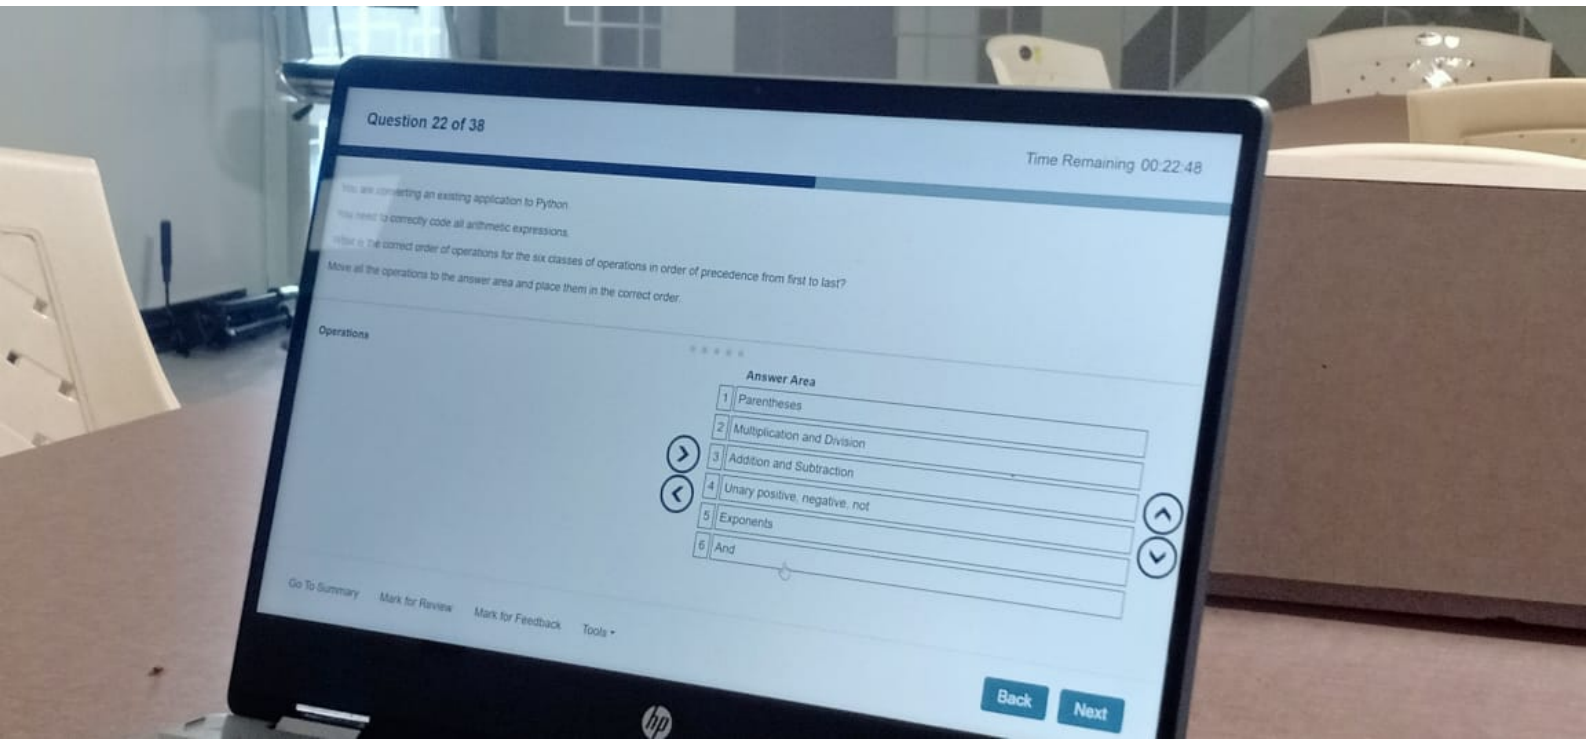
`defghijklmno`	`pmjg`	`defghijklmnop`
`ponmlkjihgfe`	`dgjm`	`zwtqnkheb`

Answer Area

`alph[3:15]`	`defghijklmno`
`alph[3:15:3]`	`dgjm`
`alph[15:3:-3]`	`pmjg`
`alph[::-3]`	`zwtqnkheb`

Go To Summary | Mark for Review | Mark for Feedback | Tools

Back | Next


Question 22 of 38
Time Remaining: 00:22:48
You are converting an existing application to Python.
You need to correctly code all arithmetic expressions.
What is the correct order of operations for the six classes of operations in order of precedence from first to last?
Move all the operations to the answer area and place them in the correct order.
Operations
Answer Area
1 Parentheses
2 Multiplication and Division
3 Addition and Subtraction
4 Unary positive, negative, not
5 Exponents
6 And
Go To Summary
Mark for Review
Mark for Feedback
Tools
Back
Next

Question 2 of 38

Time Remaining 00:21:49

A food company needs a simple program that their call center can use to enter survey data for a new coffee variety. The program must perform the following tasks:

- Accept input (`rating`).
- Return the average rating (`average`) based on a five-star scale.
- Round the output to two decimal places.

Complete the code by selecting the correct code segment from each drop-down list.

Note: You will receive partial credit for each correct selection.

Answer Area

```
sum = count = done = 0
average = 0.0
while done != -1:
    rating = float(input("Enter next rating (1-5, -1 for done)"))
        if rating == -1:
            break
        sum += rating
        count += 1
average = float(sum / count)
print("The average star rating for the new coffee is: " + format(average, '.2f'))
```

Go To Summary | Mark for Review | Mark for Feedback | Tools | Back | Next

Question 6 of 38

Time Remaining 00:21:41

You write the following code:

```
import datetime
d = datetime.datetime(2017, 4, 7)
print('{:%B-%d-%y}'.format(d))
```

You run the program.

What is the output?

A. `04-07-2017`

B. `04-07-17`

C. `April-07-17`

D. `2017-April-07`

Go To Summary | Mark for Review | Mark for Feedback | Tools

Back | Next

Question 10 of 38

Time Remaining 00:21:33

You write the following function to read a data file and print each line of the file. Line numbers are included for reference only.

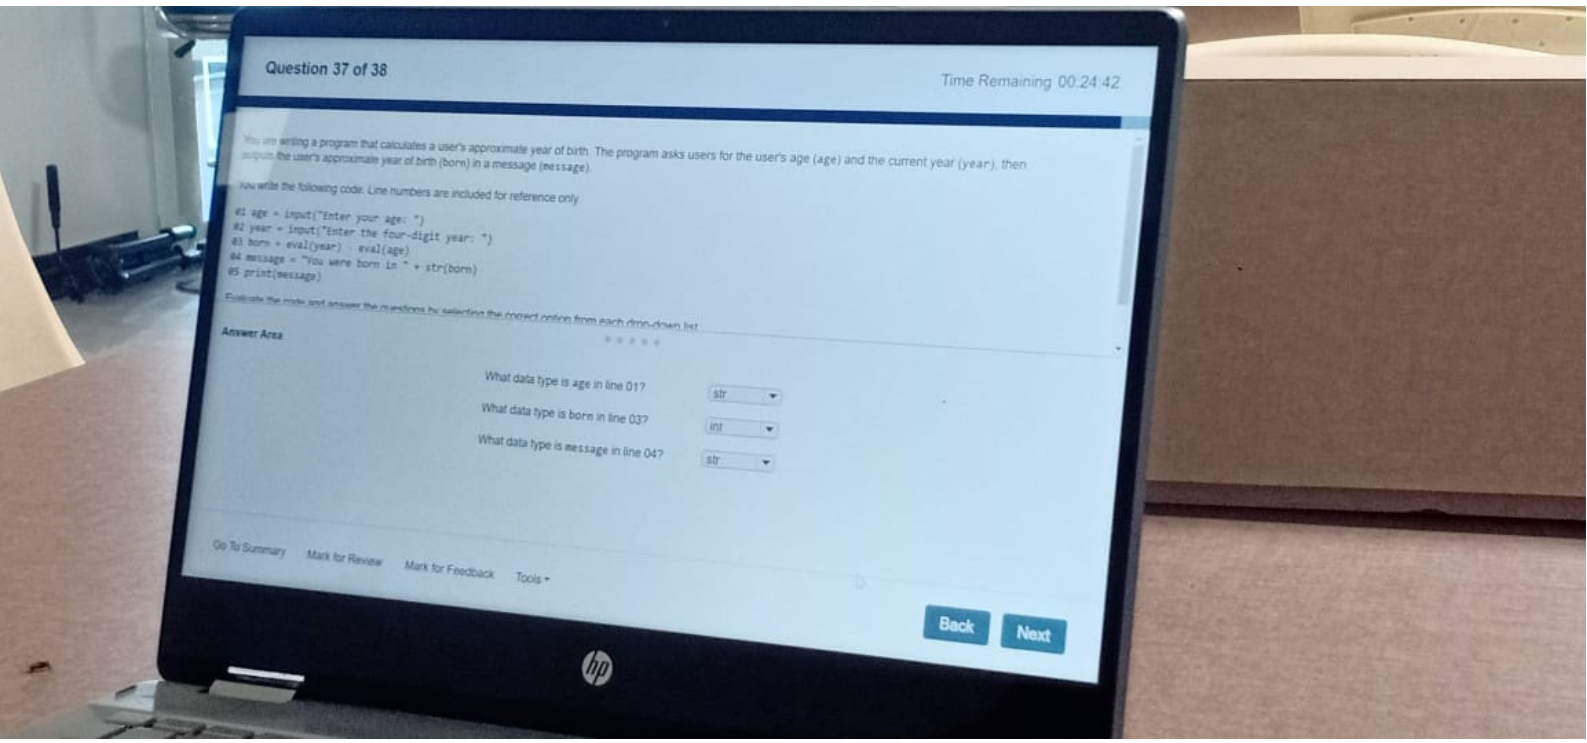
```
01 def read_file(file):
02     line = None
03     if os.path.isfile(file):
04       data = open(file,'r')
05       for line in data:
06         print(line)
```

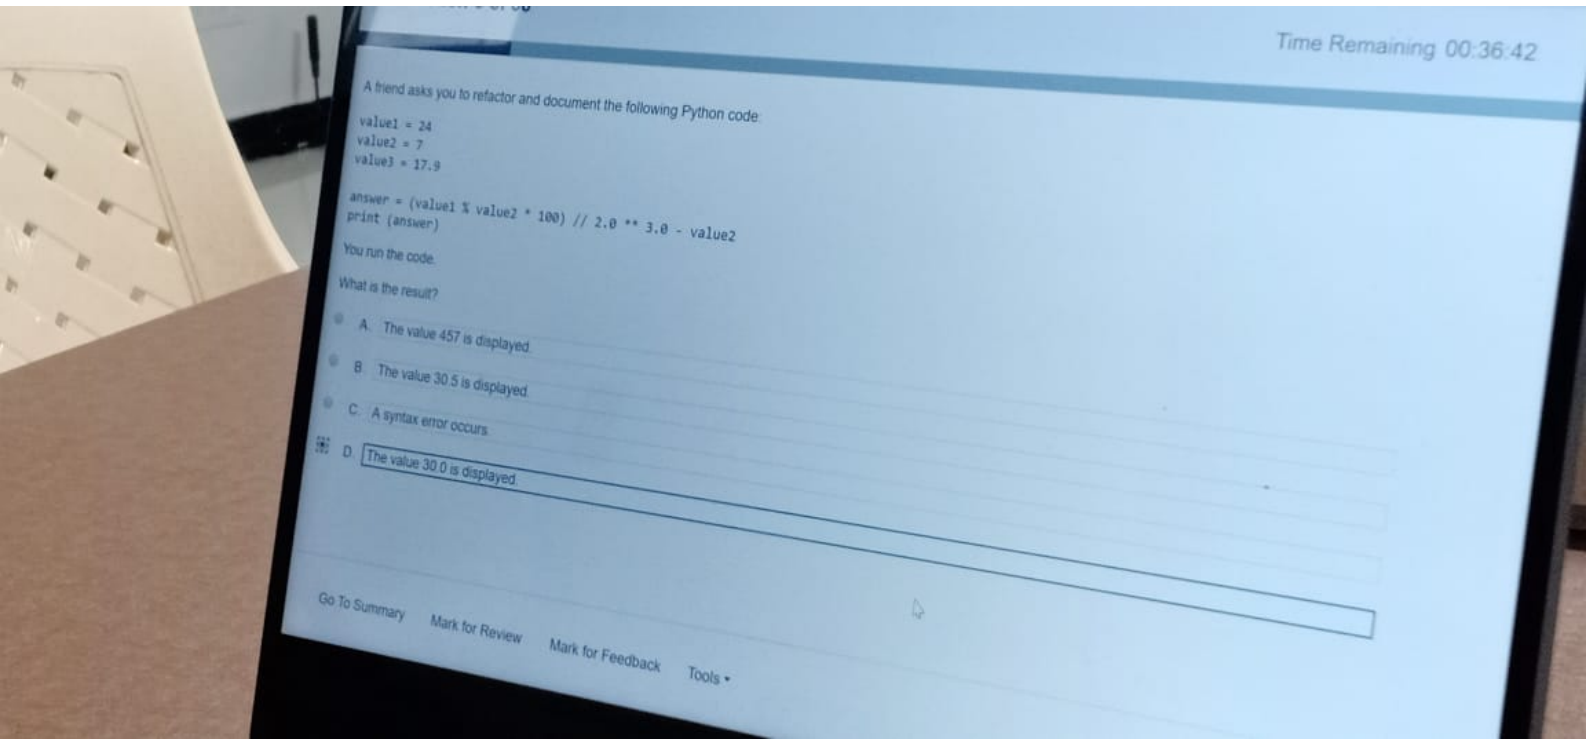
When you run the program, you receive an error on line 03.

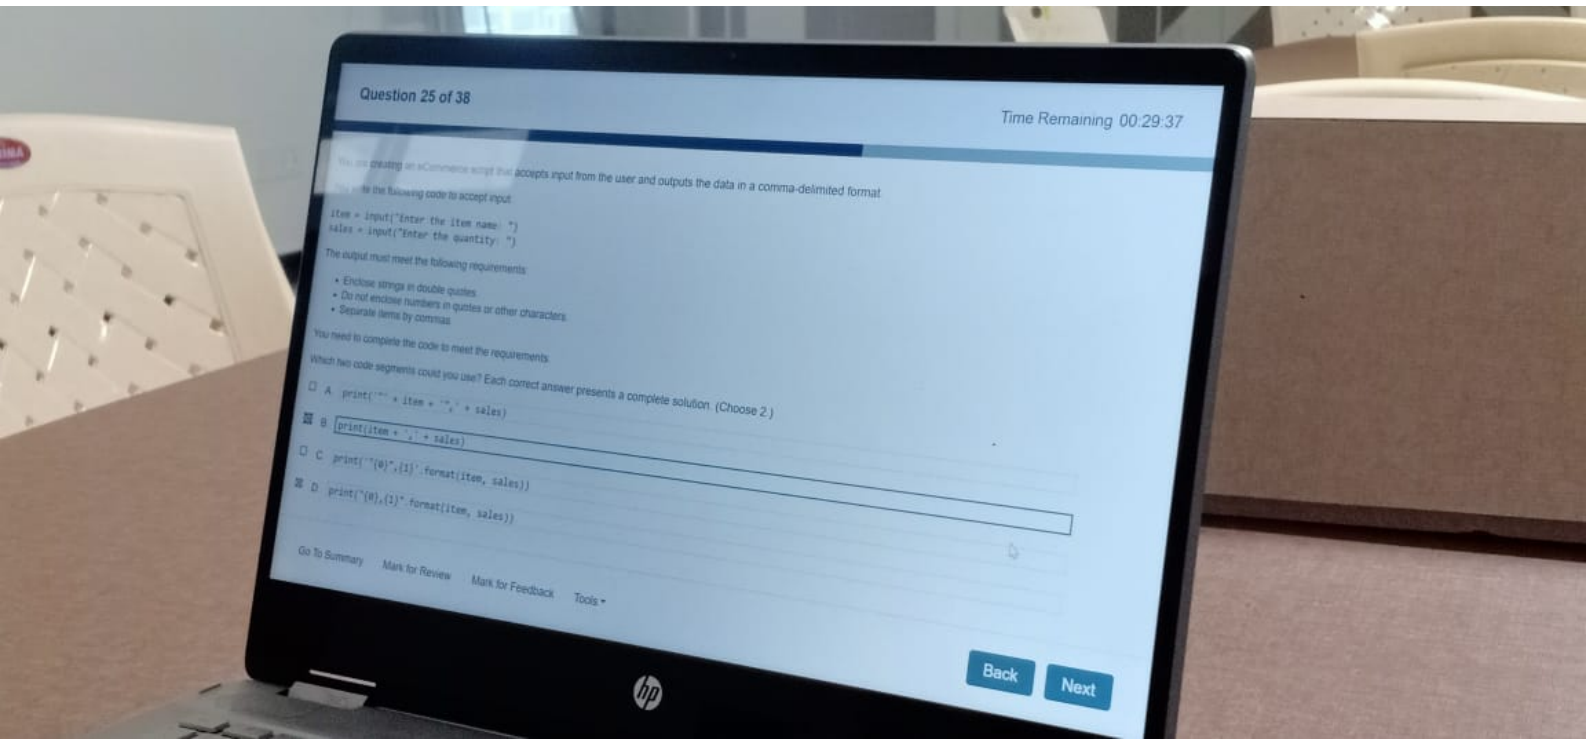
What is causing the error?

- A. You need to import the `os` library.
- B. The `isfile` method does not exist in the `path` object.
- C. The `path` method does not exist in the `os` object.
- D. The `isfile` method does not accept one parameter.

Go To Summary | Mark for Review | Mark for Feedback | Tools | Back | Next


Question 37 of 38
Time Remaining 00:24:42
You are writing a program that calculates a user's approximate year of birth. The program asks users for the user's age (age) and the current year (year), then outputs the user's approximate year of birth (born) in a message (message).
You write the following code. Line numbers are included for reference only.
01 age = input("Enter your age: ")
02 year = input("Enter the four-digit year: ")
03 born = eval(year) - eval(age)
04 message = "You were born in " + str(born)
05 print(message)
Evaluate the code and answer the questions by selecting the correct option from each drop-down list.
Answer Area
What data type is age in line 01?
str
What data type is born in line 03?
int
What data type is message in line 04?
str
Go To Summary
Mark for Review
Mark for Feedback
Tools
Back
Next


Time Remaining 00:36:42
A friend asks you to refactor and document the following Python code:
value1 = 24
value2 = 7
value3 = 17.9
answer = (value1 % value2 * 100) // 2.0 ** 3.0 - value2
print (answer)
You run the code.
What is the result?
A. The value 457 is displayed.
B. The value 30.5 is displayed.
C. A syntax error occurs.
D. The value 30.0 is displayed.
Go To Summary
Mark for Review
Mark for Feedback
Tools


Question 25 of 38
Time Remaining 00:29:37
accepts input from the user and outputs the data in a comma-delimited format.
Use the following code to accept input:
item = input("Enter the item name: ")
sales = input("Enter the quantity: ")
The output must meet the following requirements:
• Enclose strings in double quotes.
• Do not enclose numbers in quotes or other characters.
• Separate items by commas.
You need to complete the code to meet the requirements.
Which two code segments could you use? Each correct answer presents a complete solution. (Choose 2.)
A print('"' + item + '",' + sales)
B print(item + ',' + sales)
C print('"{0}",{1}'.format(item, sales))
D print("{0},{1}".format(item, sales))
Go To Summary
Mark for Review
Mark for Feedback
Tools
Back
Next

Question 8 of 38

Time Remaining 00:21:37

Review the following code segment:

```
product = 2
n = 5
while (n != 0):
    product *= n
    print (product)
    n -= 1
    if n == 3 : break
```

How many lines of output does the code print?

Enter the number as an integer here: 3

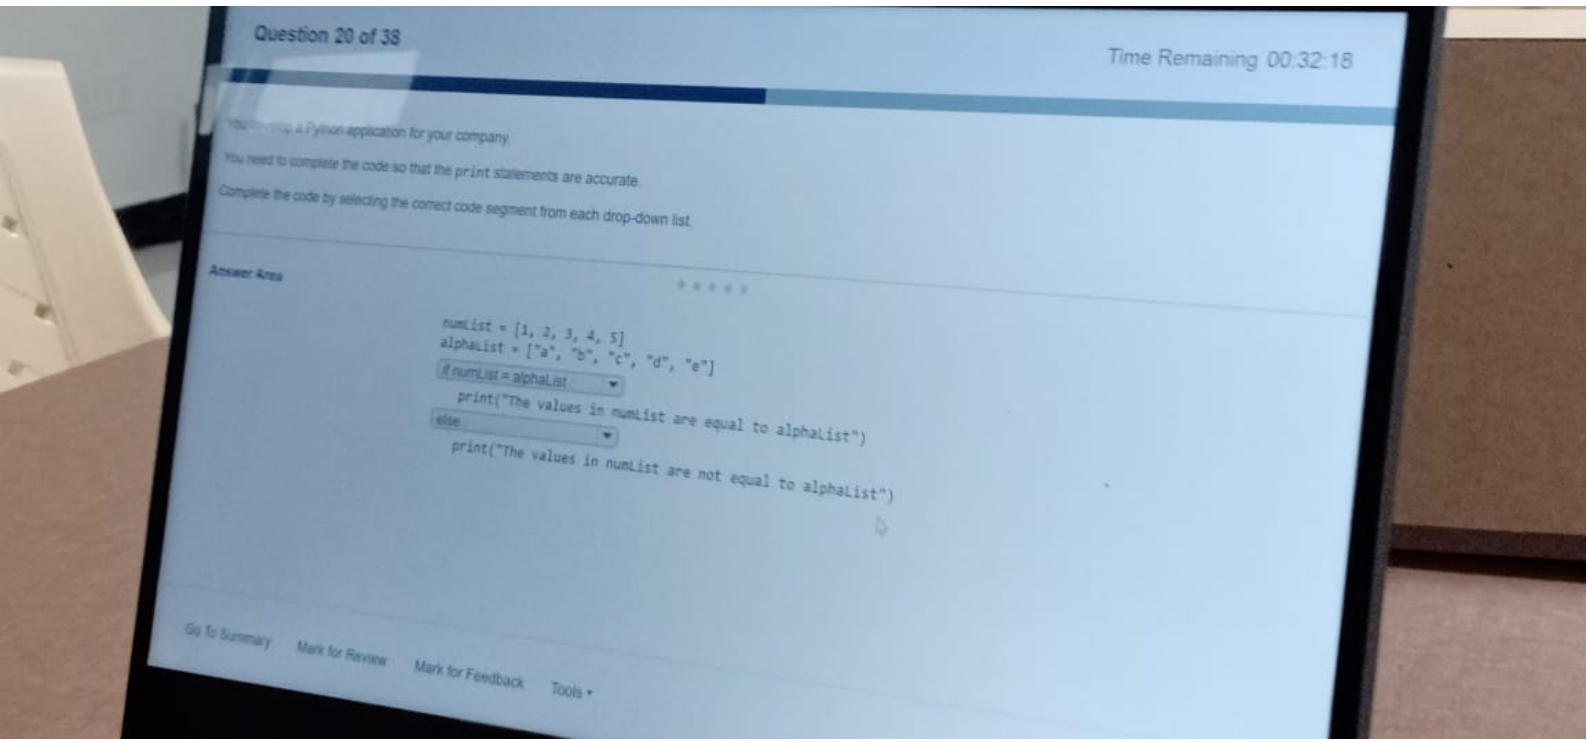
Go To Summary | Mark for Review | Mark for Feedback | Tools | Back | Next

Question 1 of 38

What does the following statement do?

```
data = input()
```

- A. Creates an HTML input element
- B. Displays all input peripheral devices on the computer
- C. Allows a user to enter text in the console
- D. Displays a message box that allows user input


Question 20 of 38
Time Remaining 00:32:18
You develop a Python application for your company.
You need to complete the code so that the print statements are accurate.
Complete the code by selecting the correct code segment from each drop-down list.
Answer Area
numList = [1, 2, 3, 4, 5]
alphaList = ["a", "b", "c", "d", "e"]
if numList = alphaList
print("The values in numList are equal to alphaList")
else
print("The values in numList are not equal to alphaList")
Go To Summary
Mark for Review
Mark for Feedback
Tools

Time

company needs a simple program that their call center can use to enter survey data for a new coffee variety. The program must perform the following tasks:

ccept input (`rating`).
Return the average rating (`average`) based on a five-star scale.
Round the output to two decimal places.

lete the code by selecting the correct code segment from each drop-down list.

You will receive partial credit for each correct selection.

wer Area

```
sum = count = done = 0
average = 0.0
while done != -1:
    rating = float(input("Enter next rating (1-5, -1 for done)"))
        if rating == -1:
            break
        sum += rating
        count += 1
average = float(sum / count)
print("The average star rating for the new coffee is: " + format(average, '.2f'))
```

Back Ne

Question 11 of 38

Time Remaining 00:21:31

A coworker wrote a program that inputs names into a database. Unfortunately, the program reversed the letters in each name.

You need to write a Python function that outputs the characters in a name in the correct order.

Complete the code by selecting the code segment from each drop-down list.

Note: You will receive partial credit for each correct selection.

Answer Area

```
#Function reverses characters in a string.
#returns new string in reversed order.

def reverse_name(backward_name):
    forward_name = ""
    length =  len(backward_name)-1
while length >= 0:
    forward_name +=  backward_name[length]
    length = length-1
    return forward_name

print(reverse_name("nohtyp"))
```

Go To Summary | Mark for Review | Mark for Feedback | Tools ▾ | Back | Next

Question 7 of 38

Time Remaining 00:21:39

For each statement about `try` statements, select **True** or **False**.

Answer Area

	True	False
A `try` statement can have one or more `except` clauses.	●	○
A `try` statement can have a `finally` clause without an `except` clause.	○	●
A `try` statement can have a `finally` clause and an `except` clause.	●	○
A `try` statement can have one or more `finally` clauses.	○	●

Go To Summary | Mark for Review | Mark for Feedback | Tools

Back | Next

Question 32 of 38

Time Remaining 00:20:45

You are writing a function that works with files.

You need to ensure that the function returns None if the file does not exist. If the file does exist, the function must return the first line.

You write the following code:

```
import os
def get_first_line(filename, mode):
```

In which order should you arrange the code segments to complete the function? Move all the code segments to the answer area and place them in the correct order.

Code Segments

Answer Area

```
1  if os.path.isfile(filename):
2      with open(filename, 'r') as file:
3          return file.readline()
4  else:
5      return None
```

Go To Summary | Mark for Review | Mark for Feedback | Tools

Back | Next

Question 25 of 38

Time Remaining 00:21:00

You work on a team that is developing a game.

You need to write code that generates a random number that meets the following requirements:

- The number is a multiple of 5.
- The lowest number is 5.
- The highest number is 100.

Which two code segments will meet the requirements? Each correct answer presents a complete solution. (Choose 2.)

☒ A.
```
from random import randrange
print(randrange(5, 105, 5))
```

☐ B.
```
from random import randint
print(randint(0, 20) * 5)
```

☐ C.
```
from random import randrange
print(randrange(0, 100, 5))
```

☒ D.
```
from random import randint
print(randint(1, 20) * 5)
```

Go To Summary | Mark for Review | Mark for Feedback | Tools

Back | Next

Question 30 of 38

Time Remaining 00:20:49

You are writing a program to randomly assign rooms (`room_number`) and team-building groups (`group`) for a company retreat.

Complete the code by selecting the correct code segment from each drop-down list.

Note: You will receive partial credit for each correct selection.

Answer Area

```
import random
roomsAssigned=[1]
room_number=1
groupList=["Ropes","Rafting","Obstacle","Wellness"]
count=0
print("Welcome to CompanyPro's Team-Building Weekend!")
name=input("Please enter your name (q to quit)? ")
while name != 'q' and count < 50:
    while room_number in roomsAssigned:
        room_number=random.randint(1,50)
    print(f"{name}, your room number is {room_number}")
    roomsAssigned.append(room_number)
    group = random.choice(groupList)
    print(f"You will meet with the {group} Group this afternoon.")
    count+=1
    name=input("Please enter your name (Q to quit)? ")
```

Go To Summary | Mark for Review | Mark for Feedback | Tools

Back | Next

Question 19 of 38

Time Remaining 00:21:15

You write the following code to determine a student's final grade based on their current grade (`grade`) and rank (`rank`):

```
grade = 76
rank = 3

if grade > 80 and rank >= 3:
    grade += 10
elif grade >= 70 and rank > 3:
    grade += 5
else:
    grade -= 5

print(grade)
```

What value will print?

- A. 71
- B. 76
- C. 81
- D. 86

Go To Summary | Mark for Review | Mark for Feedback | Tools

Back | Next

Question 34 of 38

Time Remaining 00:20:39

You are building a Python program that displays all prime numbers from 2 to 100. (A prime number is any number that is divisible only by itself and 1.)

Complete the code by moving the appropriate code segments from the list on the left to the correct locations on the right. You may use each code segment once, more than once, or not at all.

Note: You will receive partial credit for each correct code placement.

Code Segments

```
break
```

```
continue
```

```
for i in range(2, p):
    if p / i == 0:
        is_prime = False
```

```
for i in range(2, p):
    if p % i == 0:
        is_prime = False
```

```
p = p + 1
```

```
p = 2
is_prime = True
```

Answer Area

```
p = 2
is_prime = True
while p <= 100:
    for i in range(2, p):
        if p % i == 0:
            is_prime = False
            break
    if is_prime == True:
        print(p)
    p = p + 1
```

Go To Summary | Mark for Review | Mark for Feedback | Tools

Back | Next

Question 20 of 38

Time Remaining 00:21:12

The following function calculates the value of an expression that uses an exponent. Line numbers are included for reference only.

```
01 def calc_power(a, b):
02     return a**b
03 base = input("Enter the number for the base: ")
04 exponent = input("Enter the number for the exponent: ")
05 result = calc_power(base, exponent)
06 print("The result is " + result)
```

For each statement, select **True** or **False**.

Note: You will receive partial credit for each correct selection.

Answer Area

	True	False
Line 02 will cause a runtime error.	○	◉
Line 06 will cause a runtime error.	◉	○
The `eval` function should be used in lines 03 and 04.	◉	○

Go To Summary | Mark for Review | Mark for Feedback | Tools

Back | Next

Question 15 of 38

Time Remaining 00:21:22

You are creating a Python program that will let a user guess a number from 1 to 10. The user is allowed up to three guesses.

You write the following code. Line numbers are included for reference only.

```
01 from random import randint
02 target = randint(1,10)
03 chance = 1
04 print ("Guess an integer from 1 to 10. You will have 3 chances.")
05
06      guess = int(input("Guess an integer: "))
07      if guess > target:
08          print ("Guess is too high")
09      elif guess < target:
10          print ("Guess is too low")
11      else:
12          print ("Guess is just right!")
13
14
```

The program must allow three guesses. If the user guesses the correct number, the program must stop asking for guesses.

Complete lines 05, 13, and 14 by moving the appropriate code segments from the list on the left to the correct locations on the right. You may use each code segment once, more than once, or not at all.

Code Segments

- `break`
- `chance += 1`
- `chance = 2`
- `pass`
- `while chance < 3`
- `while chance < 3:`
- `while chance <= 3:`

Answer Area

Line 05: `while chance <= 3:`

Line 13: `break`

Line 14: `chance += 1`

Go To Summary | Mark for Review | Mark for Feedback | Tools

Back | Next

Question 21 of 38

Time Remaining 00:21:10

You create the following Python function to calculate the power of a number. Line numbers are included for reference only.

```
01 # The calc_power function calculates exponents
02 # x is the base
03 # y is the exponent
04 # The value of x raised to the y power is returned
05 def calc_power(x, y):
06    comment = "# Return the value"
07    return x ** y # raise x to the y power
```

For each statement, select **True** or **False**.

Answer Area

	True	False
Python will not check the syntax of lines 01 through 04.	◉	○
The pound sign (#) is optional for lines 02 and 03.	○	◉
The string in line 06 will be interpreted as a comment.	○	◉
Line 07 contains an inline comment.	◉	○

Go To Summary | Mark for Review | Mark for Feedback | Tools ▾

Back | Next

Question 18 of 38

Time Remaining 00:21:17

Review the following code:

```
x = "oranges"
y = "apples"
z = "bananas"
data = "{1} and {0} and {2}"
print(data.format(z, y, x))
```

What is the output of the `print` statement?

A. `apples and oranges and bananas`

B. `oranges and apples and bananas`

C. `apples and bananas and oranges`

D. `bananas and oranges and apples`

Go To Summary | Mark for Review | Mark for Feedback | Tools

Back | Next

Question 28 of 38

Time Remaining 00:20:53

You are writing code to meet the following requirements:

- Allow users to repeatedly enter words.
- Output the number of characters in each word.

Complete the code by selecting the correct option from each drop-down list.

Note: You will receive partial credit for each correct selection.

Answer Area

```
x = "Hello World"
while  x != "QUIT":
    num = 0
    if   char  in  x:
        num += 1
    print(num)
    x = input("Enter a new word or QUIT to exit: ")
```

Go To Summary | Mark for Review | Mark for Feedback | Tools

Back | Next

Question 27 of 38

Time Remaining 00:20:55

A publishing company needs a way to find the count of specific letters in their publications to ensure that there is a good balance. It seems that there have been complaints about overuse of the letter e. You need to create a function to meet the requirements.

Complete the code by selecting the correct code segment from each drop-down list.

Note: You will receive partial credit for each correct selection.

Answer Area

```
# Function accepts list of words from a file
#    and letter to search for.
# Returns count of a particular letter in that list.
def count_letter(letter, word_list):
    count = 0
    for [word in word_list:]
        if [letter in word:]
            count += 1
    return count
word_list = []

# word_list is populated from a file. Code not shown.

letter = input("which letter would you like to count")
letter_count = count_letter(letter, word_list)
print("There are: ", letter_count, " instances of " + letter)
```

Go To Summary | Mark for Review | Mark for Feedback | Tools | Back | Next

Question 29 of 38

Time Remaining 00:20:51

You develop a Python application for your company.

You need to complete the code so that the `print` statements are accurate.

Complete the code by selecting the correct code segment from each drop-down list.

Answer Area

```
numList = [1, 2, 3, 4, 5]
alphaList = ["a", "b", "c", "d", "e"]
if numList == alphaList :
    print("The values in numList are equal to alphaList")
else :
    print("The values in numList are not equal to alphaList")
```

Go To Summary | Mark for Review | Mark for Feedback | Tools

Back | Next

Question 35 of 38

Time Remaining 00:20:37

You are creating a Python script to evaluate text input and check for uppercase and lowercase.

Which four code segments should you use in sequence to develop the solution? Move the four code segments to the answer area and place them in the correct order.

Code Segments

```
else:
  print(name, "is upper case.")
```

```
else:
  print(name, "is lower case.")
```

Answer Area

1
```
name = input("Enter your name: ")
```

2
```
if name.lower() == name:
  print(name, "is all lower case.")
```

3
```
elif name.upper() == name:
  print(name, "is all upper case.")
```

4
```
else:
  print(name, "is mixed case.")
```

Go To Summary | Mark for Review | Mark for Feedback | Tools

Back | Next

Question 33 of 38

Time Remaining 00:20:42

A company asks you to debug some code that is causing problems with their payroll. They ask you to find the source of the payroll errors.

The following variables have been declared:

```
employee_pay = [15000, 120000, 35000, 45000]
count = 0
sum = 0
```

There are two errors in the following code:

```
for index in range(0, len(employee_pay)-1)):
    count += 1
    sum += employee_pay[index]
average = sum//count
print("The total payroll is:", sum )
```

Which code should you use to fix the errors?

To answer, select the appropriate code segments in the answer area.

Note: You will receive partial credit for each correct selection.

Answer Area

```
for index in range (len(employee_pay)):
    count += 1
    sum += employee_pay[index]
average = sum/count
print("The total payroll is:", sum )
print("The average salary is:", average)
```

Go To Summary | Mark for Review | Mark for Feedback | Tools

Back | Next

Question 17 of 38

Time Remaining 00:21:19

A friend asks you to refactor and document the following Python code:

```
value1 = 24
value2 = 7
value3 = 17.9

answer = (value1 % value2 * 100) // 2.0 ** 3.0 - value2
print (answer)
```

You run the code.

What is the result?

- A. A syntax error occurs.
- B. The value 457 is displayed.
- C. The value 30.0 is displayed.
- D. The value 30.5 is displayed.

Go To Summary | Mark for Review | Mark for Feedback | Tools

Back | Next

Question 24 of 38

Time Remaining 00:21:02

You write the following code:

```
import sys
try:
    file_in = open("in.txt", 'r')
    file_out = open("out.txt", 'w+')
except IOError:
    print('cannot open', file_name)
else:
    i = 1
    for line in file_in:
        print(line.rstrip())
        file_out.write("line " + str(i) + ": " + line)
        i = i + 1
    file_in.close()
    file_out.close()
```

The `out.txt` file does not exist. You run the code.

Which statement is correct?

- A. The code will execute without error.
- B. The code will run but will generate a logic error.
- C. The code will generate a runtime error.
- D. The code will generate a syntax error.

Go To Summary | Mark for Review | Mark for Feedback | Tools

Back | Next

Question 26 of 38

Time Remaining 00:20:58

You are writing a program that calculates a user's approximate year of birth. The program asks users for the user's age (`age`) and the current year (`year`), then outputs the user's approximate year of birth (`born`) in a message (`message`).

You write the following code. Line numbers are included for reference only.

```
01 age = input("Enter your age: ")
02 year = input("Enter the four-digit year: ")
03 born = eval(year) - eval(age)
04 message = "You were born in " + str(born)
05 print(message)
```

Evaluate the code and answer the questions by selecting the correct option from each drop-down list.

Note: You will receive partial credit for each correct selection.

Answer Area

What data type is `age` in line 01?	str
What data type is `born` in line 03?	int
What data type is `message` in line 04?	str

Go To Summary | Mark for Review | Mark for Feedback | Tools

Back | Next

Question 36 of 38

Time Remaining 00:20:35

You are creating a function to calculate admission fees (`admission_fee`) based on the following rules:

- Anyone under age 5 = free admission
- Anyone age 5 or older who is in school = $10
- Anyone age 5 to 17 who is not in school = $20
- Anyone older than age 17 who is not in school = $50

`rate` represents the price in dollars.

Complete the code by selecting the correct code segment from each drop-down list.

Answer Area

```
def admission_fee(age, school):
    rate = 0
    [if age >= 5 and school == True:]
        rate = 10
    [else age >= 5 and school == False:]
        [if age <=17:]
            rate = 20
        else:
            rate = 50
    return rate
```

Go To Summary | Mark for Review | Mark for Feedback | Tools

Back | Next

Question 9 of 38

Time Remaining 00:21:35

You are writing a Python program to determine if a number (`num`) the user inputs is one, two, or more than two digits (`digits`).

Complete the code by selecting the correct code segment from each drop-down list.

Answer Area

```
num = int(input("Enter a number with 1 or 2 digits: "))
digits = "0"
if num > -10 and num < 10:
    digits = "1"
elif num > -100 and num < 100:
    digits = "2"
else:
    digits = ">2"
print(digits + " digits.")
```

Go To Summary | Mark for Review | Mark for Feedback | Tools

Back | Next

Question 14 of 38

Time Remaining 00:21:24

A bicycle company is creating a program that allows customers to log the number of miles biked. The program will send messages based on how many miles the customer logs.

You write the following Python code. Line numbers are included for reference only.

```
01
02      name = input("What is your name? ")
03      return name
04
05      calories = miles * calories_per_mile
06      return calories
07 distance = int(input("How many miles did you bike this week? "))
08 burn_rate = 50
09 biker = get_name()
10 calories_burned = calc_calories(distance, burn_rate)
11 print(biker, ", you burned about ", calories_burned, " calories.")
```

You need to define the two required functions.

Which two code segments should you use for *line 01* and *line 04*? Each correct answer presents part of the solution. (Choose 2.)

- ☒ A. `01 def get_name():`
- ☐ B. `01 def get_name(biker):`
- ☐ C. `01 def get_name(name):`
- ☐ D. `04 def calc_calories():`
- ☒ E. `04 def calc_calories(miles, burn_rate):`
- ☐ F. `04 def calc_calories(miles, calories_per_mile):`

Go To Summary | Mark for Review | Mark for Feedback | Tools

Back | Next

Question 31 of 38

Time Remaining 00:20:47

A company needs help updating their file system. You must create a simple file-manipulation program that performs the following actions:

- Creates a file using the specified name.
- Appends the phrase "`End of listing`" to the file.

You need to complete the code to meet the requirements.

Complete the code by selecting the correct code segment from each drop-down list.

Note: You will receive partial credit for each correct selection.

Answer Area

```
import os
file = open('myFile.txt', 'w')
    file.write ("End of listing")
file.close()
```

Go To Summary | Mark for Review | Mark for Feedback | Tools

Back | Next

Question 23 of 38

Time Remaining 00:21:04

You need to test whether an object is an instance of a specific class.

How should you set up the unit test?

Complete the code by selecting the correct option from each drop-down list.

Note: You will receive partial credit for each correct selection.

Answer Area

```
import unittest
class TestIsInstance( unittest.TestCase ):
    def test_isInstance(self):
        self.assertIsInstance(obj, cls, msg=None)
if __name__ == '__main__':
    unittest.main()
```

Go To Summary | Mark for Review | Mark for Feedback | Tools

Back | Next

Question 38 of 38

Time Remaining 00:20:31

For each statement about the following function, select **True** or **False**.

```
def grosspay(hours=40,rate=25,pieces=0,piecerate=0,salary=0):
    overtime=0
    if pieces > 0:
        return pieces * piecerate
    if salary > 0:
        pass
    if hours > 40:
        overtime = (hours-40) * (1.5 * rate)
        return overtime + (40 * rate)
    else:
        return hours * rate
```

Note: You will receive partial credit for each correct selection.

Answer Area

	True	False
A function call of `grosspay()` will create a syntax error.	○	●
A function call of `grosspay(salary=50000)` will return nothing.	○	●
A function call of `grosspay(pieces=500, piecerate=4)` will return a result of 2000.	●	○

Go To Summary | Mark for Review | Mark for Feedback | Tools

Back | Next

Question 22 of 38

Time Remaining 00:21:09

A company needs help updating their file system. You must create a simple file-manipulation program that performs the following actions:

- Checks to see whether a file exists.
- If the file exists, displays its contents.

Complete the code by selecting the correct code segment from each drop-down list.

Note: You will receive partial credit for each correct selection.

Answer Area

```
import os
if  os.path.isfile('myFile.txt'):
    file = open('myFile.txt')
    print(file.read())
    file.close()
```

Go To Summary | Mark for Review | Mark for Feedback | Tools

Back | Next

Question 16 of 38

Time Remaining 00:21:20

You are converting an existing application to Python.

You need to correctly code all arithmetic expressions.

What is the correct order of operations for the six classes of operations in order of precedence from first to last?

Move all the operations to the answer area and place them in the correct order.

Operations

Answer Area

1. Parentheses
2. Exponents
3. Unary positive, negative, not
4. Multiplication and Division
5. Addition and Subtraction
6. And

Go To Summary | Bookmark for Review | Mark for Feedback | Tools

Back | Next

Question 37 of 38

Time Remaining 00:20:33

You are writing a function that increments the player score in a game.

The function has the following requirements:

- If no value is specified for `points`, then `points` start at one.
- If bonus is `True`, then `points` must be doubled.

You write the following code. Line numbers are included for reference only.

```
01 def increment_score(score, bonus, points):
02     if bonus == True:
03         points = points * 2
04     score = score + points
05     return score
06 points = 5
07 score = 10
08 new_score = increment_score(score, True, points)
```

For each statement, select **True** or **False**.

Note: You will receive partial credit for each correct selection.

Answer Area

	True	False
To meet the requirements, you must change line 01 to: `def increment_score(score, bonus, points = 1):`	◉	○
After any parameter is defined with a default value, all parameters to the right must also be defined with default values.	○	◉
If you do not change line 01 and the function is called with only two parameters, the value of the third parameter will be `None`.	○	◉
Line 03 will also modify the value of the variable `points` declared at line 06.	○	◉

Go To Summary | Mark for Review | Mark for Feedback | Tools

Back | Next

Note : You need to press "Final Submit" for

It is weekend and Jack came to his uncle's place in New York. Jack is very fond of shopping for shoes and jackets. So, he asked his uncle to guide him for the best deals in the city.

His uncle told him about "***Early Bird Sale***" which happens in Macy's. In early bird sale, first 10 customers, gets products on discount. Not only that, first 3 customers get "***But 2 Get 2***" offers. Jack was very excited about this and so he went early morning to the 13th Street Macy's store and luckily, he was the second customer.

He is very excited to grab "***But 2 Get 2***" deal. But there is a condition for this deal. The store will always charge you for the 2 most costly products, and they will give you the other 2 for free.

Let us say you have bought 4 items with the following prices:
{3, 5, 1, 7}
Here 2 most costly items are with prices 7 and 5, for this the store will charge you, and the lesser costly items which have price of 1 and 3, they will give for free.

In order to pay the minimum price, Jack wants to split the

Result

Question 38 of 38

Time Remaining 00:20:29

For each statement about the following function, select **True** or **False**.

```
def grosspay(hours=40,rate=25,pieces=0,piecerate=0,salary=0):
    overtime=0
    if pieces > 0:
        return pieces * piecerate
    if salary > 0:
        pass
    if hours > 40:
        overtime = (hours-40) * (1.5 * rate)
        return overtime + (40 * rate)
    else:
        return hours * rate
```

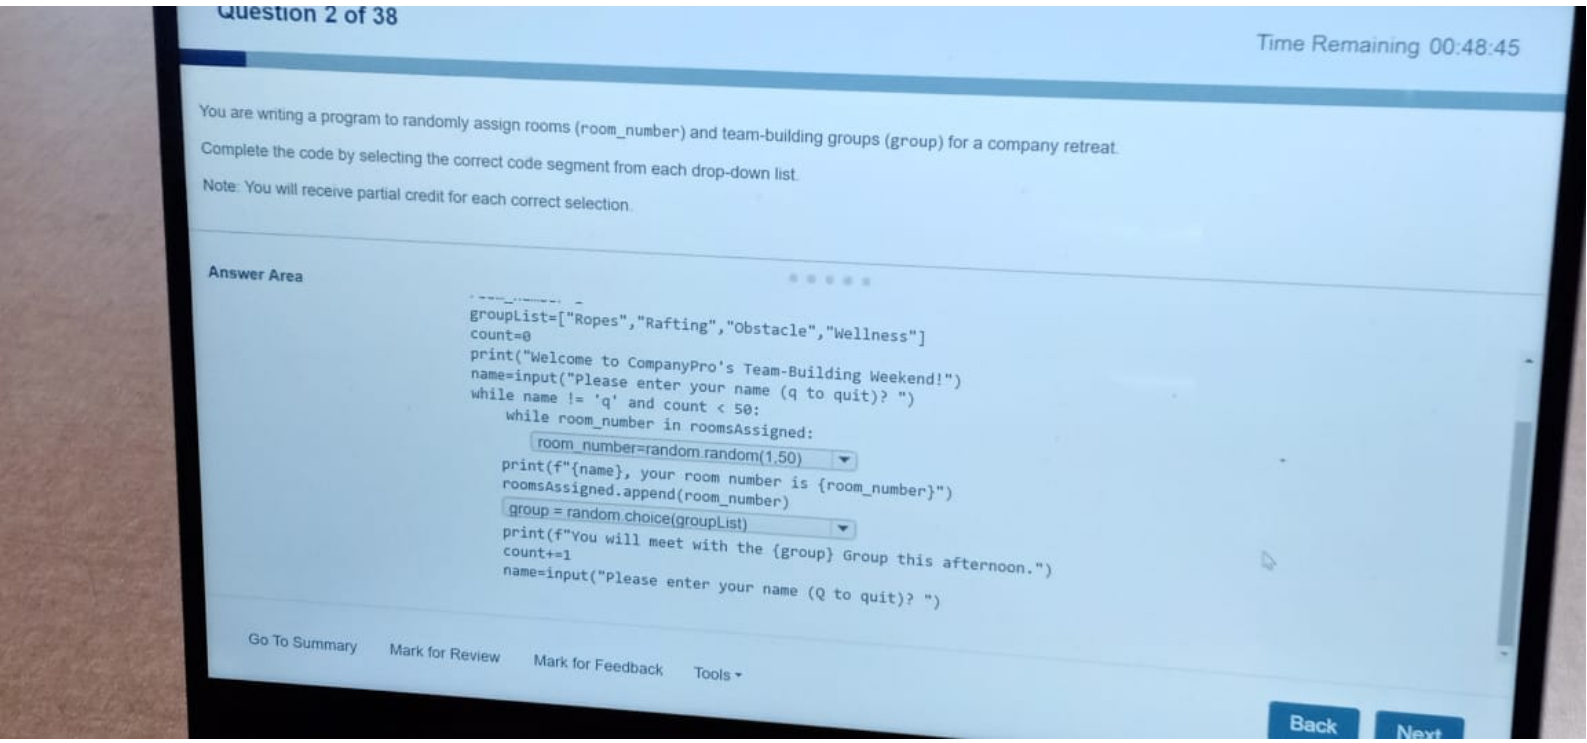
Note: You will receive partial credit for each correct selection.

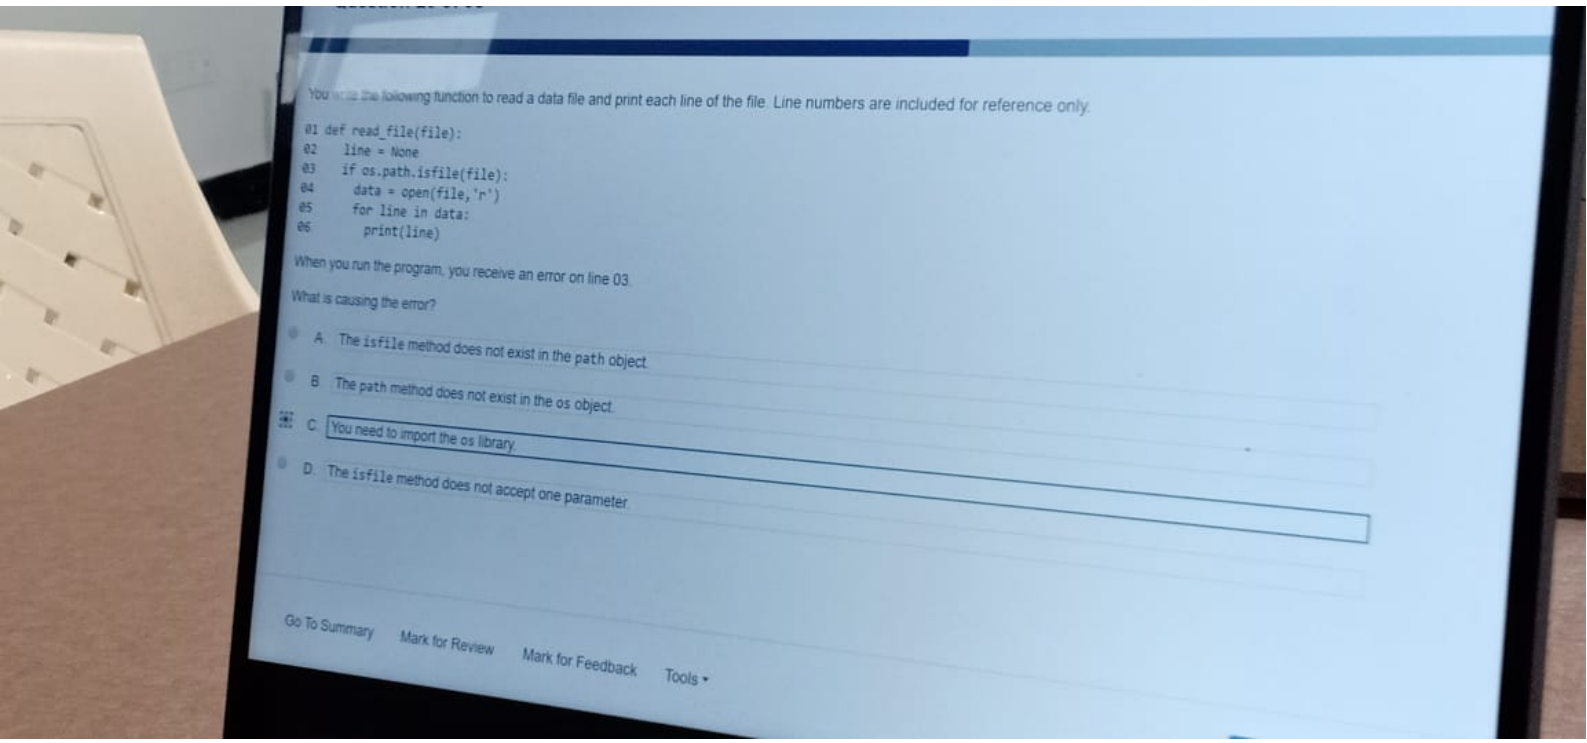
Answer Area

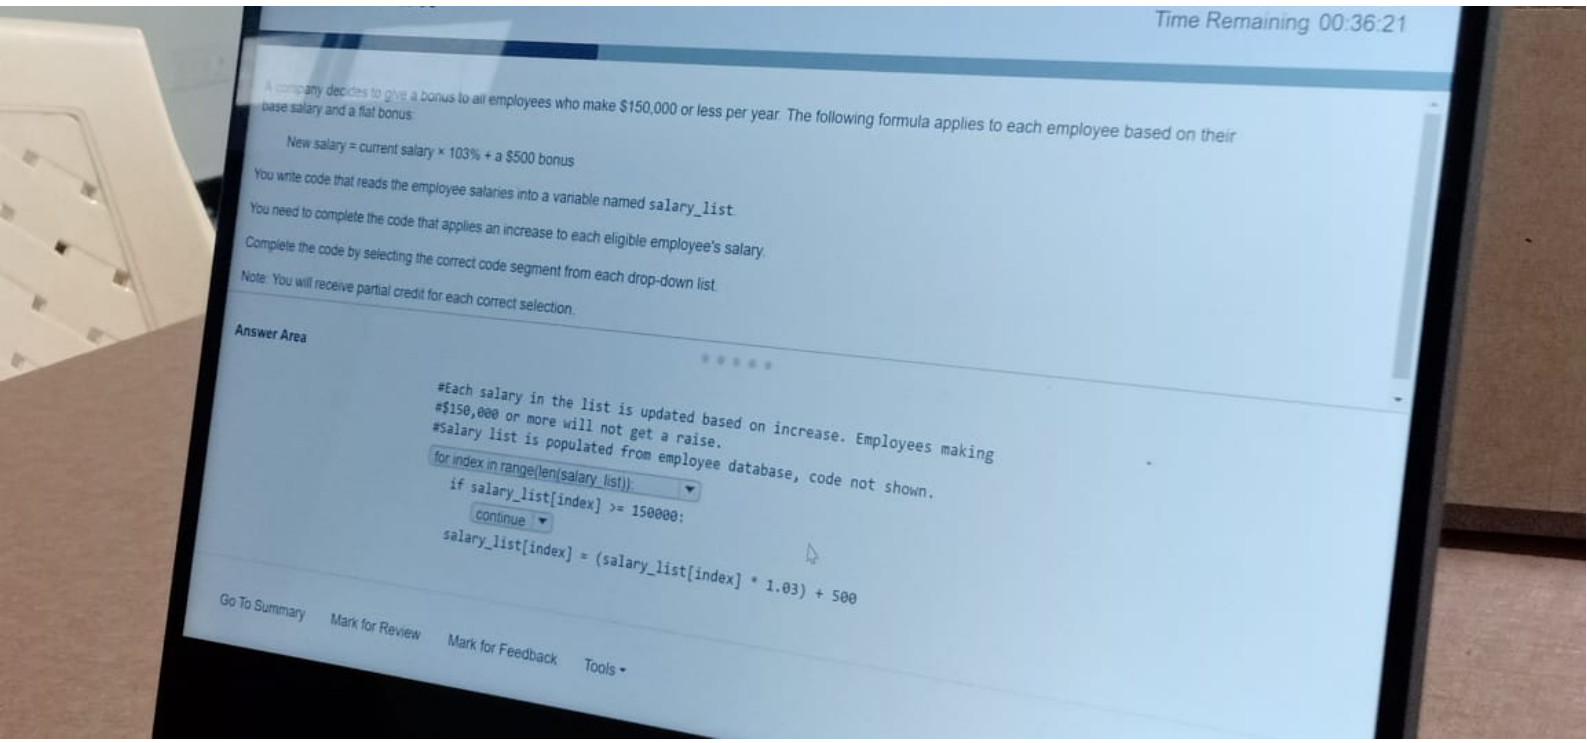
	True	False
A function call of `grosspay()` will create a syntax error.	○	●
A function call of `grosspay(salary=50000)` will return nothing.	○	●
A function call of `grosspay(pieces=500, piecerate=4)` will return a result of 2000.	●	○

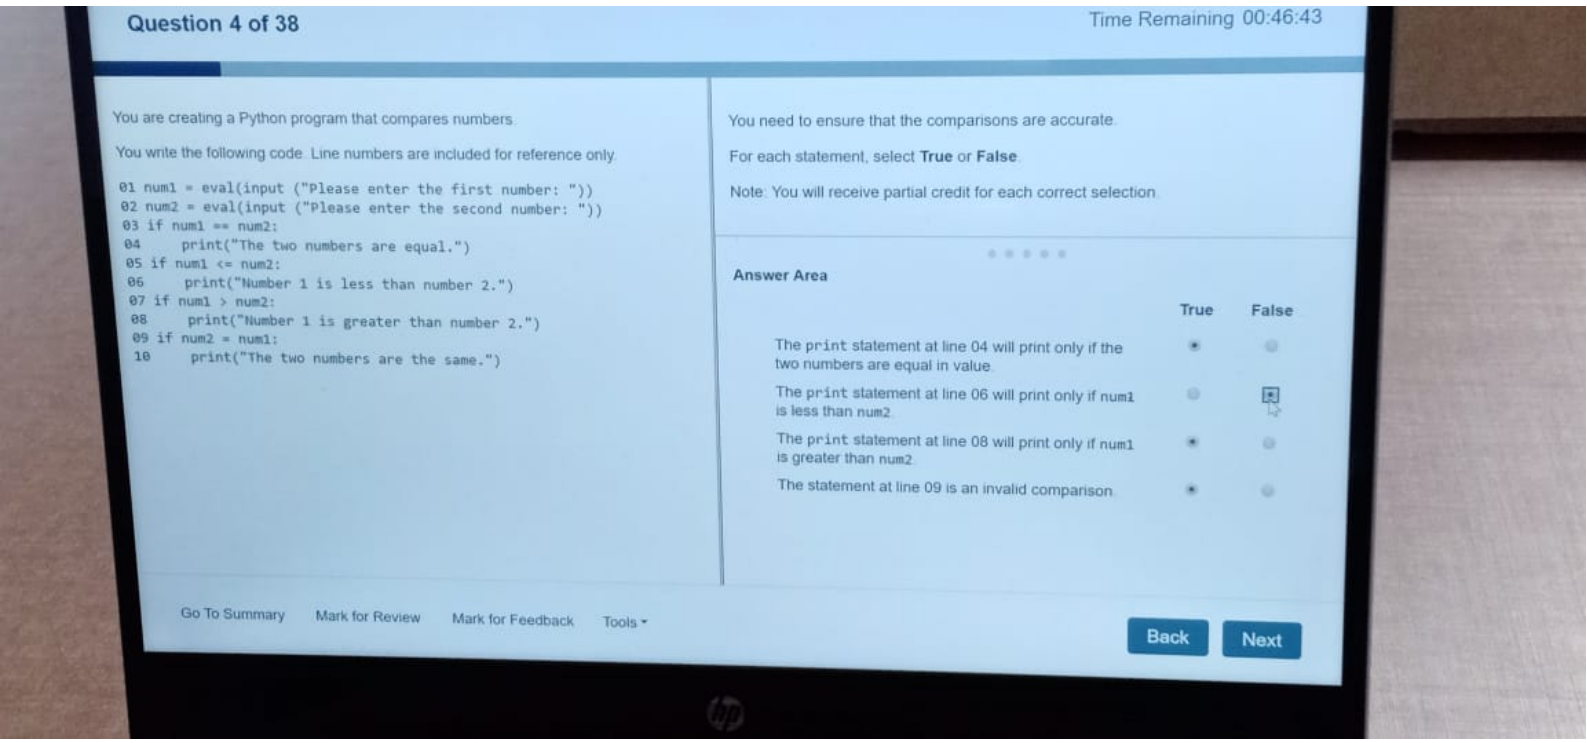
Go To Summary | Mark for Review | Mark for Feedback | Tools

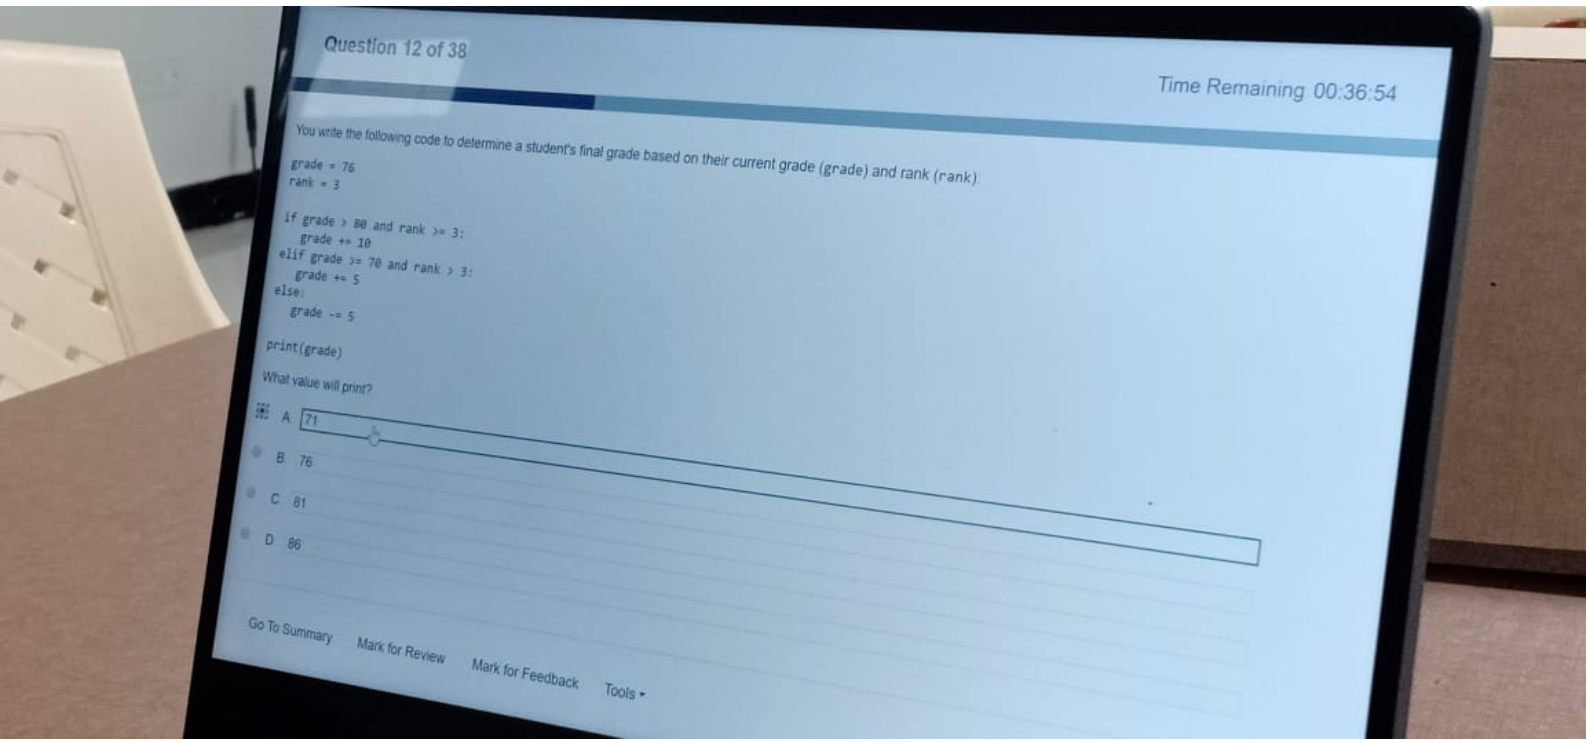
Back | Next


Question 2 of 38
Time Remaining 00:48:45
You are writing a program to randomly assign rooms (room_number) and team-building groups (group) for a company retreat.
Complete the code by selecting the correct code segment from each drop-down list.
Note: You will receive partial credit for each correct selection.
Answer Area
groupList=["Ropes","Rafting","Obstacle","Wellness"]
count=0
print("Welcome to CompanyPro's Team-Building Weekend!")
name=input("Please enter your name (q to quit)? ")
while name != 'q' and count < 50:
while room_number in roomsAssigned:
room_number=random.random(1,50)
print(f"{name}, your room number is {room_number}")
roomsAssigned.append(room_number)
group = random.choice(groupList)
print(f"You will meet with the {group} Group this afternoon.")
count+=1
name=input("Please enter your name (Q to quit)? ")
Go To Summary
Mark for Review
Mark for Feedback
Tools
Back
Next


You write the following function to read a data file and print each line of the file. Line numbers are included for reference only.
01 def read_file(file):
02 line = None
03 if os.path.isfile(file):
04 data = open(file,'r')
05 for line in data:
06 print(line)
When you run the program, you receive an error on line 03.
What is causing the error?
A. The isfile method does not exist in the path object.
B. The path method does not exist in the os object.
C. You need to import the os library.
D. The isfile method does not accept one parameter.
Go To Summary
Mark for Review
Mark for Feedback
Tools


Time Remaining 00:36:21
A company decides to give a bonus to all employees who make $150,000 or less per year. The following formula applies to each employee based on their base salary and a flat bonus:
New salary = current salary × 103% + a $500 bonus
You write code that reads the employee salaries into a variable named salary_list.
You need to complete the code that applies an increase to each eligible employee's salary.
Complete the code by selecting the correct code segment from each drop-down list.
Note: You will receive partial credit for each correct selection.
Answer Area
#Each salary in the list is updated based on increase. Employees making
#$150,000 or more will not get a raise.
#Salary list is populated from employee database, code not shown.
for index in range(len(salary_list)):
if salary_list[index] >= 150000:
continue
salary_list[index] = (salary_list[index] * 1.03) + 500
Go To Summary
Mark for Review
Mark for Feedback
Tools


Question 4 of 38
Time Remaining 00:46:43
You are creating a Python program that compares numbers.
You write the following code. Line numbers are included for reference only.
01 num1 = eval(input ("Please enter the first number: "))
02 num2 = eval(input ("Please enter the second number: "))
03 if num1 == num2:
04 print("The two numbers are equal.")
05 if num1 <= num2:
06 print("Number 1 is less than number 2.")
07 if num1 > num2:
08 print("Number 1 is greater than number 2.")
09 if num2 = num1:
10 print("The two numbers are the same.")
You need to ensure that the comparisons are accurate.
For each statement, select True or False.
Note: You will receive partial credit for each correct selection.
Answer Area
True
False
The print statement at line 04 will print only if the two numbers are equal in value.
The print statement at line 06 will print only if num1 is less than num2.
The print statement at line 08 will print only if num1 is greater than num2.
The statement at line 09 is an invalid comparison.
Go To Summary
Mark for Review
Mark for Feedback
Tools
Back
Next


Question 12 of 38
Time Remaining 00:36:54
You write the following code to determine a student's final grade based on their current grade (grade) and rank (rank):
grade = 76
rank = 3
if grade > 80 and rank >= 3:
grade += 10
elif grade >= 70 and rank > 3:
grade += 5
else:
grade -= 5
print(grade)
What value will print?
A 71
B 76
C 81
D 86
Go To Summary
Mark for Review
Mark for Feedback
Tools

Time Remaining 00:26:38

A bicycle company is creating a program that allows customers to log the number of miles biked. The program will send messages based on how many miles the customer logs.

You write the following Python code. Line numbers are included for reference only.

```
01
02      name = input("What is your name? ")
03      return name
04
05      calories = miles * calories_per_mile
06      return calories
07 distance = int(input("How many miles did you bike this week? "))
08 burn_rate = 50
09 biker = get_name()
10 calories_burned = calc_calories(distance, burn_rate)
11 print(biker, ", you burned about ", calories_burned, " calories.")
```

You need to define the two required functions.

Which two code segments should you use for line 01 and line 04? Each correct answer presents part of the solution. (Choose 2.)

- ☒ A. `01 def get_name():`
- ☐ B. `01 def get_name(biker):`
- ☐ C. `01 def get_name(name):`
- ☐ D. `04 def calc_calories():`
- ☐ E. `04 def calc_calories(miles, burn_rate);`
- ☒ F. `04 def calc_calories(miles, calories_per_mile):`

Go To Summary Mark for Review Mark for Feedback Tools

(9) WhatsApp | New Tab | web.whatsapp.com

mpany asks you to debug some code that is causing problems with their payroll. They ask you to he source of the payroll errors.

following variables have been declared:

```
employee_pay = [15000, 120000, 35000, 45000]
count = 0
sum = 0
```

re are two errors in the following code:

```
for index in range(0, len(employee_pay)-1)):
    count += 1
    sum += employee_pay[index]
average = sum//count
print("The total payroll is:", sum )
```

Which code should you use to fix the errors?

To answer, select the appropriate code segments in the answer area.

Note: You will receive partial credit for each correct selection.

Answer Area

```
for index in range (len(employee_pay)):
    count += 1
    sum += employee_pay[index]
average = sum/count
print("The total payroll is:", sum )
print("The average salary is:", average)
```

ENG IN 10:38 22-06-2022

(219) WhatsApp | New Tab | web.whatsapp.com

A company asks you to debug some code that is causing problems with their payroll. They ask you to find the source of the payroll errors.

The following variables have been declared:

```
employee_pay = [15000, 120000, 35000, 45000]
count = 0
sum = 0
```

There are two errors in the following code:

```
for index in range(0, len(employee_pay)-1)):
    count += 1
    sum += employee_pay[index]
average = sum//count
print("The total payroll is:", sum )
```

Which code should you use to fix the errors?

To answer, select the appropriate code segments in the answer area.

Note: You will receive partial credit for each correct selection.

Answer Area

```
for index in range    (len(employee_pay)):
    count += 1
    sum += employee_pay[index]
average =    sum/count
print("The total payroll is:", sum )
print("The average salary is:", average)
```

ENG IN 10:38 22-06-2022

```
rosspay(hours=40,rate=25,pieces=0,piecerate=0,salary=0):
vertime=0
f pieces > 0:
    return pieces * piecerate
if salary > 0:
    pass
if hours > 40:
    overtime = (hours-40) * (1.5 * rate)
    return overtime + (40 * rate)
else:
    return hours * rate
```

e: You will receive partial credit for each correct selection.

swer Area

	True	False
A function call of `grosspay()` will create a syntax error.	○	●
A function call of `grosspay(salary=50000)` will return nothing.	○	●
A function call of `grosspay(pieces=500, piecerate=4)` will return a result of 2000.	●	○

Back

Go To Summary | Mark for Review | Mark for Feedback | Tools

ENG IN 10:36 22-06-2022