

SSL Policy:

On the FMC navigate to **Objects > Objects Management > PKI > Internal Cas**, Click **Generate CA**, fill out the information, Click **Generate Self-signed CA**.

Overview Analysis Policies Devices **Objects** AMP Intelligence

Object Management Intrusion Rules

Generate CA Import CA

Generate Internal Certificate Authority

Name: FMC-Certificate

Country Name (two-letter code): SA

State or Province: Riyadh

Locality or City: Riyadh

Organization: BT

Organizational Unit (Department): IT

Common Name: fmc.local

Generate CSR Generate self-signed CA Cancel


Now click on FMC-Certificate it will open new window internal certificate authority.

Overview Analysis Policies Devices **Objects** AMP Intelligence


Object Management Intrusion Rules

Name	Value
FMC-Certificate	CN=IT, ORG=BT, OU=IT, C=SA

This is the self-sign certificate details subject, Issuer, validity and other information. When click on **Download** it will ask password, type any password and confirm the password and press **OK** to download the certificate.

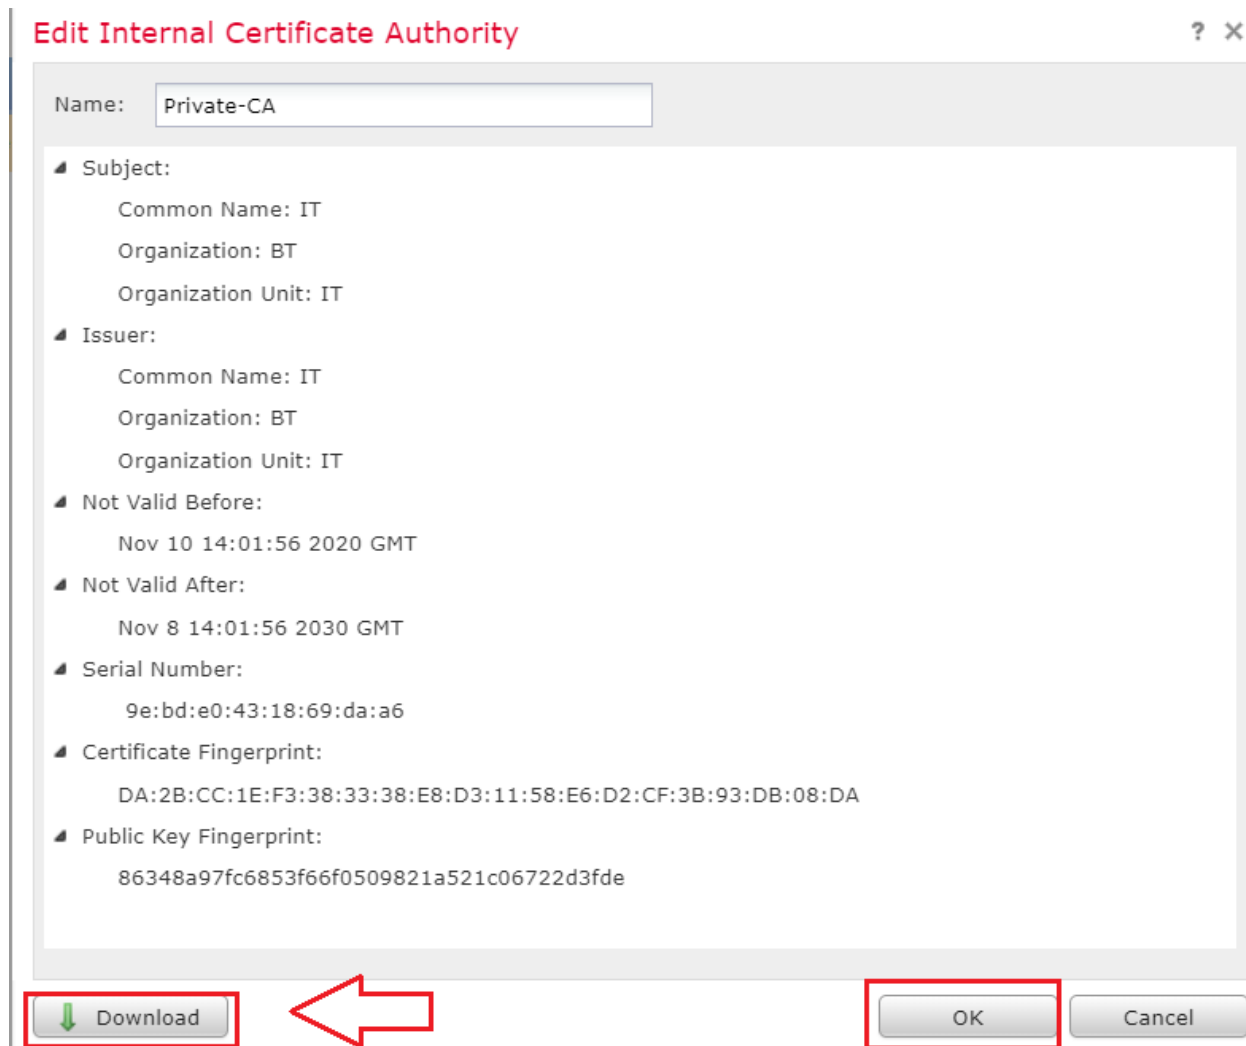

Encrypted download File type any password you like and confirm the password.

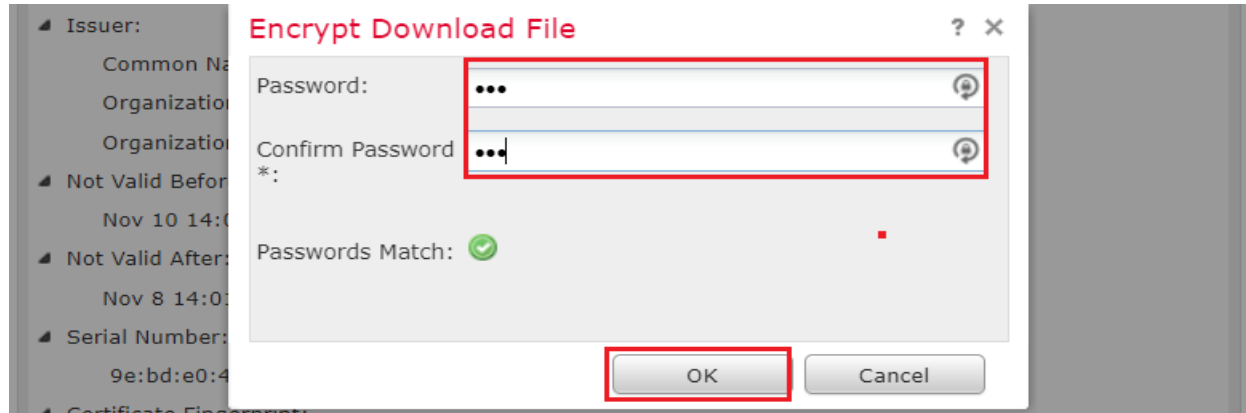

Navigate to **Policies > SSL** then click **New Policy**. Provide a name and select a Default Action. The SSL policy editor page appears. The SSL policy editor page works the same as the Access Control Policy editor page.

Overview Analysis **Policies** Devices Objects AMP Intelligence

Access Control > SSL Network Discovery Application Detectors Correlation Action

Compare Policies **New Policy**

SSL Policy

New SSL Policy ? x

Name: **My_SSL**

Description:

Default Action: ☒ Do not decrypt ☐ Block ☐ Block with reset

Save Cancel

On the SSL policy editor page, click **Add Rule**. In the Add Rule window, provide a name for the rule, and fill in all other relevant information. **Decrypt – Resign**: The sensor acts as a Man in the Middle (MitM) and accepts the connection with the user, then establishes a new connection to the server.

Editing Rule - SSL-Rule ? x

Name: **Decrypt-Rule** ☒ Enabled Move: into Category Standard Rules

Action: Decrypt - Resign with Private-CA ☐ Replace Key Only

Zones Networks VLAN Tags Users Applications Ports Category Certificate DN Cert Status Cipher Suite Version Logging

Available Zones

Inside Outside

Add to Source Add to Destination

Source Zones (1) Destination Zones (1)

Inside Outside

Save Cancel

Enable **logging** to see connection events for the SSL traffic. **Save** the policy.

Editing Rule - SSL-Rule

Name: Decrypt-Rule ☒ Enabled Move: into Category Standard Rules

Action: Decrypt - Resign with Private-CA ☐ Replace Key Only

Zones Networks VLAN Tags Users Applications Ports Category Certificate DN Cert Status Cipher Suite Version **Logging**

☒ Log at End of Connection

Send Connection Events to:

☒ Event Viewer

☐ Syslog Select a Syslog Alert Configuration...

☐ SNMP Trap Select an SNMP Alert Configuration...

Save Cancel

Ensure the default action is **Do not decrypt**

Overview Analysis **Policies** Devices Objects AMP Intelligence

Access Control ▶ SSL Network Discovery Application Detectors Correlation Actions

My_SSL

Enter Description

Rules Trusted CA Certificates Undecryptable Actions

#..	Name	Source Zones	Dest Zones	Source Netwo...	Dest Networks
-----	------	--------------	------------	-----------------	---------------

Administrator Rules

This category is empty

Standard Rules

1	SSL-Rule	Inside (Router)	Outside (Router)	LAN	Decrypt - Resign
---	----------	-----------------	------------------	-----	------------------

Root Rules

This category is empty

Default Action **Do not decrypt**

Navigate to **Policies > Access Control**. Edit your policy or create a new Access Control Policy. Click **Advanced** and edit the General Settings. From the drop-down menu select your SSL Policy. Click **OK** to save.

The screenshot shows the FortiGate web interface. The top navigation bar includes 'Overview', 'Analysis', 'Policies', 'Devices', 'Objects', 'AMP', and 'Intelligence'. The 'Policies' tab is selected, and the 'Access Control' sub-tab is active. The main content area shows the 'Block-All' policy configuration. The 'Prefilter Policy' is set to 'Default Prefilter Policy' and the 'SSL Policy' is set to 'My_SSL'. The 'Advanced' sub-tab is selected. A modal dialog titled 'General Settings' is open, showing 'My_SSL' selected for 'SSL Policy to use for inspecting encrypted connections'. The 'OK' button is highlighted. Below the dialog, the 'SSL Policy Settings' section shows 'My_SSL' selected for the same purpose.


Save all the setting now time to Deploy the changes to FTD device.

The screenshot shows the 'Deploy Policies' dialog in the FortiGate web interface. The 'Deploy' button is highlighted. The dialog shows a table with columns: Device, Inspect Interruption, Type, Group, and Current Version. The first row shows 'FTD' selected, with 'No' for 'Inspect Interruption', 'FTD' for 'Type', and '2020-11-10 08:27 PM' for 'Current Version'. The 'Deploy' button is highlighted.


Device	Inspect Interruption	Type	Group	Current Version
☒ FTD	No	FTD		2020-11-10 08:27 PM

Install Certificate in Client PC:


Double click on certificate it will start new Certificate installation wizard, click next to continue.

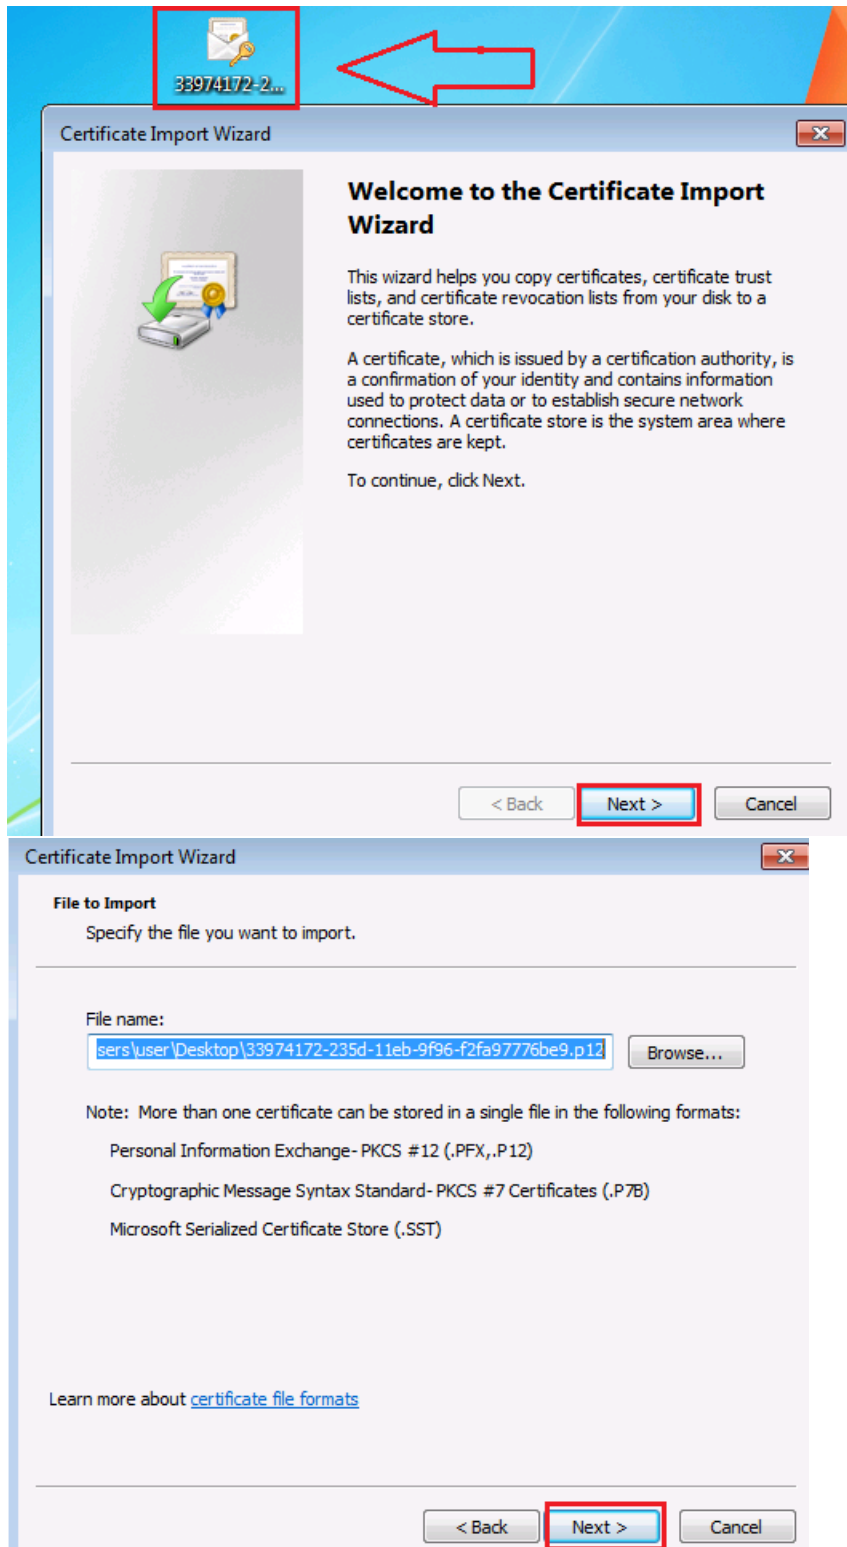


Type the password previously set on certificate in our case it was 123.

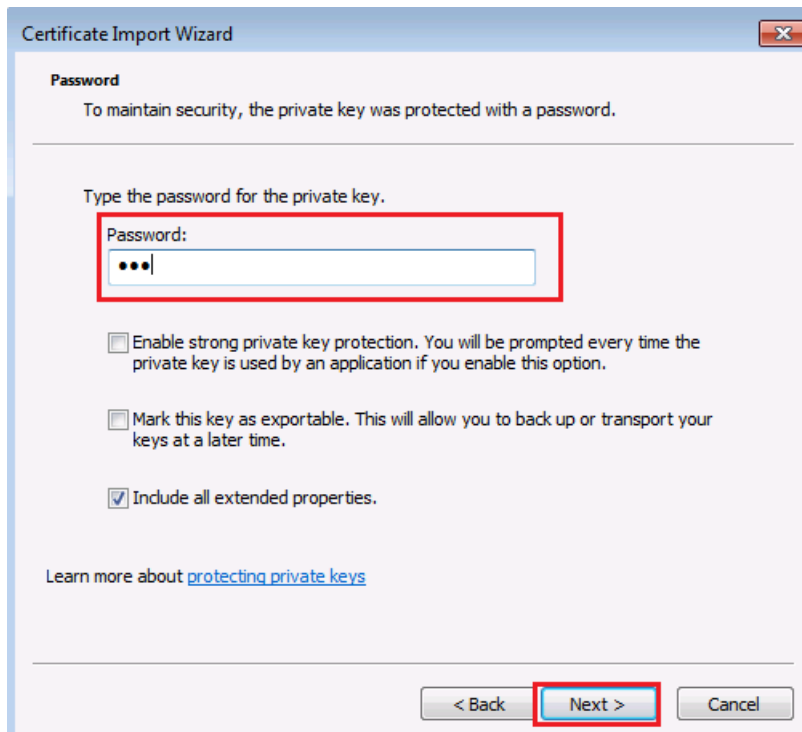


Select Place all certificate in the following store and choose Personal click Next.

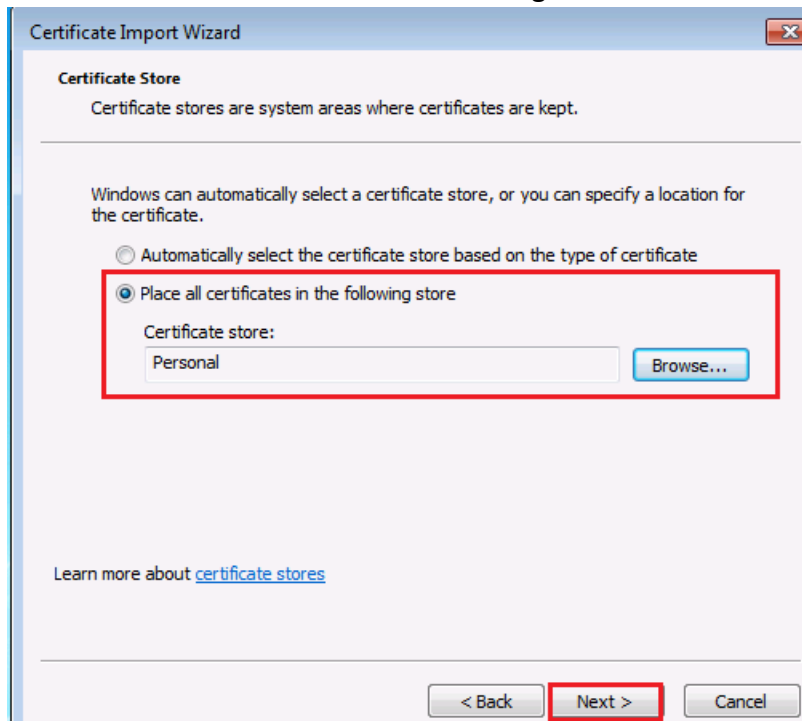



Just click Finish button to end Certificate installation.


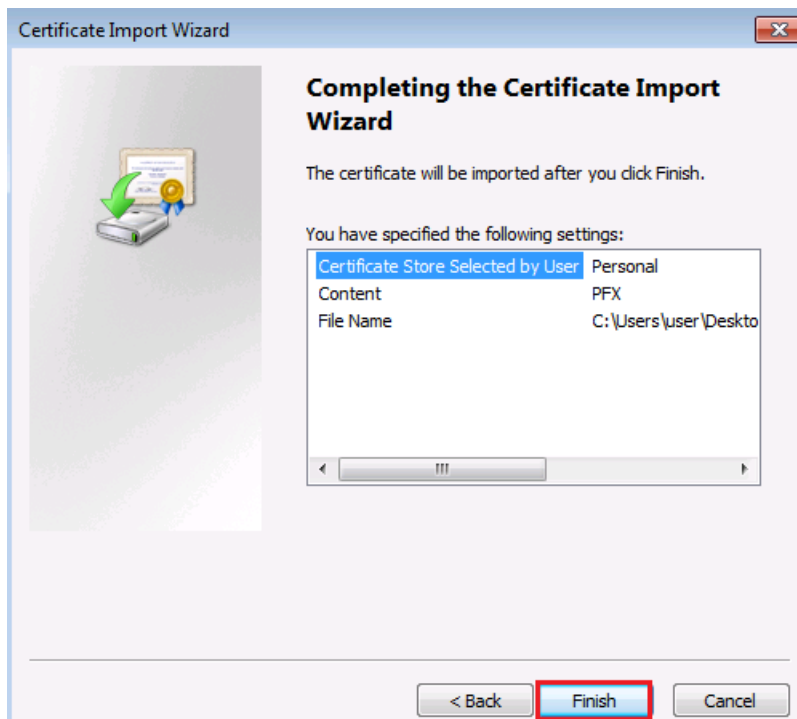


Enter **Start > Run>MMC.exe**. Click **File > Add/Remove Snap-in** . In the Add or Remove Snap-ins window, select **Certificates** and click **Add**. Select the Computer account radio button when prompted and click Next. Select Local computer (selected by default) and click **Finish**.

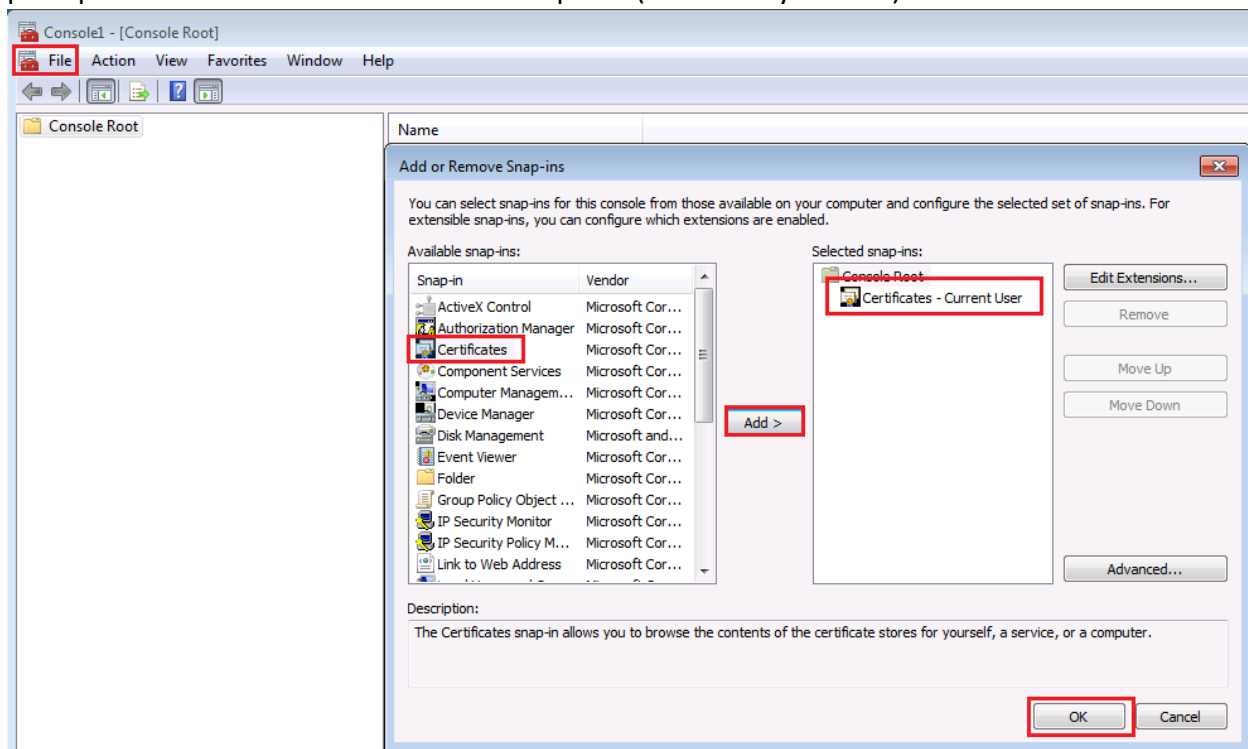


Go to **Certificates -Current User > Personal > Certificates** and Double Click on certificate to open, go to **Details** tab and click on **Copy to File** to start the wizard.

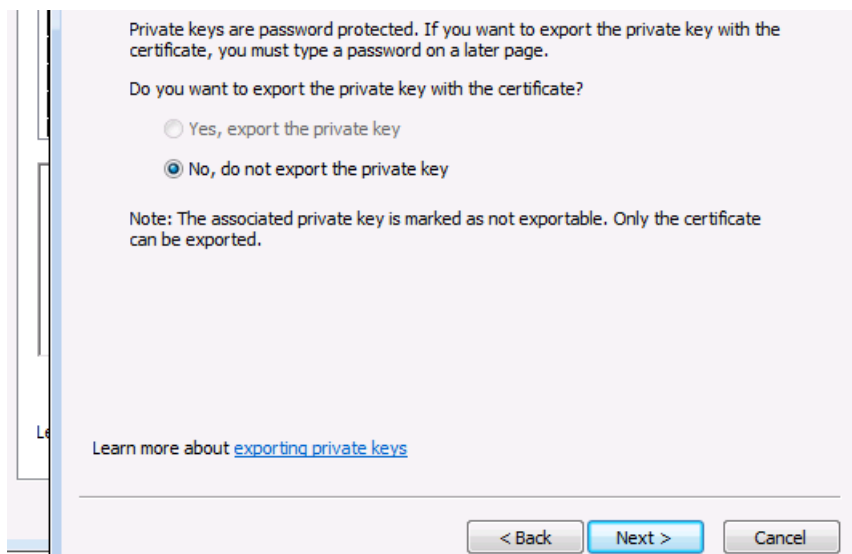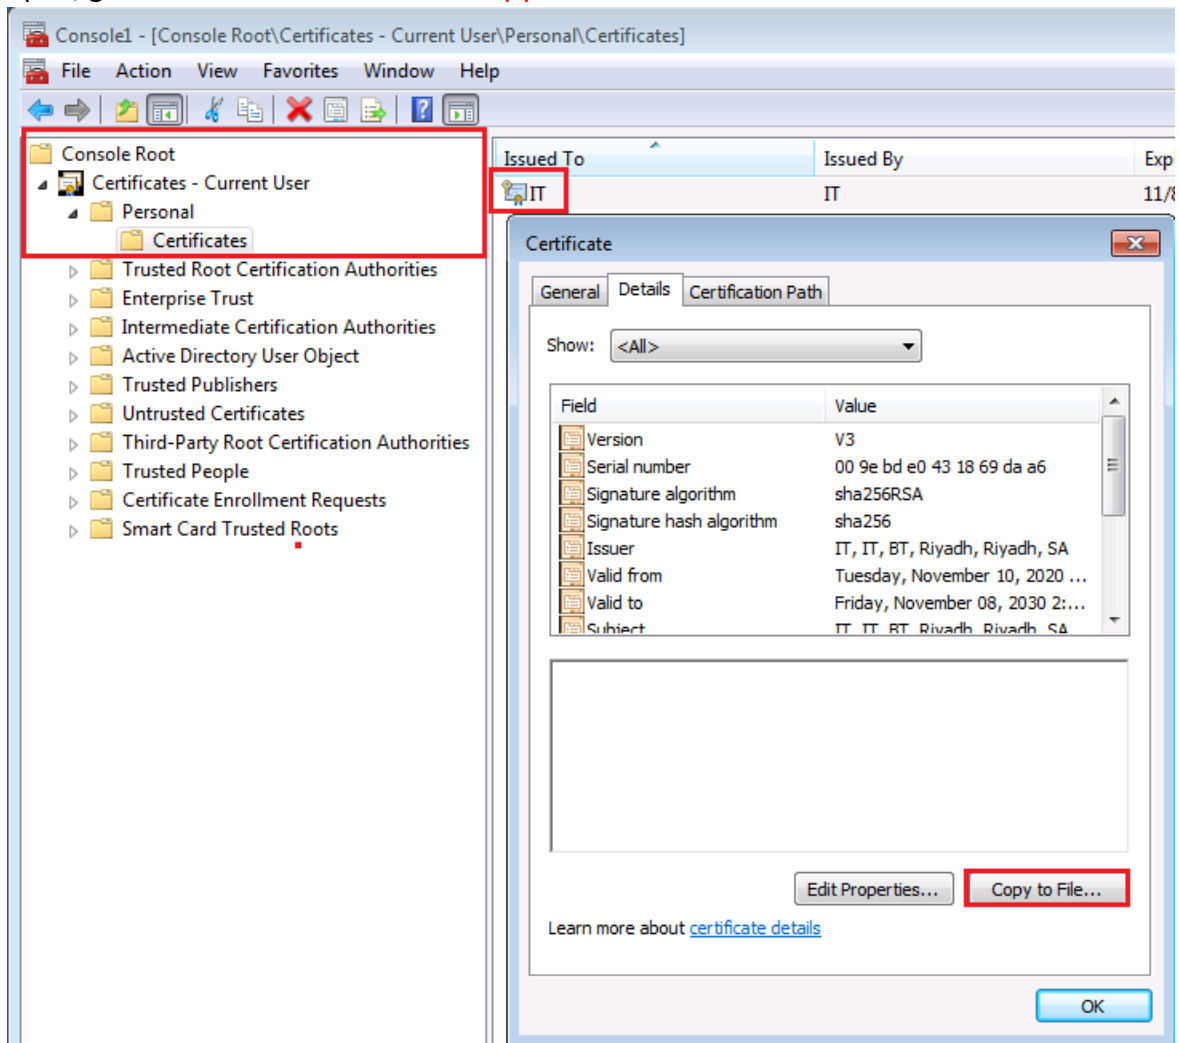


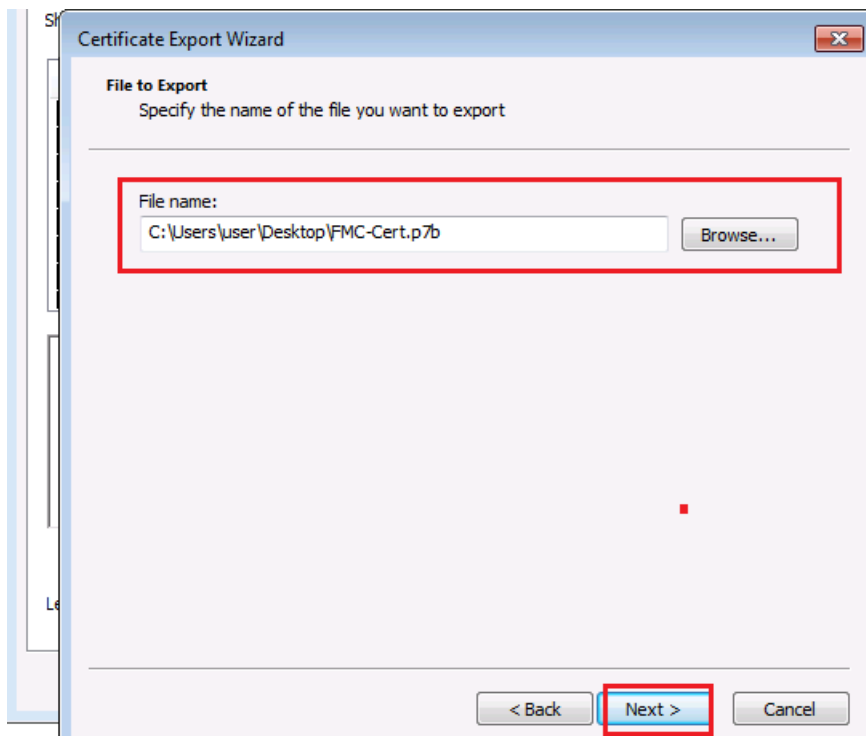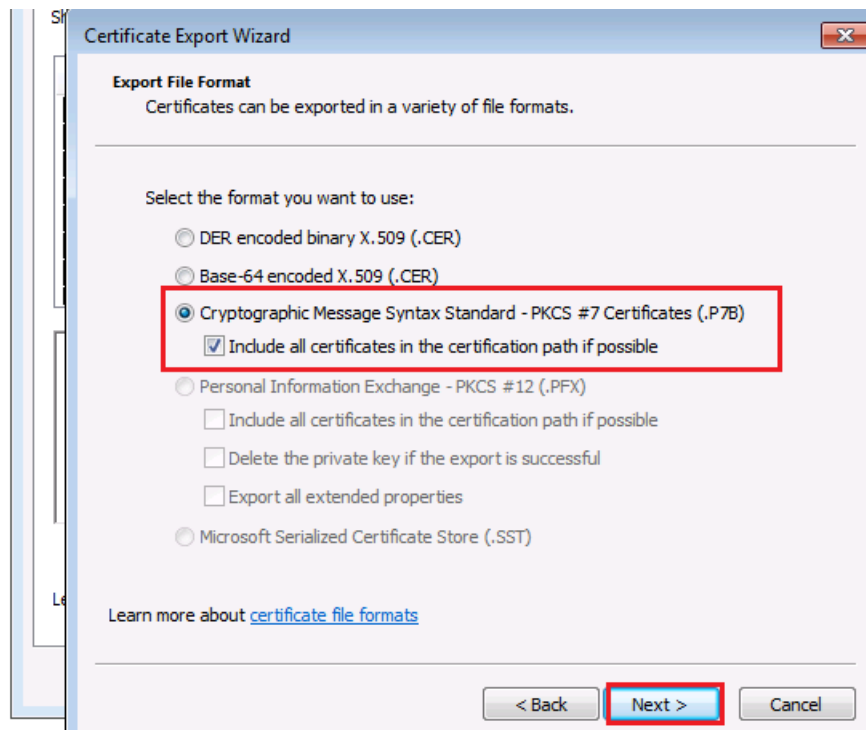


On the web browser (Mozilla Firefox) by going to **Tools > Options**. Go to **Privacy & Security > Certificates > View Certificates**.

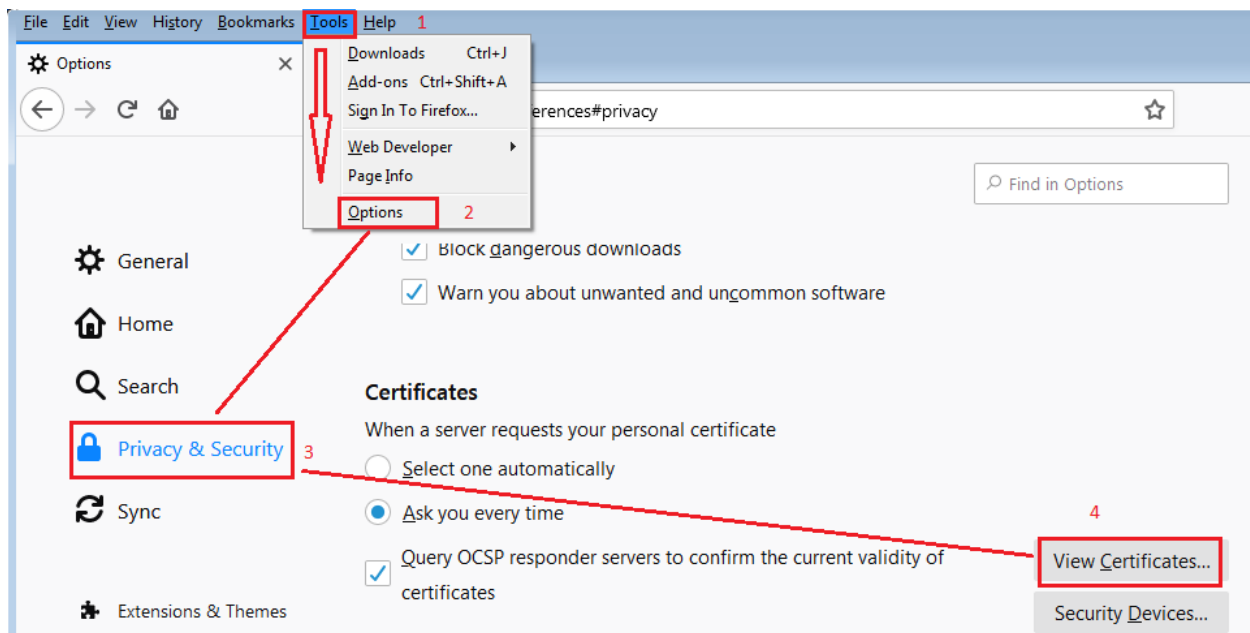

Under **Authorities** > click **Import**.

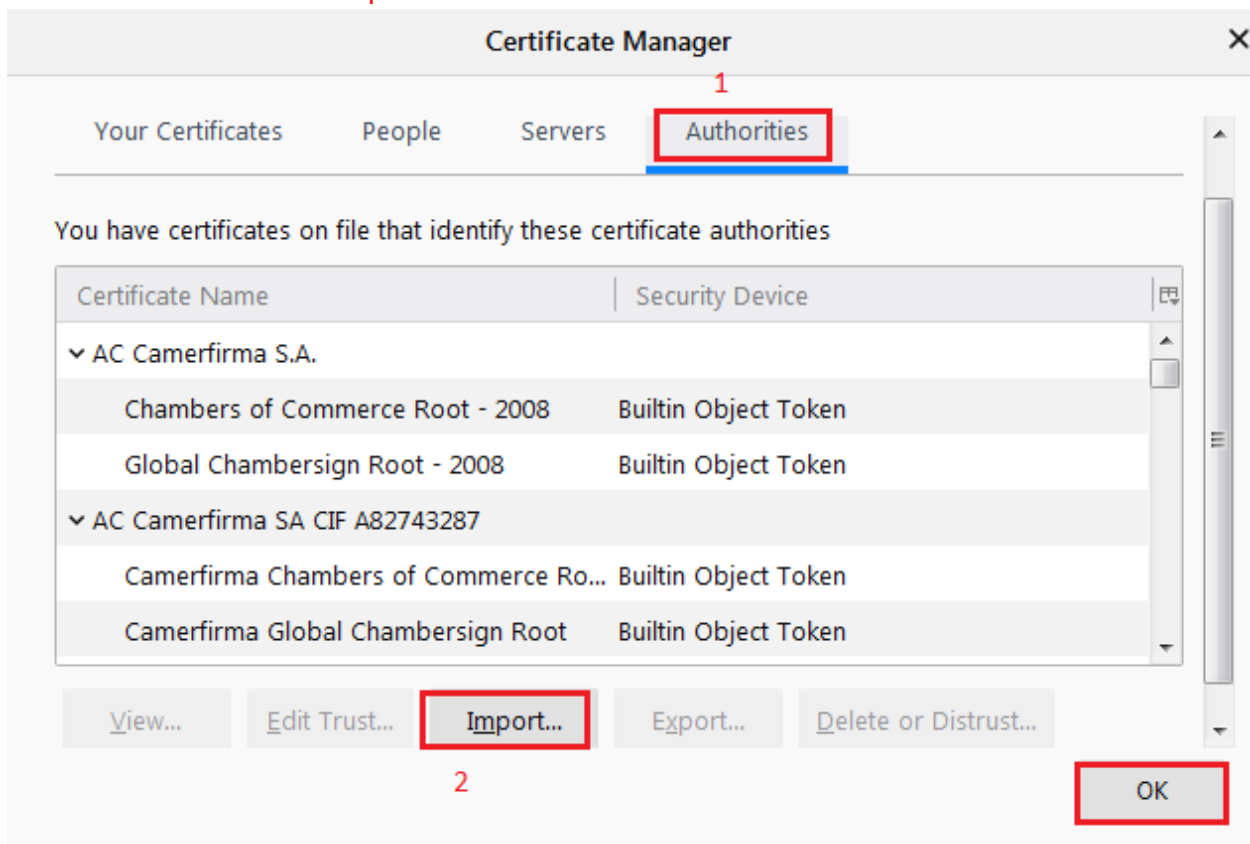

Check Trust this CA to identify websites & Trust this CA to identify email users and Click OK.

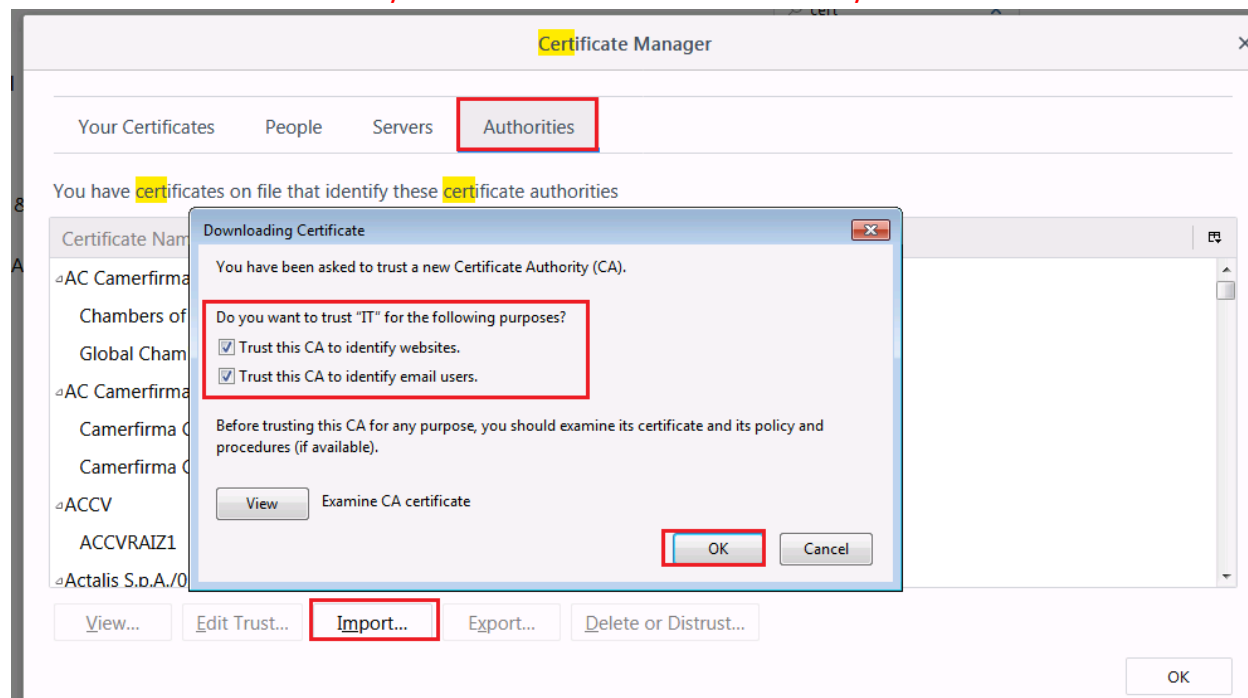

Verification

In the Management Center go to **Analysis > Connections > Events**.

Ingress Security Zone	Egress Security Zone	Source Port / ICMP Type	Destination Port / ICMP Code	SSL Status	Application Protocol	Client
Inside	Outside	51461 / tcp	443 (https) / tcp	Decrypt (Resign)	HTTPS	Secure Web browser
Inside	Outside	51460 / tcp	443 (https) / tcp	Decrypt (Resign)	HTTP	Firefox
Inside	Outside	51455 / tcp	443 (https) / tcp	Decrypt (Resign)	HTTPS	Secure Web browser
Inside	Outside	51455 / tcp	443 (https) / tcp	Decrypt (Resign)	HTTPS	Secure Web browser
Inside	Outside	51454 / tcp	443 (https) / tcp	Decrypt (Resign)	HTTP	Web browser
Inside	Outside	51453 / tcp	443 (https) / tcp	Decrypt (Resign)	HTTP	Web browser
Inside	Outside	51452 / tcp	443 (https) / tcp	Decrypt (Resign)	HTTP	Firefox
Inside	Outside	51451 / tcp	443 (https) / tcp	Decrypt (Resign)	HTTPS	Secure Web browser
Inside	Outside	51450 / tcp	443 (https) / tcp	Decrypt (Resign)	HTTPS	Secure Web browser
Inside	Outside	51450 / tcp	443 (https) / tcp	Decrypt (Resign)	HTTPS	Secure Web browser
Inside	Outside	51448 / tcp	443 (https) / tcp	Decrypt (Resign)	HTTP	Firefox
Inside	Outside	51448 / tcp	443 (https) / tcp	Decrypt (Resign)	HTTP	Web browser
Inside	Outside	51446 / tcp	443 (https) / tcp	Decrypt (Resign)	HTTP	Firefox
Inside	Outside	51445 / tcp	443 (https) / tcp	Decrypt (Resign)	HTTPS	Secure Web browser
Inside	Outside	51443 / tcp	443 (https) / tcp	Decrypt (Resign)	HTTP	Firefox