

Health Checks in FortiADC:

Health checks in FortiADC are used to monitor the status of backend servers to ensure they are available and functioning correctly. By performing these checks, FortiADC ensures that traffic is only directed to servers that are operational and responsive.

Purpose:

Health checks poll backend servers to test if an application is available. If a server fails a health check, it is deemed unavailable, and the ADC will stop sending traffic to it until it is back online.


Types of Health Checks:

FortiADC offers various methods to perform health checks on backend servers, ensuring their availability and reliability. One of the simplest approaches is to use ICMP or TCP echo requests. In this method, FortiADC sends an ICMP ping or a TCP echo request to the target server and waits for a corresponding reply. This basic check helps verify whether the server is reachable and responsive at the network level. [ICMP](#), [TCP Echo](#), [TCP](#), [HTTP](#), [HTTPS](#), [DNS](#), [RADIUS](#), [SMTP](#), [POP3](#), [IMAP4](#), [RADIUS Accounting](#), [FTP](#), [TCP Half Open Connection](#), [TCP SSL](#), [SNMP](#), [SSH](#), [L2 Detection](#), [UDP](#), [SIP](#), [SIP TCP](#), [SNMP Custom](#), [RTSP](#), [MySQL](#), [Diameter](#), [Script](#), [Oracle](#), [LDAP](#), [MSSQL](#) and [LDAPS](#).

HTTP/HTTPS	Sends a HEAD request to the server and expects a 200 OK response. Verifies health of web services running on server.
ICMP	Pings the server to check its availability.
TCP Echo	Sends a TCP echo to the server and expects a response.
TCP	Confirms that TCP three-way handshake can be completed to a specific TCP port.
DNS	Sends a DNS A record request and expects a specific IP address as response.
RADIUS/SMTP/POP3/IMAP4	Logs in to the server using the specified protocol.
TCP Half Open	Sends a SYN and waits for a SYN/ACK. When it's received RST is sent.
Custom Protocols	Supports various custom protocols like FTP, SNMP, etc

Predefined Configurations:

FortiADC includes predefined health check configurations to simplify the process of monitoring common server types and services. These ready-made configurations can be quickly cloned and customized to meet the specific needs of your environment, saving time while ensuring accurate server health assessments these are [HTTP](#), [HTTPS](#), [ICMP](#) and [TCP_ECHO](#).

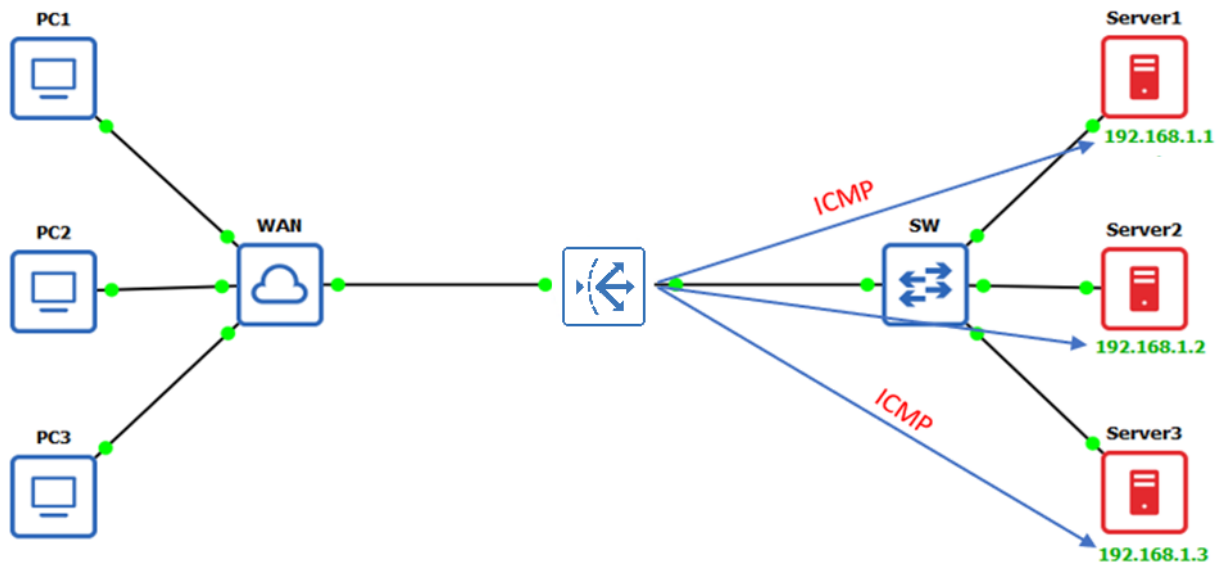

Monitoring Health Check Status:

FortiADC allows you to monitor the real-time health of servers directly from the graphical user interface (GUI) on your desktop. This feature provides instant visibility into the status of your backend servers.

Health Check

Health Check Monitor

Health Check Script

IP Address

192.168.1.1

Example: 192.0.2.1

Health Check

LB_HLTHCK_ICMP

Direct Route Mode

☐

Count

1

Default: 1 Range: 1-1000

Interval

5

Range: 1-3600(s)

Timeout

3

Range: 1-3600(s)

▶Start

✓ All health checks are completed.

Monitor Information

1 checks completed. 1 checks succeeded. Success rate: 100.0%. min/avg/max = 1.1/1.1/1.1

ID	Information	Destination	Date
1	UP	192.168.1.1	2024-12-14 19:24:31