


Content Routing and Rewrite in FortiADC:

FortiADC uses Layer 7 content routing to make smarter load-balancing decisions based on application data. It can also rewrite HTTP headers by modifying the Host field, URL, or Referrer field, ensuring smooth traffic management and better integration with backend servers.

Layer 7 Content Routing:

Content Routing in **Fortinet's FortiADC** (Application Delivery Controller) allows administrators to direct traffic based on various conditions, optimizing performance, security, and user experience. FortiADC provides **Layer 7 content switching** to route requests to different backend servers based on HTTP headers, URLs, source IPs, cookies, or other factors.

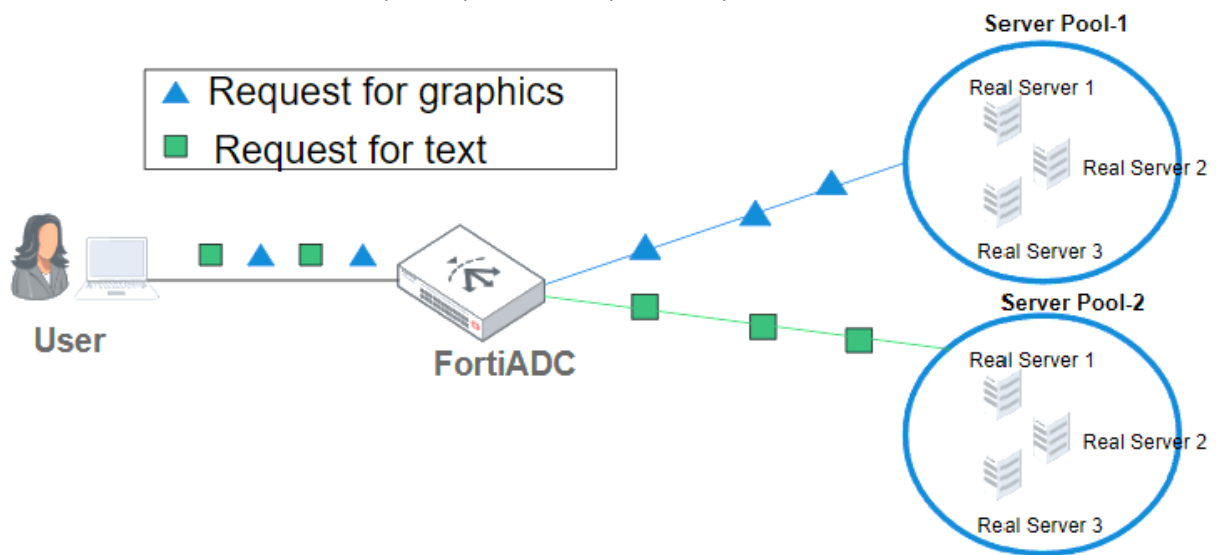

Layer 7 Content Rewrite:

Layer 7 content rewriting in **Fortinet FortiADC** allows modifying **HTTP headers, URLs, and response content** dynamically before forwarding requests or responses. This is useful for security, optimization, and seamless integration between applications.

For example, a client connecting to <https://webmail.example.com> could be redirected to <https://webmail.example.com/owa>

