



Content Rewriting Lab:

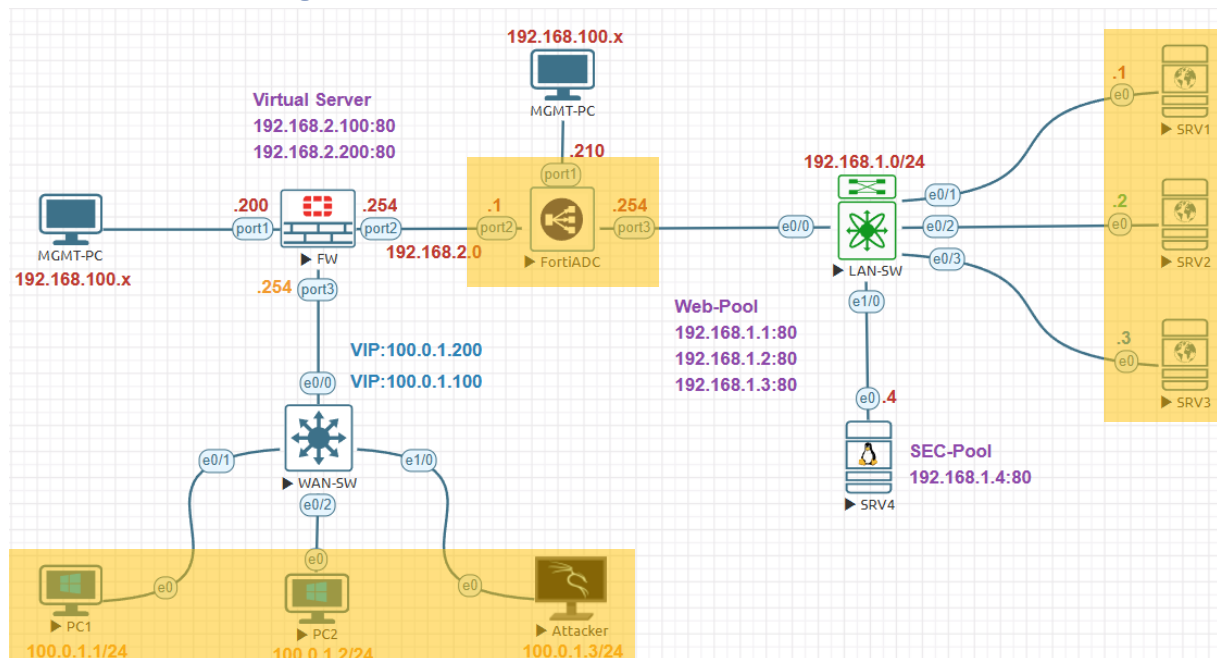

Management Subnet	192.168.100.0/24
FortiGate Management IP	192.168.100.200
FortiADC Management IP	192.168.100.210
Internal Servers Subnet	192.168.1.0/24
FortiADC External Subnet	192.168.2.0/24
FortiGate Firewall External	100.0.1.0/24
FortiADC Internal IP Address	192.168.1.254
FortiADC External IP Address	192.168.2.1
FortiGate Firewall Internal IP	192.168.2.254
FortiGate Firewall External IP	100.0.1.254
SRV1 IP Address	192.168.1.1
SRV2 IP Address	192.168.1.2
SRV3 IP Address	192.168.1.3
SRV3 IP Address	192.168.1.4
Virtual Sever-1	192.168.2.100
Virtual Sever-2	192.168.2.200
FortiGate VIP-1	100.0.1.100
FortiGate VIP-2	100.0.1.200
External PC1 IP Address	100.0.1.1
External PC2 IP Address	100.0.1.2
External PC3 IP Address	100.0.1.3

Disable Content Routing:


Click **Server Load Balance > Virtual Server > Virtual Server**. Click the **edit** icon or double click to edit **WEB_VS** and disable Content Routing. Click **Save**.

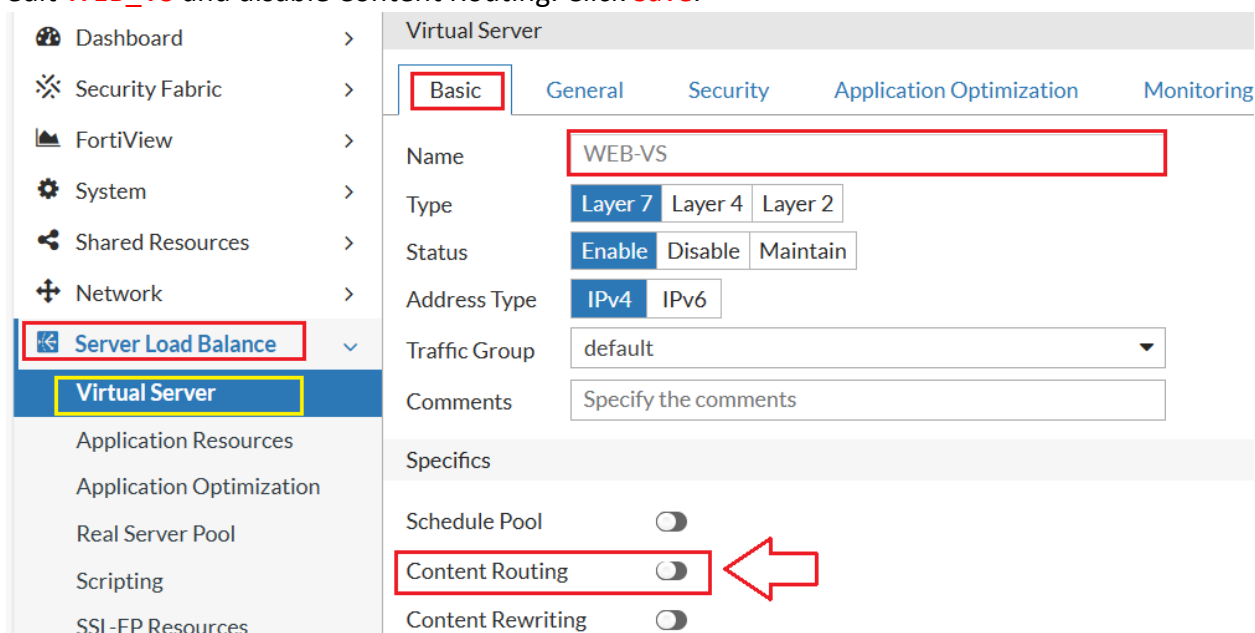

Testing:


On the Kali Linux External, open a browser, and then connect to the following URL:

<http://100.0.1.100/rs.html>

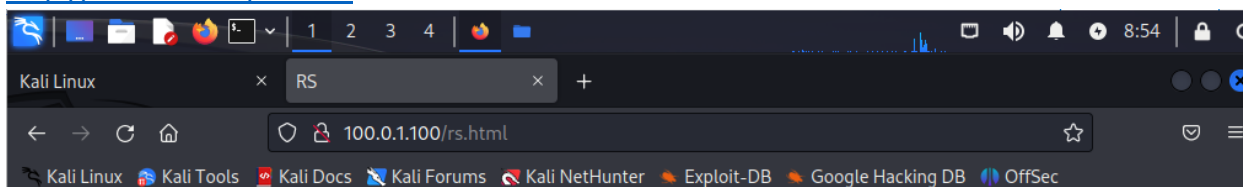

This Test Resources which is only available in SRV3.

Press **Ctrl+Shift+R** to refresh the browser page several times. Approximately two out of three connection attempts will fail. They fail each time the device routes traffic to SRV1 and SRV2 because the resources folder is located on SRV3 only.

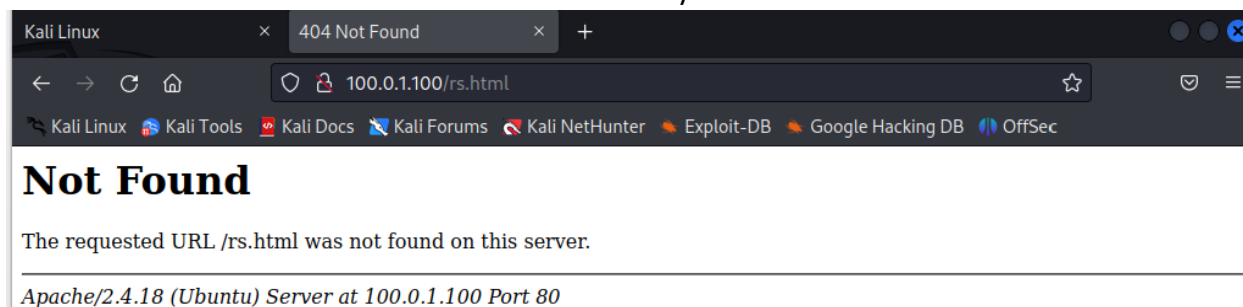

Create Content Rewriting:

Click **Server Load Balance > Virtual Server > Content Rewriting**. Click **Create New** to create a new route using the following settings:

The screenshot shows the FortiGate web interface. On the left is a navigation menu with items: Dashboard, Security Fabric, FortiView, System, Shared Resources, Network, **Server Load Balance** (highlighted with a red box), and **Virtual Server** (highlighted with a yellow box). The main content area has three tabs: **Virtual Server**, **Content Rewriting** (highlighted with a red box), and **Content Routing**. Below the tabs are buttons: **Delete**, **+ Create New** (highlighted with a red box), and **+ Add Filter**. A table header shows 'Name' and 'Action Type'. Below the table, it says 'Showing 0 to 0 of 0 entries 0 rows selected Show 25 entries'.

Name: CR-Redirect

Action Type: Request

Action: Redirect

Redirect: <http://100.0.1.100/index.html>

Click **Save**

The screenshot shows the 'Content Rewriting' configuration page. The left navigation menu is the same as the previous screenshot, with 'Server Load Balance' and 'Virtual Server' highlighted. The main content area has a title 'Content Rewriting'. Below the title are fields for 'Name' (CR-Redirect), 'Action Type' (Request/Response), and 'Action' (Redirect). Below these is a 'Specifics' section with a 'Redirect' field containing 'http://100.0.1.100/index.html'. At the bottom is a 'Comments' section with a text area labeled 'Specify the comments.'.

Scroll down to the **Match Condition** pane, and then click **Create New** to create a new rule using the following settings:

Match Condition (Empty Match Condition will match anything)

Delete
+ Create New
+ Add Filter

ID	Object	Type	Content
No data available in table			

Showing 0 to 0 of 0 entries 0 rows selected Show entries

Save
Cancel

Object: HTTP Request URL

Type: String

Content: rs.html

Content Rewriting

Match Condition (Empty Match Condition will match anything)

Name
Action Type
Action
Specifics
Redirect
Comments

Object: HTTP Request URL
Type: String Regular Expression
Content: rs.html
Negative: ☐
Ignore Case: ☒

Save
Cancel

Click **Save**, and then click **Save** again.

Dashboard
Security Fabric
FortiView
System
Shared Resources
Network
Server Load Balance
Virtual Server

Virtual Server
Content Rewriting
Content Routing
NAT Source Pool


Delete
+ Create New
+ Add Filter

Name	Action Type	Action
CR-Redirect	Request	Redirect

Showing 1 to 1 of 1 entries 0 rows selected Show entries

Enable Content Rewriting:


Click **Server Load Balance > Virtual Server > Virtual Server**. Click the **edit** icon or double click to edit **WEB-VS**.

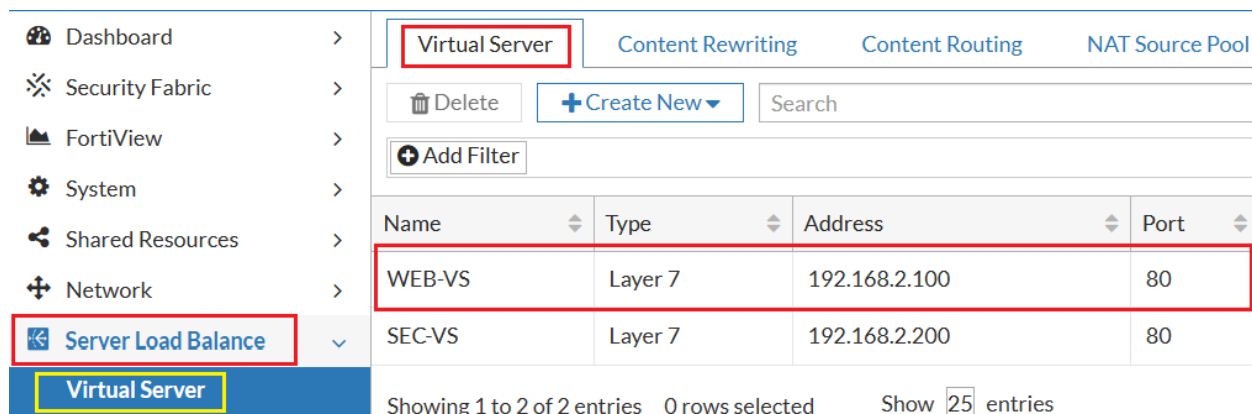

Name	Type	Address	Port
WEB-VS	Layer 7	192.168.2.100	80
SEC-VS	Layer 7	192.168.2.200	80

Showing 1 to 2 of 2 entries 0 rows selected Show 25 entries

In the **Specifics** pane, enable **Content Rewriting**. In the **Available Items** list, double-click **CR-Redirect** to add it to the **Selected Items** list.

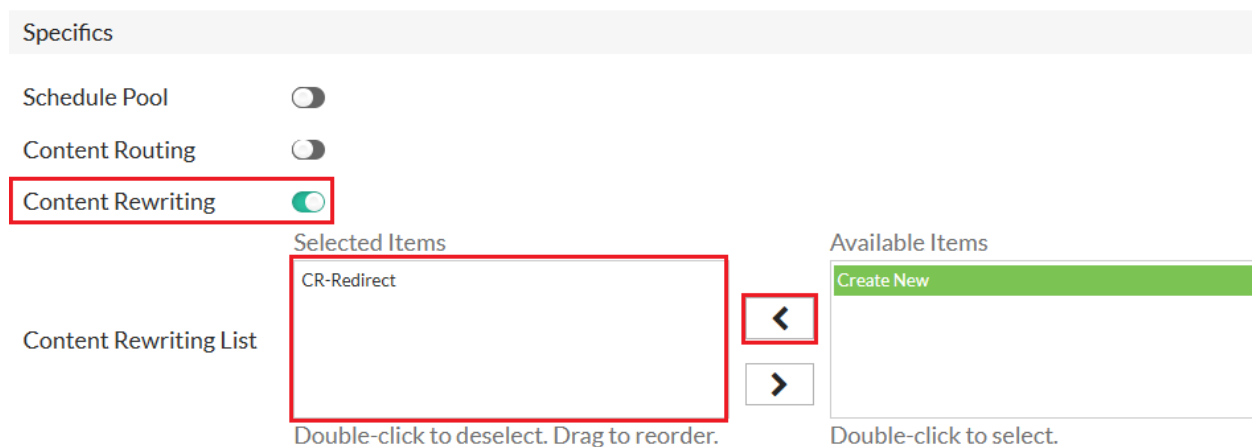

Specifics

Schedule Pool ☐

Content Routing ☐


Content Rewriting ☒

Content Rewriting List

Selected Items	Available Items
CR-Redirect	Create New

Double-click to deselect. Drag to reorder. Double-click to select.

If necessary, you can drag and drop the content Rewriting to reorder them. Click **Save**.

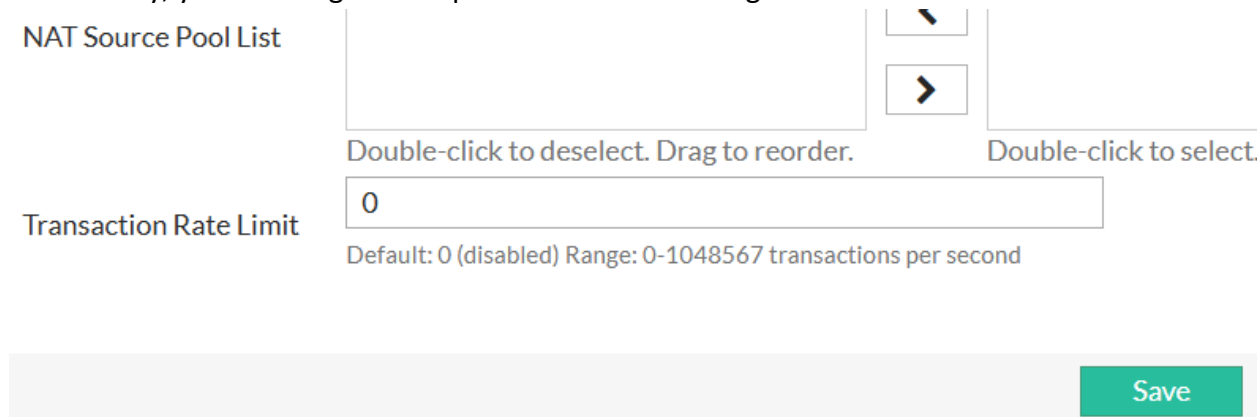

NAT Source Pool List

Double-click to deselect. Drag to reorder. Double-click to select.

Transaction Rate Limit

0

Default: 0 (disabled) Range: 0-1048567 transactions per second

Save