


DoS Protection:

DoS attack attempts to make network devices unreachable by disrupting services. It attempts to disrupt network services by overloading network with unwanted traffic.

FortiADC mitigates DoS attacks by linking a DoS protection profile to the virtual server. This profile includes application-level defenses like HTTP access restrictions and network-level safeguards such as TCP connection flood protection.

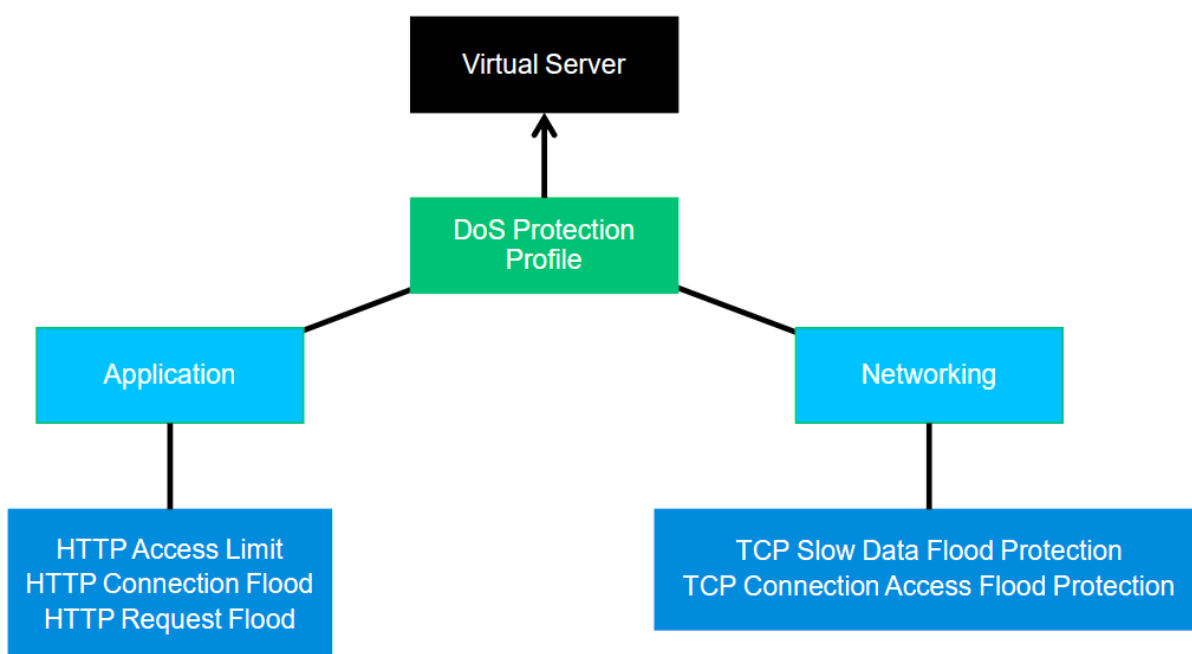

HTTP Access Limit:

The HTTP Access Limit policy is designed to regulate the rate of HTTP requests coming from a single source IP address. This helps prevent excessive requests that could lead to server overload, abuse, or potential security threats such as DoS (Denial of Service) attacks.

HTTP Connection Flood:

In FortiADC, the HTTP Connection Flood policy helps mitigate excessive concurrent connections by tracking client sessions using cookies. This prevents HTTP flood attacks that could degrade server performance.

HTTP Request Flood:

The HTTP Request Flood policy in FortiADC helps mitigate excessive HTTP requests by tracking clients using cookies. This prevents HTTP flood attacks, where an attacker sends a massive number of requests to overwhelm the web server.

TCP SYN Flood:

A TCP SYN flood attack is a type of DoS (Denial of Service) attack. Normally, when a device connects to a server, they go through a three-step process called the TCP handshake.

In this attack, the attacker sends a lot of SYN packets the first step of this process to a server, but never completes the connection. The server keeps waiting for the next step, using up its resources. This causes the server to become overwhelmed and unable to accept real connection requests from legitimate users.

TCP Slow Data Flood:

The TCP Slow Data Flood is a type of attack where the attacker sends legitimate application-layer requests but reads the responses very slowly, consuming resources on the application server and potentially exhausting the server's capacity. This attack type is designed to disrupt the server's performance without triggering traditional rate-limiting defenses.

TCP Connection Access Flood:

The TCP Connection Access Flood policy in FortiADC helps mitigate attacks where a large number of TCP connection requests are made from a specific IP address. This policy limits the number of simultaneous or new connections that can be established from a single IP, preventing abuse and protecting the server from overload.

IP fragmentation:

An IP fragmentation DDoS attack works by sending large data packets that are broken into smaller pieces. These pieces overwhelm the router or firewall because it has to store them in memory until they can be put back together. If the router or firewall can't handle all the fragments, it can run out of memory, which can make the system crash or become very slow, causing a denial of service.

FortiADC helps stop these types of attacks by controlling how the fragments are put back together. When the system runs low on memory, it will stop reassembling the fragments. Once there is enough memory available again, it will resume the process, preventing the attack from causing any problems.

