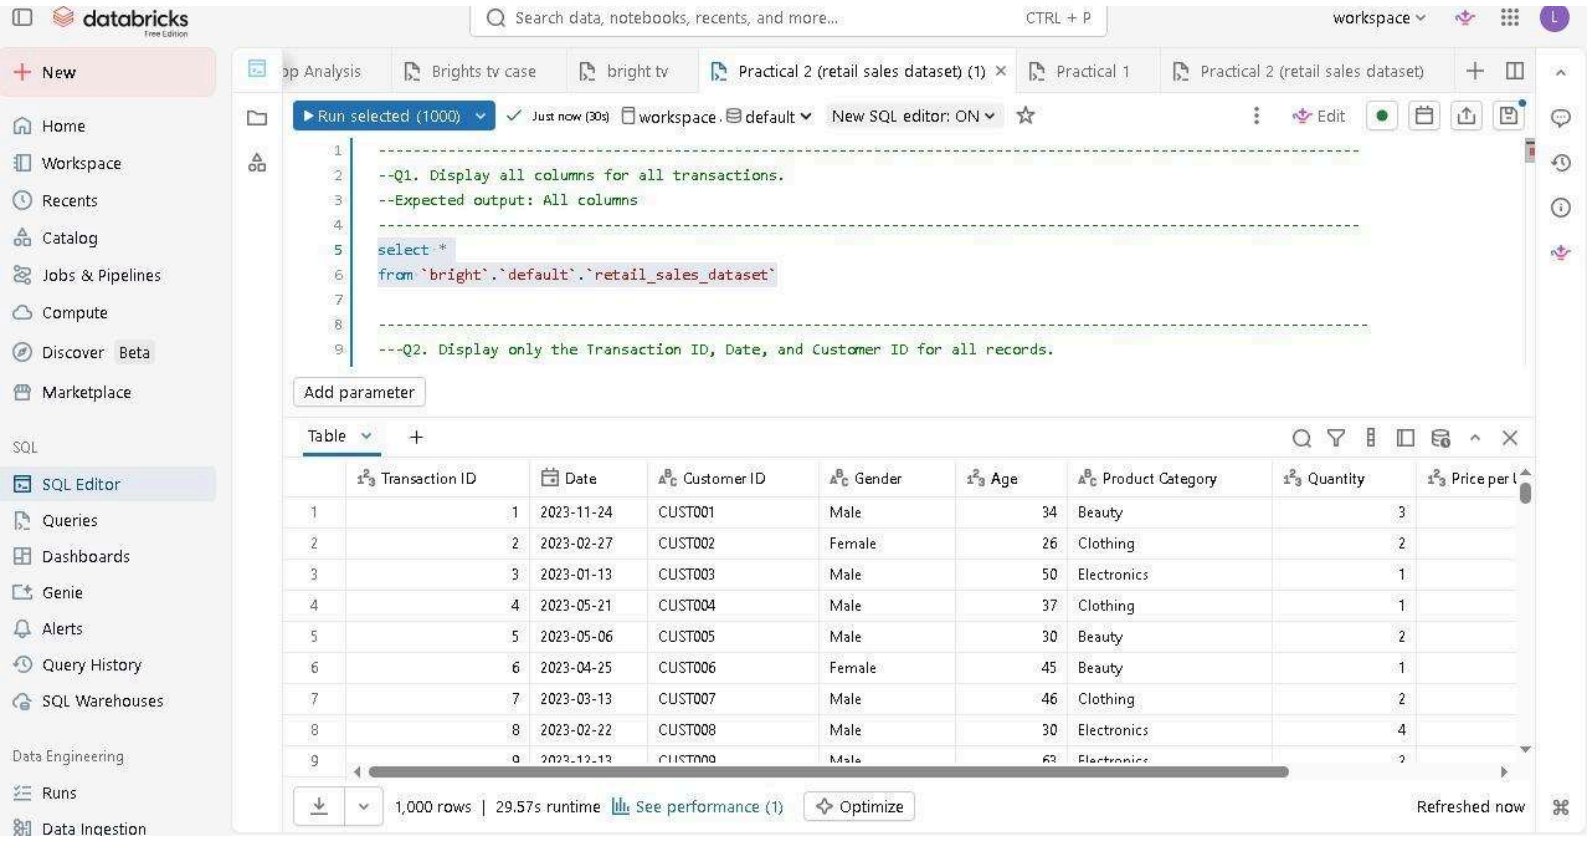

	Transaction ID	Date	Customer ID	Gender	Age	Product Category	Quantity	Price per U
1	1	2023-11-24	CUST001	Male	34	Beauty	3	
2	2	2023-02-27	CUST002	Female	26	Clothing	2	
3	3	2023-01-13	CUST003	Male	50	Electronics	1	
4	4	2023-05-21	CUST004	Male	37	Clothing	1	
5	5	2023-05-06	CUST005	Male	30	Beauty	2	
6	6	2023-04-25	CUST006	Female	45	Beauty	1	
7	7	2023-03-13	CUST007	Male	46	Clothing	2	
8	8	2023-02-22	CUST008	Male	30	Electronics	4	
9	9	2023-12-13	CUST009	Male	63	Electronics	2	

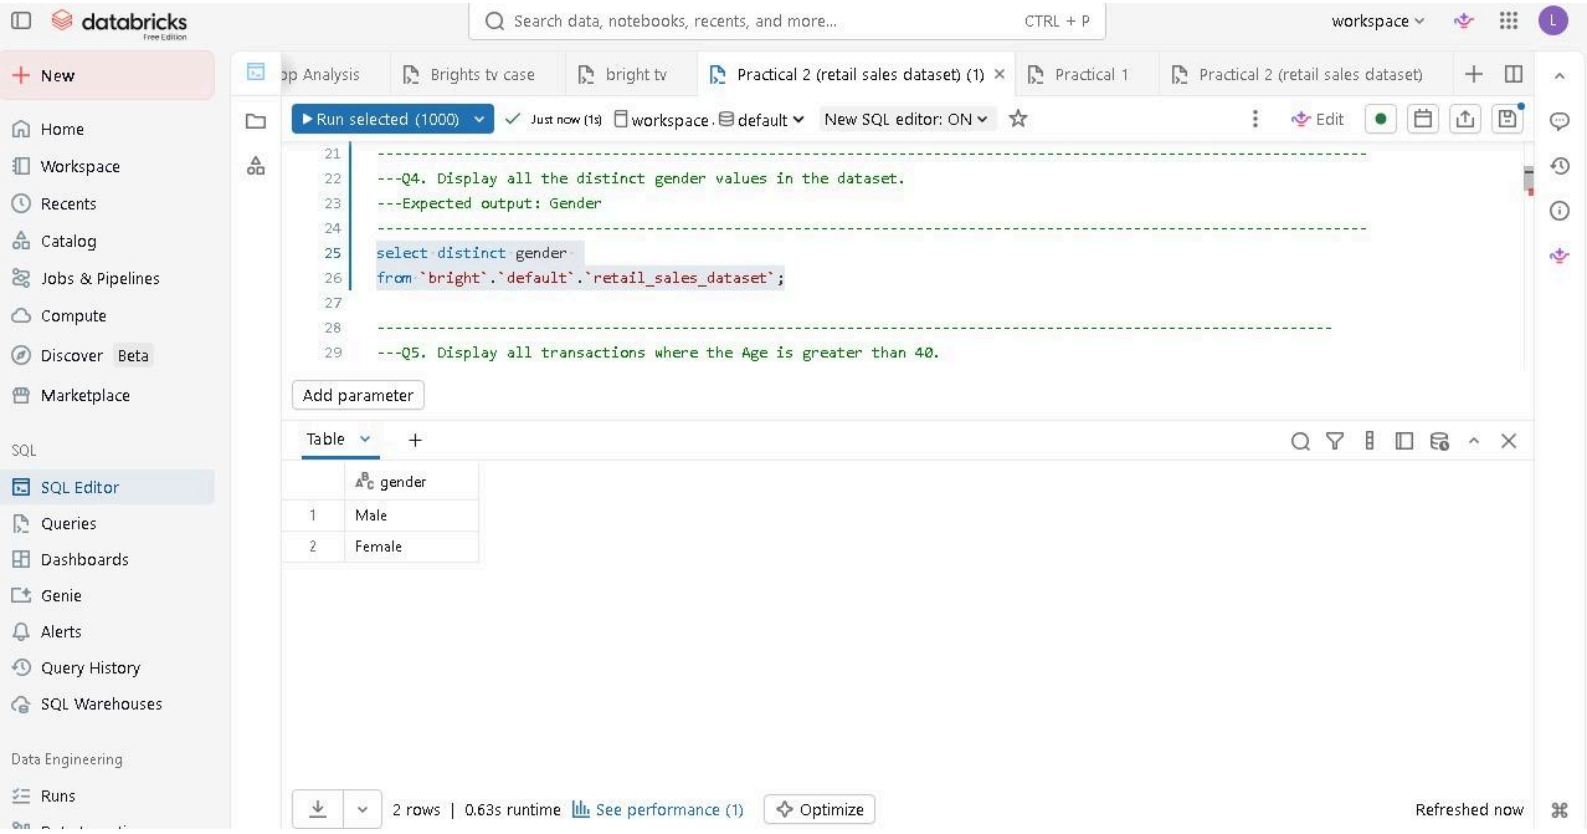
databricks
Search data, notebooks, recents, and more...
CTRL + P
workspace
New
Home
Workspace
Recents
Catalog
Jobs & Pipelines
Compute
Discover Beta
Marketplace
SQL
SQL Editor
Queries
Dashboards
Genie
Alerts
Query History
SQL Warehouses
Data Engineering
Runs
Brights tv case
bright tv
Practical 2 (retail sales dataset) (1)
Practical 1
Practical 2 (retail sales dataset)
Run selected (1000)
Just now (1s)
workspace . default
New SQL editor: ON
Edit
---Q4. Display all the distinct gender values in the dataset.
---Expected output: Gender
select distinct gender
from `bright`.`default`.`retail_sales_dataset`;
---Q5. Display all transactions where the Age is greater than 40.
Add parameter
Table
gender
1 Male
2 Female
2 rows | 0.63s runtime
See performance (1)
Optimize
Refreshed now

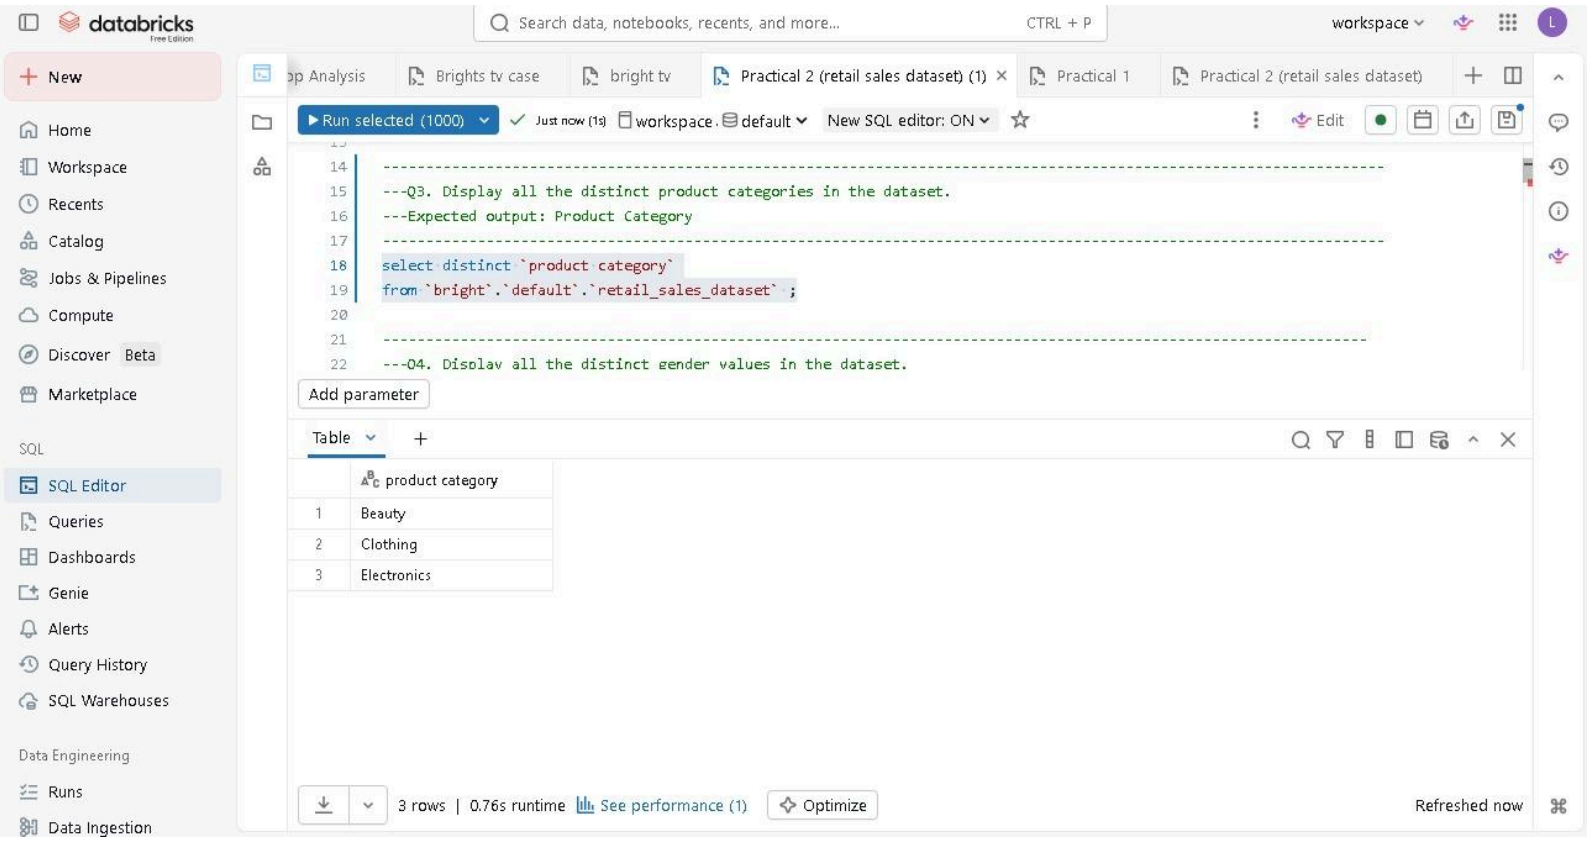
databricks
Free Edition
Search data, notebooks, recents, and more...
CTRL + P
workspace
New
Home
Workspace
Recents
Catalog
Jobs & Pipelines
Compute
Discover Beta
Marketplace
SQL
SQL Editor
Queries
Dashboards
Genie
Alerts
Query History
SQL Warehouses
Data Engineering
Runs
Data Ingestion
Brights tv case
bright tv
Practical 2 (retail sales dataset) (1)
Practical 1
Practical 2 (retail sales dataset)
Run selected (1000)
Just now (1s)
workspace . default
New SQL editor: ON
Edit
---Q3. Display all the distinct product categories in the dataset.
---Expected output: Product Category
select distinct `product category`
from `bright`.`default`.`retail_sales_dataset` ;
---Q4. Display all the distinct gender values in the dataset.
Add parameter
Table
product category
1 Beauty
2 Clothing
3 Electronics
3 rows | 0.76s runtime
See performance (1)
Optimize
Refreshed now

databricks

Search data, notebooks, recents, and more... CTRL + P

workspace

New

Home
Workspace
Recents
Catalog
Jobs & Pipelines
Compute
Discover Beta
Marketplace

SQL
SQL Editor
Queries
Dashboards
Genie
Alerts
Query History
SQL Warehouses

Data Engineering
Runs
Data Ingestion

op Analysis | Brights tv case | bright tv | Practical 2 (retail sales dataset) (1) | Practical 1 | Practical 2 (retail sales dataset)

Run selected (1000) | Just now (2s) | workspace . default | New SQL editor: ON | Edit

```
from `bright`.`default`.`retail_sales_dataset`;
-----------------------------------------------------------------------------------------------------------
---Q2. Display only the Transaction ID, Date, and Customer ID for all records.
---Expected output: Transaction ID, Date, Customer ID
-----------------------------------------------------------------------------------------------------------
select 'transaction id' , date , 'customer id'
from `bright`.`default`.`retail_sales_dataset`;

-----------------------------------------------------------------------------------------------------------
```

Add parameter

Table

	transaction id	date	customer id
1	transaction id	2023-11-24	customer id
2	transaction id	2023-02-27	customer id
3	transaction id	2023-01-13	customer id
4	transaction id	2023-05-21	customer id
5	transaction id	2023-05-06	customer id
6	transaction id	2023-04-25	customer id
7	transaction id	2023-03-13	customer id
8	transaction id	2023-02-22	customer id
9	transaction id	2023-12-13	customer id

1,000 rows | 1.76s runtime | See performance (1) | Optimize | Refreshed now

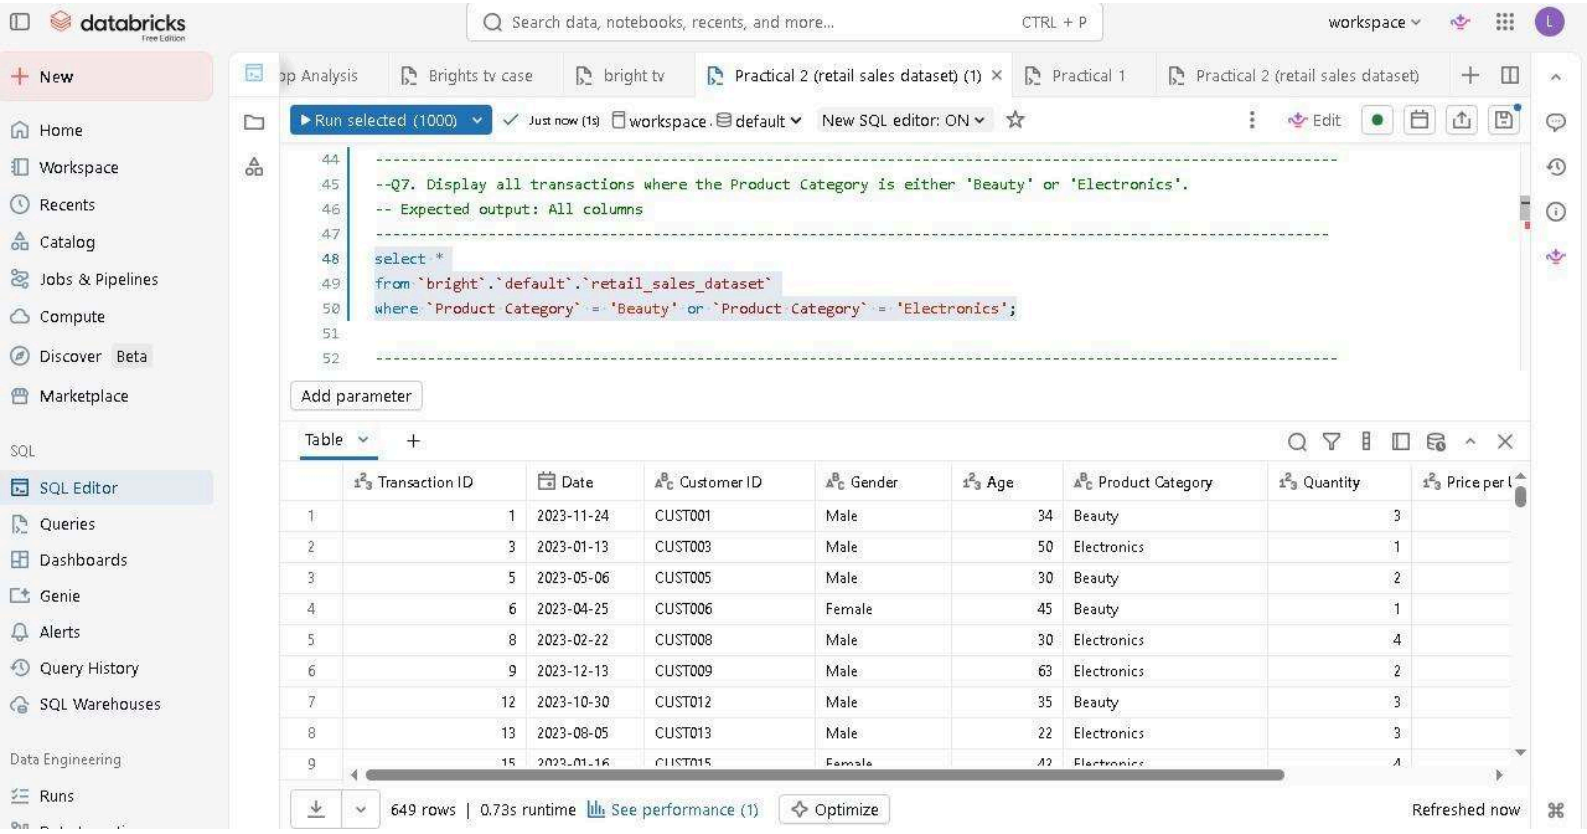

	Transaction ID	Date	Customer ID	Gender	Age	Product Category	Quantity	Price per U
1	1	2023-11-24	CUST001	Male	34	Beauty	3	
2	3	2023-01-13	CUST003	Male	50	Electronics	1	
3	5	2023-05-06	CUST005	Male	30	Beauty	2	
4	6	2023-04-25	CUST006	Female	45	Beauty	1	
5	8	2023-02-22	CUST008	Male	30	Electronics	4	
6	9	2023-12-13	CUST009	Male	63	Electronics	2	
7	12	2023-10-30	CUST012	Male	35	Beauty	3	
8	13	2023-08-05	CUST013	Male	22	Electronics	3	
9	15	2023-01-16	CUST015	Female	42	Electronics	4	

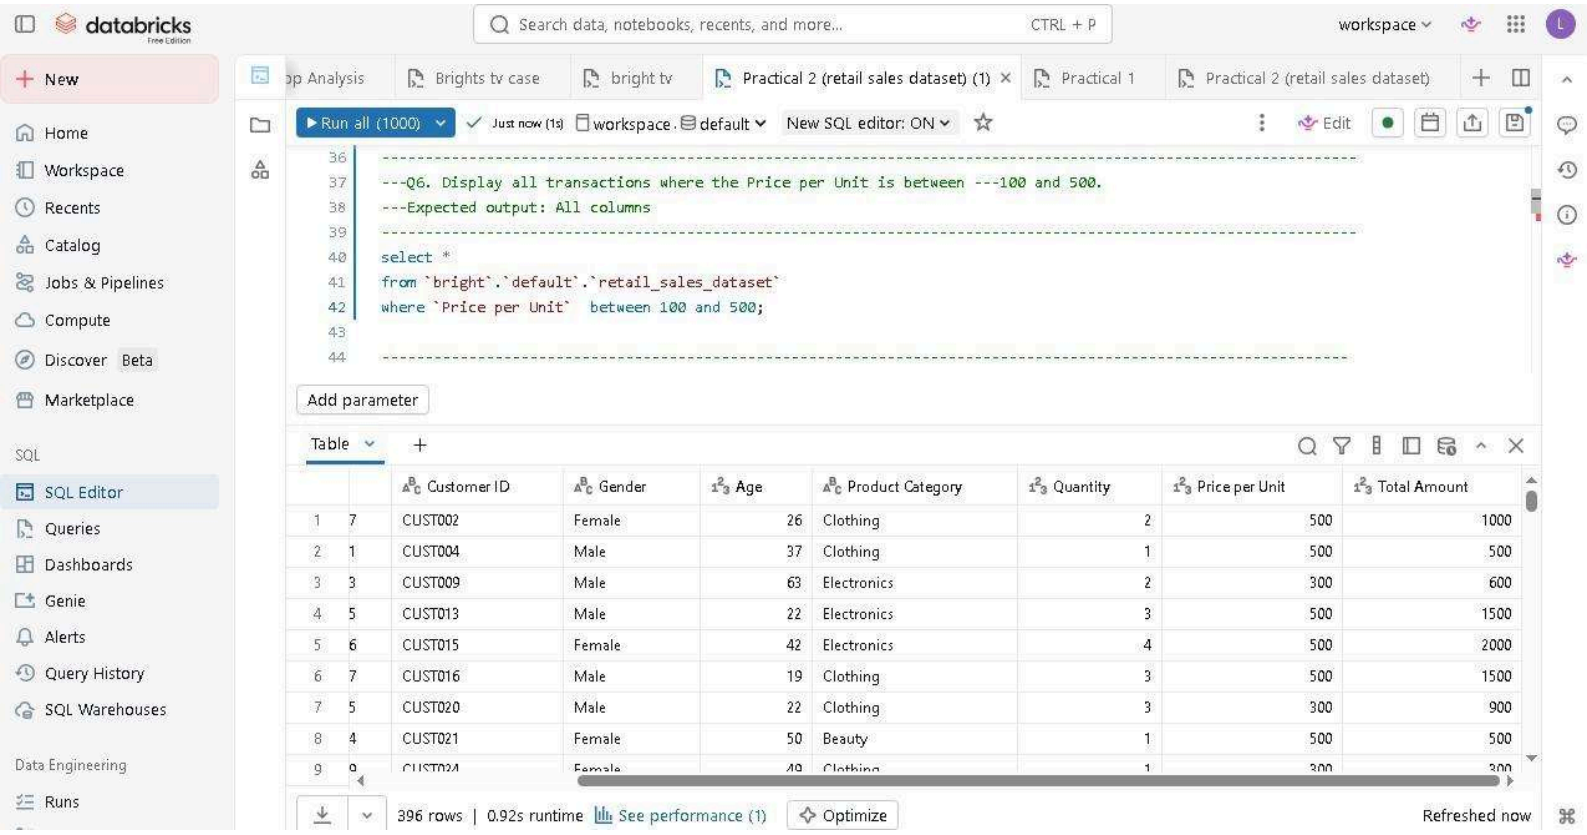
databricks
Search data, notebooks, recents, and more...
CTRL + P
workspace
New
Home
Workspace
Recents
Catalog
Jobs & Pipelines
Compute
Discover Beta
Marketplace
SQL
SQL Editor
Queries
Dashboards
Genie
Alerts
Query History
SQL Warehouses
Data Engineering
Runs
Brights tv case
bright tv
Practical 2 (retail sales dataset) (1)
Practical 1
Practical 2 (retail sales dataset)
Run all (1000)
Just now (1s)
workspace . default
New SQL editor: ON
Edit
---Q6. Display all transactions where the Price per Unit is between ---100 and 500.
---Expected output: All columns
select *
from `bright`.`default`.`retail_sales_dataset`
where `Price per Unit` between 100 and 500;
Add parameter
Table
Customer ID | Gender | Age | Product Category | Quantity | Price per Unit | Total Amount
1 7 CUST002 Female 26 Clothing 2 500 1000
2 1 CUST004 Male 37 Clothing 1 500 500
3 3 CUST009 Male 63 Electronics 2 300 600
4 5 CUST013 Male 22 Electronics 3 500 1500
5 6 CUST015 Female 42 Electronics 4 500 2000
6 7 CUST016 Male 19 Clothing 3 500 1500
7 5 CUST020 Male 22 Clothing 3 300 900
8 4 CUST021 Female 50 Beauty 1 500 500
396 rows | 0.92s runtime
See performance (1)
Optimize
Refreshed now

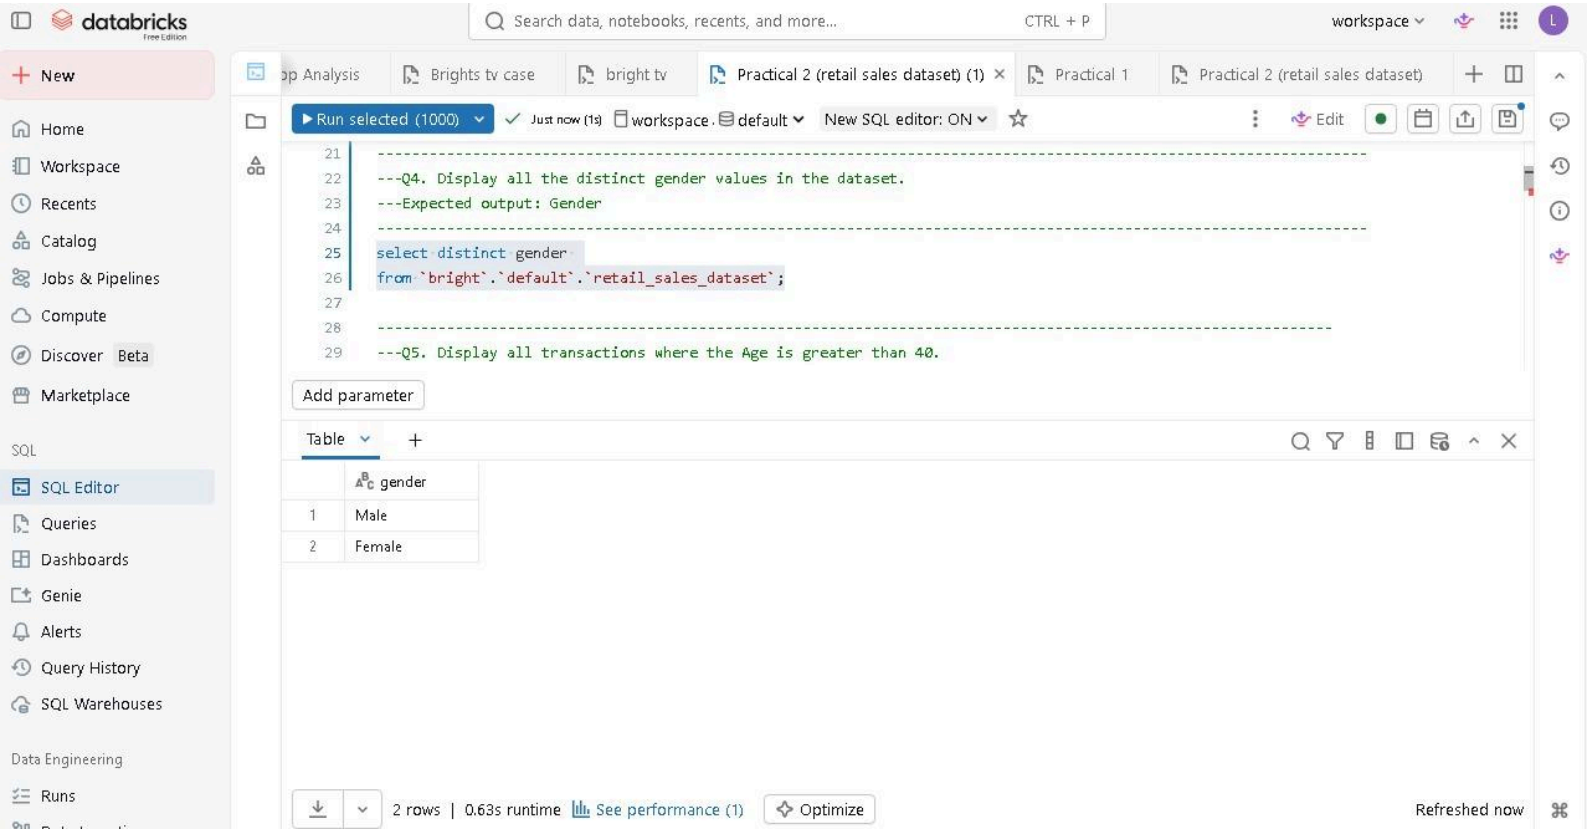
databricks
Search data, notebooks, recents, and more...
CTRL + P
workspace
New
Home
Workspace
Recents
Catalog
Jobs & Pipelines
Compute
Discover Beta
Marketplace
SQL
SQL Editor
Queries
Dashboards
Genie
Alerts
Query History
SQL Warehouses
Data Engineering
Runs
Brights tv case
bright tv
Practical 2 (retail sales dataset) (1)
Practical 1
Practical 2 (retail sales dataset)
Run selected (1000)
Just now (1s)
workspace . default
New SQL editor: ON
Edit
---Q4. Display all the distinct gender values in the dataset.
---Expected output: Gender
select distinct gender
from `bright`.`default`.`retail_sales_dataset`;
---Q5. Display all transactions where the Age is greater than 40.
Add parameter
Table
gender
1 Male
2 Female
2 rows | 0.63s runtime
See performance (1)
Optimize
Refreshed now

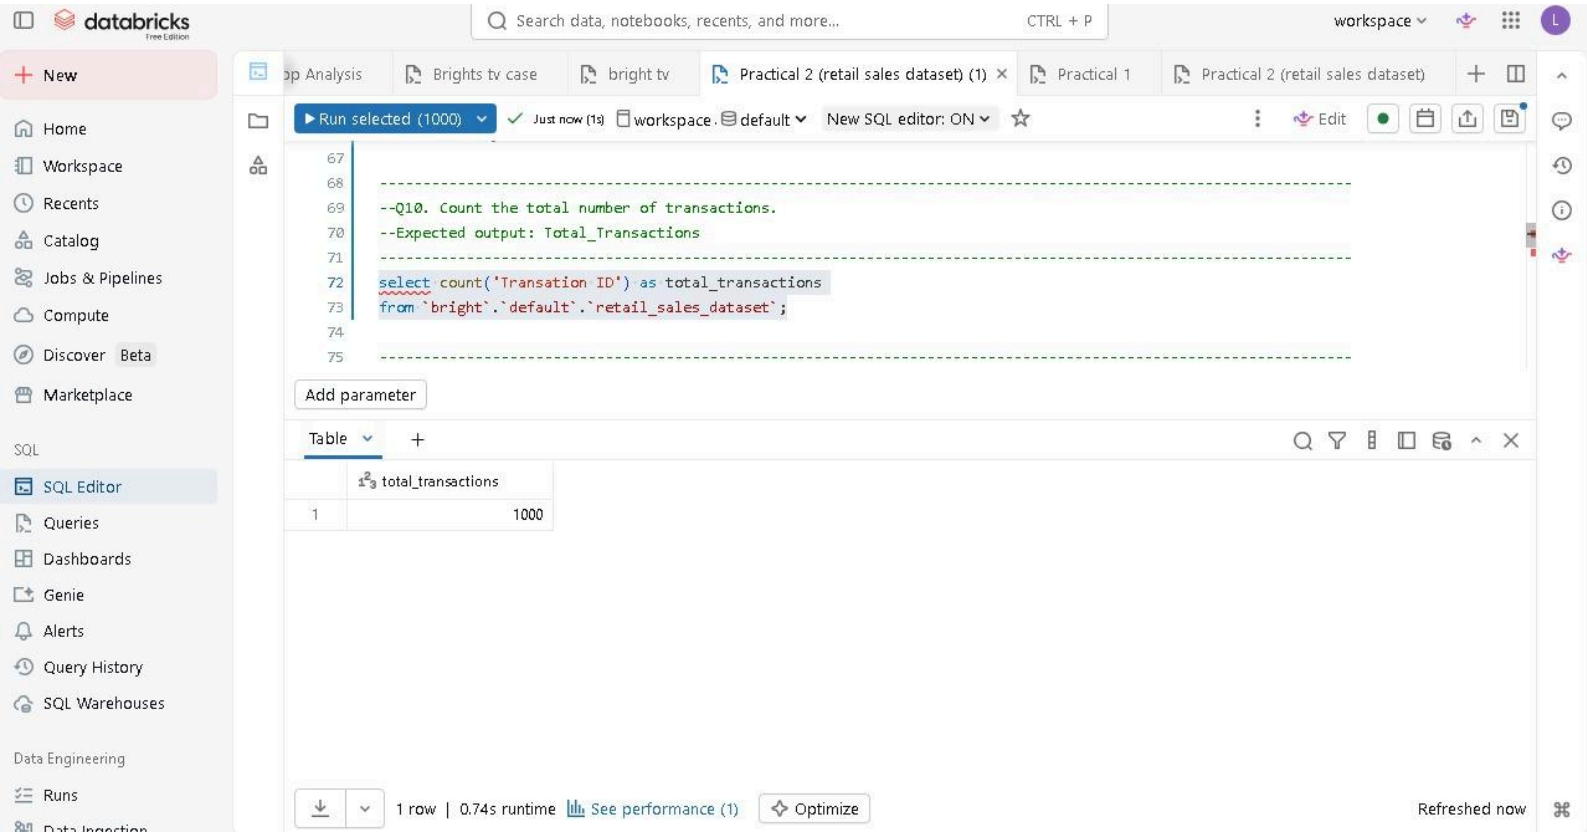
databricks
Search data, notebooks, recents, and more...
CTRL + P
workspace
New
Home
Workspace
Recents
Catalog
Jobs & Pipelines
Compute
Discover Beta
Marketplace
SQL
SQL Editor
Queries
Dashboards
Genie
Alerts
Query History
SQL Warehouses
Data Engineering
Runs
Brights tv case
bright tv
Practical 2 (retail sales dataset) (1)
Practical 1
Practical 2 (retail sales dataset)
Run selected (1000)
Just now (1s)
workspace . default
New SQL editor: ON
Edit
--Q10. Count the total number of transactions.
--Expected output: Total_Transactions
select count('Transation ID') as total_transactions
from `bright`.`default`.`retail_sales_dataset`;
Add parameter
Table
total_transactions
1
1000
1 row | 0.74s runtime
See performance (1)
Optimize
Refreshed now

databricks

Search data, notebooks, recents, and more... CTRL + P

workspace

New

Home
Workspace
Recents
Catalog
Jobs & Pipelines
Compute
Discover Beta
Marketplace

SQL
SQL Editor
Queries
Dashboards
Genie
Alerts
Query History
SQL Warehouses

Data Engineering
Runs

op Analysis | Brights tv case | workspace | Practical 2 (retail sales dataset) (1) | Practical 1 | Practical 2 (retail sales dataset)

Run selected (1000) | Just now (1s) | workspace . default | New SQL editor: ON | Edit

```
--------------------------------------------------------------------------------
--Q9. Display all transactions where the Quantity is greater than or equal to 3.
--Expected output: All columns
--------------------------------------------------------------------------------
select *
from `bright`.`default`.`retail_sales_dataset`
where Quantity >= 3
```

Add parameter

Table

	Transaction ID	Date	Customer ID	Gender	Age	Product Category	Quantity	Price per U
1	1	2023-11-24	CUST001	Male	34	Beauty	3	
2	8	2023-02-22	CUST008	Male	30	Electronics	4	
3	10	2023-10-07	CUST010	Female	52	Clothing	4	
4	12	2023-10-30	CUST012	Male	35	Beauty	3	
5	13	2023-08-05	CUST013	Male	22	Electronics	3	
6	14	2023-01-17	CUST014	Male	64	Clothing	4	
7	15	2023-01-16	CUST015	Female	42	Electronics	4	
8	16	2023-02-17	CUST016	Male	19	Clothing	3	
9	17	2023-04-22	CUST017	Female	27	Clothing	4	

504 rows | 0.60s runtime | See performance (1) | Optimize | Refreshed now

```
--Q8. Display all transactions where the Product Category is not 'Clothing'.
--Expected output: All columns
select *
from `bright`.`default`.`retail_sales_dataset`
where `Product Category` != 'Clothing';
```

		Customer ID	Gender	Age	Product Category	Quantity	Price per Unit	Total Amount
1	4	CUST001	Male	34	Beauty	3	50	150
2	3	CUST003	Male	50	Electronics	1	30	30
3	6	CUST005	Male	30	Beauty	2	50	100
4	5	CUST006	Female	45	Beauty	1	30	30
5	2	CUST008	Male	30	Electronics	4	25	100
6	3	CUST009	Male	63	Electronics	2	300	600
7	0	CUST012	Male	35	Beauty	3	25	75
8	5	CUST013	Male	22	Electronics	3	500	1500
9	6	CUST015	Female	42	Electronics	4	500	2000

649 rows | 0.67s runtime

```
--------------------------------------------------------------------------------------------------
--Q13. Find the maximum Total Amount spent in a single transaction.
--Expected output: Max_Total_Amount
--------------------------------------------------------------------------------------------------
select max (`Total Amount`) as Max_Total_Amount
from `bright`.`default`.`retail_sales_dataset`;

--------------------------------------------------------------------------------------------------
--Q14. Find the minimum Price per Unit in the dataset.
```

	Max_Total_Amount
1	2000

1 row | 0.54s runtime

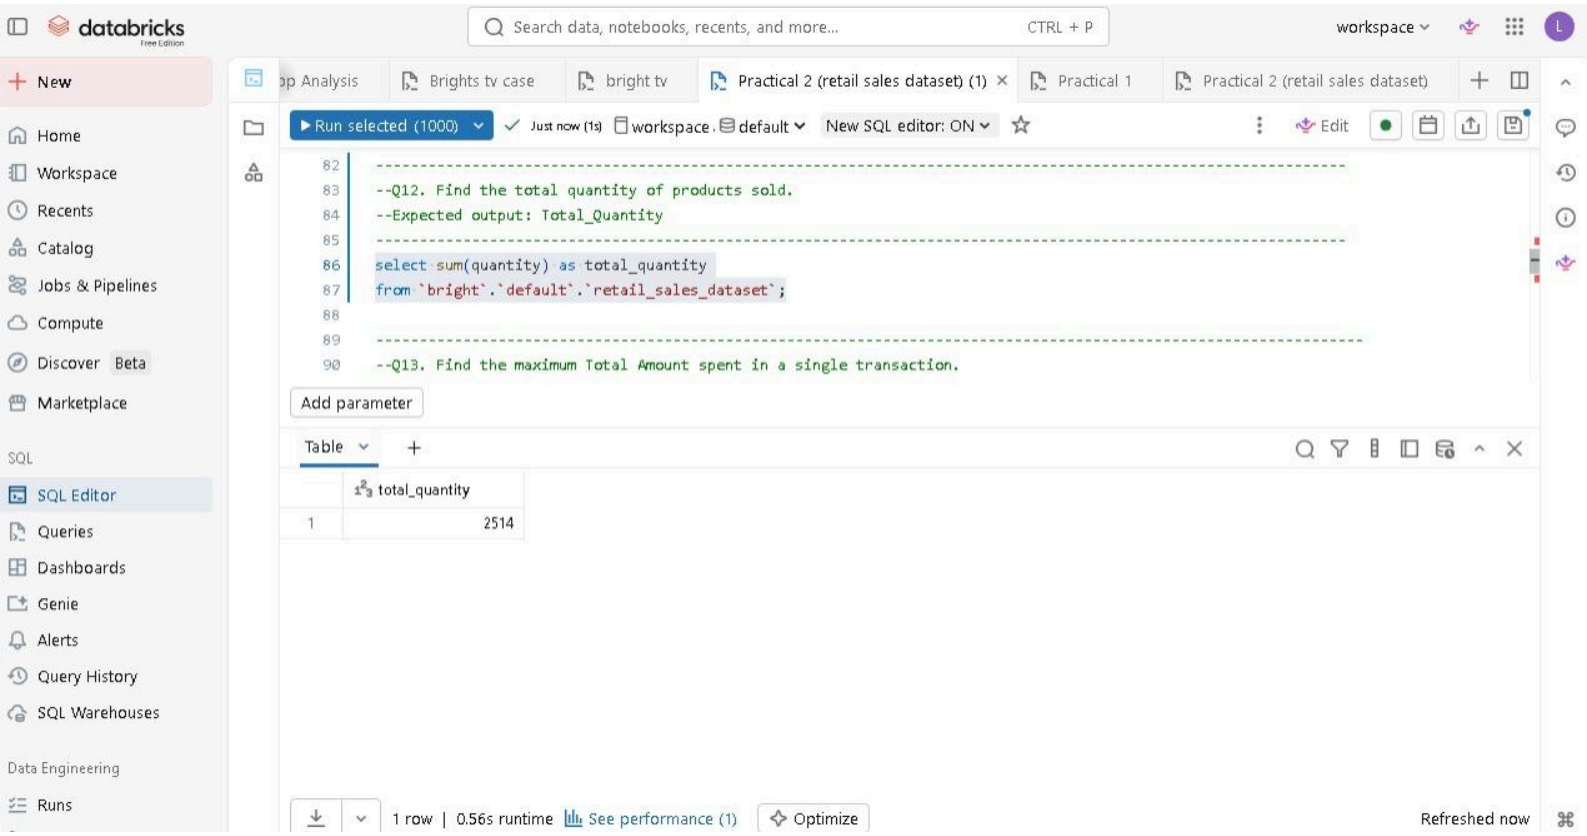
databricks
Search data, notebooks, recents, and more...
CTRL + P
workspace
New
Home
Workspace
Recents
Catalog
Jobs & Pipelines
Compute
Discover Beta
Marketplace
SQL
SQL Editor
Queries
Dashboards
Genie
Alerts
Query History
SQL Warehouses
Data Engineering
Runs
Brights tv case
bright tv
Practical 2 (retail sales dataset) (1)
Practical 1
Practical 2 (retail sales dataset)
Run selected (1000)
Just now (1s)
workspace . default
New SQL editor: ON
Edit
--Q12. Find the total quantity of products sold.
--Expected output: Total_Quantity
select sum(quantity) as total_quantity
from `bright`.`default`.`retail_sales_dataset`;
--Q13. Find the maximum Total Amount spent in a single transaction.
Add parameter
Table
total_quantity
1
2514
1 row | 0.56s runtime
See performance (1)
Optimize
Refreshed now

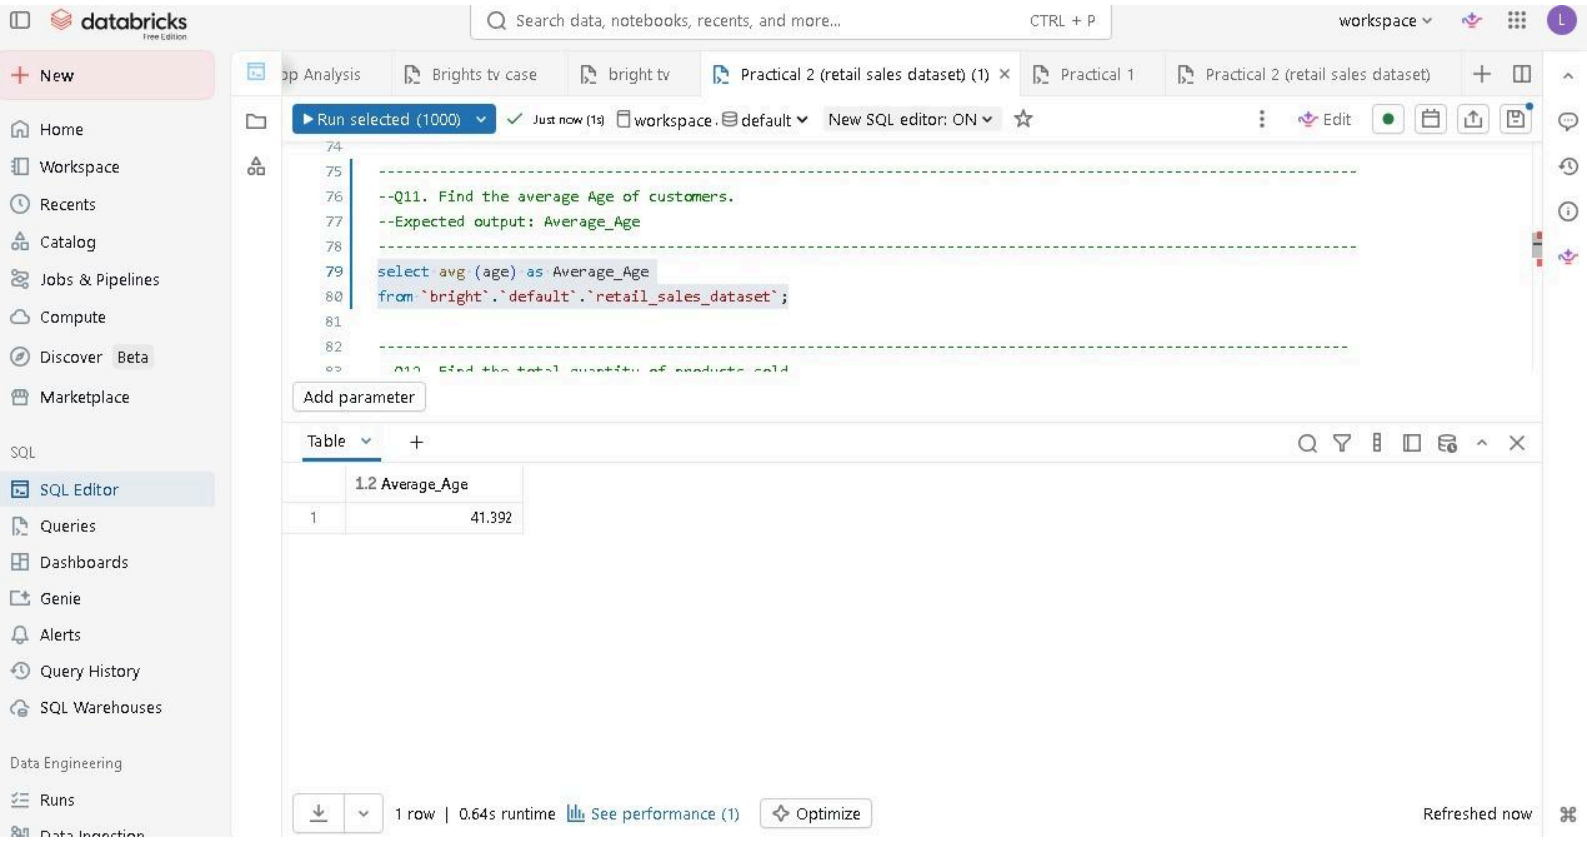
databricks
Search data, notebooks, recents, and more...
CTRL + P
workspace
New
Home
Workspace
Recents
Catalog
Jobs & Pipelines
Compute
Discover Beta
Marketplace
SQL
SQL Editor
Queries
Dashboards
Genie
Alerts
Query History
SQL Warehouses
Data Engineering
Runs
Brights tv case
bright tv
Practical 2 (retail sales dataset) (1)
Practical 1
Practical 2 (retail sales dataset)
Run selected (1000)
Just now (1s)
workspace . default
New SQL editor: ON
Edit
--Q11. Find the average Age of customers.
--Expected output: Average_Age
select avg (age) as Average_Age
from `bright`.`default`.`retail_sales_dataset`;
Add parameter
Table
1.2 Average_Age
1
41.392
1 row | 0.64s runtime
See performance (1)
Optimize
Refreshed now

```
--------------------------------------------------------------------------------
--Q17. Find the average Price per Unit per product category.
--Expected output: Product Category, Average_Price
--------------------------------------------------------------------------------
select avg(`Price per Unit`) as Average_Price , `Product Category`
from `bright`.`default`.`retail_sales_dataset`
group by `Product Category`;

--------------------------------------------------------------------------------
```

	1.2 Average_Price	Product Category
1	184.05537459283389	Beauty
2	174.28774928774928	Clothing
3	181.90058479532163	Electronics

3 rows | 0.61s runtime

```
--------------------------------------------------------------------------------
--Q15. Find the number of transactions per Product Category.
--Expected output: Product Category, Transaction_Count
--------------------------------------------------------------------------------
select count(`Transaction ID`) , `Product Category`
 from `bright`.`default`.`retail_sales_dataset`
 group by `Product Category`;

--------------------------------------------------------------------------------
```

	count(Transaction ID)	Product Category
1	307	Beauty
2	351	Clothing
3	342	Electronics

3 rows | 0.56s runtime

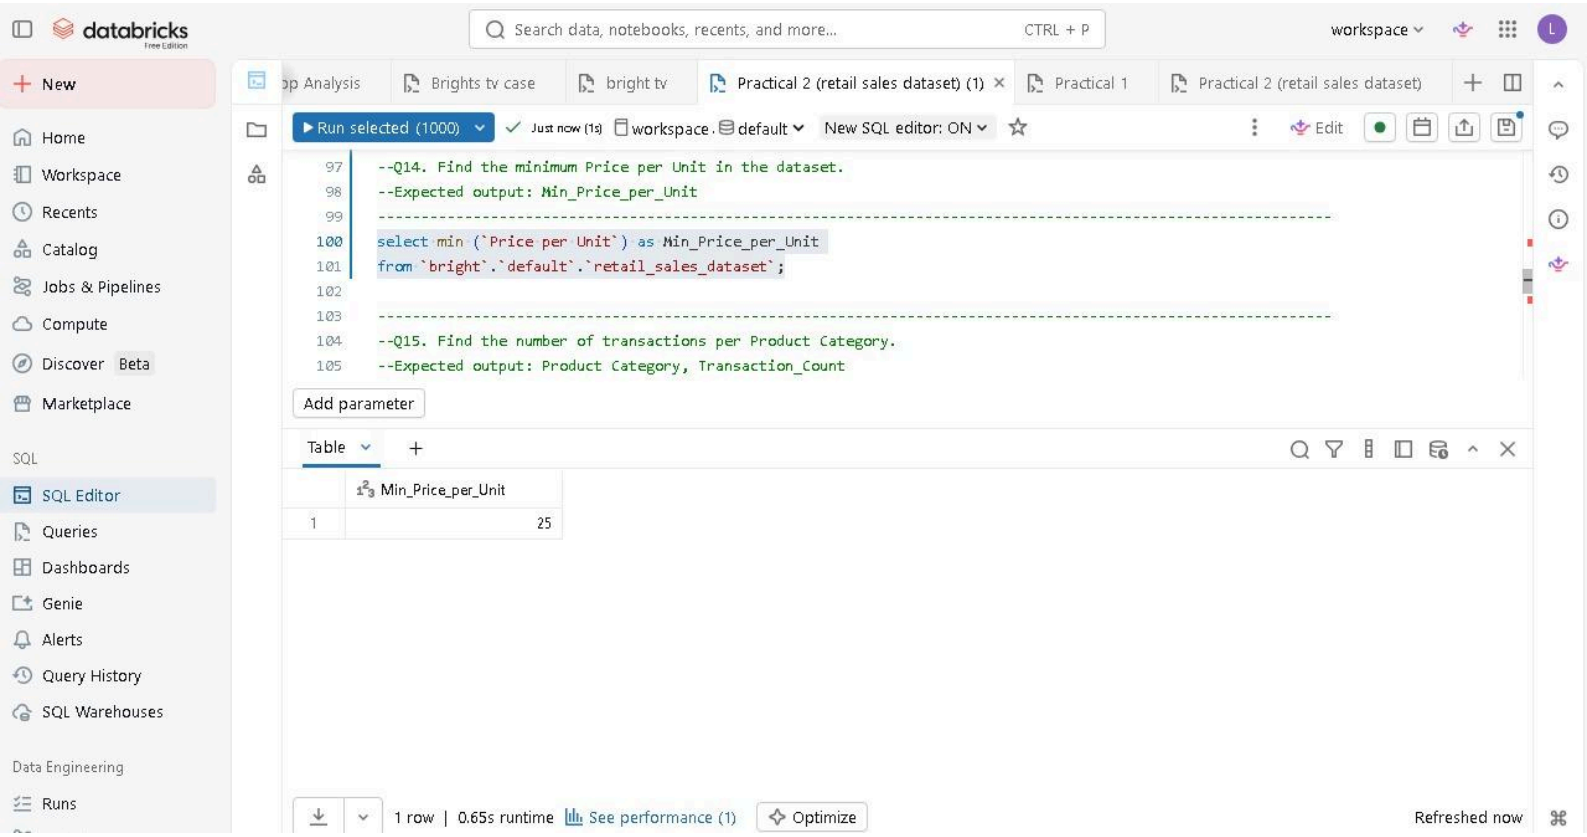
databricks
Search data, notebooks, recents, and more...
CTRL + P
workspace
New
Home
Workspace
Recents
Catalog
Jobs & Pipelines
Compute
Discover Beta
Marketplace
SQL
SQL Editor
Queries
Dashboards
Genie
Alerts
Query History
SQL Warehouses
Data Engineering
Runs
Brights tv case
bright tv
Practical 2 (retail sales dataset) (1)
Practical 1
Practical 2 (retail sales dataset)
Run selected (1000)
Just now (1s)
workspace . default
New SQL editor: ON
Edit
--Q14. Find the minimum Price per Unit in the dataset.
--Expected output: Min_Price_per_Unit
select min (`Price per Unit`) as Min_Price_per_Unit
from `bright`.`default`.`retail_sales_dataset`;
--Q15. Find the number of transactions per Product Category.
--Expected output: Product Category, Transaction_Count
Add parameter
Table
Min_Price_per_Unit
1
25
1 row | 0.65s runtime
See performance (1)
Optimize
Refreshed now

databricks

Search data, notebooks, recents, and more... CTRL + P

workspace

New

Home
Workspace
Recents
Catalog
Jobs & Pipelines
Compute
Discover Beta
Marketplace

SQL
SQL Editor
Queries
Dashboards
Genie
Alerts
Query History
SQL Warehouses

Data Engineering
Runs

Analysis | Brights tv case | bright tv | Practical 2 (retail sales dataset) (1) | Practical 1 | Practical 2 (retail sales dataset)

Run selected (1000) | Just now (1s) | workspace . default | New SQL editor: ON | Edit

```
--otherwise 'Low'.
--Expected output: Transaction ID, Total Amount, Spending_Level
-----------------------------------------------------------------------------------------------------
SELECT
    `Transaction ID`,
    `Total Amount` AS ta,
    CASE
        WHEN `Total Amount` > 1000 THEN 'High'
        ELSE 'Low'
    END AS Spending_Level
FROM `bright`.`default`.`retail_sales_dataset`;
```

Add parameter

Table

	Transaction ID	ta	Spending_Level
1	1	150	Low
2	2	1000	Low
3	3	30	Low
4	4	500	Low
5	5	100	Low
6	6	30	Low
7	7	50	Low

1,000 rows | 0.66s runtime | See performance (1) | Optimize | Refreshed now

```
--Q19. Find the average quantity per product category where the average is more than 2.
--Expected output: Product Category, Average_Quantity
-----------------------------------------------------------------------------------------------------------
select avg(`quantity`) as Average_Quantity , `Product Category`
from `bright`.`default`.`retail_sales_dataset`
group by `Product Category`
having avg(`quantity`) > 2;

-----------------------------------------------------------------------------------------------------------
```

	1.2 Average_Quantity	Product Category
1	2.511400651465798	Beauty
2	2.547008547008547	Clothing
3	2.482456140350877	Electronics

3 rows | 1.16s runtime

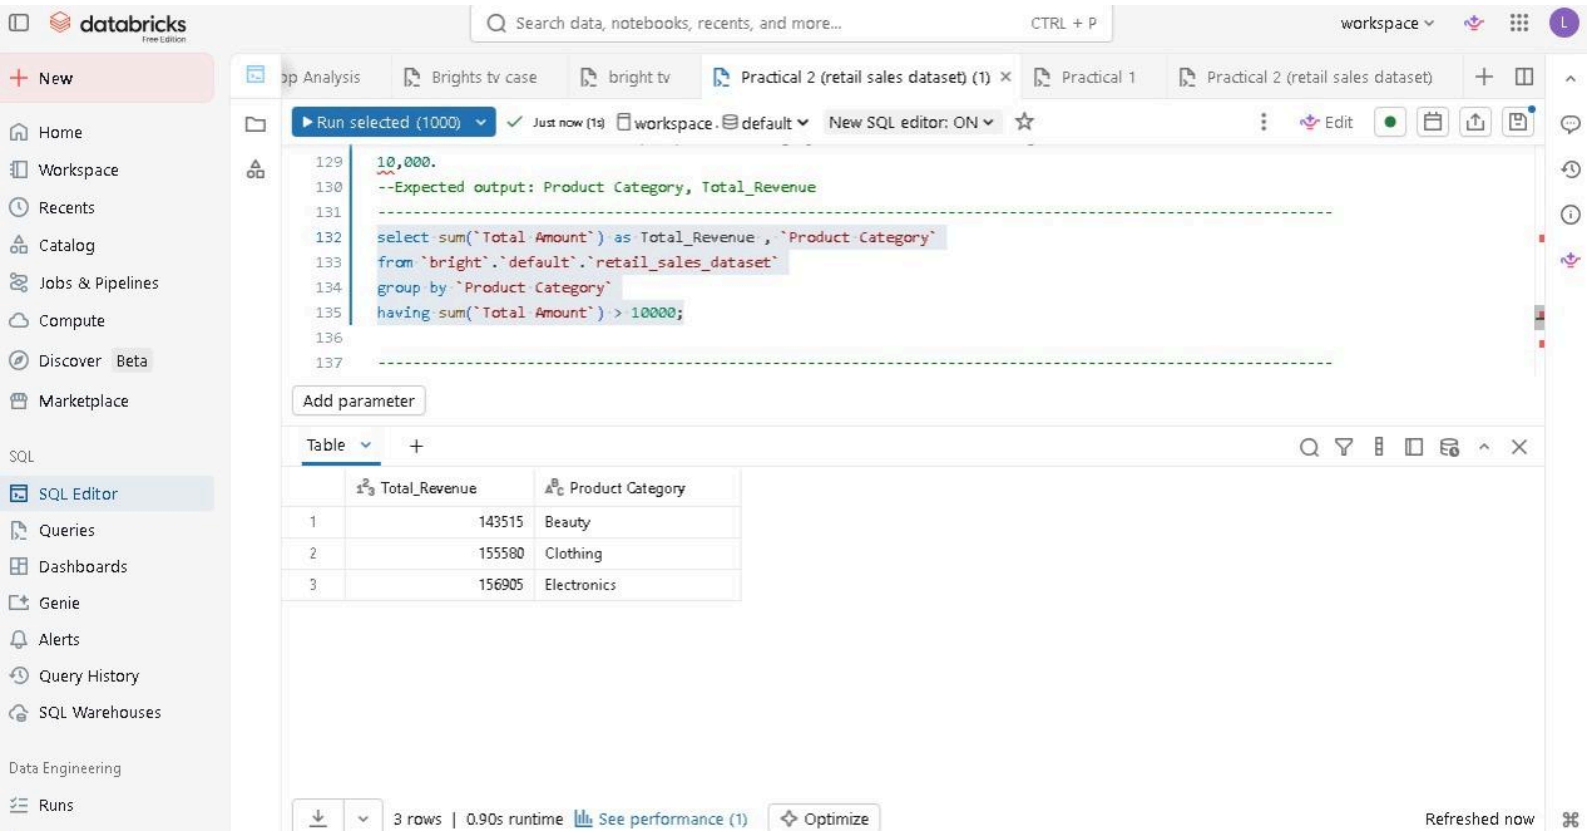
databricks
Search data, notebooks, recents, and more...
CTRL + P
workspace
New
Home
Workspace
Recents
Catalog
Jobs & Pipelines
Compute
Discover Beta
Marketplace
SQL
SQL Editor
Queries
Dashboards
Genie
Alerts
Query History
SQL Warehouses
Data Engineering
Runs
Brights tv case
bright tv
Practical 2 (retail sales dataset) (1)
Practical 1
Practical 2 (retail sales dataset)
Run selected (1000)
Just now (1s)
workspace . default
New SQL editor: ON
Edit
10,000.
--Expected output: Product Category, Total_Revenue
select sum(`Total Amount`) as Total_Revenue , `Product Category`
from `bright`.`default`.`retail_sales_dataset`
group by `Product Category`
having sum(`Total Amount`) > 10000;
Add parameter
Table
Total_Revenue
Product Category
1 143515 Beauty
2 155580 Clothing
3 156905 Electronics
3 rows | 0.90s runtime
See performance (1)
Optimize
Refreshed now