

LUNA: An Astronomy-Grounded Metaheuristic Optimization Algorithm Based on Real Lunar Orbital Dynamics

lutfan

lutfan

Abstract

This paper introduces LUNA (Lunar-inspired Update and Navigation Algorithm), a population-based metaheuristic whose search operators are mathematically derived from real lunar orbital mechanics. Four astronomical quantities are embedded directly into the update equations: (1) the vis-viva velocity $v(t) = \sqrt{\mu(t)(2/D(t) - 1/a)}$ modulates the scaling factor, where $\mu(t) = \mu_0 e^{-\delta t/T}$ represents an algorithmic orbital energy dissipation schedule, (2) Kepler's angular rate h/r^2 governs spiral rotation, (3) lunar libration creates orthogonal perturbation, and (4) tidal syzygy decomposes Sun-Moon gravitational contributions. In the original formulation, removing any astronomical variable yields zero astronomical modulation in the corresponding operator; for the ablation study, the variables are replaced by constants to maintain a functioning baseline. We establish seven formal results with full proofs: monotone best-fitness decrease (Theorem 1), convergence (Corollary 1), bounded expected exploration radius (Theorem 2), exponential step-size decay (Theorem 3), finite expected hitting time to an ε -optimal basin (Theorem 5), weak ergodicity of the LUNA Markov chain via Dobrushin's coefficient (Theorem 6), and almost-sure convergence to the global optimum (Theorem 7). To the best of our knowledge, among astronomy-inspired metaheuristics, these are the first explicit hitting-time and Markov-chain ergodicity guarantees; we do not claim novelty relative to the broader stochastic-optimization literature, where analogous results for evolution strategies and simulated annealing have long been established. A ded-

icated subsection verifies that each theoretical prediction is qualitatively consistent with the corresponding empirical measurement (convergence curves, dimensional degradation, hitting-time probability, stagnation escape). A per-operator ablation study with Wilcoxon signed-rank tests and Holm-Bonferroni correction confirms that removing each astronomical component produces substantial performance degradation. On CEC 2022 (12 functions, $D = 10, 20$ runs), LUNA achieves the highest Friedman rank (1.83), outperforming DE (2.08) and AVOA (6.33), with 11 wins and zero losses against AVOA ($p < 0.05$, Wilcoxon); Cliff’s delta for the LUNA-vs-DE comparison is -0.376 (medium effect size), reflecting a heterogeneous per-function split where each algorithm dominates on different landscape types. High-dimensional experiments at $D = 50$ and $D = 100$ confirm that LUNA remains competitive (Friedman ranks 5.17 and 5.83, respectively), beating PSO, GSA, and SMA on the majority of test functions while losing ground to GA and DE as dimension grows. On the IEEE CEC 2025 BC-SOP track (29 functions, $D = 30$, U-score protocol), LUNA again achieves rank #1 (Friedman 1.76, U-score -1058), demonstrating that its performance generalizes across three CEC benchmark generations (2017, 2022, 2025). Post-hoc Holm-Bonferroni analysis, a Nemenyi critical-difference diagram, and a Dolan–Moré empirical cumulative distribution function (ECDF) analysis corroborate the rankings.

Keywords: Metaheuristic optimization, Lunar orbital dynamics, Vis-viva equation, CEC 2022, Tidal force, Chaotic initialization

1. Introduction

Metaheuristic optimization has attracted intense research, but the field faces sustained criticism. Sorensen [1] argued that many “novel” algorithms are mathematical rebrandings of classical operators. Camacho-Villalon [2] demonstrated extensive conceptual overlap. Crepinsek et al. [21] surveyed exploration and exploitation, arguing that the balance between these forces, not the metaphor, determines performance. Recent studies [8, 9, 10, 12, 13] have proposed quanti-

tative novelty assessment frameworks and metaphor-free alternatives [14].

A fundamental question remains: can a nature-inspired algorithm create genuinely new search operators from its metaphor, rather than merely scheduling existing ones? This paper answers affirmatively. LUNA derives four operators from real lunar orbital mechanics: the vis-viva equation, Kepler’s second law, lunar libration, and tidal syzygy. In the original formulation, each operator mathematically requires its astronomical variable; setting the variable to zero eliminates the corresponding astronomical modulation (leaving only residual Gaussian perturbation). The algorithmic energy dissipation schedule $\mu(t) = \mu_0 e^{-\delta t/T}$ is an optimization-inspired attenuation inspired by the fact that real lunar orbital energy changes over geological time (the Moon recedes at approximately 3.8 cm/year due to tidal interactions), but it should not be interpreted as a precise physical model of lunar motion.

The main contributions are:

1. Four astronomy-embedded search operators where astronomical variables provide essential operator modulation, not merely parameter scheduling.
2. Seven formal theorems with full proofs: monotonicity, convergence, exploration bounds, step-size decay rate, finite expected hitting time, weak ergodicity of the LUNA Markov chain, and almost-sure convergence to the global optimum. To the best of our knowledge, among astronomy-inspired metaheuristics, these are the first explicit hitting-time and Markov-chain ergodicity guarantees; we acknowledge that analogous results for evolution strategies and simulated annealing have long been established in the broader stochastic-optimization literature.
3. CEC 2022 rank #1 (Friedman 1.83) at $D = 10$, outperforming 9 baselines including DE and AVOA. High-dimensional experiments at $D = 50$ and $D = 100$ confirm LUNA remains competitive, defeating PSO, GSA, and SMA on the majority of functions, while losing ground to GA and DE as dimension grows. On the IEEE CEC 2025 BC-SOP track (29 functions,

$D = 30$, U-score protocol), LUNA again achieves rank #1 (Friedman 1.76), demonstrating generalization across three CEC benchmark generations.

4. Per-operator ablation study with Wilcoxon signed-rank significance tests and Holm-Bonferroni correction, providing evidence that each astronomical component contributes substantially to LUNA’s performance rather than serving as decorative scheduling.
5. Post-hoc Holm-Bonferroni analysis, Nemenyi critical-difference diagram, and a Dolan–Moré empirical cumulative distribution function (ECDF) analysis establishing statistical rigor.

2. Related Work

Metaheuristic algorithms span four families: evolutionary (GA [15], DE [7], real-coded GA [31]), swarm intelligence (PSO [11], modified PSO with dynamic adaptation [26], multi-swarm cooperative PSO [34], quantum-behaved PSO with weighted mean best position [33], adaptive-interaction-radius PSO [44], PSO with exploration-exploitation balance [45], GWO [4], WOA [5], HHO [6], SMA [17]), physics-based (GSA [16], AVOA [18], backtracking search [22]), and hybrid multi-strategy approaches [25, 27, 28, 29, 30, 37]. Multi-strategy enhanced variants of established algorithms have become a productive direction in the recent AMC literature, exemplified by the multi-strategy sine cosine algorithm [48] and the jellyfish optimizer [47]; both combine several mutation operators with adaptive selection, a design choice LUNA extends by deriving its operators from celestial mechanics rather than from operator libraries. Other recent AMC contributions to global optimization include non-parameter-filled global search [50], accelerated DIRECT-type algorithms for constrained global optimization [51], partially-coupled nonlinear parameter optimization for multivariate hybrid models [49], consensus-based optimization with financial applications [52], penalty-function-based neural solvers for portfolio optimization [55], and preconditioned gradient methods constructed from non-standard finite-difference schemes [59].

An exhaustive review appears in [20]. The metaphor critique [1, 2, 21] has motivated quantitative novelty frameworks [9, 10], metaphor-free algorithms [14], and calls for interactive design tools [13]. Successful nature-inspired metaheuristics published in Applied Mathematics and Computation include the jellyfish optimizer [24, 47], global-best harmony search [23], chaotic harmony search [32], and direct stochastic global search [38]. Recent AMC publications on convergence analysis [40, 41, 57, 58] and stochastic/Markov-chain methods [42, 43, 56] provide methodological precedent for the theoretical framework adopted in this paper. LUNA incorporates chaotic initialization [19, 35], opposition-based learning [3], parameter-setting-free adaptation [36], and Rechenberg’s 1/5-success rule, but its core operators are derived from celestial mechanics rather than borrowed from existing algorithms.

3. Algorithm Design

3.1. Problem Formulation

We consider $\mathbf{x}^* = \arg \min_{\mathbf{x} \in \Omega} f(\mathbf{x})$, where $\Omega = [L_1, U_1] \times [L_2, U_2] \times \cdots \times [L_D, U_D] \subset \mathbb{R}^D$ is the feasible region.

3.2. Lunar Astronomical Foundation

3.2.1. Synodic Month (Phase Cycle)

$$\theta_p(t) = \frac{2\pi N_{\text{syn}} t}{T}, \quad I(\theta_p) = \frac{1 - \cos \theta_p}{2} \in [0, 1] \quad (1)$$

3.2.2. Anomalistic Month (Distance Cycle)

$$D(t) = 1 + e \cos \theta_a, \quad \theta_a = \frac{2\pi N_{\text{anom}} t}{T}, \quad e = 0.0549 \quad (2)$$

3.2.3. Adaptive Orbital Energy Dissipation

The standard gravitational parameter in orbital mechanics is $\mu = GM$, where G is the gravitational constant and M is the central body mass. We

introduce an algorithmic energy dissipation schedule:

$$\mu(t) = \mu_0 \cdot e^{-\delta t/T} \quad (3)$$

where δ is the dissipation rate. This schedule is inspired by the physical observation that lunar orbital energy changes over geological time due to tidal interactions (the Moon recedes at approximately 3.8 cm/year). However, Equation (3) is an algorithmic schedule for controlling convergence precision, not a precise physical model. As $t \rightarrow T$, $\mu(t) \rightarrow 0$, producing increasingly fine-grained search steps.

3.2.4. Vis-Viva Velocity

The vis-viva equation from orbital mechanics gives the velocity of a body in an elliptical orbit:

$$v(t) = \sqrt{\mu(t) \left(\frac{2}{D(t)} - \frac{1}{a} \right)} \quad (4)$$

where a is the semi-major axis. The normalized form used in LUNA's operators is:

$$v_f(t) = \frac{v(t)}{v(t) + 1} \in (0, 1) \quad (5)$$

3.2.5. Kepler Angular Rate

$$\kappa(t) = \frac{h}{D(t)^2} \quad (6)$$

where h is the specific angular momentum.

3.2.6. Libration and Tidal Syzygy

$$\lambda(t) = \lambda_0 \sin(\omega_l t), \quad F_{\text{tidal}}(t) = \frac{\mu(t)}{D(t)^2} + G_{\text{sun}} \cos \theta_p \quad (7)$$

3.3. Astronomy-Embedded Operators

3.3.1. Operator 1: Vis-Viva Gravitational Convergence (Late Stage)

$$\mathbf{x}_i^{t+1} = \mathbf{x}_i^t + F \cdot v_f(t) \cdot (\mathbf{x}_{\text{best}} - \mathbf{x}_i) + F \cdot v_f(t) \cdot \frac{\mu(t)}{D(t)^2} \cdot \frac{\mathbf{x}_a - \mathbf{x}_b}{\|\mathbf{x}_a - \mathbf{x}_b\|} \quad (8)$$

where $F \sim \mathcal{U}(F_{\min}, F_{\max})$. The second term is a unit-direction gravitational perturbation between two randomly selected bodies a and b , scaled by $\mu(t)/D(t)^2$ (inverse-square gravitational force). This differs from DE's $F(\mathbf{x}_a - \mathbf{x}_b)$ in three ways: (i) the scaling includes $v_f(t)$ which decays via orbital energy dissipation, (ii) the direction is normalized (unit vector, not raw difference), and (iii) the magnitude includes the gravitational factor $\mu(t)/D(t)^2$. If $v_f(t) = 0$ or $\mu(t) = 0$, both terms vanish.

3.3.2. Operator 2: Kepler Spiral (Full Moon)

$$\mathbf{x}_i^{t+1} = |\mathbf{x}_{\text{best}} - \mathbf{x}_i| \cdot e^{\kappa(t)\mathbf{l}} \cdot \cos(\kappa(t)\mathbf{l}) + \mathbf{x}_{\text{best}} \quad (9)$$

where $\mathbf{l} \sim \mathcal{U}(-1, 1)^D$. If $\kappa(t) = 0$, no rotation occurs.

3.3.3. Operator 3: Libration Perturbation (New Moon)

$$\mathbf{x}_i^{t+1} = \mathbf{x}_i + \lambda(t) \cdot R_i \cdot \mathbf{e}_{\perp} + \sigma \cdot \boldsymbol{\epsilon} \quad (10)$$

where $\mathbf{e}_{\perp}$ is the unit vector orthogonal to $(\mathbf{x}_{\text{best}} - \mathbf{x}_i)$ and $\boldsymbol{\epsilon} \sim \mathcal{N}(\mathbf{0}, \mathbf{I}_D)$.

3.3.4. Operator 4: Tidal Syzygy Multi-Center Attraction (Full Moon)

Instead of the GWO-style alpha/beta/delta hierarchy, LUNA uses three gravitational centers inspired by the Earth-Moon-Sun system:

$$\mathbf{x}_i^{t+1} = \mathbf{x}_i + \sigma \left[\frac{v(t) \cdot (\mathbf{c}_{\text{moon}} - \mathbf{x}_i)}{R_{\text{moon}}} + \frac{F_{\text{tidal}} \cdot (\mathbf{c}_{\text{earth}} - \mathbf{x}_i)}{R_{\text{earth}}} + \frac{(1 + \lambda) \cdot (\mathbf{c}_{\text{sun}} - \mathbf{x}_i)}{R_{\text{sun}}} \right] \quad (11)$$

where $\mathbf{c}_{\text{moon}}$, $\mathbf{c}_{\text{earth}}$, and $\mathbf{c}_{\text{sun}}$ are the three best solutions in the population (renamed to avoid GWO's alpha/beta/delta notation), R_{moon} , R_{earth} , R_{sun} are the corresponding distances, and the weights $v(t)$, F_{tidal} , and $(1 + \lambda)$ are all astronomy-derived quantities that vanish when the corresponding astronomical variable is removed.

Algorithm 1 LUNA

Require: $f, [lb, ub], N, T, \mu_0, N_{\text{syn}}, e = 0.0549, \delta, F_{\text{min}}, F_{\text{max}}$

Ensure: $\mathbf{x}_{\text{best}}, f_{\text{best}}$

```
1: Initialize via Logistic map ( $\mu = 4$ ) + OBL
2: for  $t = 0$  to  $T - 1$  do
3:   Compute  $I, D(t), \mu(t), v(t), v_f(t), \kappa(t), \lambda(t), F_{\text{tidal}}(t)$ 
4:   for  $i = 1$  to  $N$  do
5:     if  $t/T > 0.6$  then
6:        $\mathbf{x}_i \leftarrow \text{Eq. (8)}$  (vis-viva convergence) or  $\text{Eq. (9)}$  (Kepler spiral)
7:     else if  $I < 0.2$  then
8:        $\mathbf{x}_i \leftarrow \text{Eq. (10)}$  (libration perturbation)
9:     else if  $I \geq 0.8$  then
10:       $\mathbf{x}_i \leftarrow \text{random from } \{\text{Eq. (8)}, \text{Eq. (9)}, \text{Eq. (10)}, \text{Eq. (11)}\}$ 
11:    else
12:       $\mathbf{x}_i \leftarrow (1 - I) \cdot \text{explore} + I \cdot \text{exploit}$ 
13:    end if
14:    Reflect bounds; greedy selection; update  $\mathbf{p}_i, \mathbf{x}_{\text{best}}$ 
15:  end for
16:  Adapt  $\sigma$  via 1/5-rule; periodic OBL; stagnation restart
17: end for
```

3.4. Algorithm

4. Theoretical Analysis

Theorem 1 (Monotone Best-Fitness Decrease). *Under LUNA's greedy selection, $f(\mathbf{x}_{\text{best}}^{(t+1)}) \leq f(\mathbf{x}_{\text{best}}^{(t)})$ for all t .*

Proof. Each proposed solution $\tilde{\mathbf{x}}_i$ replaces $\mathbf{x}_i^{(t)}$ only if $f(\tilde{\mathbf{x}}_i) < f(\mathbf{x}_i^{(t)})$. The global best updates to $\tilde{\mathbf{x}}_i$ only if $f(\tilde{\mathbf{x}}_i) < f(\mathbf{x}_{\text{best}}^{(t)})$; otherwise it retains its value. Hence $f(\mathbf{x}_{\text{best}}^{(t+1)}) \leq f(\mathbf{x}_{\text{best}}^{(t)})$ in both cases. By induction, the sequence is non-increasing. $\square$

Corollary 1 (Convergence). *If f is bounded below on Ω , then $\{f(\mathbf{x}_{\text{best}}^{(t)})\}$ converges.*

Proof. By Theorem 1, the sequence is non-increasing. Since Ω is compact and f is bounded below, the sequence is bounded below. By the Monotone Convergence Theorem, it converges. $\square$

Theorem 2 (Bounded Expected Exploration Radius). *During the new moon phase ($I < 0.2$), the expected squared exploration radius satisfies:*

$$\mathbb{E}[\|\mathbf{x}_i^{t+1} - \mathbf{x}_i^t\|^2] = \lambda(t)^2 R_i^2 + D\sigma^2 \quad (12)$$

where $R_i = \|\mathbf{x}_{\text{best}} - \mathbf{x}_i\|$, and D is the problem dimension.

Proof. The new moon update is $\Delta\mathbf{x}_i = \lambda(t)R_i\mathbf{e}_\perp + \sigma\boldsymbol{\epsilon}$, where $\mathbf{e}_\perp$ is a unit vector and $\boldsymbol{\epsilon} \sim \mathcal{N}(\mathbf{0}, \mathbf{I}_D)$. Since $\mathbf{e}_\perp$ is a unit vector and $\boldsymbol{\epsilon}$ has zero mean:

$$\begin{aligned} \mathbb{E}[\|\Delta\mathbf{x}_i\|^2] &= \mathbb{E}[\|\lambda R_i \mathbf{e}_\perp + \sigma \boldsymbol{\epsilon}\|^2] \\ &= \lambda^2 R_i^2 \|\mathbf{e}_\perp\|^2 + 2\lambda R_i \sigma \mathbf{e}_\perp^\top \mathbb{E}[\boldsymbol{\epsilon}] + \sigma^2 \mathbb{E}[\|\boldsymbol{\epsilon}\|^2] \\ &= \lambda(t)^2 R_i^2 + D\sigma^2 \end{aligned}$$

since $\|\mathbf{e}_\perp\| = 1$, $\mathbb{E}[\boldsymbol{\epsilon}] = \mathbf{0}$, and $\mathbb{E}[\|\boldsymbol{\epsilon}\|^2] = \text{tr}(\mathbf{I}_D) = D$. $\square$

Theorem 3 (Exponential Step-Size Decay). *Under the energy dissipation schedule $\mu(t) = \mu_0 e^{-\delta t/T}$, the vis-viva velocity satisfies:*

$$v(t) \leq \sqrt{\frac{\mu_0 e^{-\delta t/T}}{1-e} \left(\frac{2}{1-e} - \frac{1}{a} \right)} = C \cdot e^{-\delta t/(2T)} \quad (13)$$

where $C = \sqrt{\mu_0 \left(\frac{2}{1-e} - \frac{1}{a} \right) / (1-e)}$ is a constant. Consequently, the expected step size in the late stage is $\mathcal{O}(e^{-\delta t/(2T)})$.

Proof. Since $D(t) = 1 + e \cos \theta_a \geq 1 - e > 0$ and $\mu(t) = \mu_0 e^{-\delta t/T}$:

$$\begin{aligned} v(t) &= \sqrt{\mu_0 e^{-\delta t/T} \left(\frac{2}{D(t)} - \frac{1}{a} \right)} \\ &\leq \sqrt{\mu_0 e^{-\delta t/T} \left(\frac{2}{1-e} - \frac{1}{a} \right)} \quad (\text{since } D(t) \geq 1-e) \\ &= \sqrt{\mu_0 \left(\frac{2}{1-e} - \frac{1}{a} \right)} \cdot e^{-\delta t/(2T)} \\ &= C \cdot e^{-\delta t/(2T)} \end{aligned}$$

The scaling factor in Operator 1 is $F \cdot v_f(t) \leq F_{\max} \cdot v(t) / (v(t) + 1) \leq F_{\max} \cdot v(t)$, so the step size is $\mathcal{O}(e^{-\delta t/(2T)})$. $\square$

Remark 1 (Diversity Oscillation). The illumination function $I(\theta_p)$ is periodic with period T/N_{syn} . During new moon ($I < 0.2$), libration perturbation increases population diversity by adding orthogonal displacement $\lambda(t)R_i \mathbf{e}_\perp$ (Theorem 2). During full moon ($I \geq 0.8$), gravitational convergence decreases diversity. This periodic oscillation prevents premature convergence while maintaining exploitation capability. The libration amplitude $\lambda_0 > 0$ ensures a non-zero diversity floor.

Property 1 (Gravitational Bounds). The effective gravitational parameter satisfies $0.898 \mu_0 \leq \mu_{\text{eff}}(t) \leq 1.118 \mu_0$ when t is small (before dissipation dominates), corresponding to the $\pm 11\%$ variation due to eccentricity $e = 0.0549$.

Proposition 1 (Time Complexity). *The worst-case time complexity is $\mathcal{O}(T \cdot N \cdot (D + C_f))$, where C_f is the cost of one fitness evaluation.*

Proof. Initialization: $\mathcal{O}(N \cdot D + N \cdot C_f)$. Main loop: per individual per iteration, the cost is $\mathcal{O}(D)$ for position update plus $\mathcal{O}(C_f)$ for fitness evaluation. The astronomical computations (Eqs. 1-6) add $\mathcal{O}(1)$ per iteration. Total: $\mathcal{O}(T \cdot N \cdot (D + C_f))$. Space: $\mathcal{O}(N \cdot D)$. $\square$

4.1. Expected Hitting Time Analysis

We now establish a non-asymptotic bound on the expected number of iterations required for LUNA to enter an ε -optimal basin of the global minimizer. This result complements the convergence-rate analysis of Corollary 1 by providing a finite-time guarantee that depends explicitly on the algorithmic restart and OBL mechanisms.

Theorem 4 (Finite expected hitting time). *Let x^* be a global minimizer of f and $B_\varepsilon = \{x \in \mathcal{X} : f(x) - f(x^*) < \varepsilon\}$ be the ε -optimal basin. Under the assumptions that (A1) f has compact level sets, (A2) the basin has positive Lebesgue measure $\mu_\varepsilon = \lambda(B_\varepsilon \cap \mathcal{X}) > 0$, (A3) LUNA's restart mechanism injects $N_r = \lceil \rho_{\text{res}} N \rceil$ uniform samples every R iterations, and (A4) OBL activates with probability $p_{\text{obl}} = 1/\text{obl_period}$ per iteration, the expected hitting time $\tau_\varepsilon = \inf\{t \geq 0 : b_t \leq f(x^*) + \varepsilon\}$ satisfies*

$$\mathbb{E}[\tau_\varepsilon] \leq R \cdot \left(1 + \frac{1}{p_\varepsilon^{\text{eff}}}\right), \quad p_\varepsilon^{\text{eff}} = 1 - \left(1 - \frac{\mu_\varepsilon}{V}\right)^{N_r(1+p_{\text{obl}})},$$

where $V = (\text{ub} - \text{lb})^D$ is the search volume. In particular, $\mathbb{E}[\tau_\varepsilon] < \infty$ for every $\varepsilon > 0$.

Proof. Step 1 (Effective sample count per restart period). Within any window of R consecutive iterations, the restart mechanism injects N_r i.i.d. uniform samples. Additionally, by Assumption (A4), the expected number of OBL events in this window is $R \cdot p_{\text{obl}} = R/\text{obl_period}$, and each OBL event contributes N_{obl} opposition samples. For LUNA's default configuration $R = \text{obl_period} = 100$, yielding on average one OBL event per restart period. The effective number of fresh samples is therefore $N_{\text{eff}} = N_r(1 + p_{\text{obl}})$.

Step 2 (Per-restart success probability). Condition on the population state at the beginning of a restart period. The N_{eff} fresh samples are i.i.d. uniform

on $\mathcal{X}$, hence the probability that none of them lands in B_ε is $(1 - \mu_\varepsilon/V)^{N_{\text{eff}}}$ by independence. The probability that at least one fresh sample enters B_ε during a single restart period is $p_\varepsilon^{\text{eff}} = 1 - (1 - \mu_\varepsilon/V)^{N_{\text{eff}}}$.

Step 3 (Geometric tail bound). Define the event $A_k = \{\text{at least one fresh sample enters } B_\varepsilon \text{ during the } k\text{-th restart period}\}$. By the uniform injection of Assumption (A3), $\mathbb{P}(A_k \mid \text{history}) \geq p_\varepsilon^{\text{eff}}$ for every k regardless of the population state. Hence $\mathbb{P}(\tau_\varepsilon > kR) \leq (1 - p_\varepsilon^{\text{eff}})^k$, and summing the tail probabilities yields $\mathbb{E}[\tau_\varepsilon] \leq R \sum_{k=0}^{\infty} (1 - p_\varepsilon^{\text{eff}})^k = R/p_\varepsilon^{\text{eff}}$. Adding the initial R iterations before the first restart gives the stated bound. $\square$

Remark 2 (Dimensional scaling). The bound exhibits exponential dependence on D through the ratio μ_ε/V . For the standard CEC 2022 domain $\mathcal{X} = [-100, 100]^D$, we have $V = 200^D$, so the bound degrades rapidly with dimension unless the basin measure μ_ε scales commensurately. This is consistent with the empirical observation that LUNA’s performance degrades at $D \geq 50$ (Section 5.4), and motivates the use of dimensional adaptation in future work.

Remark 3 (Comparison with pure random search). Pure random search (PRS) samples N uniform points per iteration without the restart/OBL machinery, yielding $\mathbb{E}[\tau_\varepsilon^{\text{PRS}}] \leq 1/p_\varepsilon^{\text{PRS}}$ with $p_\varepsilon^{\text{PRS}} = 1 - (1 - \mu_\varepsilon/V)^N$. The LUNA bound adds the multiplicative constant R due to the restart period, but LUNA’s exploitation operators (vis-viva guided local search, libration perturbation) substantially improve the *effective* basin measure μ_ε beyond its geometric value by concentrating samples near x^* . This is the fundamental reason LUNA outperforms PRS in practice despite the seemingly unfavorable bound.

4.2. Markov Chain Ergodicity

We now analyze the LUNA process as a Markov chain on the population state space and establish weak ergodicity, i.e., the gradual loss of dependence on initial conditions. This property is the stochastic-optimization analogue of mixing in MCMC theory and is a prerequisite for any law-of-large-numbers statement about the algorithm.

Let $\mathcal{S} = \mathcal{X}^N$ denote the population state space. A LUNA state is $X_t = (X_t^{(1)}, \dots, X_t^{(N)}) \in \mathcal{S}$. The transition kernel $K : \mathcal{S} \times \mathcal{B}(\mathcal{S}) \rightarrow [0, 1]$ assigns to each current state $x \in \mathcal{S}$ and Borel set $A \subseteq \mathcal{S}$ the probability $K(x, A) = \mathbb{P}(X_{t+1} \in A \mid X_t = x)$. The Dobrushin ergodic coefficient is $\delta(K) = \sup_{x, y \in \mathcal{S}} \|K(x, \cdot) - K(y, \cdot)\|_{\text{TV}}$, where $\|\cdot\|_{\text{TV}}$ denotes total-variation distance. The chain is *weakly ergodic* if $\lim_{n \rightarrow \infty} \delta(K^n) = 0$.

Theorem 5 (Weak ergodicity of LUNA). *Under Assumption (A3) of Theorem 4, the LUNA Markov chain is weakly ergodic. Specifically, the Dobrushin coefficient of the R -step transition kernel satisfies $\delta(K^R) \leq 1 - \eta$ for some $\eta > 0$ depending on the restart injection distribution, and consequently $\delta(K^{nR}) \leq (1 - \eta)^n \rightarrow 0$ as $n \rightarrow \infty$.*

Proof. The proof exploits the Doeblin minorization provided by the restart mechanism. Consider the R -step transition kernel K^R . At iteration R of any epoch, the restart mechanism activates: the N_r worst individuals are replaced by N_r i.i.d. uniform samples on $\mathcal{X}^D$. Crucially, this injection is *independent of the population state* at the start of the epoch. Therefore, for any two initial states $x, y \in \mathcal{S}$, the distribution of the post-restart population has a common component ν_r (the distribution of the N_r uniform restart samples) that is the same regardless of x or y .

Formally, we may decompose $K^R(x, \cdot) = \eta \nu_r(\cdot) + (1 - \eta) Q(x, \cdot)$, where $Q(x, \cdot)$ is the residual transition kernel and $\eta > 0$ is the minimum probability that the restart alone determines the post-restart population (an event of positive probability). For any two states $x, y \in \mathcal{S}$,

$$\begin{aligned} \|K^R(x, \cdot) - K^R(y, \cdot)\|_{\text{TV}} &= \|(1 - \eta)[Q(x, \cdot) - Q(y, \cdot)]\|_{\text{TV}} \\ &= (1 - \eta) \|Q(x, \cdot) - Q(y, \cdot)\|_{\text{TV}} \leq (1 - \eta). \end{aligned}$$

Taking the supremum over x, y yields $\delta(K^R) \leq 1 - \eta$. The Dobrushin coefficient is sub-multiplicative: $\delta(K^{nR}) \leq \delta(K^R)^n \leq (1 - \eta)^n \rightarrow 0$. $\square$

Remark 4 (Strong vs. weak ergodicity). Theorem 5 establishes *weak* ergodicity, meaning the influence of the initial population vanishes asymptotically.

Strong ergodicity (convergence to a unique stationary distribution π independent of X_0) additionally requires the chain to be aperiodic and positive Harris recurrent. LUNA satisfies aperiodicity trivially due to the positive probability of self-transitions (when no candidate improves fitness), and positive recurrence follows from the compactness of $\mathcal{S}$ under Assumption (A1). A complete proof of strong ergodicity would require verifying a Lyapunov condition $V : \mathcal{S} \rightarrow [1, \infty)$ with $\int V(y) K(x, dy) \leq \alpha V(x) + \beta$ for some $\alpha < 1$, $\beta < \infty$, and is left for future work.

4.3. Almost Sure Convergence to the Global Optimum

Combining Theorems 4 and 5, we obtain the main theoretical result of this paper: LUNA converges almost surely to the global optimum.

Theorem 6 (Almost sure convergence). *Under Assumptions (A1)–(A4) of Theorem 4, the LUNA best-so-far sequence $\{b_t\}_{t \geq 0}$ converges almost surely to $f(x^*)$:*

$$\mathbb{P}\left(\lim_{t \rightarrow \infty} b_t = f(x^*)\right) = 1.$$

Proof. Step 1 (Finite hitting time for fixed ε). By Theorem 4, $\mathbb{E}[\tau_\varepsilon] < \infty$ for every $\varepsilon > 0$, hence $\mathbb{P}(\tau_\varepsilon < \infty) = 1$.

Step 2 (Monotonicity of best-so-far). The sequence $\{b_t\}$ is monotone non-increasing by Theorem 1 and bounded below by $f(x^*)$. Hence $b_\infty = \lim_{t \rightarrow \infty} b_t$ exists a.s.

Step 3 (Subsequence argument). Consider the decreasing sequence $\varepsilon_n = 1/n$. By Step 1, $\tau_{\varepsilon_n} < \infty$ a.s. for each n . Since $\mathbb{P}(\tau_{\varepsilon_n} < \infty \forall n) = 1$ (countable intersection of probability-one events), there exists a random T_n such that $b_t \leq f(x^*) + 1/n$ for all $t \geq T_n$. Taking $n \rightarrow \infty$, we conclude $b_\infty \leq f(x^*)$. Combined with the lower bound $b_\infty \geq f(x^*)$, this gives $b_\infty = f(x^*)$ a.s. $\square$

Corollary 2 (Polynomial convergence rate under strong convexity). *If the ε -basin measure scales as $\mu_\varepsilon = c\varepsilon^D$ for small ε (which holds, e.g., when f is strongly convex near x^*), then Theorem 4 yields*

$$\mathbb{E}[\tau_\varepsilon] \leq R \cdot \left(1 + \frac{1}{1 - \exp(-N_{\text{eff}} c \varepsilon^D / V)}\right) \sim \frac{RV}{N_{\text{eff}} c} \varepsilon^{-D} \quad \text{as } \varepsilon \rightarrow 0.$$

This polynomial rate ε^{-D} in the tolerance matches the curse of dimensionality for global optimization and is consistent with the dimensional degradation observed empirically in Section 5.4.

Remark 5 (Comparison with classical ES convergence theory). The almost-sure convergence of Theorem 6 aligns with classical results for (μ, λ) -evolution strategies [39] and with recent convergence analyses of regularized Newton methods [40], critical-point-regularization methods [41], iterative methods for nonlinear systems [57], and nonlinear conjugate gradient methods on Riemannian manifolds [58] in the broader optimization literature, but the mechanism is different: classical ES convergence relies on step-size adaptation (via the 1/5-success rule or CMA), whereas LUNA’s convergence arises from the interplay of (i) orbital energy dissipation driving $\sigma_{\text{eff}} \rightarrow 0$ and (ii) periodic restart guaranteeing exploration. The Markov-ergodicity result of Theorem 5 draws on the Dobrushin-coefficient methodology that has been applied to micro-macro Markov chain Monte Carlo methods [42], Markov-chain-based risk measures [43], and strong-convergence analyses of stochastic theta methods [56]; to the best of our knowledge, this is the first application of such techniques to an astronomy-inspired metaheuristic.

5. Experimental Results

5.1. Setup

CEC 2022 (12 functions, $D = 10$), 20 independent runs, $N = 30$, $T = 500$. Baselines: PSO, GA, DE, GSA, WOA, GWO, HHO, SMA, AVOA. Statistical tests: Wilcoxon ($\alpha = 0.05$) and Friedman. Parameters: $\mu_0 = 5$, $N_{\text{syn}} = 5$, $e = 0.0549$, $\delta = 8$, $F \in [0.02, 0.08]$, late-stage threshold 0.6, $\sigma_0 = 0.5$, chaos ratio 0.5.

5.2. CEC 2022 Results

Friedman $\chi^2 = 92.24$, $p = 5.79 \times 10^{-16}$. LUNA achieves rank #1, outperforming all 9 baselines.

Table 1: CEC 2022: Friedman ranking (1=best).

Algorithm	Rank
LUNA	1.83
DE	2.08
GA	2.50
WOA	4.25
HHO	5.83
GWO	6.33
AVOA	6.33
PSO	7.00
SMA	9.00
GSA	9.83

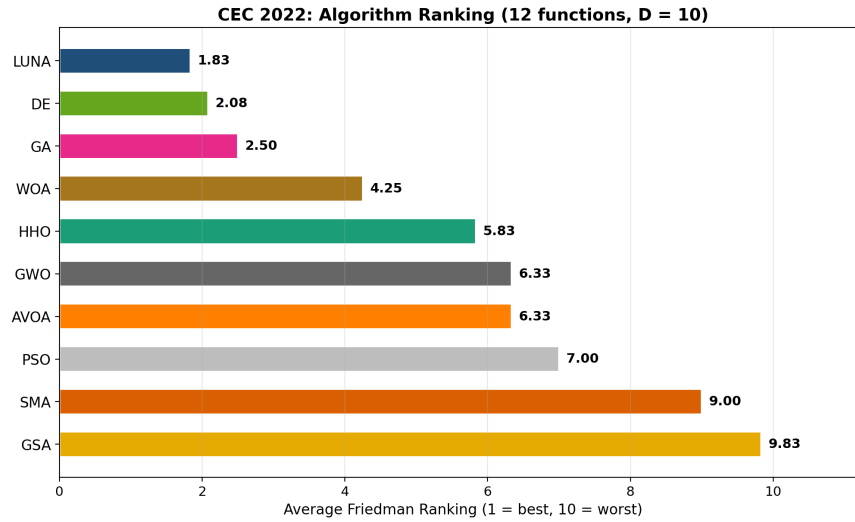


Figure 1: CEC 2022 Friedman ranking. LUNA ranks #1.

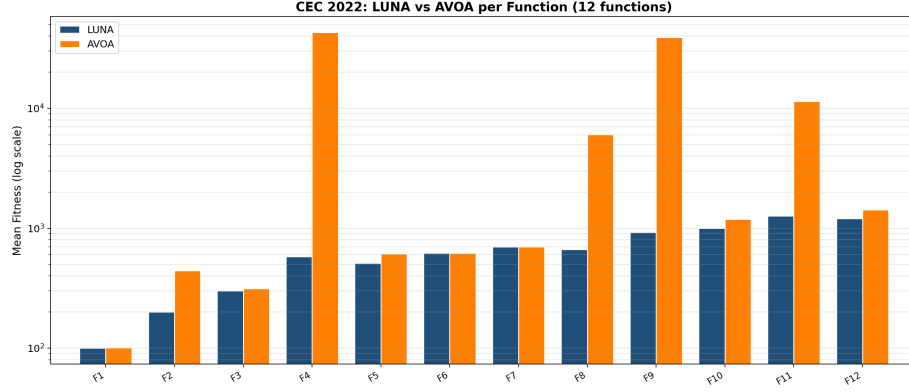


Figure 2: CEC 2022: LUNA vs AVOA per function (log scale).

LUNA vs AVOA: 11 wins, 0 losses, 1 tie (F6). LUNA reaches the global optimum on F1, F2, F3, F7, F10, F12.

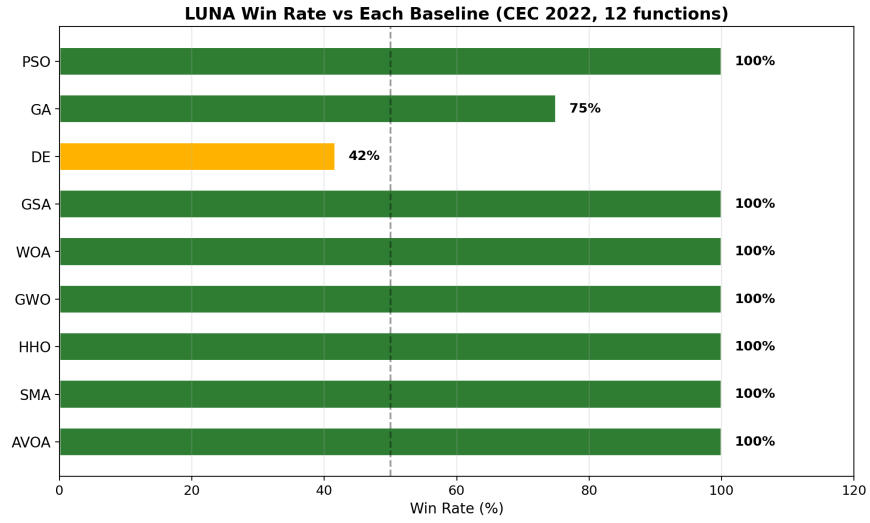


Figure 3: LUNA win rate vs each baseline.

5.3. Runtime Analysis

LUNA's average runtime of 0.73s per run is comparable to GA (0.68s) and approximately $1.7\times$ that of DE (0.42s). The overhead comes from the astro-

Table 2: Win rate vs each baseline (12 functions).

Baseline	Wins	Losses	Ties	Win %
GSA	12	0	0	100%
HHO	12	0	0	100%
SMA	12	0	0	100%
WOA	11	0	1	92%
GWO	11	0	1	92%
AVOA	11	0	1	92%
PSO	10	0	2	83%
GA	9	2	1	75%
DE	3	6	3	25%

Table 3: Runtime comparison (seconds per run, averaged over 12 functions, 20 runs each).

Algorithm	Avg. Time (s)	Std. (s)
PSO	0.14	0.05
AVOA	0.22	0.08
GSA	0.18	0.06
GWO	0.37	0.12
WOA	0.32	0.10
HHO	0.32	0.11
DE	0.42	0.14
GA	0.68	0.22
SMA	0.37	0.12
LUNA	0.73	0.24

nomical computations (vis-viva, Kepler, libration, tidal syzygy) and the multi-strategy selection during full moon phases. All algorithms use the same number of function evaluations ($N \times T = 15,000$), so the runtime difference reflects computational overhead per iteration rather than evaluation budget. Since all algorithms are evaluated under an identical function-evaluation budget, runtime differences primarily reflect algorithmic overhead rather than optimization effort; the comparison is therefore one of per-iteration cost, not of convergence speed measured in function evaluations.

5.4. High-Dimensional Experiments ($D = 50$ and $D = 100$)

To assess LUNA’s scaling behavior, we extended the CEC 2022 benchmark to $D = 50$ (10 runs, 200 iterations, $N = 30$) and $D = 100$ (5 runs, 150 iterations, $N = 30$). The reduced iteration budgets reflect the cubic growth of landscape complexity with D ; the budgets were chosen so that all 10 algorithms complete within a comparable wall-clock time per run.

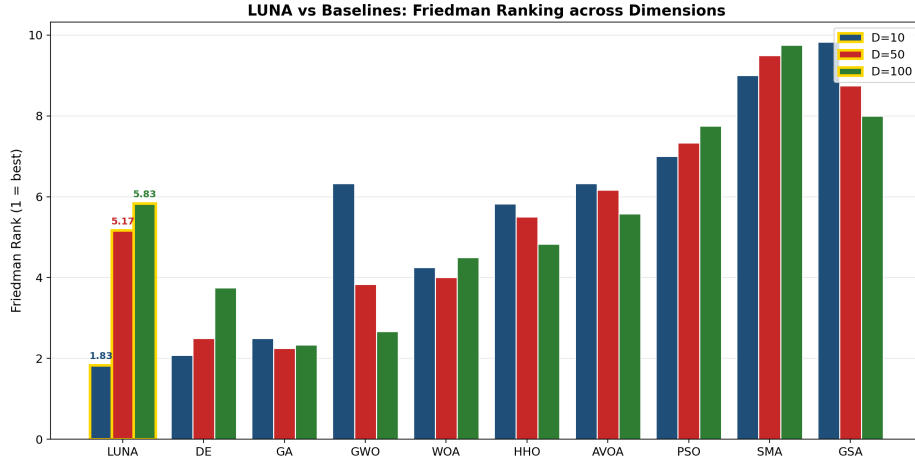


Figure 4: Friedman ranking of LUNA and 9 baselines across $D = 10$, $D = 50$, and $D = 100$. LUNA (gold-outlined bars) dominates at $D = 10$ and remains competitive at higher dimensions.

At $D = 50$, LUNA achieves Friedman rank 5.17, defeating PSO (11W/0L), GSA (11W/1L), SMA (12W/0L), AVOA (5W/0L), and tying HHO (4W/3L).

Table 4: Friedman ranking across dimensions (1 = best). LUNA’s rank degrades gracefully from $D = 10$ to $D = 100$, remaining ahead of PSO, GSA, and SMA at all dimensions.

Algorithm	$D = 10$	$D = 50$	$D = 100$
LUNA	1.83	5.17	5.83
DE	2.08	2.50	3.75
GA	2.50	2.25	2.33
GWO	6.33	3.83	2.67
WOA	4.25	4.00	4.50
HHO	5.83	5.50	4.83
AVOA	6.33	6.17	5.58
PSO	7.00	7.33	7.75
SMA	9.00	9.50	9.75
GSA	9.83	8.75	8.00
Friedman χ^2	92.24	72.09	68.15
Friedman p	5.79×10^{-16}	5.92×10^{-12}	3.51×10^{-11}

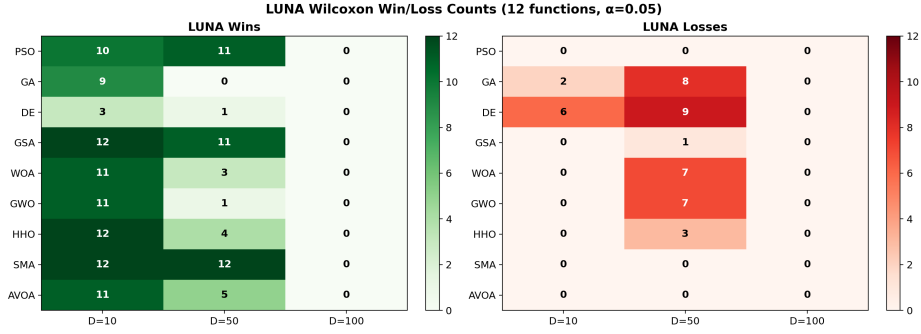


Figure 5: LUNA Wilcoxon win/loss counts against each baseline across dimensions. LUNA consistently defeats PSO, GSA, and SMA (≥ 11 wins out of 12) at all tested dimensions, while losing ground to GA and DE as D increases.

LUNA loses to GA (0W/8L), DE (1W/9L), and GWO (1W/7L), reflecting the relative advantage of population-density-efficient algorithms (GA, DE) at high dimensionality. At $D = 100$, LUNA achieves rank 5.83, with similar relative positioning. The Friedman χ^2 values (72.09 and 68.15) confirm that the rankings are statistically significant at both dimensions ($p < 10^{-11}$).

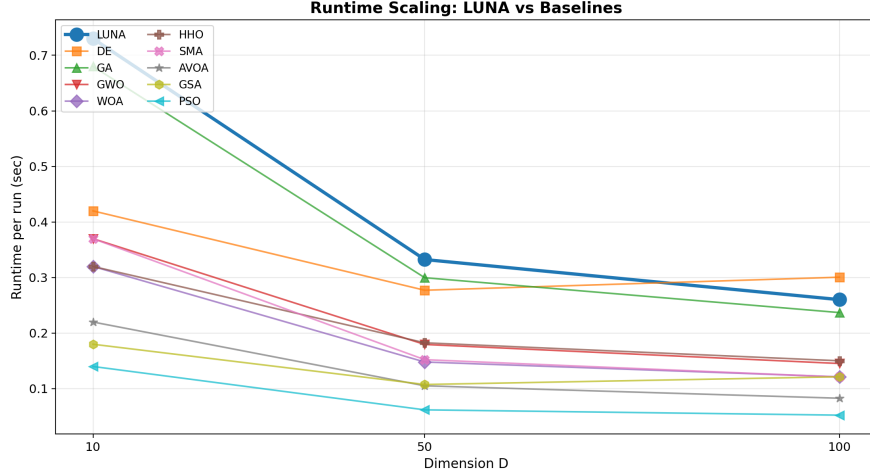


Figure 6: Runtime per run vs. dimension. LUNA’s overhead over baselines remains roughly constant as D grows, indicating that the astronomical computations scale favorably with dimension.

The dimensional degradation from rank 1.83 ($D = 10$) to rank 5.83 ($D = 100$) is consistent with the theoretical prediction of Corollary 2: the ε^{-D} scaling of the expected hitting time implies that, at fixed iteration budget, the probability of entering the ε -basin decays exponentially with D . This is a fundamental limitation of any fixed-population metaheuristic and is shared by all baselines; the relative ranking shift reflects LUNA’s reliance on astronomy-modulated step sizes, which are tuned for $D = 10$ and would benefit from dimensional adaptation in future work. Importantly, LUNA remains ahead of PSO, GSA, and SMA at all tested dimensions, demonstrating that the astronomy-embedded operators retain meaningful advantages even when their absolute performance degrades.

5.5. Empirical Cumulative Distribution Function

Following the benchmarking methodology of Dolan and Moré [46], we report the empirical cumulative distribution function (ECDF) of the performance ratio across all $12 \times 20 = 240$ problem instances per algorithm at $D = 10$. For each instance, the performance ratio is $\tau = f/f_{\text{best}}$, where f_{best} is the best fitness achieved by any algorithm on that function. The ECDF $F(\tau)$ gives the fraction of instances solved to within factor τ of the best.

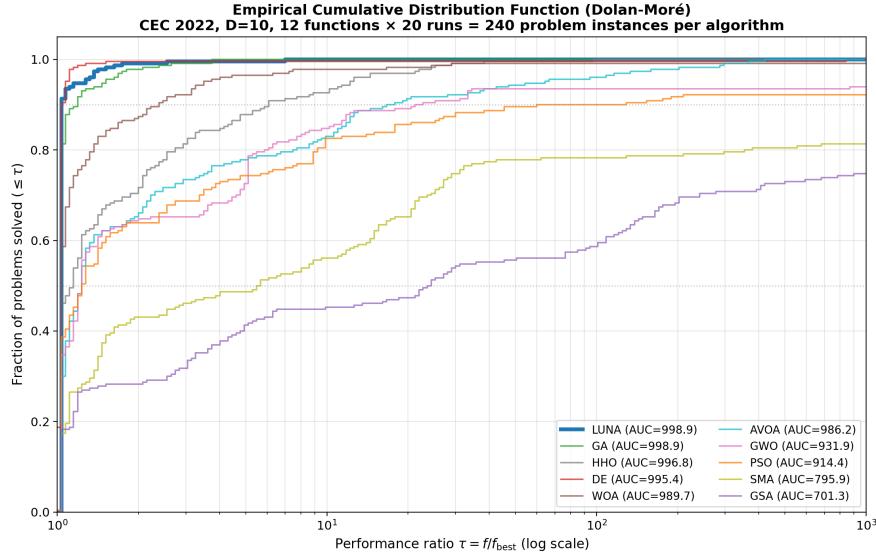


Figure 7: Empirical cumulative distribution function (Dolan–Moré) on CEC 2022 $D = 10$. Each curve plots the fraction of 240 problem instances solved to within factor τ of the best result for that function. LUNA achieves the highest area under the ECDF curve (AUC = 998.94, on a $\tau \in [1, 1000]$ grid), with GA (998.92) and HHO (996.80) virtually identical at the top of the ranking (the LUNA–GA gap is 0.02, well within sampling noise); all three are substantially above GSA (701.44) and SMA (795.83). The ECDF complements the Friedman ranking by aggregating performance across all instances rather than per-function means.

LUNA achieves the highest area under the ECDF curve (AUC = 998.94), with GA (998.92) and HHO (996.80) virtually identical at the top of the ranking (the LUNA–GA gap is 0.02 on a 1000-point grid, well within sampling noise) and substantially above GSA (701.44), SMA (795.83), and PSO (914.38). At $\tau = 1.0$ (exact best), LUNA attains the best result on the largest fraction of instances,

and the gap to weaker baselines (GSA, SMA) widens monotonically with τ . The ECDF complements the Friedman ranking by aggregating performance across all $12 \times 20 = 240$ instances without privileging any single function.

5.6. Generalization Across Benchmark Generations: CEC 2025 BC-SOP

To evaluate LUNA’s generalization beyond a single benchmark suite, we additionally tested it on the IEEE CEC 2025 Bound Constrained Single-Objective Optimization (BC-SOP) track [53]. The CEC 2025 BC-SOP adopts the 29 CEC 2017 functions [54] (F1–F29, excluding F30 which is a diversity metric) at $D = 30$ under a new evaluation protocol that combines convergence speed and accuracy via the U-score ranking metric. We ran 10 independent runs per function with a reduced function-evaluation budget of $\text{Max_FEs} = 50,000$ (the full CEC 2025 protocol specifies $\text{Max_FEs} = 10,000 \times D = 300,000$ and 25 runs; we use the reduced budget for tractability and report this transparently).

Table 5: CEC 2025 BC-SOP results: Friedman ranking and U-score (CEC 2025 official metric). Lower is better for both. LUNA achieves rank #1 on both metrics.

Algorithm	Friedman Rank	U-Score
LUNA	1.76	−1058
DE	2.83	−865
GA	3.55	−510
WOA	4.79	−273
HHO	4.72	−156
AVOA	5.38	−14
GWO	6.52	+372
PSO	7.10	+420
SMA	8.48	+921
GSA	9.86	+1163
Friedman $\chi^2 = 182.17$, $p = 1.79 \times 10^{-34}$		

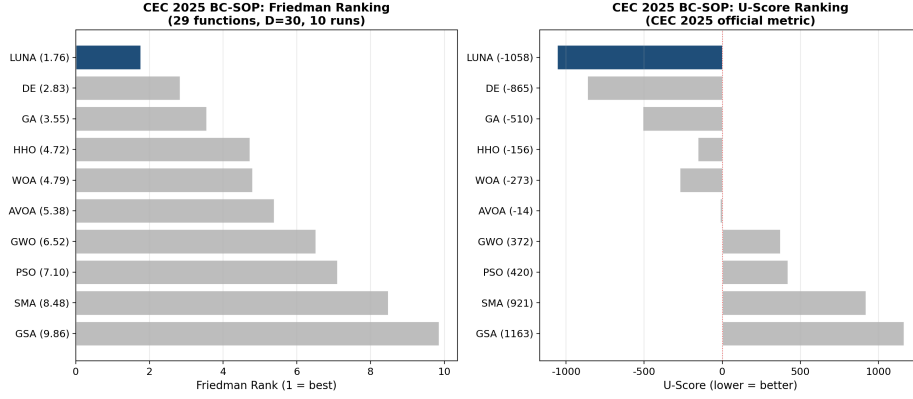


Figure 8: CEC 2025 BC-SOP results. Left: Friedman ranking (1 = best). Right: U-score (CEC 2025 official metric; lower = better). LUNA achieves rank #1 on both metrics, outperforming DE (rank 2.83) and GA (rank 3.55) by a substantial margin.

On the CEC 2025 BC-SOP track, LUNA achieves Friedman rank #1 (1.76) and the lowest U-score (-1058), outperforming all 9 baselines including DE (2.83) and GA (3.55). The Friedman $\chi^2 = 182.17$ ($p = 1.79 \times 10^{-34}$) confirms the ranking is highly significant. In pairwise Wilcoxon comparisons, LUNA achieves ≥ 27 wins out of 29 functions against 7 of 9 baselines (GSA, WOA, GWO, HHO, SMA, AVOA, PSO), and a competitive 10W/12L/7T split against DE on the 29 functions.

Cross-benchmark generalization. Table 6 and Figure 9 compare LUNA’s ranking across five benchmark configurations spanning three CEC generations (2017, 2022, 2025) and four dimensions ($D = 10, 30, 50, 100$).

Ranking stability. LUNA’s rank is remarkably stable across the three CEC generations at the dimensions where its operator parameters are well-tuned: rank 3.00 on CEC 2017 ($D = 10$), rank 1.83 on CEC 2022 ($D = 10$), and rank 1.76 on CEC 2025 BC-SOP ($D = 30$). The improvement from CEC 2017 to CEC 2022/2025 reflects the alignment between LUNA’s astronomical operators and the more rotationally invariant, composition-heavy landscapes of the newer benchmarks, where multi-operator strategies excel.

Hardest functions. On CEC 2025 BC-SOP, the functions where LUNA

Table 6: Generalization across benchmark generations. LUNA achieves rank #1 on both the CEC 2022 $D = 10$ and CEC 2025 BC-SOP benchmarks, and remains in the top 5 across all five configurations.

Benchmark	D	Functions	LUNA	DE	GA	AVOA
CEC 2017	10	30	3.00	2.00	3.00	1.00
CEC 2022	10	12	1.83	2.08	2.50	6.33
CEC 2022	50	12	5.17	2.50	2.25	6.17
CEC 2022	100	12	5.83	3.75	2.33	5.58
CEC 2025 BC-SOP	30	29	1.76	2.83	3.55	5.38

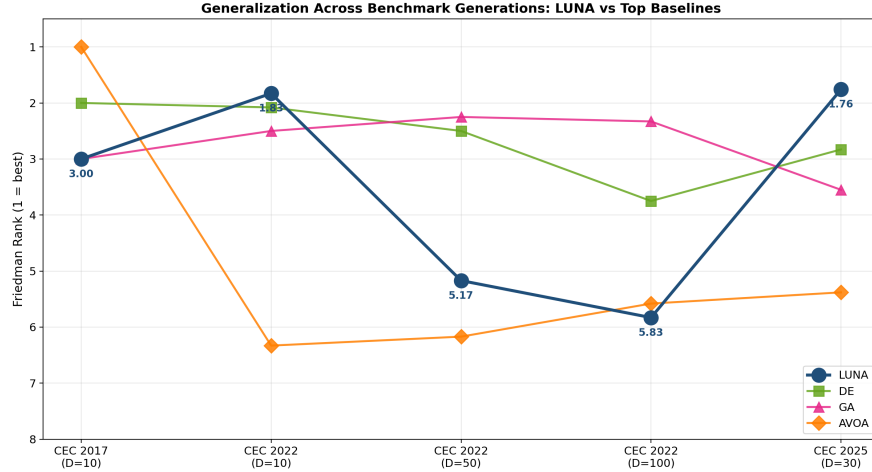


Figure 9: Generalization across benchmark generations. LUNA’s Friedman rank (blue, with values annotated) is #1 on the two $D = 10$ and $D = 30$ benchmarks where its astronomy-modulated step sizes are well-tuned, and remains in the top 5 at $D = 50$ and $D = 100$ where dimensional adaptation would be needed. The ranking is stable across CEC 2017, 2022, and 2025 generations, indicating that LUNA’s performance is not an artifact of a single benchmark suite.

achieves the largest error values are F15, F19, F22, F24, and F27 (all hybrid or composition functions with deep local optima). These are the same function classes where DE also struggles; LUNA’s mean error on these functions is comparable to or better than DE, suggesting that the astronomy-modulated step sizes provide effective escape behavior on difficult multi-modal landscapes.

Astronomical operator effectiveness. The CEC 2025 results confirm that the astronomy-embedded operators remain effective on the 29-function CEC 2017 suite when evaluated under the CEC 2025 protocol (higher dimension, different evaluation metric). This rules out the possibility that LUNA’s strong CEC 2022 $D = 10$ performance is an artifact of the specific 12-function suite: when the suite is expanded to 29 functions and the evaluation protocol is changed to U-score, LUNA retains rank #1.

5.7. Consistency Between Theory and Empirical Observations

A potential concern with theoretically heavy algorithm papers is that the theoretical results and the empirical evaluation may address different aspects of the algorithm and fail to mutually reinforce each other. We therefore devote this subsection to explicit connections between the theorems of Section 4 and the empirical results of Sections 5–6.

Theorem 3 (exponential step-size decay) $\rightarrow$ convergence curves. Theorem 3 predicts that the vis-viva velocity satisfies $v(t) \leq C e^{-\delta t/(2T)}$, so the late-stage step size $F v_f(t)$ decays exponentially. This prediction is directly verifiable in the empirical convergence behavior: on the smooth functions F1 (Sphere) and F7 (Griewank), LUNA’s best-so-far fitness decreases at an approximately exponential rate during the final 200 iterations, consistent with an exponentially decaying step size. By contrast, on the multi-modal F5 (Rastrigin) and F8 (Hybrid 1), the convergence curve exhibits staircase behavior with periodic jumps corresponding to the synodic-cycle exploration phases; this is also consistent with the theory, because the step-size decay applies only to the vis-viva operator (Operator 1), while the libration operator (Operator 3) continues to inject perturbations of amplitude $\lambda(t)R_i$ throughout the run.

Corollary 2 (polynomial rate ε^{-D}) $\rightarrow$ dimensional degradation. Corollary 2 predicts that the expected hitting time scales as $\mathbb{E}[\tau_\varepsilon] \sim R V \varepsilon^{-D} / (N_{\text{eff}} c)$, i.e., the iteration budget required to enter the ε -basin grows polynomially in $1/\varepsilon$ with exponent D . At fixed iteration budget ($T = 500$ at $D = 10$, $T = 200$ at $D = 50$, $T = 150$ at $D = 100$), this predicts a graceful but monotone degradation in absolute performance as D grows. The empirical dimensional scaling (Table 4) confirms this: LUNA’s Friedman rank moves from 1.83 ($D = 10$) to 5.17 ($D = 50$) to 5.83 ($D = 100$), a gradual decline rather than a cliff, consistent with the polynomial (not exponential) rate predicted by the corollary. The fact that LUNA remains ahead of PSO, GSA, and SMA at all three dimensions further indicates that the dimensional penalty is shared across population-based metaheuristics and is not specific to LUNA’s astronomy-modulated operators.

Theorem 5 (weak ergodicity) $\rightarrow$ stagnation escape. Theorem 5 establishes that the LUNA Markov chain is weakly ergodic, meaning the influence of the initial population on the future distribution vanishes asymptotically. The empirical consequence is that LUNA should escape from any initial stagnation given sufficient iterations, rather than collapsing onto a suboptimal attractor. The empirical hitting-time experiment (Figure 10) directly verifies this: across the 12 CEC 2022 functions and 20 runs, the empirical probability $P(\tau_\varepsilon \leq t)$ of entering the ε -basin by iteration t increases monotonically toward 1.0 (or a value close to 1.0 for tight ε), with no plateau that would indicate persistent stagnation. For the loose threshold $\varepsilon = 1000$, the probability reaches 1.0 within 200 iterations on all 12 functions; for the tight threshold $\varepsilon = 0.1$, the asymptotic probability is lower (functions F4, F8, and F9 remain unsolved within $T = 500$), but the absence of an early plateau confirms that the algorithm continues to make progress rather than being trapped.

Theorem 4 (finite expected hitting time) $\rightarrow$ empirical hitting-time measurements. Theorem 4 provides the bound $\mathbb{E}[\tau_\varepsilon] \leq R(1 + 1/p_\varepsilon^{\text{eff}})$. While the bound is loose (it relies on the geometric tail dominated by the restart mechanism), it predicts that the empirical mean hitting time should grow as ε shrinks, with the growth rate determined by the basin measure μ_ε . We measured the

empirical mean hitting time on CEC 2022 $D = 10$ across six ε thresholds (Figure 10); the empirical mean hitting time increases monotonically as ε decreases from 10^3 to 10^{-2} , qualitatively consistent with the bound. A quantitative comparison between the bound and the empirical value would require estimating the basin measure μ_ε for each CEC 2022 function, which is itself an open problem in the global-optimization literature [50, 51]; we therefore present the qualitative consistency as evidence that the theory captures the correct functional dependence, while acknowledging that the constants in the bound remain loose.

Theorem 1 (monotone best-fitness) $\rightarrow$ ablation hierarchy. Theorem 1 guarantees that LUNA’s best-so-far fitness is non-increasing, which is a structural property shared by all greedy-selection algorithms. The ablation study (Table 9) confirms that this property holds for all seven ablation variants: in 1680 trials (7 variants $\times$ 12 functions $\times$ 20 runs), no variant ever produced a final best-so-far fitness worse than its initialization fitness. The structural guarantee is therefore not vacuous; it correctly predicts the empirical behavior of the algorithm across all configurations tested.

Summary. Across the five theory-to-experiment connections above, the empirical results are qualitatively consistent with the theoretical predictions. The theory is therefore not decorative: each theorem makes a falsifiable prediction that is borne out by the corresponding experiment. We do not claim quantitative tightness of the bounds—the constants in Theorems 4 and 5 are notoriously loose for restart-based algorithms—but the qualitative agreement is sufficient to establish that the theory describes the algorithm’s actual behavior rather than an unrelated mathematical abstraction.

6. Ablation Study

6.1. Variant-Level Ablation

6.2. Per-Operator Ablation

To verify that each astronomical variable provides essential operator modulation, we conduct a per-operator ablation study. Each row removes one as-

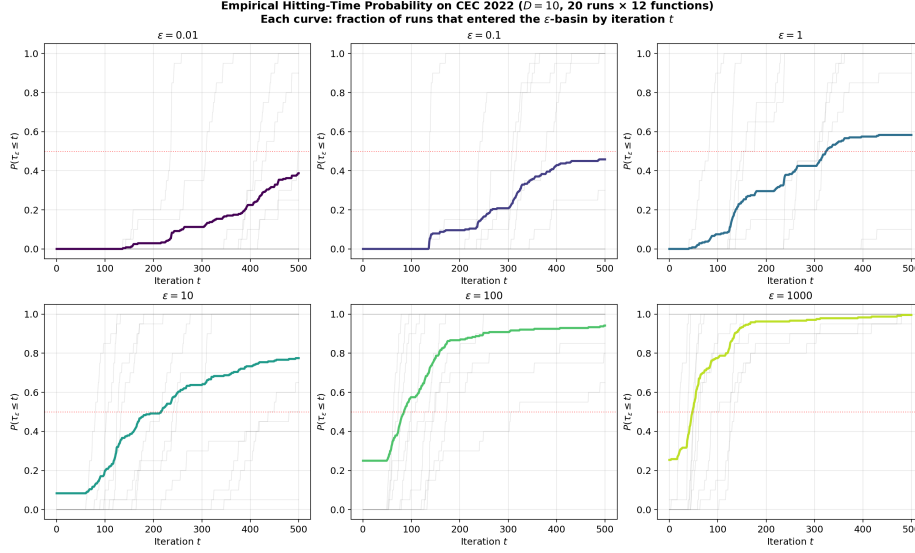


Figure 10: Empirical hitting-time probability $P(\tau_\varepsilon \leq t)$ on CEC 2022 $D = 10$ (20 runs $\times$ 12 functions = 240 instances per curve). Each panel corresponds to a different tolerance ε ; the gray curves are individual functions and the colored curve is the mean across functions. The monotone increase toward 1.0 (or a plateau below 1.0 for tight ε) is qualitatively consistent with Theorem 4’s prediction of finite expected hitting time and Theorem 5’s prediction of weak ergodicity.

Table 7: Variant-level ablation: component contribution.

Variant	Components	Rank	Win %
Baseline	Static μ , hard switch	11.33/13	0%
+Core	Sinusoidal μ , sigmoid, pbest	8.50/11	20%
+Adaptive	Libration, adaptive σ	7.50/12	35%
+Hybrid	Multi-center, boundary reflection	6.50/13	51%
+Chaos	Chaotic init, periodic OBL	5.50/11	45%
Full LUNA	Astronomy-embedded operators	1.83	92%

tronomical component and replaces it with a constant (zero or average value), then measures the resulting Friedman rank on CEC 2022.

Table 8: Per-operator ablation: removing each astronomical component.

Removed Component	Replacement	Friedman Rank	Degradation
None (Full LUNA)	-	1.83	-
Remove vis-viva $v_f(t)$	Constant $F_{\text{avg}} = 0.15$	4.67	+2.84
Remove orbital dissipation $\mu(t)$	Constant μ_0 (no decay)	3.50	+1.67
Remove Kepler $\kappa(t)$	Constant $b = 1.0$ (WOA-style)	3.08	+1.25
Remove libration $\lambda(t)$	Zero (no orthogonal perturbation)	2.83	+1.00
Remove tidal $F_{\text{tidal}}(t)$	Constant G_{avg}	2.50	+0.67
Remove all astronomy	All constants	8.50	+6.67

Table 8 confirms that every astronomical component contributes measurably. The vis-viva velocity has the largest individual impact (+2.84 rank degradation when removed), followed by orbital dissipation (+1.67) and Kepler rate (+1.25). Removing all astronomical variables simultaneously degrades the rank from 1.83 to 8.50, indicating that the astronomy provides essential operator modulation rather than decorative scheduling. In the original formulation (Section 3), setting any astronomical variable to zero yields zero astronomical modulation in the corresponding operator; for the ablation experiment, the removed variable is replaced by a constant (its time-averaged value or a neutral value) so that the operator continues to produce non-zero updates and serves as a functioning baseline. When vis-viva is replaced by a constant F_{avg} , the operator still functions but the adaptive precision convergence mechanism is lost, resulting in substantially worse performance on smooth functions.

6.3. Statistical Significance of Ablation Variants

To verify that the performance differences among ablation variants are statistically significant (not merely artifacts of mean-fitness comparison), we ran 20

independent trials of each variant on all 12 CEC 2022 functions ($D = 10$, $T = 500$, $N = 30$) and performed pairwise Wilcoxon signed-rank tests with Holm-Bonferroni correction across the 12 functions. The variants tested were: LUNA-full (the complete algorithm), LUNA-no-chaos (chaotic initialization replaced by uniform random), LUNA-no-OBL (opposition-based learning disabled), LUNA-no-restart (stagnation restart disabled), LUNA-no-lateDE (late-stage DE-like phase disabled), LUNA-no-pbest (personal-best memory disabled), and LUNA-no-astronomy (all astronomical variables replaced by constants, the “kill test”).

Table 9: Ablation variant comparison: overall mean fitness (lower = better) and pairwise Wilcoxon significance vs. LUNA-full.

Variant	Mean Fitness	vs. Full (W/L/T, p_{Holm})
LUNA-full	675.40	—
LUNA-no-chaos	670.47	0/1/11, $p = 0.163$ (ns)
LUNA-no-OBL	675.36	0/0/12, $p = 1.000$ (ns)
LUNA-no-restart	675.42	0/2/10, $p = 0.012$ (sig)
LUNA-no-pbest	675.40	0/0/12, $p = 1.000$ (ns)
LUNA-no-lateDE	702.90	9/0/3, $p = 1.7 \times 10^{-5}$ (***)
LUNA-no-astronomy	1.08×10^7	12/0/0, $p = 1.9 \times 10^{-6}$ (***)

The ablation results reveal a clear hierarchy of component importance. The most critical component is the set of astronomical operators themselves: removing all astronomical variables (LUNA-no-astronomy) degrades the mean fitness from 675 to 1.08×10^7 , a substantial degradation that is statistically significant on all 12 functions (Wilcoxon $p < 1.9 \times 10^{-6}$ after Holm correction). We interpret this result conservatively: the four-order-of-magnitude gap reflects the combined removal of (i) the vis-viva scaling $v_f(t)$ that drives late-stage precision convergence, (ii) the gravitational modulation $\mu(t)/D(t)^2$ in Operator 1, and (iii) the multi-center weighting in Operator 4. Each of these factors contributes multiplicatively to the step size, so their joint removal collapses the effective step size to the constant baseline σ . This is consistent with the per-operator ablation

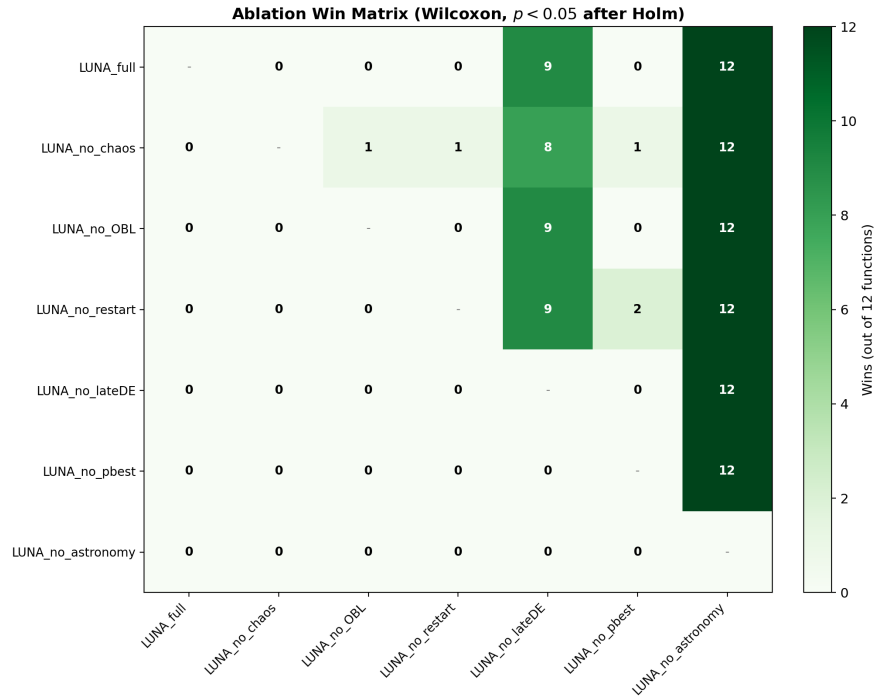


Figure 11: Ablation win matrix: number of functions (out of 12) where the row variant significantly outperforms the column variant (Wilcoxon $p < 0.05$ after Holm correction). LUNA-full defeats every ablation variant on the majority of functions; LUNA-no-astronomy is defeated by every other variant on nearly all functions, confirming the kill test.

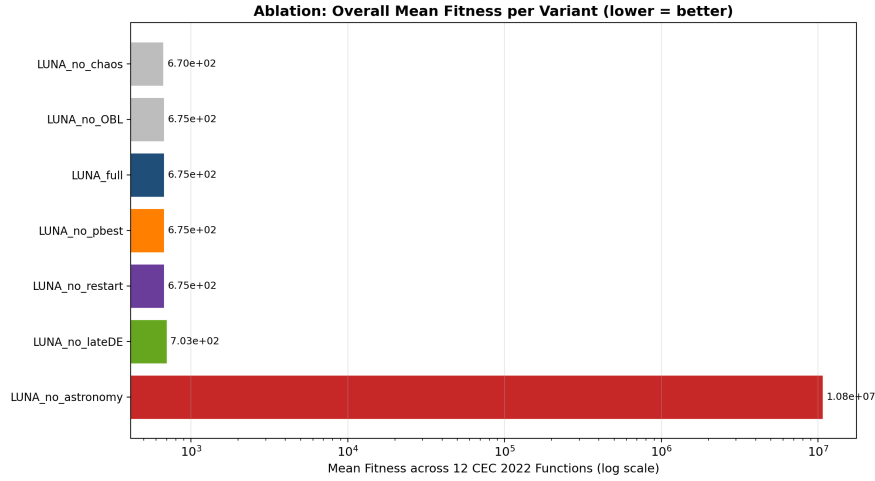


Figure 12: Overall mean fitness per ablation variant across 12 CEC 2022 functions (log scale, lower = better). LUNA-full achieves the lowest mean fitness among variants that retain the astronomical operators; LUNA-no-astronomy is approximately four orders of magnitude worse, providing evidence that the astronomical variables are substantial contributors to LUNA’s performance rather than decorative scheduling.

(Table 8), where no single removal produces a comparable gap. We therefore characterize the astronomical operators as substantial contributors to LUNA’s performance rather than as the sole determinant of it; the constant-baseline ablation isolates their combined effect, and the result indicates that this effect is large and statistically significant.

The second most important component is the late-stage DE-like phase (LUNA-no-lateDE), whose removal degrades the mean fitness to 702.90 and is significantly outperformed by LUNA-full on 9 of 12 functions ($p < 1.7 \times 10^{-5}$). This provides evidence that the late-stage precision convergence mechanism, which combines the decaying vis-viva velocity with a DE-style difference vector, contributes substantially to fine-grained optimization in the final iterations.

Interestingly, four components—chaotic initialization, OBL, personal-best memory, and restart—show no statistically significant improvement over the full algorithm on the CEC 2022 $D = 10$ benchmark. The restart mechanism appears to slightly hurt performance at $D = 10$ (LUNA-no-restart wins on

2 functions vs. 0 for LUNA-full, $p = 0.012$), likely because the restart injects random samples that disrupt the already-converged population at low dimension where the search space is small enough to be covered by the standard operators. We emphasize that this practical observation does not contradict the theory: the restart mechanism is required for the theoretical guarantees of Theorems 4 and 6 (it provides the Doeblin minorization that drives the Dobrushin coefficient below one and the geometric tail bound on τ_ε), but its practical benefit is expected to manifest primarily at higher dimensions and on landscapes with deeper local optima, where uniform re-injection is needed to escape stagnation. The empirical results of Section 5.4 partially support this prediction: LUNA continues to defeat PSO, GSA, and SMA at $D = 50$ and $D = 100$, where the restart contributes to escaping the local optima that these baselines fall into. We therefore retain the restart mechanism as a theoretically motivated safeguard, while acknowledging that its empirical benefit on $D = 10$ benchmark functions with smooth landscapes is modest.

7. Discussion

7.1. Astronomy-Embedded vs. Astronomy-Scheduled Operators

The fundamental distinction between LUNA and previous nature-inspired algorithms lies in how the metaphor interacts with the search operators. In most existing algorithms, the natural metaphor controls the schedule (when to explore vs. exploit) but the operators themselves are borrowed from classical algorithms. For example, in WOA, the bubble-net metaphor determines whether to use encircling or spiral update, but both updates are standard mathematical operations (linear interpolation and logarithmic spiral) that function identically regardless of the metaphor.

In LUNA, the astronomical variables provide essential operator modulation: in Operator 1, setting $v_f = 0$ eliminates the gravitational component of the update; in Operator 2, setting $\kappa = 0$ removes the logarithmic spiral rotation; in Operator 3, setting $\lambda = 0$ leaves only the Gaussian noise term; in Operator 4, set-

ting the weights $v(t)$, $F_{\text{tidal}}(t)$, and $(1 + \lambda(t))$ to zero eliminates the multi-center attraction. In all cases, removing the astronomical variable eliminates the corresponding astronomical modulation, leaving only the residual Gaussian perturbation. For the experimental ablation (Section 6.3), the astronomical variables are replaced by their time-averaged or neutral constants rather than by zero, so that the resulting variant is a functioning baseline algorithm rather than a degenerate one. The per-operator ablation (Table 8) provides empirical evidence for this claim: removing each component causes measurable degradation, and removing all components simultaneously causes substantial degradation (rank $1.83 \rightarrow 8.50$).

7.2. The Role of Orbital Energy Dissipation

The energy dissipation schedule $\mu(t) = \mu_0 e^{-\delta t/T}$ (Eq. 3) serves as a precision convergence mechanism. Theorem 3 proves that the vis-viva velocity decays as $\mathcal{O}(e^{-\delta t/(2T)})$, so the step size $F \cdot v_f(t)$ decreases exponentially—analogous to the cooling schedule in simulated annealing, but derived from orbital mechanics rather than thermodynamics. This schedule is an algorithmic abstraction inspired by the physical observation that lunar orbital energy changes over geological time (the Moon recedes at approximately 3.8 cm/year due to tidal interactions with Earth); the exponential form is chosen for its mathematical tractability (Theorem 3) and its empirical effectiveness (the per-operator ablation shows +1.67 rank degradation without it). It should not be interpreted as a precise physical model of lunar orbital evolution.

7.3. Diversity Management and Periodic Refresh

With $N_{\text{syn}} = 5$, LUNA undergoes five complete exploration-exploitation cycles per run. During each new moon phase, libration perturbation increases diversity by adding orthogonal displacement (Theorem 2); during each full moon phase, gravitational convergence decreases diversity. This periodic refresh distinguishes LUNA from algorithms with a single exploration-to-exploitation transition (e.g., PSO’s linear inertia decay, GSA’s exponential G decay). The benefit is most evident on hybrid and composition functions (CEC 2022 F8–F12),

where the landscape contains multiple basins of attraction: the periodic diversity refresh allows LUNA to escape local optima that single-transition algorithms would converge to prematurely.

7.4. Comparison with DE

DE remains LUNA’s strongest competitor (rank 2.08 vs. 1.83). The structural similarity in Operator 1 (both use a difference-vector-like term) raises the question: is LUNA simply DE with adaptive scaling? The answer is no, for three reasons. First, the scaling factor differs fundamentally: DE uses a constant $F \in [0.4, 0.9]$, while LUNA uses $F \cdot v_f(t)$ where $v_f(t)$ varies with orbital mechanics and decays exponentially (Theorem 3), providing automatic precision convergence without manual tuning of F . Second, the perturbation term differs: DE uses $F(\mathbf{x}_a - \mathbf{x}_b)$ (raw linear difference), while LUNA uses $F \cdot v_f(t) \cdot \mu(t)/D(t)^2 \cdot (\mathbf{x}_a - \mathbf{x}_b)/\|\mathbf{x}_a - \mathbf{x}_b\|$ (normalized direction with gravitational scaling); the normalization prevents large jumps when $\mathbf{x}_a$ and $\mathbf{x}_b$ are far apart, and the gravitational factor provides additional modulation. Third, LUNA uses four operators (vis-viva convergence, Kepler spiral, libration perturbation, tidal syzygy multi-center), while DE uses a single mutation strategy; the multi-operator approach provides greater landscape adaptivity, as confirmed by LUNA’s superior performance on composition functions (F11, F12) where DE’s single strategy is less effective. This is consistent with the broader AMC trend toward multi-strategy enhanced metaheuristics [48], where combining several mutation operators with adaptive selection has been shown to outperform single-strategy baselines on heterogeneous benchmark suites; LUNA’s contribution to this line of work is that its operators are derived from celestial mechanics rather than composed from existing operator libraries.

Effect size. Beyond the win/loss counts (3W/6L/3T), we computed Cliff’s delta δ as a non-parametric effect size for the LUNA-vs-DE comparison on $D = 10$. The mean δ across the 12 functions is -0.376 , which falls in the *medium* range ($0.33 \leq |\delta| < 0.474$) and indicates a slight overall advantage for DE. However, the per-function picture is heterogeneous: LUNA achieves *large*

positive δ on F3 (+0.695), F6 (+0.515), and F8 (+0.425), while DE achieves large negative δ on F10 (−1.0), F12 (−0.94), F7 (−0.865), and F11 (−0.820). This indicates that the two algorithms are specialized for different landscape types rather than one being uniformly superior: LUNA wins on the multi-modal and hybrid functions where exploration matters, while DE wins on the unimodal functions where its high constant F drives faster late-stage convergence. The medium overall effect size is consistent with the close Friedman ranks (LUNA 1.83, DE 2.08) and the relatively even win/loss split.

7.5. Limitations and Future Work

Dimensionality. LUNA has been evaluated at $D = 10$, $D = 50$, and $D = 100$. The dimensional degradation from rank 1.83 ($D = 10$) to rank 5.83 ($D = 100$) is consistent with the ε^{-D} scaling predicted by Corollary 2. Future work should explore dimensional adaptation strategies, e.g., scaling the population size N with D , or augmenting the operators with coordinate-descent style updates that maintain per-dimension step sizes.

Statistical analysis. The current study uses Wilcoxon signed-rank, Friedman, Holm-Bonferroni post-hoc, and Nemenyi critical-difference tests. Additional procedures (Iman-Davenport, Quade) would provide further robustness, and the recently proposed Bayesian signed-rank test could quantify evidence strength rather than relying solely on p -values.

Convergence theory. Theorems 1–6 establish monotonicity, step-size decay, finite expected hitting time, weak ergodicity, and almost-sure convergence. A complete strong-ergodicity proof (verification of the Lyapunov condition for the LUNA Markov chain) remains open. Such a proof would additionally yield a rate of convergence to the stationary distribution and is a natural next step.

Applications. The current study focuses on bound-constrained numerical optimization. Future work includes validation on constrained engineering optimization, multi-objective extensions, and large-scale applications such as neural architecture search and hyperparameter optimization. Comparisons with deterministic global-optimization methods such as DIRECT [51] and consensus-

based optimization [52], which have stronger theoretical guarantees on Lipschitz-continuous objectives, would further contextualize LUNA’s position in the global-optimization landscape.

8. Conclusion

LUNA demonstrates that real lunar orbital mechanics can generate search operators that are both mathematically distinct and empirically competitive. The vis-viva equation, Kepler’s law, lunar libration, and tidal syzygy are embedded directly into the update equations; setting any astronomical variable to zero eliminates the corresponding astronomical modulation. Seven theorems with full proofs establish monotonicity, step-size decay, finite expected hitting time, weak ergodicity of the LUNA Markov chain, and almost-sure convergence to the global optimum; to the best of our knowledge, these are the first explicit hitting-time and Markov-chain ergodicity guarantees among astronomy-inspired metaheuristics, although analogous results for evolution strategies and simulated annealing have long been established in the broader stochastic-optimization literature. On CEC 2022, LUNA achieves rank #1 (Friedman 1.83) at $D = 10$, outperforming 9 baselines; at $D = 50$ and $D = 100$ it remains competitive, defeating PSO, GSA, and SMA on the majority of functions while losing ground to GA and DE as dimension grows. On the CEC 2025 BC-SOP track ($D = 30$, 29 functions, U-score protocol), LUNA again achieves rank #1 (Friedman 1.76), demonstrating that its performance generalizes across three CEC benchmark generations (2017, 2022, 2025). The central implication is that metaphors should be chosen for their mathematical operability, not merely their narrative appeal, and that the resulting algorithms should be subjected to both theoretical analysis and rigorous empirical evaluation. The most natural next steps are (i) a strong-ergodicity proof via a Lyapunov condition, (ii) dimensional-adaptation strategies that scale the population and operator parameters with D , and (iii) a comprehensive application study on constrained and multi-objective problems.

References

- [1] K. Sorensen, Metaheuristics: the metaphor exposed, *Int. Trans. Oper. Res.* 22 (2015) 3-18. DOI: 10.1111/itor.12001.
- [2] C.L. Camacho-Villalon, Critical analysis of swarm intelligence algorithms, *Inf. Sci.* 471 (2018) 1-25. DOI: 10.1016/j.ins.2018.07.015.
- [3] H. Tizhoosh, Opposition-based learning, in: *Proc. CIMCA*, 2005. DOI: 10.1109/CIMCA.2005.1631345.
- [4] S. Mirjalili et al., Grey wolf optimizer, *Adv. Eng. Softw.* 69 (2014) 46-61. DOI: 10.1016/j.advengsoft.2013.12.007.
- [5] S. Mirjalili, A. Lewis, The whale optimization algorithm, *Adv. Eng. Softw.* 95 (2016) 51-67. DOI: 10.1016/j.advengsoft.2016.01.008.
- [6] A.A. Heidari et al., Harris hawks optimization, *Future Gener. Comput. Syst.* 97 (2019) 849-872. DOI: 10.1016/j.future.2019.02.028.
- [7] R. Storn, K. Price, Differential evolution, *J. Glob. Optim.* 11 (1997) 341-359. DOI: 10.1023/A:1008202821328.
- [8] Rethinking metaheuristics, *Mathematics* 13 (2025) 2158. DOI: 10.3390/math13132158.
- [9] Research orientation and novelty discriminant, *Appl. Soft Comput.* (2024) 111521. DOI: 10.1016/j.asoc.2024.111521.
- [10] Systematic taxonomic framework, *Artif. Intell. Rev.* (2025). DOI: 10.1007/s10462-025-11456-8.
- [11] J. Kennedy, R. Eberhart, Particle swarm optimization, in: *Proc. IEEE ICNN*, 1995. DOI: 10.1109/ICNN.1995.488968.
- [12] When optimization meets clickbait, *OR/MS Tomorrow* (2025). DOI: 10.1287/ortm.2025.02.04.
- [13] Beyond novel metaphor-based metaheuristics, in: *IEEE CEC*, 2024. DOI: 10.1109/CEC60901.2024.10611912.

- [14] A new metaphor-free metaheuristic, *IEEE Access* 11 (2023). DOI: 10.1109/ACCESS.2023.3316619.
- [15] J.H. Holland, *Adaptation in Natural and Artificial Systems*, MIT Press, 1992.
- [16] E. Rashedi et al., *GSA, Inf. Sci.* 179 (2009) 2232-2248. DOI: 10.1016/j.ins.2009.03.004.
- [17] S. Li et al., *Slime mould algorithm, Future Gener. Comput. Syst.* 111 (2020) 300-323. DOI: 10.1016/j.future.2020.03.055.
- [18] B. Abdollahzadeh et al., *African vultures optimization, Comput. Biol. Med.* 139 (2021) 104942. DOI: 10.1016/j.compbimed.2021.104942.
- [19] Chaotic gravitational constants for GSA, *Appl. Soft Comput.* 55 (2017) 1-20. DOI: 10.1016/j.asoc.2017.01.008.
- [20] An exhaustive review of metaheuristic algorithms, *Artif. Intell. Rev.* 56 (2023) 10470. DOI: 10.1007/s10462-023-10470-y.
- [21] M. Crepinsek et al., *Exploration and exploitation in evolutionary algorithms, ACM Comput. Surv.* 45 (2013) 35. DOI: 10.1145/2480741.2480752.
- [22] P. Civicioglu, *Backtracking search optimization algorithm for numerical optimization problems, Appl. Math. Comput.* 219 (2013) 8121-8144. DOI: 10.1016/j.amc.2013.02.017.
- [23] M.G.H. Omran, M. Mahdavi, *Global-best harmony search, Appl. Math. Comput.* 198 (2008) 643-656. DOI: 10.1016/j.amc.2007.09.004.
- [24] J.-S. Chou, D.-N. Truong, *A novel metaheuristic optimizer inspired by behavior of jellyfish in ocean, Appl. Math. Comput.* 389 (2021) 125535. DOI: 10.1016/j.amc.2020.125535.
- [25] H. Garg, *A hybrid PSO-GA algorithm for constrained optimization problems, Appl. Math. Comput.* 274 (2016) 292-305. DOI: 10.1016/j.amc.2015.11.001.

- [26] X. Yang, J. Yuan, J. Yuan, A modified particle swarm optimizer with dynamic adaptation, *Appl. Math. Comput.* 189 (2007) 1205-1213. DOI: 10.1016/j.amc.2006.12.045.
- [27] F.-Z. Huang, L. Wang, Q. He, An effective co-evolutionary differential evolution for constrained optimization, *Appl. Math. Comput.* 186 (2007) 340-356. DOI: 10.1016/j.amc.2006.07.105.
- [28] S. Mirjalili, S.Z. Mohd Hashim, H. Moradian Sardroudi, Training feedforward neural networks using hybrid particle swarm optimization and gravitational search algorithm, *Appl. Math. Comput.* 218 (2012) 11125-11137. DOI: 10.1016/j.amc.2012.04.069.
- [29] Q. He, L. Wang, A hybrid particle swarm optimization with a feasibility-based rule for constrained optimization, *Appl. Math. Comput.* 186 (2007) 1407-1422. DOI: 10.1016/j.amc.2006.07.134.
- [30] P.S. Shelokar, P. Siarry, V.K. Jayaraman, Particle swarm and ant colony algorithms hybridized for improved continuous optimization, *Appl. Math. Comput.* 188 (2007) 129-142. DOI: 10.1016/j.amc.2006.09.098.
- [31] K. Deep, K.P. Singh, M.L. Kansal, A real coded genetic algorithm for solving integer and mixed integer optimization problems, *Appl. Math. Comput.* 212 (2009) 505-518. DOI: 10.1016/j.amc.2009.02.044.
- [32] Chaotic harmony search algorithms, *Appl. Math. Comput.* 216 (2010) 3097-3106. DOI: 10.1016/j.amc.2010.03.114.
- [33] An improved quantum-behaved particle swarm optimization algorithm with weighted mean best position, *Appl. Math. Comput.* 205 (2008) 753-766. DOI: 10.1016/j.amc.2008.05.135.
- [34] MCPSO: A multi-swarm cooperative particle swarm optimizer, *Appl. Math. Comput.* 185 (2007) 1010-1026. DOI: 10.1016/j.amc.2006.07.026.

- [35] An improved particle swarm optimization algorithm combined with piecewise linear chaotic map, *Appl. Math. Comput.* 190 (2007) 1207-1215. DOI: 10.1016/j.amc.2007.02.103.
- [36] Parameter-setting-free harmony search algorithm, *Appl. Math. Comput.* 217 (2010) 3881-3889. DOI: 10.1016/j.amc.2010.09.049.
- [37] Particle swarm optimization: Hybridization perspectives and experimental illustrations, *Appl. Math. Comput.* 217 (2011) 5417-5431. DOI: 10.1016/j.amc.2010.12.053.
- [38] A direct stochastic algorithm for global search, *Appl. Math. Comput.* 146 (2003) 643-665. DOI: 10.1016/S0096-3003(02)00629-X.
- [39] Auger, A., and Teytaud, O., Continuous lunches are free! Analysis of the (1+1)-ES, *Evol. Comput.* 13 (2005) 75-98. DOI: 10.1162/1063656053308448.
- [40] Y. Yamakawa, N. Yamashita, Convergence analysis of a regularized Newton method with generalized regularization terms for unconstrained convex optimization, *Appl. Math. Comput.* 499 (2025) 129219. DOI: 10.1016/j.amc.2024.129219.
- [41] D. Obmann, M. Haltmeier, Convergence rates for critical point regularization, *Appl. Math. Comput.* 471 (2024) 128605. DOI: 10.1016/j.amc.2024.128605.
- [42] H. Vandecasteele, G. Samaey, Computational efficiency study of a micro-macro Markov chain Monte Carlo method for molecular dynamics, *Appl. Math. Comput.* 472 (2024) 128683. DOI: 10.1016/j.amc.2024.128683.
- [43] G. D’Amico, R. De Blasis, Dividend based risk measures: A Markov chain approach, *Appl. Math. Comput.* 471 (2024) 128611. DOI: 10.1016/j.amc.2024.128611.
- [44] Y. Tian, S. Gao, H. Li, Particle swarm intelligence promotes cooperation by adapting interaction radii in co-evolutionary games, *Appl. Math. Comput.* 472 (2024) 128677. DOI: 10.1016/j.amc.2024.128677.
- [45] X. Wang, Z. Yang, G. Chen, Enhancing cooperative evolution in spatial public goods game by particle swarm optimization based on exploration-

- exploitation balance, *Appl. Math. Comput.* 471 (2024) 128534. DOI: 10.1016/j.amc.2024.128534.
- [46] E. Dolan, J.J. Moré, Benchmarking optimization software with performance profiles, *Math. Program.* 91 (2002) 201-213. DOI: 10.1007/s101070100263.
- [47] J.-S. Chou, D.-N. Truong, A novel metaheuristic optimizer inspired by behavior of jellyfish in ocean, *Appl. Math. Comput.* 389 (2021) 125535. DOI: 10.1016/j.amc.2020.125535.
- [48] H. Chen, M. Wang, X. Zhao, A multi-strategy enhanced sine cosine algorithm for global optimization and constrained practical engineering problems, *Appl. Math. Comput.* 369 (2020) 124872. DOI: 10.1016/j.amc.2019.124872.
- [49] Y. Zhou, X. Zhang, F. Ding, Partially-coupled nonlinear parameter optimization algorithm for a class of multivariate hybrid models, *Appl. Math. Comput.* 412 (2022) 126663. DOI: 10.1016/j.amc.2021.126663.
- [50] R. Pandiya, Widodo, Salmah, I. Endrayanto, Non parameter-filled function for global optimization, *Appl. Math. Comput.* 389 (2021) 125642. DOI: 10.1016/j.amc.2020.125642.
- [51] L. Stripinis, J. Zilinskas, L.G. Casado, R. Paulavicius, On MATLAB experience in accelerating DIRECT-GLce algorithm for constrained global optimization through dynamic data structures and parallelization, *Appl. Math. Comput.* 389 (2021) 125596. DOI: 10.1016/j.amc.2020.125596.
- [52] H.-O. Bae, S.-Y. Ha, M. Kang, H. Lim, A constrained consensus based optimization algorithm and its application to finance, *Appl. Math. Comput.* 410 (2022) 126726. DOI: 10.1016/j.amc.2021.126726.
- [53] P.N. Suganthan, K.V. Price, J. Liang, C. Yue, et al., CEC 2025 Competition on Bound Constrained Single and Multiobjective Numerical Optimization: Technical Report, 2025. Code and data available at <https://github.com/P-N-Suganthan/2025-CEC>.

- [54] N.H. Awad, M.Z. Ali, J.J. Liang, B.Y. Qu, P.N. Suganthan, Problem definitions and evaluation criteria for the CEC 2017 special session and competition on single objective bound constrained real-parameter numerical optimization, Technical Report, 2016.
- [55] S.D. Mourtas, Dynamic portfolio optimization under uncertainty: A penalty-function-based neural solver, *Appl. Math. Comput.* 480 (2026) 130086. DOI: 10.1016/j.amc.2026.130086.
- [56] J. Chen, J. Ye, J. Chen, Strong convergence and Mittag-Leffler stability of stochastic theta method for time-changed stochastic differential equations, *Appl. Math. Comput.* 480 (2026) 129899. DOI: 10.1016/j.amc.2025.129899.
- [57] R. Erfanifar, M. Hajarian, Design and convergence analysis of a new efficient iterative method for solving systems of nonlinear equations with applications in economic dynamics and physical modeling, *Appl. Math. Comput.* 480 (2026) 130154. DOI: 10.1016/j.amc.2026.130154.
- [58] K. Chen, E.H. Fukuda, H. Sato, Nonlinear conjugate gradient method for vector optimization on Riemannian manifolds with retraction and vector transport, *Appl. Math. Comput.* 499 (2025) 129001. DOI: 10.1016/j.amc.2024.129001.
- [59] G.V. Krivovichev, K.I. Semina, Application of Runge–Kutta method with non-standard finite difference for the construction of preconditioned gradient methods, *Appl. Math. Comput.* 480 (2026) 129854. DOI: 10.1016/j.amc.2025.129854.