


REV.	DESCRIPTION	ECN NO.	NAME	DATE

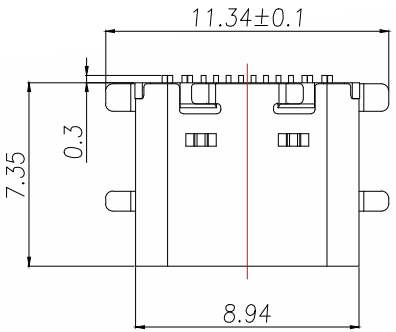


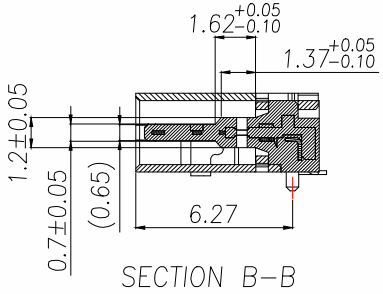



SECTION B–B

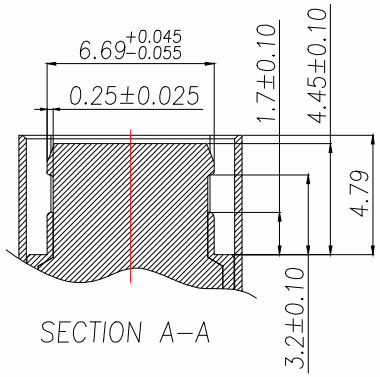


SECTION A–A

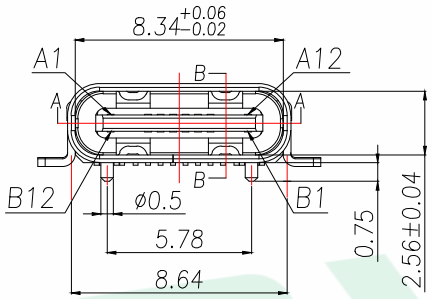






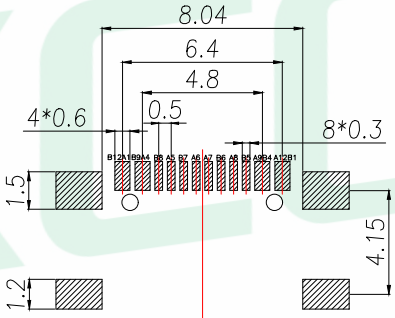

(TOP VIEW)

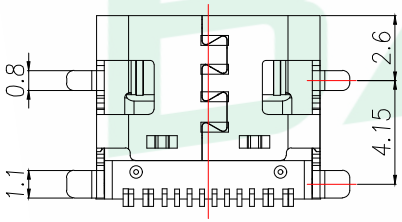

RECOMMENDED P.C.B. LAYOUT (T:1.0~1.2mm)

TOLERANCE UNSPECIFIED ±0.05mm

SPECIFICATION:

1. Material:
   - HOUSING&MOLDING:LCP,UL94 V-0
   - CONTACTS:COPPER ALLOY T=0.20mm
   - MIDDLE CLIP:SUS301-1/2H,T=0.15mm
   - SHELL:SUS, T=0.30mm
2. Mechanical:
   - 2.1.Mating force:5~20N;
   - 2.2.Unmating force:6~20N;
   - 2.3.Durability:10000 Cycles;
3. Electrical:
   - 3.1.Current Rating:3A/5A Max.;
   - 3.2.Voltage Rating:20V Max.;
   - 3.3.Dielectric Withstanding voltage:100VAc;
   - 3.4.Contact resistance:40m Ohms Max.;
   - 3.5.Insulation Resistance:100M Ohms Min.;
4. Environmental:
   - 4.1.Operating temperature:-40°C~+85°C;
   - 4.2.Wetting Temperature:265±5°C,5±0.5s


NO.	PART NAME	Q'TY	MATERIAL	FINISH
4	Shell	1	Stainless steel,T=0.30mm	30u"Ni Min.
3	GroundBar	1	Stainless steel,T=0.15mm	No Plating
2	Contact	16	Copper alloys,T=0.15mm	Au/Ni-Plated
1	Housing	1	High-temperature plastics	UL 94 V-0

PIN DEFINE TABLE

PIN	A1	A4	A5	A6	A7	A8	A9	A12
SIGNAL	GND	VBUS	CC1	D+	D−	SBU1	VBUS	GND
PIN	B12	B9	B8	B7	B6	B5	B4	B1
SIGNAL	GND	VBUS	SBU2	D−	D+	CC2	VBUS	GND

GENERAL TOLERANCE

DIM.	TOL.
x.	±0.30
x.x	±0.35
x.xx	±0.25
GENERAL ANGLE:	
x.°	±5.0°
x.x°	±3.0°
x.xx°	±2.5°



DONGGUAN BAOXUN PRECISION TECHNOLOGY CO., LTD

BXCONN®

TITLE: TYPE-C 16pin 母座 板上全帖


DWG. NO.: UC01-0B16F32P10 CHECKED: MAX


PART NO.: UC01-0B16F32P10 DRAWN: ELLA


UNIT:	SCALE:	SHEET:	DWG. SIZE:	LAYER:	APPROVED:
mm	none	1of 1	A4	bxconn	WILL

WWW.BXCONN.COM 东莞市宝讯精密技术有限公司 ARTICLE: BX-CN-001-A

REV.	DESCRIPTION	ECN NO.	NAME	DATE

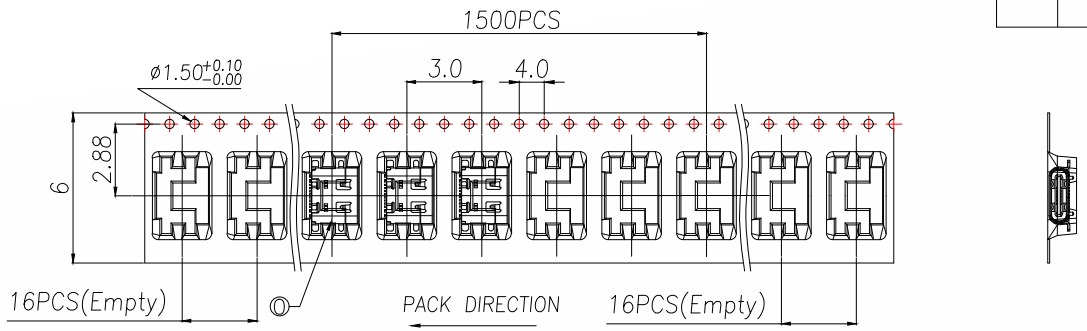

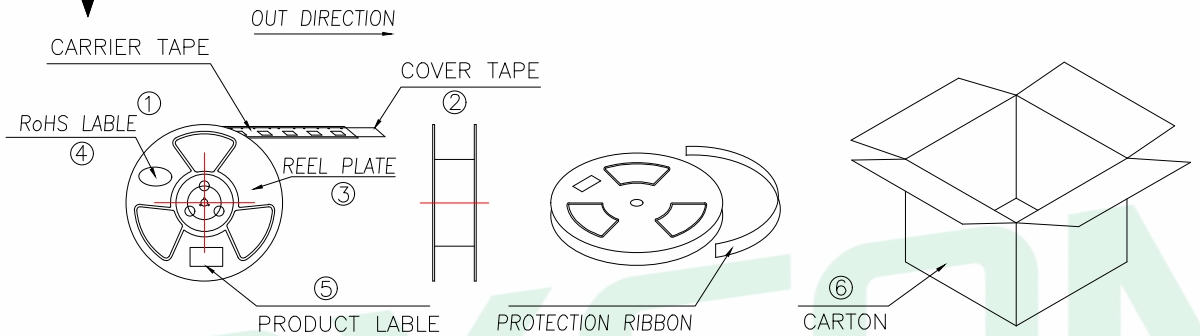

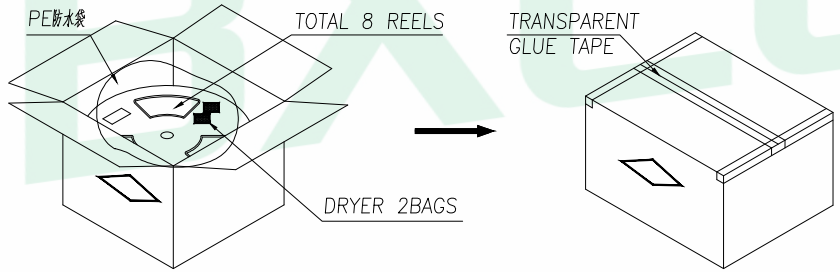

说明:

1.每卷前后各空16PCS,尾部用美纹胶纸封住;

2.将产品放满盘后,再卷一圈保护带,用美纹胶纸将其封住,并贴上1Pcs物料标签;

3.每10卷盘一叠共15000Pcs并装入1个外箱内;

4.在搬运过程中要轻拿轻放;

5.在运输中不可堆放过多(1.8M最高),不可重压;

6.跌落测试条件:

成品箱从1.2米高度自由落体(一角三棱六面):

a.产品不可跑出下带凹槽;

b.产品不可有摔伤,变形;

c.内包装材料不可严重破损.

NO.	NAME	SPEC	Q'TY
0	TYPE C RECEPTACLE		15000PCS/CARTON
1	CARRIER TAPE	W=24mm,T=0.50mm	1500PCS/PLATE
2	COVER TAPE	W=21.5mm	10PLATES/CARTON
3	REEL PLATE	ø380×100×24.4mm	10PCS/CARTON
4	RoHS LABEL		10PCS/CARTON
5	PRODUCT LABER		10PCS/CARTON
6	CARTON	390×390×310mm	1PCS/PACKAGE

GENERAL TOLERANCE

DIM.	TOL.
x.	±0.30
x.x	±0.35
x.xx	±0.25
GENERAL	ANGLE:
x.°	±5.0°
x.x°	±3.0°
x.xx°	±2.5°

DONGGUAN BAOXUN PRECISION TECHNOLOGY CO., LTD

BXCONN®

TITLE: TYPE-C 16pin 母座 板上全帖

DWG. NO.: UC01-0B16F32P10 | CHECKED: MAX

PART NO.: UC01-0B16F32P10 | DRAWN: ELLA

UNIT: mm | SCALE: none | SHEET: 1of 1 | DWG. SIZE: A4 | LAYER: bxconn | APPROVED: WILL