

License

<https://creativecommons.org/licenses/by-nc-sa/2.0/>



Web Technologies

Leonardo Querzoni

querzoni@diag.uniroma1.it

Sapienza University of Rome


Credits

These slides have been designed by Emilio Coppa (coppa@luiss.it, Luiss University) on the basis of teaching material originally created by:

- Marco Squarcina (marco.squarcina@tuwien.ac.at), S&P Group, TU WIEN
- Mauro Tempesta (mauro.tempesta@tuwien.ac.at), S&P Group, TU WIEN
- Fabrizio D'Amore (damore@diag.uniroma1.it), Sapienza University of Rome

Introduction to HTTP

Anatomy of a Typical Web Application

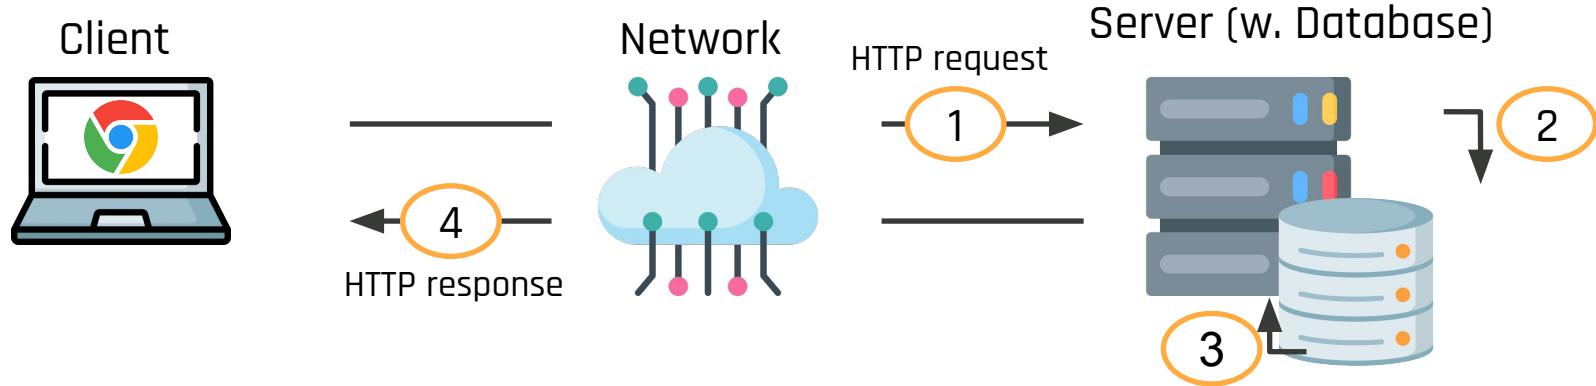

1. The user request a webpage with dynamically generated content
2. The web application queries the database for user's data
3. The data from the database is used to generate page content
4. The page is rendered by the client's browser

Uniform Resource Locator (URL)

URLs are identifiers for documents on the Web



- Some elements are optional: port, query string, fragment
- When reserved characters (like space : ? /) need to be used in the URL, they must be URL-encoded:
 - %20 = space
 - %2F = /
 - ...

Example of encoding:

`https://example.com/page?name=my%20page`

The HTTP Protocol

- ▶ HTTP (Hypertext Transfer Protocol) defines the structure of the communication between client and web server
- ▶ Properties:
 - **Stateless:** different requests are processed independently from each other
 - Cookies are used to implement stateful applications on top of HTTP
 - **Not encrypted:** HTTP traffic can be read and modified on the network without the communication parties to notice it
 - Default port for HTTP is 80

The HTTPS Protocol

- ▶ HTTPS is the secure variant of HTTP:
 - Essentially, HTTP traffic delivered over a TLS connection
 - Default port is 443
- ▶ Security properties:
 - **Confidentiality:** content of the traffic cannot be inspected as it travels on the network
 - **Integrity:** content of the traffic cannot be modified as it travels on the network
 - **Authentication:** the client can verify that it is communicating with the expected server

HTTP Request

Path (+ optional query string)
Method HTTP version
↓ ↓
POST /login HTTP/2

Host: example.com

User-Agent: Mozilla/5.0 (Macintosh; Intel Mac OS X 10.16; rv:85.0)

Gecko/20100101 Firefox/85.0

Accept: text/html,application/xhtml+xml,application/xml;q=0.9,image/webp,*/*;q=0.8

Content-Type: application/x-www-form-urlencoded

Content-Length: 71

Origin: https://example.com

Connection: keep-alive

Referer: https://example.com/login

Upgrade-Insecure-Requests: 1

user=ugo&csrf_token=ijljMjlkMDE40DJmZWZlODhf

Most common HTTP Methods:

GET should have no side effects, used to retrieve data

POST possible side effect, used to insert/update remote resources

HEAD same as GET but without response body

HTTP headers

Blank line

Optional request body (empty for GET)

HTTP Response

HTTP Status code, where first digit defines the message type: 2: OK, 3: Redirect, 4: Client Error, 5: Server Error

version Reason phrase

↓
HTTP/2 200 OK

Server: nginx

Date: Mon, 22 Feb 2021 15:38:46 GMT

Content-Type: text/html; charset=utf-8

Content-Length: 10459

Vary: Cookie

Set-Cookie: session=apU8ig7aeonYoLt0K0C9R5D5fY; Secure; HttpOnly; Path=/

Strict-Transport-Security: max-age=63072000

```
<html>
  <body>login successful!</body>
</html>
```

Cookie

Blank line

HTTP headers

(Optional)
response
body

Opening a page with Google Chrome

Not secure | www.diag.uniroma1.it

SAPIENZA
UNIVERSITÀ DI ROMA

Dipartimento di Ingegneria informatica, automatica e gestionale

DIPARTIMENTO STRUTTURE DIDATTICA RICERCA TERZA MISSIONE NOTIZIE DIAG SUI MEDIA SEMINARS & TALKS

DIAG Dipartimento di Ingegneria informatica, automatica e gestionale Antonio Ruberti

IN EVIDENZA

Calendario eventi

Chi siamo

Sapienza per tutti

ALTRI SITI

Sapienza

Facoltà IIS

Vademecum per la sicurezza

Canale Youtube del DIAG

LINEE GUIDA FASE 3 COVID-19

Dipartimento di Ingegneria Informatica Automatica e Gestionale Antonio Ruberti

Grande partecipazione a OpenDIAG ONLIFE EDITION “dal vivo”

Redazione Data Manager Online - 16 Luglio 2021

Intelligenza artificiale e machine learning per le macchine del futuro

Michele Romano

Torna metà di tempo a un brevissimo articolo su OpenDIAG, che aveva parlato della necessità di creare una piattaforma di condivisione dei dati per la ricerca scientifica. Il primo e unico progetto di OpenDIAG è stato realizzato da Pisa dell'Università Federico II di Napoli, e riguarda la condivisione dei dati relativi alla ricerca svolta nel campo della robotica.

Meccanica, Hsd avvia la fabbrica zero difetti

Industria

Hsd, la divisione che gestisce la produzione di componenti meccanici per gli impianti di trattamento delle acque, ha deciso di investire nella digitalizzazione del processo produttivo. La nuova fabbrica, che ha una capacità di produzione di 100 milioni di pezzi all'anno, sarà dotata di tecnologie avanzate come la robotica, l'intelligenza artificiale e la tecnologia 3D.

Artificial Intelligence

10

Google Chrome: Developers tools



1. Select Network
2. Refresh the page
3. Choose a request
4. Inspect request and response

General

- Request URL: http://www.diag.uniroma1.it/
- Request Method: GET
- Status Code: 200 OK
- Remote Address: 151.100.59.104:80
- Referrer Policy: strict-origin-when-cross-origin

Response Headers

- Cache-Control: no-cache, must-revalidate
- Connection: Keep-Alive
- Content-Encoding: gzip
- Content-Language: it
- Content-Length: 7020
- Content-Type: text/html; charset=utf-8
- Date: Wed, 04 Aug 2021 14:02:13 GMT
- Expires: Sun, 19 Nov 1978 05:00:00 GMT
- Keep-Alive: timeout=5, max=100
- Link: </dipartimento>; rel="canonical",</node/5559>; rel="shortlink"
- Server: Apache/2.4.18 (Ubuntu)
- Vary: Accept-Encoding
- X-Content-Type-Options: nosniff
- X-Frame-Options: SAMEORIGIN
- X-Generator: Drupal 7 (http://drupal.org)

Request Headers (11)

- Accept: */*
- Accept-Encoding: gzip, deflate
- Accept-Language: it-IT, it;q=0.9, en-US;q=0.8, en;q=0.7
- Cache-Control: max-age=0
- Cloudflare-Key: 00000000000000000000000000000000
- Cloudflare-Page-Hash: 00000000000000000000000000000000
- Cloudflare-Ray-ID: 00000000000000000000000000000000
- Cloudflare-Request-ID: 00000000000000000000000000000000
- Cloudflare-Trace-ID: 00000000000000000000000000000000
- Cloudflare-Worker-Index: 00000000000000000000000000000000
- Host: www.diag.uniroma1.it
- Sec-Fetch-Dest: document
- Sec-Fetch-Mode: navigate
- Sec-Fetch-Site: none
- User-Agent: Mozilla/5.0 (Windows NT 10.0; Win64; x64) AppleWebKit/537.36 (KHTML, like Gecko) Chrome/90.0.4385.157 Safari/537.36

76 requests | 1.6 MB transferred

▼ General

Request URL: http://www.diag.uniromal.it/

Request Method: GET

Status Code: 200 OK

Remote Address: 151.100.59.104:80

Referrer Policy: strict-origin-when-cross-origin

▼ Request Headers

[View source](#)

Accept: text/html,application/xhtml+xml,application/xml;q=0.9,image/avif,image/webp,image/apng,*/*;q=0.8,application/signed-exchange;v=q=0.9

Accept-Encoding: gzip, deflate

Accept-Language: it-IT,it;q=0.9,en-US;q=0.8,en;q=0.7

Cache-Control: no-cache

Connection: keep-alive

Cookie: _ga=GA; has_js=1; LtpaToken=

URpcGFydGltZW50aS9PVT1EaWRhdHRpY2EvT1U9QXRlbmVvL089VW5pcm9tY

saW8gQ29wcGEvT1U9RGlwLUluZm9ybWF0aWNhL0

DNT: 1

Host: www.diag.uniromal.it

Pragma: no-cache

Upgrade-Insecure-Requests: 1

User-Agent: Mozilla/5.0 (X11; Linux x86_64) AppleWebKit/537.36 (KHTML, like Gecko) Chrome/92.0.4515.107 Safari/537.36

▼ Response Headers

[View source](#)

Cache-Control: no-cache, must-revalidate

Connection: Keep-Alive

Content-Encoding: gzip

Content-Language: it

Content-Length: 7020

Content-Type: text/html; charset=utf-8

Date: Wed, 04 Aug 2021 14:02:13 GMT

Expires: Sun, 19 Nov 1978 05:00:00 GMT

Keep-Alive: timeout=5, max=100

Link: </dipartimento>; rel="canonical",</node/5559>; rel="shortlink"

Server: Apache/2.4.18 (Ubuntu)

Vary: Accept-Encoding

X-Content-Type-Options: nosniff

X-Frame-Options: SAMEORIGIN

X-Generator: Drupal 7 (<http://drupal.org>)

We can see which cookies are used by the page

x	Headers	Preview	Response	Initiator	Timing	Cookies								
Request Cookies <input type="checkbox"/> show filtered out request cookies														
Name	Value	Domain	P...	Expire...	Size	HttpO...	Secure	Same...	Same...	Priority				
_ga	GA1.2.1296694775.1625228322	.uniroma1.it	/	2023-...	30					Medium				
has_js	1	www.diag.uniroma1.it	/	Session	7					Medium				
LtpaToken	AAECAzYxMDNFQUE2NjEwM0...	.uniroma1.it	/	Session	181					Medium				

The screenshot shows the Chrome DevTools interface with the Application tab selected. On the left, a sidebar lists various storage types: Manifest, Service Workers, Storage, Local Storage, Session Storage, IndexedDB, Web SQL, Cookies, Cache, and Background Services. The Cookies section is expanded, showing entries for http://www.diag.uniroma1.it and Trust Tokens. The main panel displays a table of cookies. The columns are: Name, Value, Domain, P..., Expir..., Size, HttpO..., Secure, Same..., Same..., and Priority. Three rows are visible: LtpaToken, has_js, and _ga. The _ga cookie is highlighted in blue. At the bottom, there's a "Cookie Value" field containing "GA1.2.1296694775.1625228322" and a checkbox for "Show URL decoded".

Name	Value	Domain	P...	Expir...	Size	HttpO...	Secure	Same...	Same...	Priority
LtpaToken	AAECAzYxMDNFQUE2NjEwM...	.uniroma1.it	/	Sessi...	181					Medi...
has_js	1	www.diag.uniroma1.it	/	Sessi...	7					Medi...
_ga	GA1.2.1296694775.1625228...	.uniroma1.it	/	2023-...	30					Medi...

We can even modify their name/value (the fields are editable). Also, we can see that besides cookies, there are several types of storage.

Elements Console Sources Network Performance Memory Application Security Lighthouse AdBlock

```
<!DOCTYPE html>
<html lang="it" dir="ltr" prefix="content: http://purl.org/rss/1.0/modules/content/ dc: http://purl.org/dc/terms/ foaf: http://xmlns.com/foaf/0.1/ og: http://ogp.me/ns# rdfs: http://www.w3.org/2000/01/rdf-schema# sioc: http://rdfs.org/sioc/ns# siot: http://rdfs.org/sioc/types# skos: http://www.w3.org/2004/02/skos/core# xsd: http://www.w3.org/2001/XMLSchema#> class="js flexbox canvas canvastext webgl no-touch geolocation postmessage websqldatabase indexeddb hashchange history draganddrop websockets rgba hsla multiplebgs backgroundsize borderimage borderradius boxshadow textshadow opacity cssanimations csscolumns cssgradients cssreflections csstransforms csstransforms3d csstransitions fontface generatedcontent video audio localstorage sessionstorage webworker s no-applicationcache svg inlinesvg smil svgclippaths fontawesome-i2svg-active fontawesome-i2svg-complete" style="background-color: #f0f0f0;">
  ><head>...
  ...
  <body class="navbar-is-fixed-top html front not-logged-in no-sidebars page-node page-node-5559 node-type-home-page i18n-it dipartimento site-name-line s-1" style="padding-bottom: 80px;" data-new-gr-c-s-check-loaded="14.1024.0" data-gr-ext-installed="">> $0
    ><div id="skip-link">...</div>
    ><header id="navbar" role="banner" class="navbar navbar-fixed-top navbar-default">...</header>
    ><section>...</section>
    <!-- -->
    ><section id="tabs">...</section>
    ><section id="page-top">...</section>
    ><section id="news">...</section>
    ><div class="main-container container">...</div>
    ><section id="hero">...</section>
    ><section id="credits">...</section>
    <script src="https://use.fontawesome.com/releases/v5.11.2/js/all.js"></script>
    <script src="http://www.diag.uniroma1.it/sites/all/themes/bootstrap/js/bootstrap.js?qvzikv"></script>
    <div id="popup-active-overlay">...</div>
    <div id="cboxOverlay" style="display: none; ">...</div>
    ><div id="colorbox" class="dialog" tabindex="-1" style="display: none; ">...</div>
  </body>
  ><grammarly-desktop-integration data-grammarly-shadow-root="true">...</grammarly-desktop-integration>
</html>
```

Styles Computed Layout »
 Filter :hov .cls +

```
element.style {
  padding-bottom: 80px;
}
body.navbar overrides.m.css?qvzikv:1
  -is-fixed-
  top {
    padding-top: 64px;
}
@media only screen and (max-width: 767px) {
  body {
    style.css?qvzikv:19
    padding-top: 135px !important;
  }
  body {
    style.css?qvzikv:10
    color: #333333;
    font-size: 1.4em;
    min-height: 100%;
    background: □#fff !important;
    font-family: 'Open Sans', sans-serif !important;
  }
  body {
    overrides.m.css?qvzikv:1
    position: relative;
  }
  body {
    scaffolding.less:31
    font-family: "Helvetica Neue",
    Helvetica, Arial, sans-serif;
    font-size: 14px;
    line-height: 1.42857143;
    color: #333;
    background-color: □#fff;
  }
  body {
    normalize.less:19
    margin: ▷ 0;
  }
  * {
    style.css?qvzikv:1
    padding: ▷ 0;
    margin: ▷ 0;
  }
  * {
    vendor-prefixes.less:77
    -webkit_box_sizing: border-box;
    -moz-box-sizing: border-box;
    box-sizing: border-box;
  }
```

We can inspect (and even edit) the page content



THIS TEXT WAS NOT PRESENT IN THE ORIGINAL PAGE



Dipartimento di Ingegneria Informatica Automatica e Gestionale Antonio Ruberti

IN EVIDENZA

Calendario eventi

Chi siamo

Sapienza per tutti

LINEE GUIDA FASE 3 COVID-19

ALTRI SITI

Sapienza

Elements Console Sources Network Performance Memory Application Security Lighthouse AdBlock

Styles Computed Layout >

Filter :hov .cls +

element.style {

.dipartimento header.css?qvzikv:128

.navbar-header h1 a { color: #005866 !important; }

.navbar-header h1 a { color: #822433 !important; }

a, a:hover { style.css?qvzikv:61 color: #000; text-decoration: none !important; }

a { scaffolding.less:52 color: #337ab7; text-decoration: none; }

a { normalize.less:89 background-color: transparent; }

* { style.css?qvzikv:1 padding: 0; margin: 0; }

{ vendor-prefixes.less:77 -webkit-box-sizing: border-box; -moz-box-sizing: border-box; box-sizing: border-box; }

a:-webkit-user-agent-stylesheet any-link { color: -webkit-link; cursor: pointer; text-decoration: underline; }

Inherited from h1.name.navbar-brand

.dipartimento header.css?qvzikv:124

.navbar-header h1 { color: #005866 !important; }

```
<!DOCTYPE html>
<html lang="it" dir="ltr" prefix="content: http://purl.org/rss/1.0/modules/content/ dc: http://purl.org/dc/terms/ foaf: http://xmlns.com/foaf/0.1/ og: http://ogp.me/ns# rdfs: http://www.w3.org/2000/01/rdf-schema# sioc: http://rdfs.org/sioc/ns# sioc:type# skos: http://www.w3.org/2004/02/skos/core# xsd: http://www.w3.org/2001/XMLSchema#> class="js flexbox canvas canvastext webgl no-touch geolocation positionmessage websqldatabase indexeddb hashchange history draganddrop websockets rgba hsla multiplebgs background-size borderimage borderradius boxshadow textshadow opacity csstransitions csscolumns cssgradients cssreflections csstransforms csstransforms3d csstransitions fontface generatedcontent video audio localstorage sessionstorage webworkers no-applicationcache svg inlinesvg smil svgclippaths fontawesome-i2svg-active fontawesome-i2svg-complete" style=>
  ><head></head>
  ><body class="navbar-is-fixed-top html front not-logged-in no-sidebars page-node page-node-5559 node-type-home-page i18n-it dipartimento site-name-lines-1" style="padding-bottom: 80px;" data-new-gr-c-s-checked="14.1024.0" data-gr-ext-installed=">
    ><div id="skip-link"><a href="#"></a></div>
    ><header id="navbar" role="banner" class="navbar navbar-fixed-top navbar-default">
      ><div class="container">
        ><div class="region region-header-top"></div>
        ><div class="navbar-header">
          ><div class="name navbar-brand">
            ><a href="#" title="Home Page">THIS TEXT WAS NOT PRESENT IN THE ORIGINAL PAGE</a> == $0
          ></div>
        ></div>
      ></header>
      ><section></section>
      ><!-- -->
      ><section id="tabs"></section>
      ><section id="page-top"></section>
      ><section id="news"></section>
      ><div class="main-container container"></div>
      ><section id="hero"></section>
      ><section id="credits"></section>
      ><script src="https://use.fontawesome.com/releases/v5.11.2/js/all.js"></script>
      ><script src="http://www.diag.uniroma1.it/sites/all/themes/bootstrap/js/bootstrap.js?qvzikv"></script>
      ><div id="popup-active-overlay"></div>
      ><div id="cboxOverlay" style="display: none;"></div>
      ><div id="colorbox" class="dialog" role="dialog" tabindex="-1" style="display: none;"></div>
```

After changing an element....
The edit is only on my browser!

The Languages of the Web: Client-Side

- ▶ **HTML**

- Defines the structure of the webpage

```
<html>
  <body>
    <p>hello!</p>
  </body>
</html>
```

- ▶ **CSS**

- Defines the styling of the page

```
p {
  color: red;
}
```

- ▶ **JavaScript:**

- Allows to add dynamic interactive effects to the webpage (e.g., react to user interactions)

```
let d = window.document;
let p = d.getElementsByTagName('p')[0];
p.addEventListener('click', function () {
  this.style.color = 'blue';
});
```

The Languages of the Web: Server-Side

- ▶ Virtually **every programming language** can be used on the server-side (even C!)
- ▶ Most **common server-side languages** in 2020:
 - **Python**, NodeJS (JavaScript), Java, C#, **PHP**
- ▶ The server-side language is used to implement your web application:
 - Session management of users
 - Interaction with the database
 - Generation of the response pages
 - ...

Quick and dirty HTTP server

A quick but **unsafe** way of spawning a HTTP server is:

```
> python3 -m http.server 8000
```

Serving HTTP on 0.0.0.0 port 8000 (<http://0.0.0.0:8000/>) ...

NOTE: the current working directory is the root for the web server

PHP: Hypertext Preprocessor - Basics

- We will use PHP in some of the examples
- It is a server-side scripting language with [C-like syntax](#)
- HTML and PHP code can be [intermingled](#) in the same file
- [Variable names](#) start with **\$**
- Command **echo** can be used to [print](#) the value of an expression
- The operator **.** denotes [string concatenation](#)
- Important global associative arrays (i.e., dictionaries):
 - **\$_GET**: parameters provided via the [URL query string](#)
 - **\$_POST**: parameters provided in the [body of a request](#)
 - **\$_SESSION**: parameters stored in a PHP session (preserved across multiple requests)

PHP: Hypertext Preprocessor - Example

```
<HTML>
  <BODY>
    <P><?php echo "Hello " . $_GET["name"]; ?></P>
  </BODY>
</HTML>
```

index.php



GET /index.php?name=Ugo HTTP/2
Host: example.com

```
<HTML>
  <BODY>
    <P>Hello Ugo</P>
  </BODY>
</HTML>
```

example.com



Quick and dirty HTTP+PHP server

A quick but **unsafe** way of spawning a HTTP/PHP server is:

```
> php -S 0.0.0.0:8000
```

```
[Mon Oct 25 18:42:06 2021] PHP 7.4.3 Development Server (http://0.0.0.0:8000) started
[Mon Oct 25 18:42:28 2021] 127.0.0.1:37502 Accepted
[Mon Oct 25 18:42:28 2021] 127.0.0.1:37502 [200]: GET /
[Mon Oct 25 18:42:28 2021] PHP Notice: Undefined index: name in index.php on line 3
[Mon Oct 25 18:42:28 2021] 127.0.0.1:37502 Closing
[Mon Oct 25 18:42:37 2021] 127.0.0.1:37506 Accepted
[Mon Oct 25 18:42:37 2021] 127.0.0.1:37504 [200]: GET /?name=ugo
[Mon Oct 25 18:42:37 2021] 127.0.0.1:37504 Closing
```

NOTE: the current working directory is the root for the web server

Quick and dirty HTTP/Python server

```
from flask import Flask, request

app = Flask(__name__)

@app.route("/")
def hello_world():
    return "<html>\n<body>\n<p>Hello %s</p></body></html>" % request.args.get('name')
```

app.py



GET /?name=Ugo HTTP/2
Host: example.com

<HTML>
<BODY>
<P>Hello Ugo</P>
</BODY>
</HTML>

example.com



Quick and dirty HTTP/Python server (2)

```
> pip3 install flask
```

```
> python3 -m flask run
```

- * Environment: production

WARNING: This is a development server. Do not use it in a production deployment.

Use a production WSGI server instead.

- * Debug mode: off

- * Running on http://127.0.0.1:5000/ (Press CTRL+C to quit)

```
127.0.0.1 - - [25/Oct/2021 18:57:17] "GET / HTTP/1.1" 200 -
```

```
127.0.0.1 - - [25/Oct/2021 18:57:17] "GET /favicon.ico HTTP/1.1" 404 -
```

```
127.0.0.1 - - [25/Oct/2021 18:57:29] "GET /?name=ugo HTTP/1.1" 200 -
```

How to make our server reachable from the internet?

Assuming that we are just talking about development/CTF deployment... we can use **ngrok** to make our server reachable (possibly even with HTTPS). This will work even without a firewall (port forwarding) and without a (dynamic) domain.

The screenshot shows the ngrok homepage. On the left, the URL <https://ngrok.com/> is displayed in pink. The main heading on the page is "Public URLs for building webhook integrations." Below this, a subtext reads: "Spend more time programming. One command for an instant, secure URL to your localhost server through any NAT or firewall." A blue button at the bottom left says "Get started for free". At the top of the page, there is a navigation bar with links: "How it works", "Pricing", "Enterprise solutions", "Docs", "Download", "Login", and a "Sign up" button. To the right of the main content area, there is a terminal window showing the command `./ngrok http 3000` and the output "ngrok by @inconshreveable". It also shows a browser window displaying the URL `https://katesapp.ngrok.io` with the message "Welcome to Kate's Site! It's currently under development...". Below the terminal, a table provides session details:

Session	Status	Account	Web Interface
Forwarding	online	Kate Libby (Plan: Pro)	http://127.0.0.1:4040
Forwarding			https://katesapp.ngrok.io -> localhost:3000
Forwarding			https://katesapp.ngrok.io -> localhost:3000

ngrok

1. Spawn your local HTTP server on port X
2. [Download](#) and install ngrok (available as a snap package!)
3. Register an account on [ngrok.com](#) and get the authtoken
4. Configure the authtoken:
> `ngrok authtoken <auth_token>`

ngrok (2)

5. Run ngrok for http X: > **ngrok http X**

```
Session Status          online
Account                ercoppa (Plan: Free)
Version                2.3.40
Region                 United States (us)
Web Interface          http://127.0.0.1:4040
Forwarding             http://2781-151-31-172-3.ngrok.io -> http://localhost:5000
Forwarding             https://2781-151-31-172-3.ngrok.io -> http://localhost:5000

Connections            ttl     opn     rt1     rt5     p50     p90
                      3       0      0.04    0.01    0.00    0.00

HTTP Requests
-----
GET /                  200 OK
GET /favicon.ico       404 NOT FOUND
GET /                  200 OK
```

ngrok (3)

6. Get statistics from the ngrok web interface

The screenshot shows the ngrok web interface with the following details:

Header Bar: ngrok (online), Inspect (selected), Status, Documentation.

Filter by: All Requests (Clear).

Request List:

Method	URL	Status	Duration
GET	/	200 OK	2.06ms
GET	/favicon.ico	404 NOT FOUND	2.13ms
GET	/	200 OK	0.97ms

Selected Request Details: GET / (Duration: 0.97ms, 6 minutes ago, IP: 151.31.172.3)

Request Headers: Summary, Headers (selected), Raw, Binary, Replay ▾

Response Headers: 200 OK, Headers, Raw, Binary

Response Body: 45 bytes text/html; charset=utf-8
<html><body><p>Hello None</p></body></html>

Training challenge #12

URL: <https://training12.webhack.it>

NOTE: THE CHALLENGE IS LIVE!
TRY IT TO LEARN!

Description:

At WebHackIT we like ping pong! Can we play it for fun?

Ping Pong!



I expect to find

"" at

page at:

https://your-ngrok.url

Fetch the page

WebHackIT

Analysis

- It is a web application that ask us a URL
- It is saying that, at the URL, we should serve a page with a specific content
- The url should be from ngrok.io

....let's try to serve a page with this content!

Solution

....too easy! Just look at the previous slides!

HTTP/2 and HTTP/3

HTTP2

- Major revision of the HTTP network protocol. It was derived from the earlier experimental SPDY protocol, originally developed by Google. RFC 7540.
- Main goals:
 - Provide a negotiation mechanism to select HTTP/1.1, 2.0, or other non-HTTP protocols.
 - High-level compatibility with HTTP/1.1
 - Decrease latency to improve page load speed:
 - data compression of HTTP headers
 - HTTP/2 Server Push
 - pipelining of requests
 - fixing the **head-of-line blocking problem** in HTTP 1.x
 - multiplexing multiple requests over a single TCP connection
 - Support common existing use cases of HTTP, such as desktop web browsers, mobile web browsers, web APIs, web servers at various scales, proxy servers, etc.

Head-of-line blocking problem in HTTP 1.x

HTTP pipelining is a way to send another request while waiting for the response to a previous request. The idea is to avoid to perform several parallel requests since the setup time for each request could be huge.

Problem:


- suppose request B is “queued” (in the pipeline) after request A
- what happens if request A requires a long processing time?

Hard to choose how to “queue” the requests. Modern browsers disable pipelining...

HTTP2: some key ideas

- The client can request an upgrade of the connection using the HTTP/1 Request Header. If the server speaks HTTP/2, it sends a "101 Switching" status and from then on it speaks HTTP2 on that connection.
- HTTP2 is a binary protocol, while HTTP is "based" on ASCII. Web applications do not require changes, everything is done by the browser/server.
- The binary protocol allows to efficiently perform multiplexing within one connection:
 - **Stream:** bidirectional bytes flow within a connection, carrying one or more messages.
 - **Message:** sequence of frames that map to a logical request or response message.
 - **Frame:** smallest unit of communication in HTTP/2, each containing a frame header, which at a minimum identifies the stream to which the frame belongs.

HTTP/2: request and response multiplexing

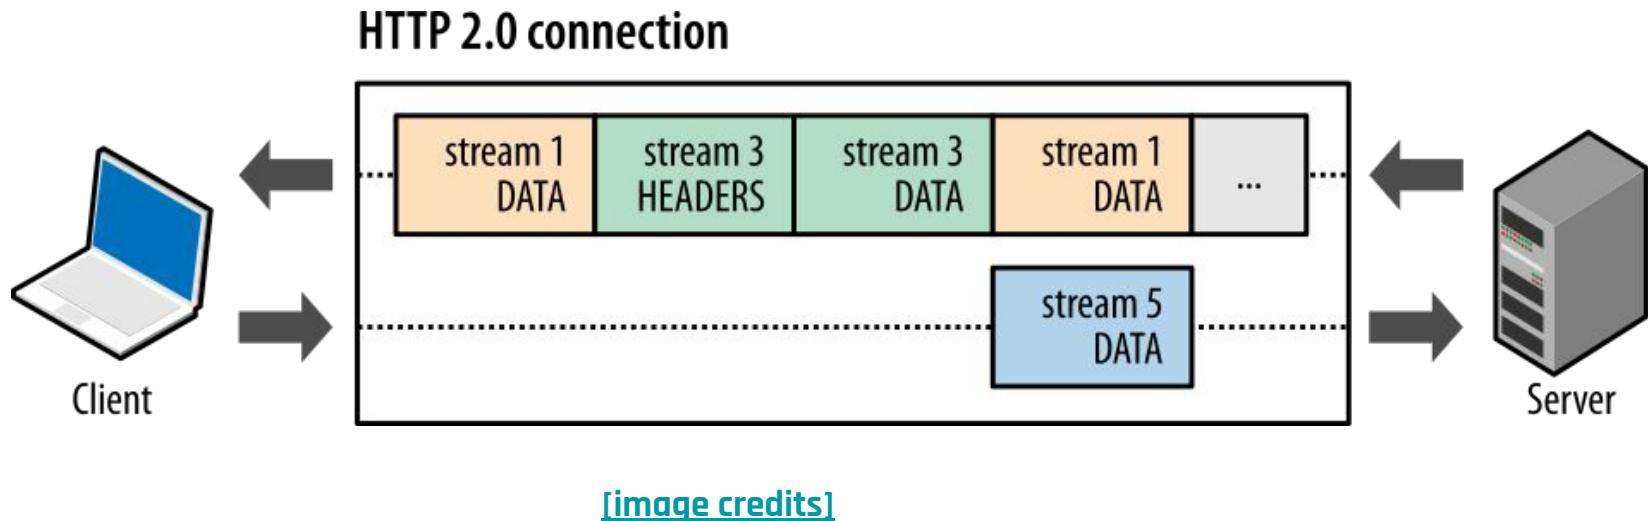


HTTP/3 and QUIC

- HTTP/2 addresses **head-of-line blocking** (HOL) through request multiplexing, which eliminates HOL blocking at the application layer, but **HOL still exists at the transport TCP layer!**
- Third revision of HTTP, officially supported since 2022 . Backward compatible: same request methods, status codes, and message fields.
- It is based on QUIC, a general-purpose transport layer network protocol designed by Google, which come with two main features:
 - **Switch from TCP to UDP:** this significantly reduces the overhead from the protocol stack, however, now it is up to protocol to recover from transmission errors (a packet is lost). This helps with HOL.
 - **Integrate into the protocol exchange of setup keys and supported protocols part of the initial handshake process:** this reduces overhead for the setup of TLS, which was not optimal in HTTP/2.

Cookies

HTTP(S) Sessions

- ▶ HTTP(S) is a stateless protocol
 - Requests are independent from each other
 - What if user wants to stay logged in?
- ▶ Session concept
 - Session data is stored on the server with a unique session ID
 - Client attaches the session ID to each request
 - Attacker can hijack an (in)active session and impersonate user if session tokens are not properly protected!

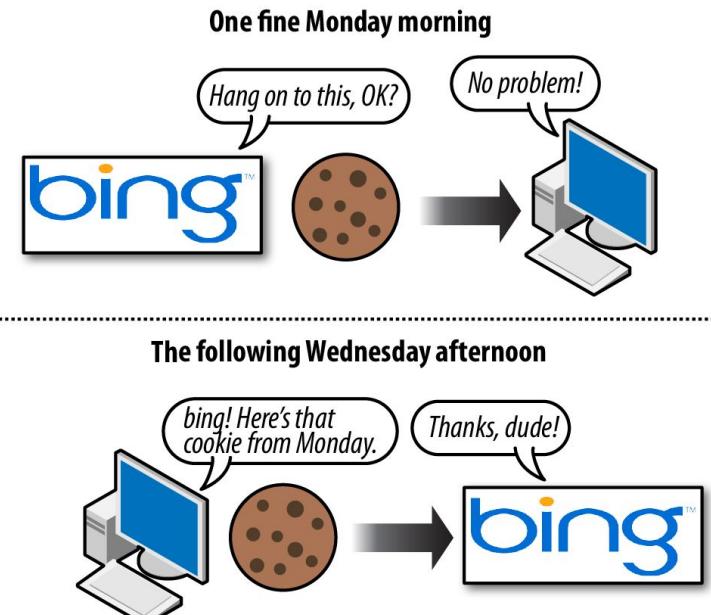

Storing Info in Browser with Cookies

- Sessions are typically implemented on top of cookies
- Cookies set by websites are automatically attached by the browser to subsequent requests to the same website
- Cookie attributes (e.g., Domain, Path, Secure, HttpOnly) can be used to customize the cookie behavior
- A cookie is identified by the triplet (name, domain, path)



Cookies in practice

Setting a new cookie (client-side with Javascript):

```
document.cookie = "username=John Doe; expires=Thu, 18 Dec 2013 12:00:00 UTC; path=/";
```

where:

- **username** is the key (string)
- **John Doe** is the value (string) associated with the key
- **Thu, 18 Dec 2013 12:00:00 UTC** is the expiration date. When missing, the cookie expires at the end of the session
- **path=/** is the path the cookie belongs to. By default, the cookie belongs to the current page.

Cookies in practice (2)

Read all cookies:

```
let x = document.cookie;
```

Delete a cookie:

```
document.cookie = "username=; expires=Thu, 01 Jan 1970 00:00:00 UTC; path=/";
```

...you just set the expiration date to a past date.

Cookies in practice (3)

Handling cookies in PHP (server side):

```
setcookie("user", "John Doe", time() + (86400 * 30), "/"); // we set a cookie  
echo $_COOKIE["user"]; // we get the value for the cookie  
setcookie("user", "", time() - 3600); // delete the cookie
```

What are Cookies used for?

▶ Authentication



- The cookie proves that the client previously authenticated correctly

▶ Personalization

- Helps the website recognize the user from a previous visit

▶ Tracking





- Follow the user from site to site; learn his/her browsing behavior, preferences, and so on

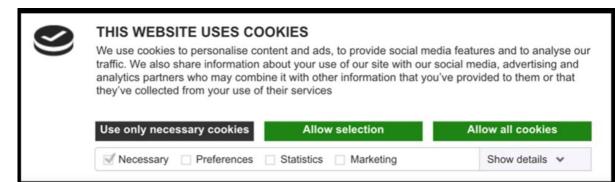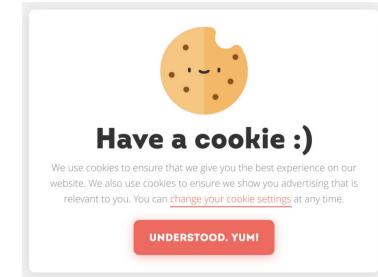

Third-party cookies

- a page can host contents coming from other web servers
- cookies that are sent by these servers are named **third-party cookies**
- there are organizations operating in the advertisement that use third-party cookies for tracking users across different sites, allowing ads consistent to user profile
- This may be a huge privacy concern.
- Several countries have issued laws on the topic. UE have regulated this matter...

Cookie Banners

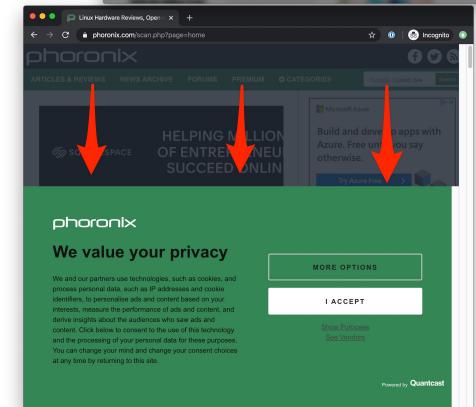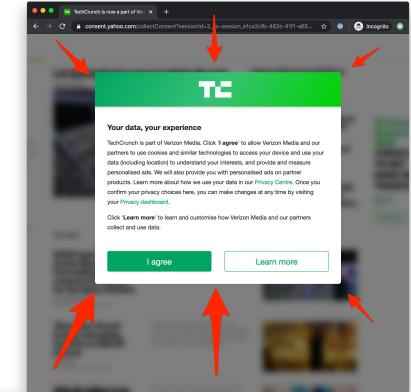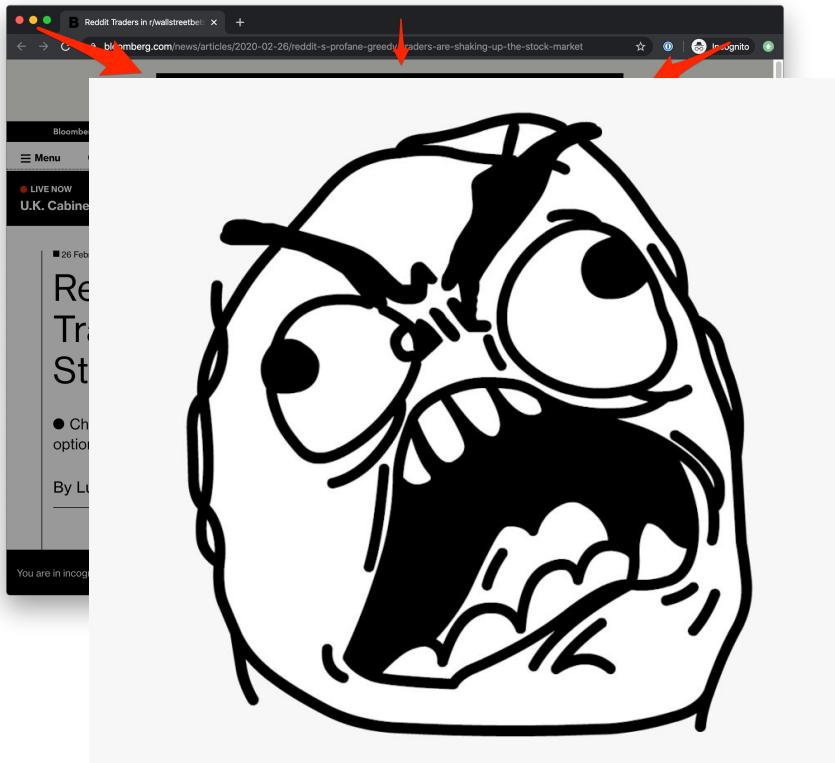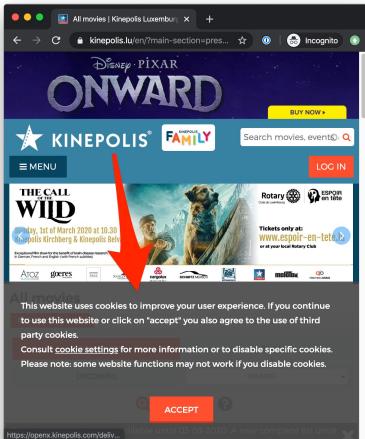

Storage

Web Storage (or DOM Storage)

Modern browsers allow a web application to store (key, value) pairs on the client:

- **Session Storage**: kept only for the current session
- **Local Storage**: permanent across sessions

The key and value can only be strings. The maximum size for the whole storage is typically 5MB, however, it depends from the browser implementation.

Web Storage is NOT encrypted: e.g., Firefox uses a SQLite file.

Cookie vs Web Storage

They are similar but different:

- Cookies keep track of data in the client for the server (they are attached to each request!). Web Storage keeps track of data only for the client: the server cannot access it (however, the client may still send its content to the server...).
- Cookies have a maximum size of 4KB. Web Storage is designed with a larger capacity in mind.
- Not always clear what happens if two tabs edit the same cookie at the same time. Web Storage uses DB transactions to deal with concurrent operations.
- Cookies come with very old API, which may lead to some security risks. API for Web Storage were designed later and “should” be better.

Web Storage in practice

Javascript (client-side):

```
localStorage.setItem("lastname", "Smith");
```

```
console.log(localStorage.getItem("lastname"));
```

```
localStorage.removeItem("lastname");
```

Same API for **sessionStorage**.


Document Object Model (DOM)

Document Object Model (DOM)

A cross-platform and language-independent interface that treats an XML or HTML document as a tree structure. Each node is an object representing a part of the document.


Javascript can thus easily modify the a page by modifying the HTML DOM.

[\[image credits\]](#)

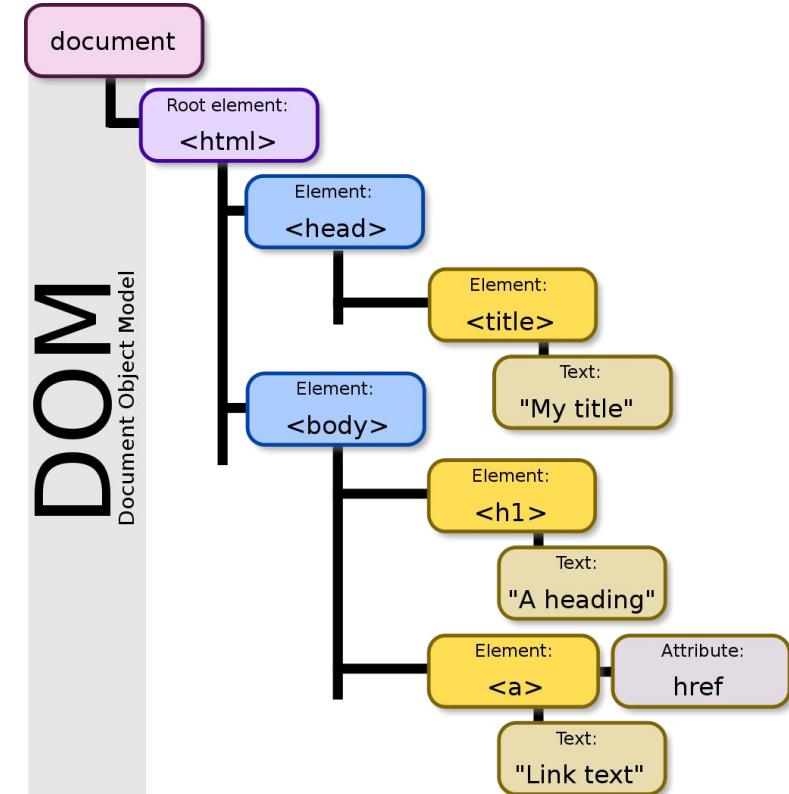

HTML DOM in practice

```
<!-- My document -->
<HTML>
<HEAD>
  <TITLE>My Document</TITLE>
</HEAD>
<BODY>
  <H1>Header</H1>
  <P>Paragraph</P>
  <P>Paragraph</P>
</BODY>
</HTML>
```

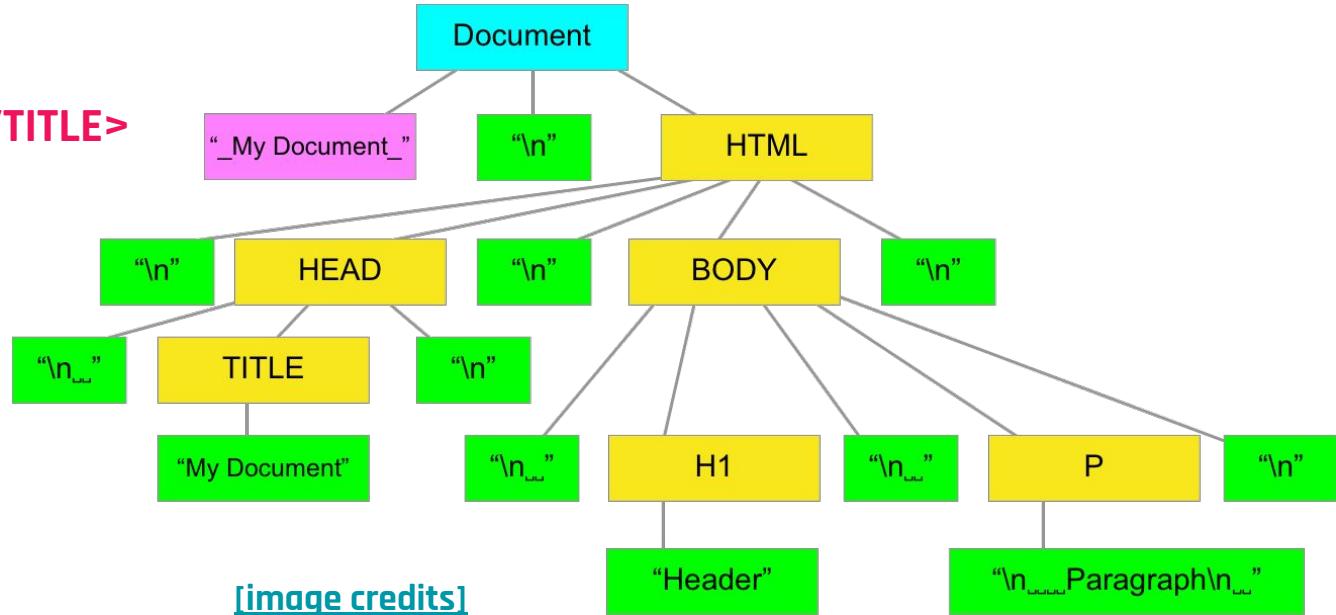

HTML DOM in practice (2)

Javascript (client-side):

- Elements can be retrieved with: `document.getElementById(id)`, `document.getElementsByTagName(name)`, `document.getElementsByClassName(name)`. E.g.:

```
document.getElementById("demo").innerHTML = "Hello World!";
<p id="demo"></p>    →    <p id="demo">Hello World!</p>
```

- Given an element, it can be modified using `element.innerHTML` (element content, see example above), `element.<attribute>` (modify an attribute), `element.style.<property>` (modify a CSS property).


HTML DOM in practice (3)

- Given an element, we can modify its subtree with: **element.appendChild(element2)**, **element.replaceChild(old, new)**, **element.removeChild(element2)**
- We can create a new element with **document.createElement(<tagname>)**


Additional details and example can be found [here](#).

MODERN WEB APPLICATIONS

Web Applications: old but still common approach

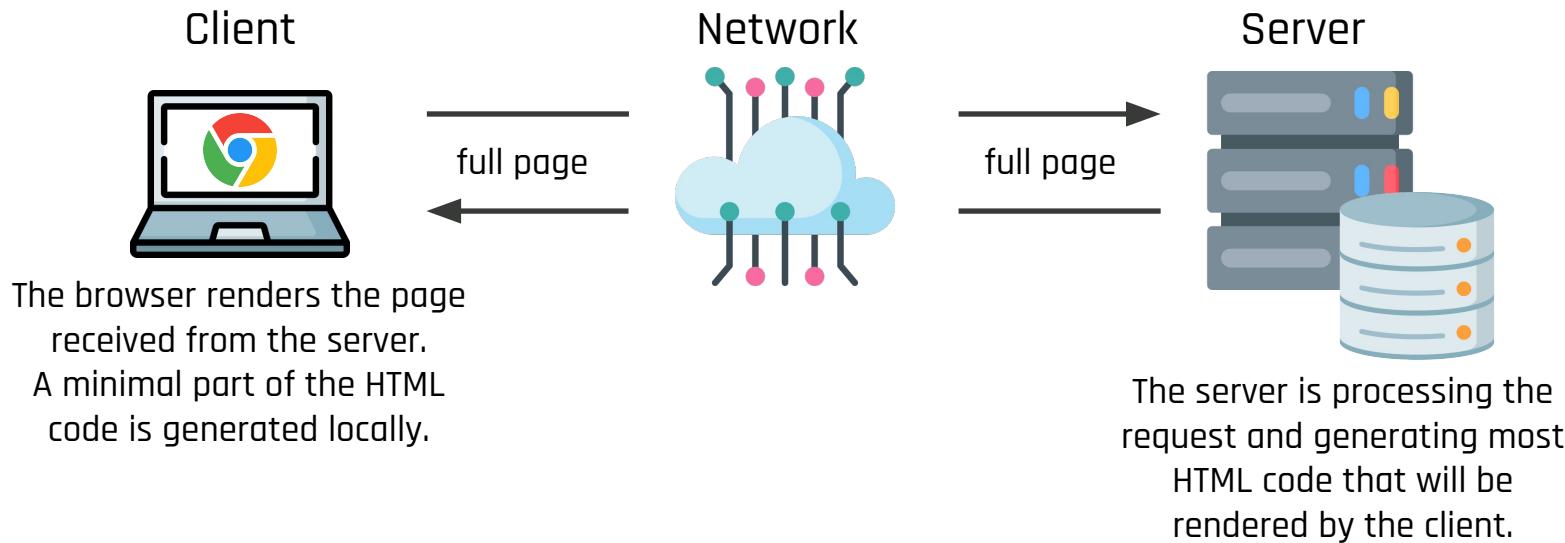

Web Applications: old but still common approach (2)

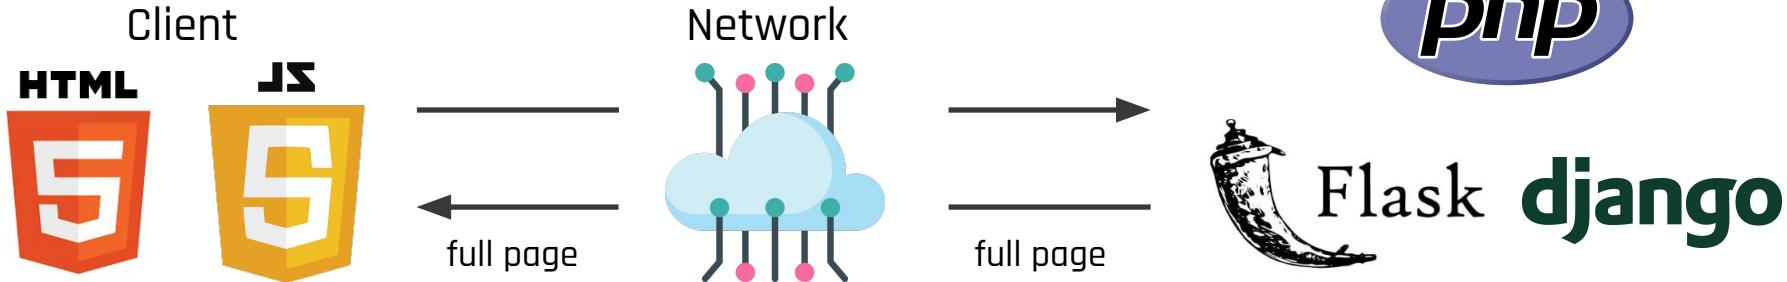


Pros:

- browser is doing little work (it is mainly a “viewer”)
- Simple logic: most things are done by the server

Cons:

- Hard to scale: large load on the server
- Decoupling: what if want to support a mobile app that has its own way of rendering the content?

Web Applications: modern approach


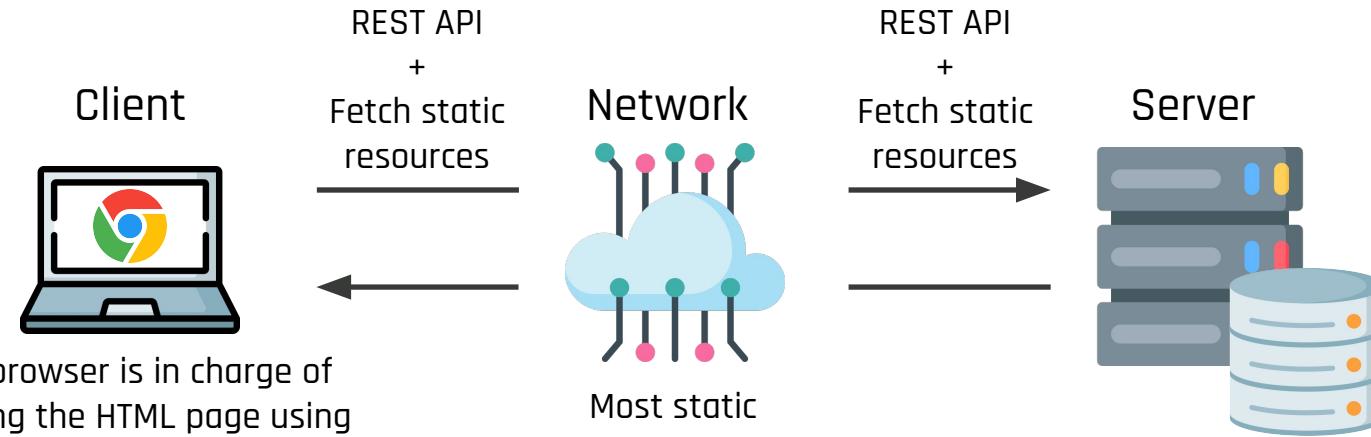


The browser is in charge of building the HTML page using the static resources and the response from the REST API.

Most static resources are cached by CDN

The server is processing the requests, serializing (JSON) the data that should be shown in a page. HTML code is not dynamically generated.

Web Applications: modern approach (2)

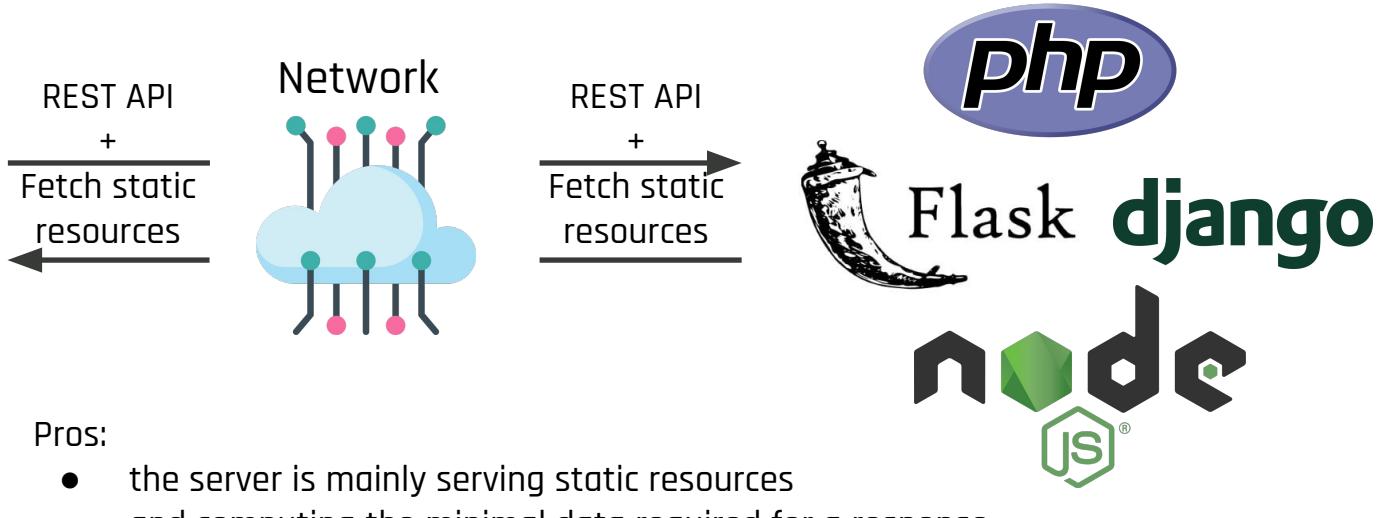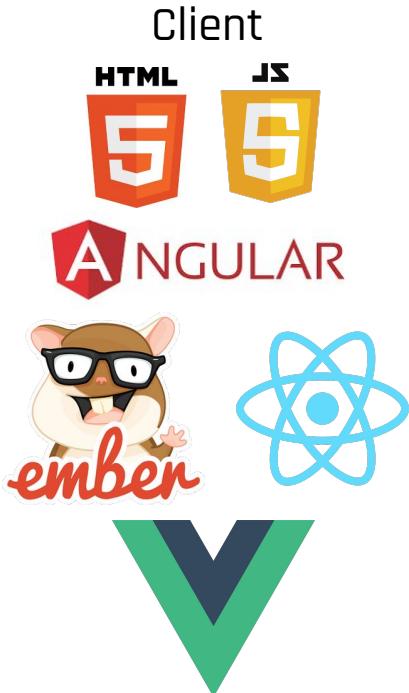

Pros:

- the server is mainly serving static resources and computing the minimal data required for a response
- Clear separation between frontend and backend, making easier to support other client platforms (e.g., mobile app)

Cons:

- Extremely advanced client frameworks

Web Applications: modern approach (3)

Modern client web frameworks propose the Single-Page Application (SPA) paradigm:

- there is only a single page that is doing all the work. Depending on the URL, the page is built and rendered in different ways.
- when the user clicks something, the page performs a REST request, waits for the response and then renders the new content
- the client framework dynamically modifies the DOM
- there is no need thus reload from scratch the page for each user interaction
- better response time and better user experience
- It is very hard to inspect the code for a human or a bot (e.g., a search engine)

Web Applications: modern approach (4)

HTTP was not designed for a continuous interactions and push notifications.
Modern browsers support **WebSocket**:

```
const socket = new WebSocket('ws://example.com:1234/updates');

// Fired when a connection with a WebSocket is opened,
socket.onopen = function () {
  setInterval(function() {
    if (socket.bufferedAmount == 0)
      socket.send(getUpdateData());
  }, 50);
};

// Fired when data is received through a WebSocket,
socket.onmessage = function(event) {
  handleUpdateData(event.data);
};
```

WEB AUTHENTICATION

HTTP Basic Authentication

HTTP defines with [RFC 7617](#) an HTTP transaction for basic authentication:

- The client request a page, e.g.:
GET / HTTP/1.1
- The server replies with:
HTTP/1.1 401 Unauthorized
WWW-Authenticate: Basic realm=<name-realm>
- The client gets the username/password from the user with, e.g., a popup and sends:
GET / HTTP/1.1
Authorization: Basic <BASE64(username:password)>

HTTP Digest Authentication

HTTP defines with [RFC 7616](#) an HTTP transaction for basic authentication:

- The client request a page, e.g.:

GET / HTTP/1.1

- The server replies with:

HTTP/1.1 401 Unauthorized

**WWW-Authenticate: Digest realm=<name-realm> nonce=<nonce>
opaque=<opaque> algorithm=<algorithm> qop=auth**

algorithm is a cryptographically secure hash function (default: MD5)

HTTP Digest Authentication (2)

HTTP defines with [RFC 7616](#) an HTTP transaction for basic authentication:

- The client gets the username/password from the user with, e.g., a popup and sends:

GET / HTTP/1.1


**Authorization: Digest realm=<name-realm> nonce=<nonce> user=<user>
opaque=<opaque> response=<digest> nc=<counter> cnonce=<cnonce>**

where

**digest = HASH(HASH(<username>:<name-realm>:<passwd>):
<nonce>:<counter>:<cnonce>:auth:HASH(GET:/))**

OAuth and Single Sign On (SSO)

- The user has an account on a service provider (Google, Facebook, Linkedin, etc.), also called Identity Provider (IdP)
- The client wants to access a protected resource on a server.
- The server generates a grant code for the client
- The client interacts with IdP, obtaining an access token, which is sent to the server
- The server validates by interacting with IdP, getting also user attributes.

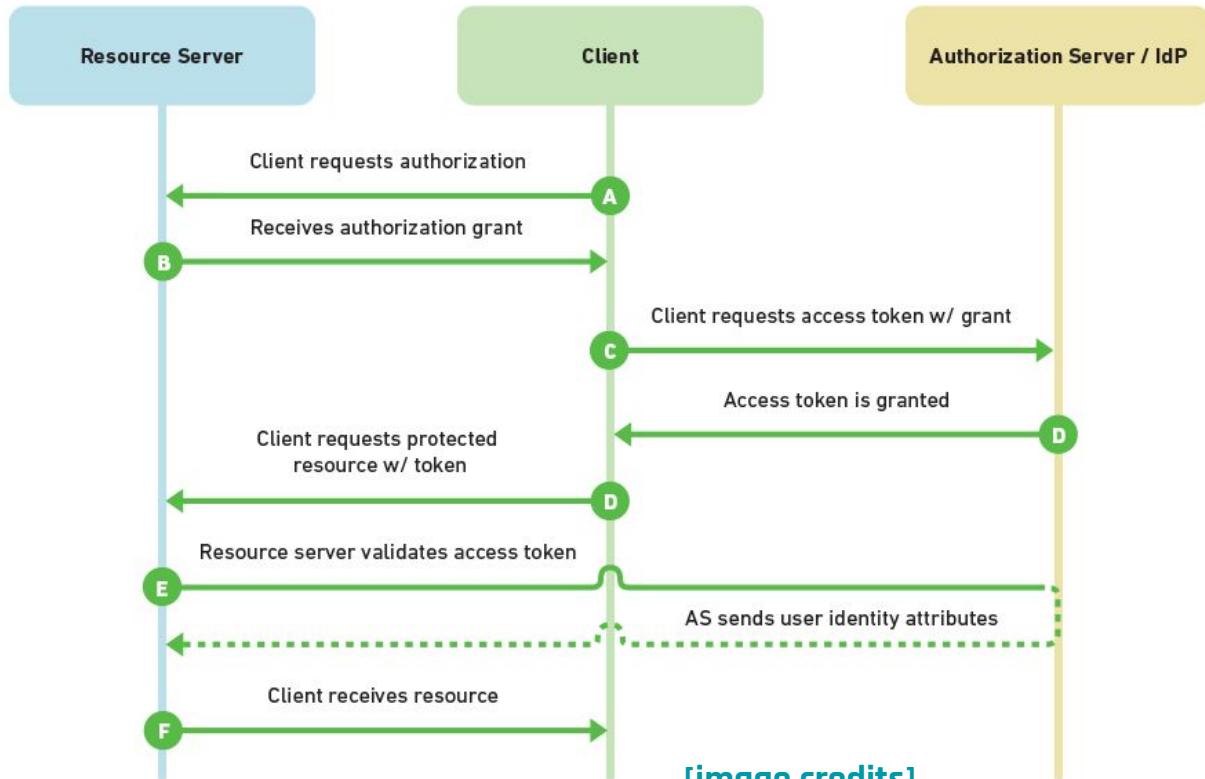

BURP SUITE

Burp Suite by PortSwigger

- Platform for performing security testing of web applications
 - Written in Java. Proprietary and closed source :(
 - Luckily, there is a (free) community edition for Linux, Windows, and Mac OS X [\[DOWNLOAD\]](#)
 - Several functionalities:
 - HTTP(S) Interceptor
 - HTTP(S) repeater
 - Request comparer
- NOTE: THERE IS NO MAGIC BEHIND THIS TOOL. HENCE YOU CAN DO THE SAME THINGS WITH OTHER (100% OPEN SOURCE) TOOLS. HOWEVER, THIS TOOL CAN BE VALUABLE AT THE BEGINNING WHEN YOU ARE JUST STARTING LEARNING ABOUT THE WEB.**

Another valuable resource from the same company...



Web Security Academy



Boost your career

The Web Security Academy is a strong step toward a career in cybersecurity.



Flexible learning

Learn anywhere, anytime, with free interactive labs and progress-tracking.



Learn from experts

Produced by a world-class team - led by the author of The Web Application Hacker's Handbook.


It nicely covers the topics that we will see in the upcoming lectures. The labs may help you prepare for the CTF.

Tutorial - Burp Suite (1)




Tutorial - Burp Suite (2)

A temporary project is fine for our goals.

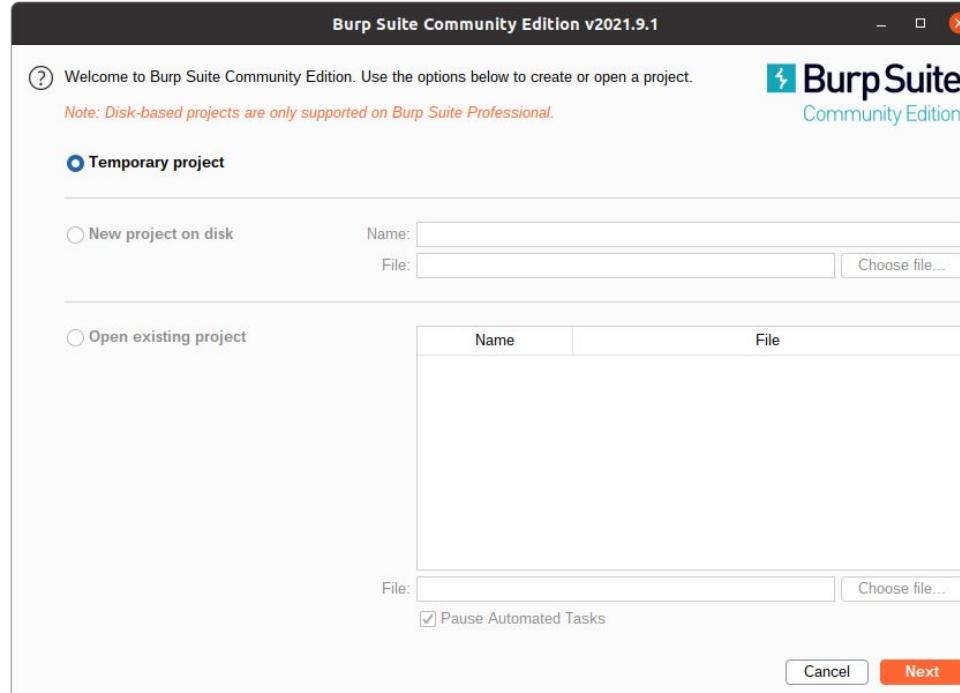

Tutorial - Burp Suite (3)


Default settings
are fine for our
goals.

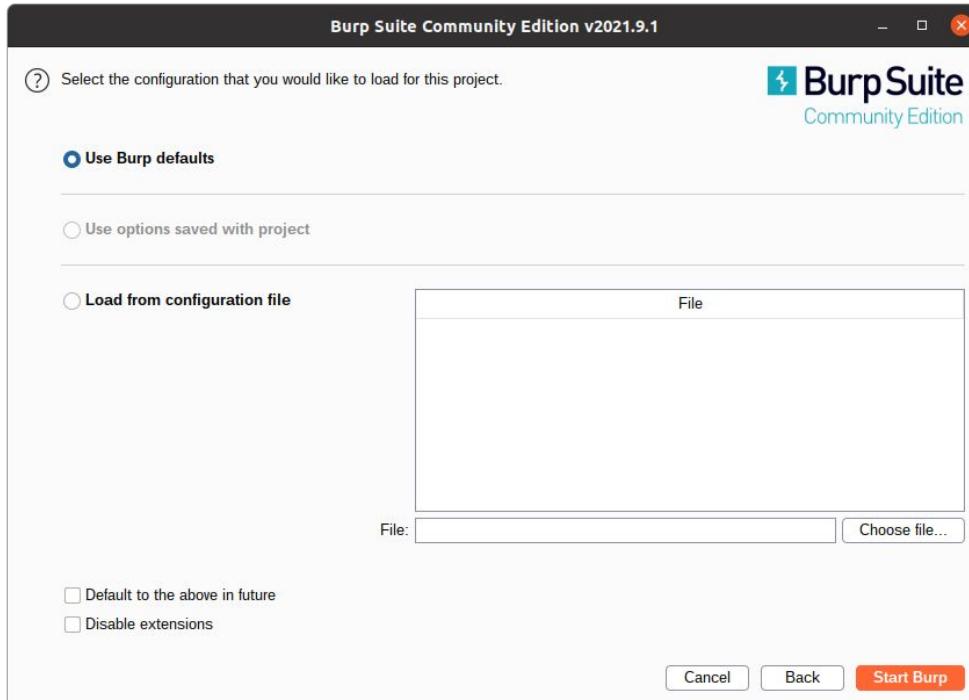

Tutorial - Burp Suite (4)

Dashboard...


Use the tabs to switch to specific functionalities

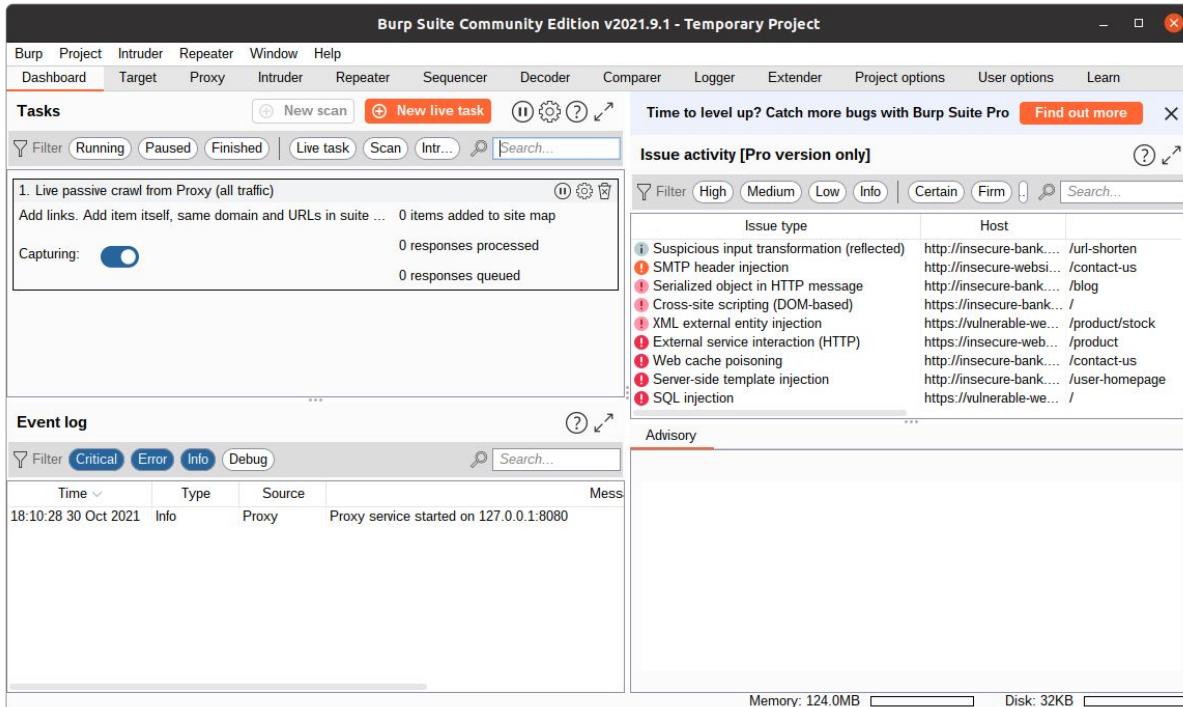

Tutorial - Burp Suite (5)


Tab: Proxy >
Intercept

Use *Open Browser* to launch the embedded browser

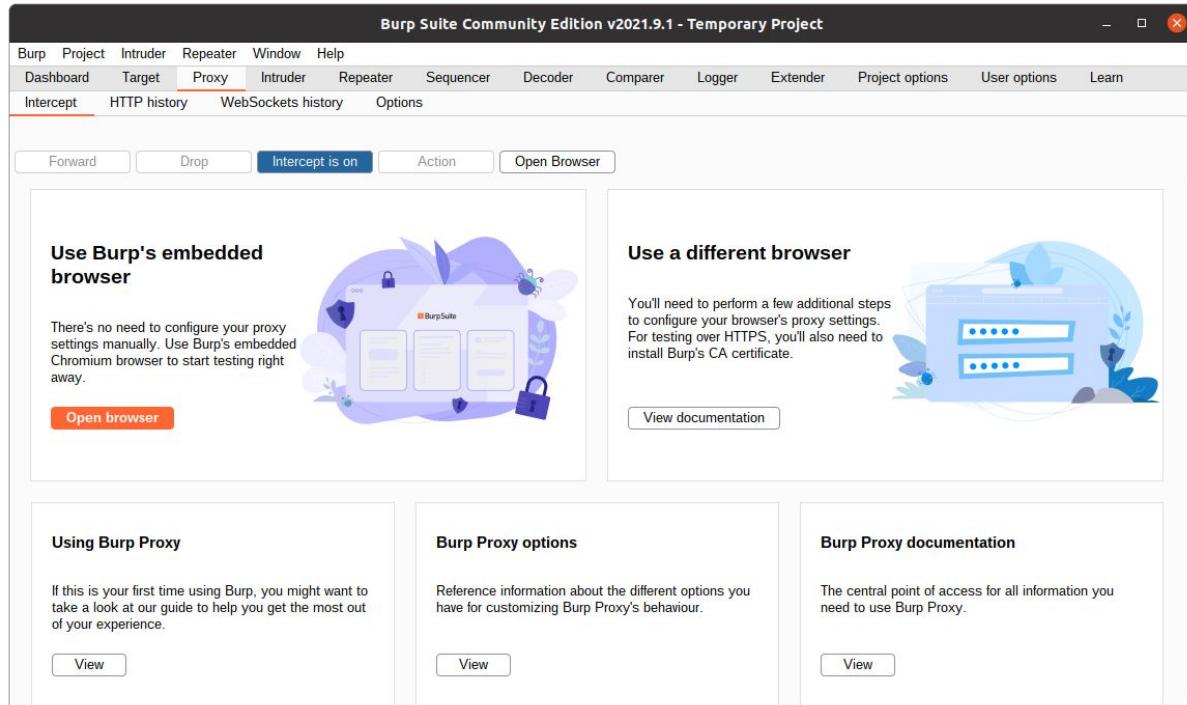

Tutorial - Burp Suite (6)

The embedded browser is based on Chromium. This a (clean) browser: use it for the challenges.

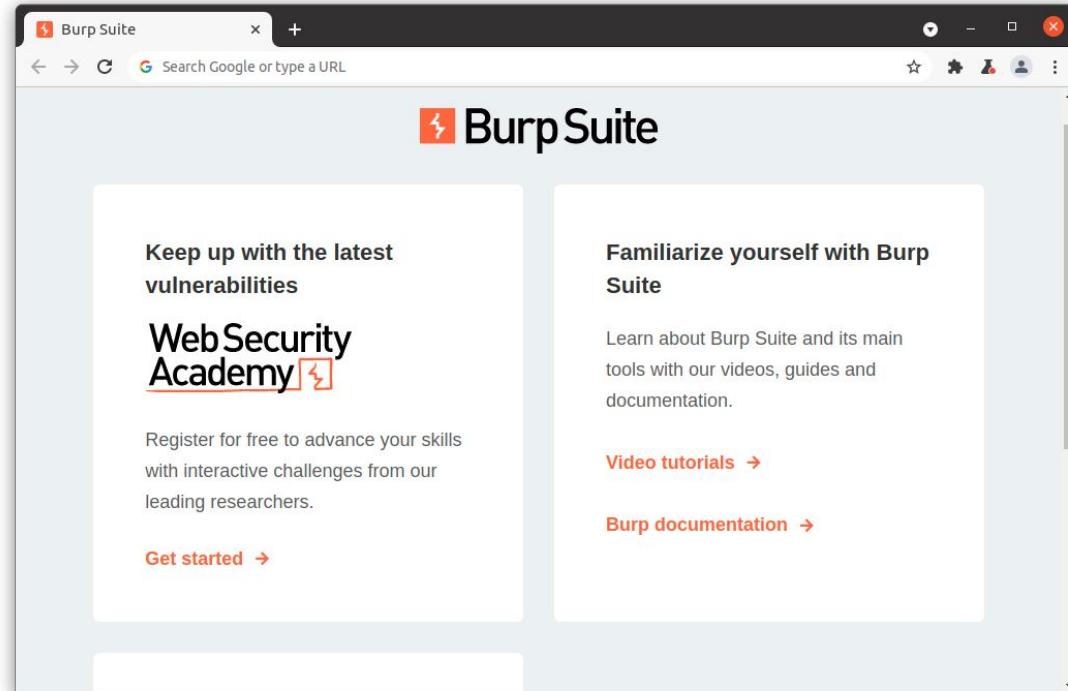


Tutorial - Burp Suite (7)

When doing a HTTP request, Burp will intercept it and wait for your instruction:

- forward
- drop

You can edit the request before forwarding it.

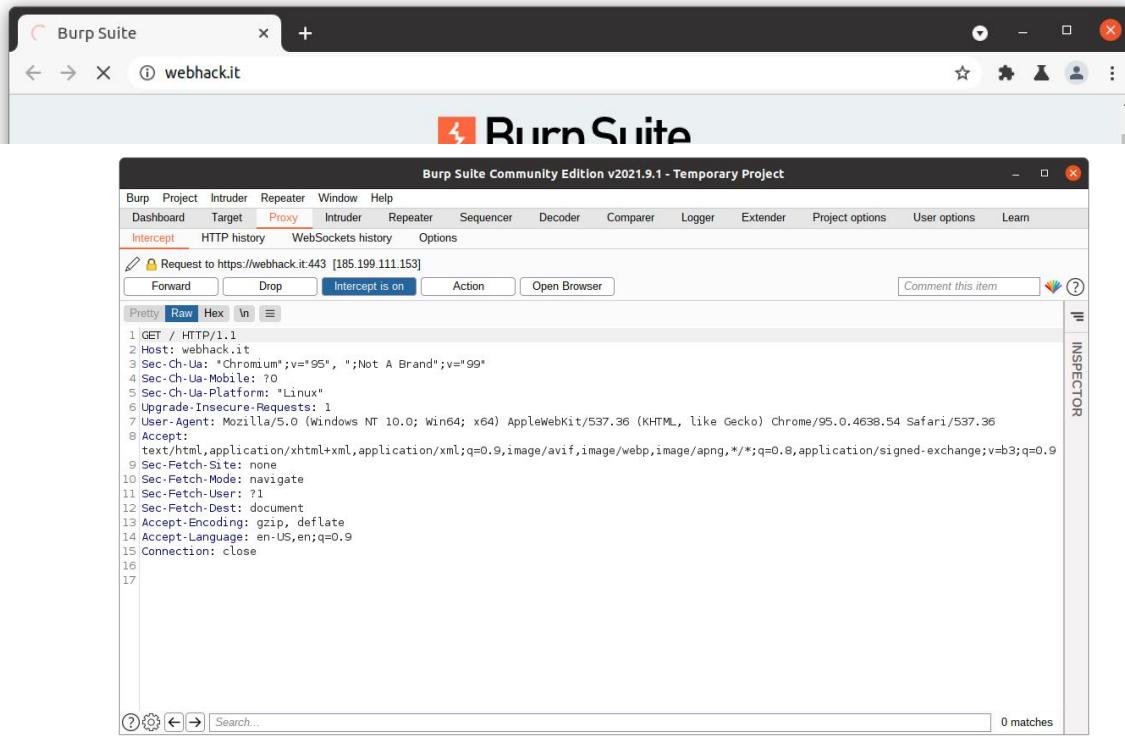

Tutorial - Burp Suite (8)


Intercepting each request
gives you a lot of control but
it is a mess when a site
requires a lot of requests...
e.g., for images, css, js, etc.



Hence, we can disable this
function: click *intercept is on*.
Now, we can browse without
stopping each request.

Tutorial - Burp Suite (9)

Burp Suite is messing up with the certificates! This is done to correctly intercept our HTTPS traffic.

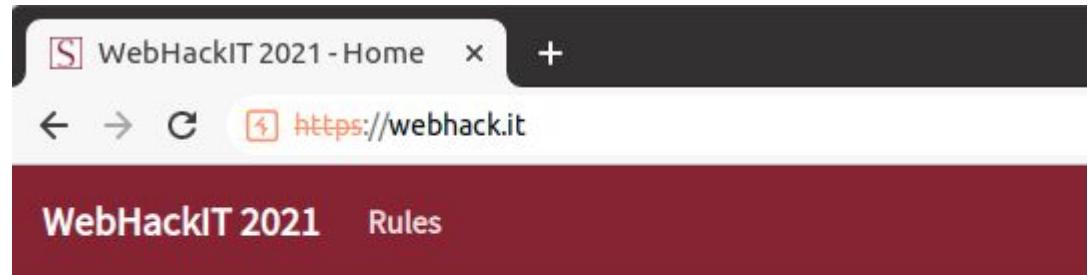

Tutorial - Burp Suite (9)

Tab: **Proxy > HTTP History**

We get a history of all network requests. We can easily inspect them...

#	Host	Method	URL	Params	Edited	Status	Length	MIME type	Extension	Title	Comment	TLS	
1	https://webhack.it	GET	/			200	5395	HTML		WebHackIT 2021 - H...	✓	1	
2	http://webhack.it	GET	/			301	640	HTML		301 Moved Permanen...		1	
3	https://webhack.it	GET	/			200	5394	HTML		WebHackIT 2021 - H...	✓	1	
10	https://webhack.it	GET	/static/js/jquery-3.4.1.min.js			200	88779	script	js			✓	1
11	https://webhack.it	GET	/static/js/popper.min.js			200	19823	script	js			✓	1
12	https://webhack.it	GET	/static/js/bootstrap.min.js			200	49579	script	js			✓	1
13	https://webhack.it	GET	/static/js/datatables.min.js			200	88469	script	js			✓	1
14	https://webhack.it	GET	/static/js/flatpickr.min.js			200	49151	script	js			✓	1
15	https://webhack.it	GET	/static/js/dcf7.js			200	1599	script	js			✓	1
19	https://fonts.gstatic.com	GET	/s/sourcesanspro/v14/6xK3dSBY...			200	17055		woff2			✓	2

Tutorial - Burp Suite (10)

Tab: Proxy > HTTP History

We can see the request and the response.

The screenshot shows the Burp Suite interface with the title "Burp Suite Community Edition V2021.9.1 - Temporary Project". The "HTTP history" tab is selected. The main pane displays a list of network requests:

#	Host	Method	URL	Params	Edited	Status	Length	MIME type	Extension	Title	Comment	TLS	IP
1	https://webhack.it	GET	/			200	5395	HTML		WebHackIT 2021 - H...		✓	185.199.11
2	http://webhack.it	GET	/			301	640	HTML		301 Moved Perman...			185.199.11
3	https://webhack.it	GET	/			200	5394	HTML		WebHackIT 2021 - H...		✓	185.199.11
10	http://webhack.it	GET	/static/fingerprint/3.4.1.min.js			200	88770	script	js			/	185.199.11

Below the list are two panes: "Request" and "Response". The "Request" pane shows the raw HTTP request sent to "https://webhack.it". The "Response" pane shows the raw HTTP response received from "GitHub.com". To the right of these panes is the "INSPECTOR" panel, which contains tabs for "Request Attributes", "Request Headers (16)", and "Response Headers (20)".

Tutorial - Burp Suite (11)

Tab: Proxy > HTTP History

If we want to repeat a request, then can use
Send to Repeater

The screenshot shows the Burp Suite interface with the following details:

- Navigation Bar:** Burp, Project, Intruder, Repeater, Window, Help.
- Sub-Menu:** Intercept, HTTP history, WebSockets history, Options.
- Table Headers:** #, Host, Method, URL, Params, Edited, Status, Length, MIME type, Extension, Title, Comment, TLS, If.
- Table Data:** Several rows of requests are listed, such as "https://webhack.it" and "http://webhack.it".
- Request Panel:** Shows the selected request details. The "Send to Repeater" option is highlighted.
- Response Panel:** Shows the response details for the selected request.
- Inspector Panel:** Displays request attributes and headers.


Tutorial - Burp Suite (12)

Tab: Repeater

Now we can modify the request (headers and/or the body). E.g.:

- change the URL
- change Accept-Language
- change User-Agent

After we can *Send it.*

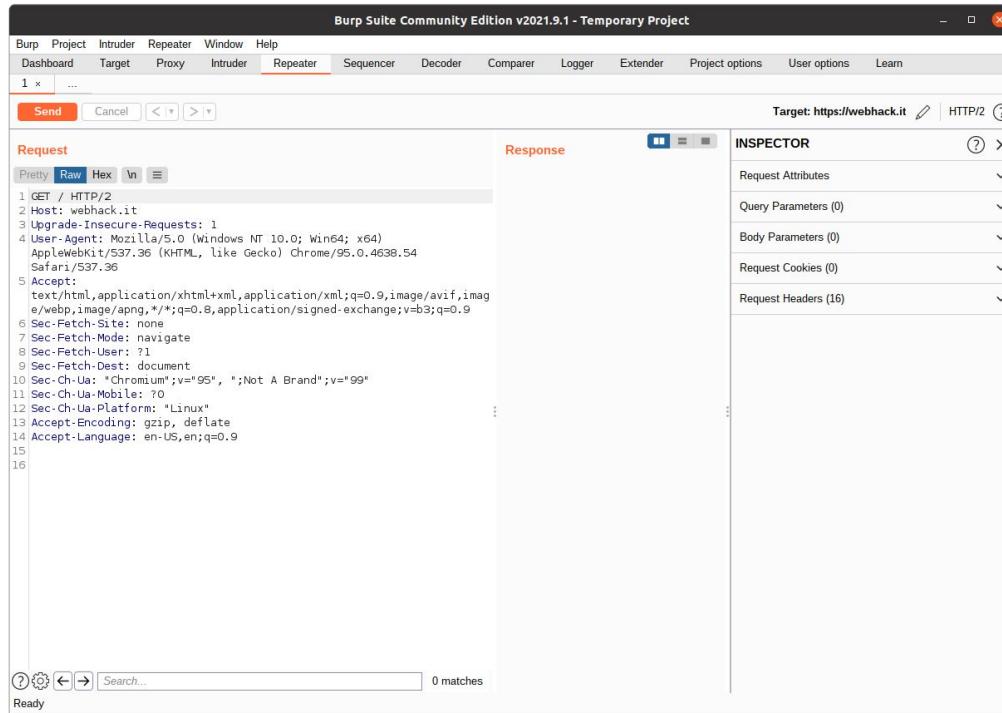

Tutorial - Burp Suite (13)

Tab: Repeater

We get back the response. We can use *Render* to view the rendered page.

Burp Suite Community Edition v2021.9.1 - Temporary Project

Target: <https://webhack.it> | HTTP/2

Request

```
1 GET /secret HTTP/2
2 Host: webhack.it
3 Upgrade-Insecure-Requests: 1
4 User-Agent: Mozilla/5.0 (Windows NT 10.0; Win64; x64) AppleWebKit/537.36 (KHTML, like Gecko) Chrome/95.0.4638.54 Safari/537.36
5 Accept: text/html,application/xhtml+xml,application/xml;q=0.9,image/avif,image/webp,image/apng,*/*;q=0.8,application/signed-exchange;v=b3
6 Sec-Fetch-Site: none
7 Sec-Fetch-Mode: navigate
8 Sec-Fetch-User: ?1
9 Sec-Fetch-Dest: document
10 Sec-Ch-Ua: "Chromium";v="95", ";Not A Brand";v="99"
11 Sec-Ch-Ua-Mobile: ?
12 Sec-Ch-Ua-Platform: "Linux"
13 Accept-Encoding: gzip, deflate
14 Accept-Language: it-IT,en;q=0.9
15
16
```

Response

```
1 HTTP/2 404 Not Found
2 Server: GitHub.com
3 Content-Type: text/html; charset=utf-8
4 Access-Control-Allow-Origin: *
5 Etag: W/"5f5feel0-247b"
6 Content-Security-Policy: default-src 'none'; style-src
7 X-Proxy-Cache: MISS
8 X-Github-Request-Id: 74E6:0636:62C028:666807:617D75C6
9 Accept-Ranges: bytes
10 Date: Sat, 30 Oct 2021 16:41:42 GMT
11 Via: 1.1 varnish
12 Age: 0
13 X-Served-By: cache-mxp6943-MXP
14 X-Cache: MISS
15 X-Cache-Hits: 0
16 X-Timer: S1635612102.415616,V0,VE95
17 Vary: Accept-Encoding
18 X-Fastly-Request-Id: 1c7a2014da3e20a83aed2d8b0c428431c
19 Content-Length: 9339
20
21 <!DOCTYPE html>
22 <html>
23 <head>
24   <meta http-equiv="Content-type" content="text/html"
25   <meta http-equiv="Content-Security-Policy" content:
26   <title>
27     Page not found &mdash; GitHub Pages
28   </title>
29   <style type="text/css" media="screen">
30     body{
31       background-color:#f1f1f1;
32       margin:0;
33       font-family:"Helvetica Neue",Helvetica,Arial,sans-serif;
34     }
35   </style>
36 </head>
37 <body>
38   <h1>404</h1>
39   <p>The requested URL was not found on this server. If you entered the URL manually please check your spelling and try again or contact the administrator if you believe this is a mistake.</p>
40   <ul>
41     <li><a href="/">Return to homepage</a></li>
42     <li><a href="https://github.com/help?search=404">Get help with this error</a></li>
43   </ul>
44 </body>
45 </html>
```

INSPECTOR

- Request Attributes
- Query Parameters (0)
- Body Parameters (0)
- Request Cookies (0)
- Request Headers (16)
- Response Headers (18)


Done

9,958 bytes | 134 millis

Tutorial - Burp Suite (14)

Tab: Intruder

This can be used to perform brute-force attacks. For instance, you can test the value of a GET/POST/COOKIE picking values from a list (e.g., a dictionary).

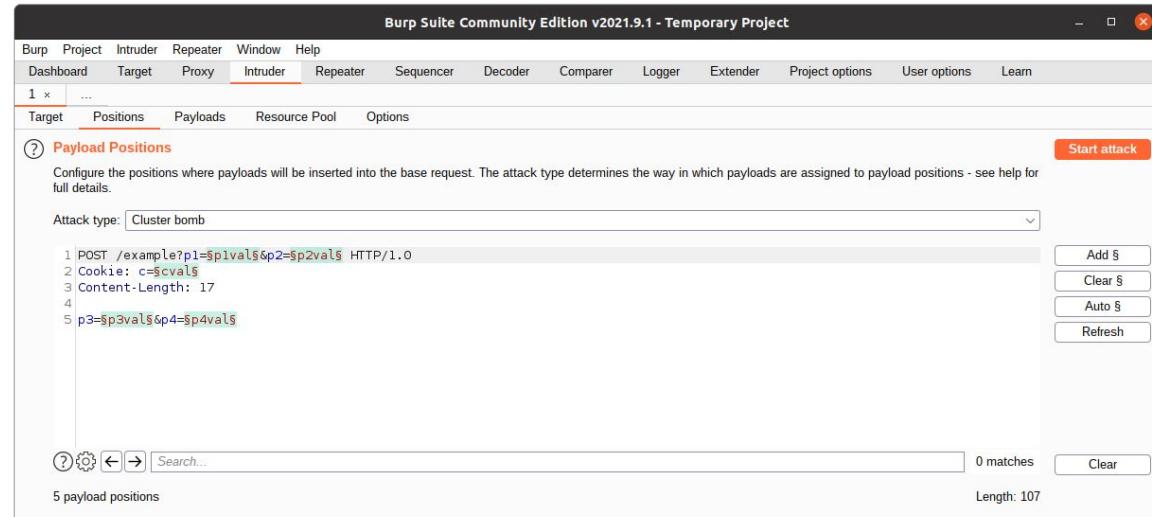


**THERE IS NO NEED TO USE THIS
FUNCTIONALITY IN OUR CTF**

Tutorial - Burp Suite (14)

Tab: Decoder

Quick way of {de,en}coding data.

E.g., In the example, we can encode on the fly a plain text in base64

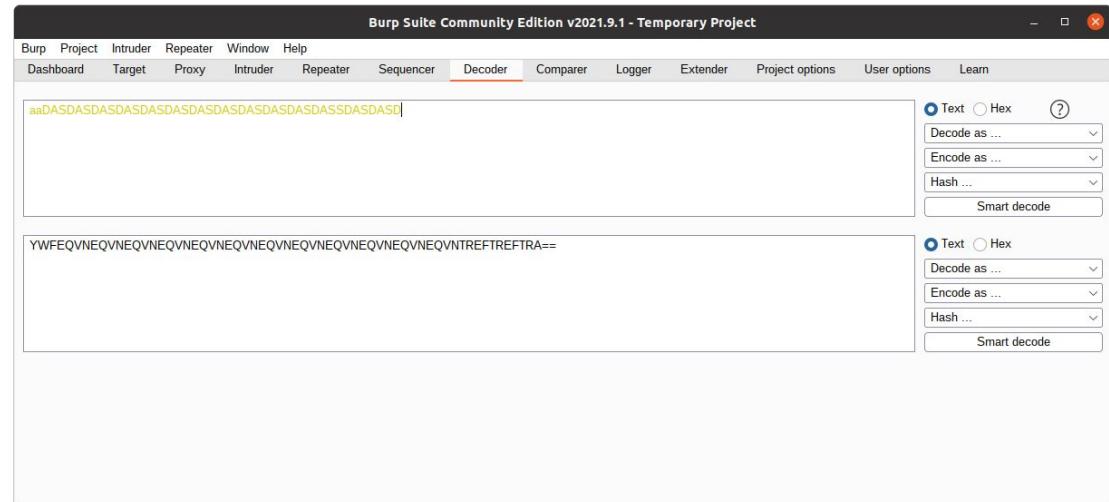

Training challenge #13

URL: <https://training13.webhack.it>

NOTE: THE CHALLENGE IS LIVE!
TRY IT TO LEARN!

Description:

Getting into a system is not always easy... unless... the page leaks crucial information!

Byte Information Exchange



username

password

Enter

WebHackIT

Analysis

- It is a web application that asks username/password
- The description is hinting that the page is leaking some crucial information

....let's try to carefully check the page!

Solution (1)

We see two comments:

- the first one is suggesting a username/password
- the second one is exposing a hidden POST key/value

```
48 .form-signin .form-control {
49   position: relative;
50   box-sizing: border-box;
51   height: auto;
52   padding: 10px;
53   font-size: 16px;
54 }
55
56 .form-signin .form-control:focus {
57   z-index: 2;
58 }
59
60 .form-signin input[type="email"] {
61   margin-bottom: -1px;
62   border-bottom-right-radius: 0;
63   border-bottom-left-radius: 0;
64 }
65
66 .form-signin input[type="password"] {
67   margin-bottom: 10px;
68   border-top-left-radius: 0;
69   border-top-right-radius: 0;
70 }
71 </style>
72
73 </head>
74
75 <body class="text-center">
76 <form class="form-signin" method="post">
77 <h1>Byte Information Exchange</h1>
78 
84   <input type="password" class="form-control" id="pass" name="pass" placeholder="password">
85   <!--
86   <input type="hidden" class="form-control" id="debug_mode" name="debug_mode" placeholder="1" value="0">
87   -->
88 </div>
89 <button class="btn btn-lg btn-primary btn-block" type="submit">Enter</button>
90 <p class="mt-5 mb-3 text-muted">WebHackIT</p>
91 </form>
92 </body>
93 </html>
```

Solution (2)

The screenshot shows the Burp Suite interface with the 'Decoder' tab selected. There are two main sections for decoding. The top section has the input 'demo' and the output 'ZGVtbw=='. The bottom section has the input 'ZGVtbw==' and the output 'demo'. Both sections include a 'Text' radio button (selected), a 'Hex' radio button, and a 'Smart decode' button. To the right of each section are dropdown menus for 'Decode as ...', 'Encode as ...', and 'Hash ...'.

Using Decoder in Burp Suite, we can quickly get base64("demo")

Solution (3)

Using the Repeater in Burp Suite, we can forge a new request, using the computed password and adding the additional POST key/value

The screenshot shows the OWASP ZAP interface with the following details:

Request

```
POST / HTTP/2
Host: training13.webhack.it
Cookie: challenge_auth_token=eyJhbGciOiJIUzI1NiIsInR5cCI6IkpXVCJ9eyJzdwiOijlcNmVcHBhQGdtyWlsBmVsISImV4cIC6MTYzNTYyMDQ1NS44NTA3Mjk3LCJpYXQiOjE2MzU2MTY4NTUuODUwNzI5N30.KzhIVAsznNzdDh57jHlw7f9NBug3s
Content-Length: 36
Cache-Control: max-age=0
Sec-Ch-Ua: "Chromium";v="95", "Not A Brand";v="99"
Sec-Ch-Ua-Mobile: ?
Sec-Ch-Ua-Platform: "Linux"
Upgrade-Insecure-Requests: 1
Origin: https://training13.webhack.it
Content-Type: application/x-www-form-urlencoded
User-Agent: Mozilla/5.0 (Windows NT 10.0; Win64; x64) AppleWebKit/537.36 (KHTML, like Gecko) Chrome/95.0.4638.54 Safari/537.36
Accept: text/html,application/xhtml+xml,application/xml;q=0.9,image/avif,image/webp,image/apng,*/*;q=0.8,application/signed-exch ange;v=b3;q=0.9
Sec-Fetch-Site: same-origin
Sec-Fetch-Mode: navigate
Sec-Fetch-User: ?
Sec-Fetch-Dest: document
Referer: https://training13.webhack.it/
Accept-Encoding: gzip, deflate
Accept-Language: en-US,en;q=0.9
user=demo&pass=ZGVtbw==&debug_mode=1
```

Response

```
<form class="form-signin">
  <div class="form-group">
    <label for="username">Email address</label>
    <input type="text" id="username" name="username" value="demosession" required="">
  </div>
  <div class="form-group">
    <label for="password">Password</label>
    <input type="password" id="password" name="password" required="">
  </div>
  <div class="checkbox">
    <label for="remember-me">Remember me</label>
    <input type="checkbox" id="remember-me" name="remember-me">
  </div>
  <div class="form-group">
    <button type="submit" class="btn btn-lg btn-primary">Sign in</button>
  </div>
</form>
```

INSPECTOR

- Request Attributes
- Query Parameters (0)
- Body Parameters (3)
- Request Cookies (1)
- Request Headers (22)
- Response Headers (5)