

Is reward really enough?

Luca Viano¹

¹EPFL

May 17, 2026

Abstract

We challenge the common wisdom that *reward is enough to learn* intelligent behavior. In many practical settings—robotics, LLM fine-tuning, multi-agent systems—designing a correct reward function is infeasible, and practitioners instead rely on expert demonstrations or human preferences. Yet existing imitation learning (IL) and alignment algorithms rest on unrealistic assumptions. This thesis removes four of them, yielding the following contributions.

1. **Multi-agent IL.** Standard IL algorithms are restricted to single-agent systems and fail arbitrarily in games. We characterize the statistical complexity of learning Nash equilibria from demonstrations and introduce RMAX-RAVI-UCB-ZERO-BC, the first rate-optimal IL algorithm for Markov games.
2. **IL from features.** Existing IL requires observing expert *actions*, but recordings (e.g., video) reveal only features. We prove that environment interaction is necessary in this setting and design FRA-IL, the first min-max optimal algorithm for IL from features in Linear MDPs.
3. **IL without expert realizability.** Standard IL guarantees require the learner’s policy class to contain the expert policy, which fails in distillation or when learning from a privileged expert. We introduce SPOIL and OVI, the first offline and interactive IL algorithms whose sample complexity depends only on the complexity of the *Q-value* class, not the expert’s policy.
4. **Robust alignment.** DPO and its variants avoid overfitting only when the data-generating policy is known, which rarely holds in practice. We propose PEPO, the first alignment algorithm that provably avoids over-optimization without any knowledge of the data-generating policy.

The theoretical results are validated experimentally in simulated robotics and in post-training of LLMs up to 34B parameters.

1 Introduction

Reinforcement Learning (RL) [44, 6] is the subfield of machine learning which studies intelligent decision making. In particular, RL studies efficient algorithms to learn efficiently a strategy to maximize the total reward obtained in stochastic sequential decision-making problems. In [43], it has been hypothesized that

Reward is enough to explain any intelligent behavior,

or in their own words: *"Intelligence, and its associated abilities, can be understood as subserving the maximisation of reward by an agent acting in its environment."* The authors provided several examples from biology [42, 19], social sciences [5] and linguistics [9].

A complementary question that motivates this thesis is the following, more algorithmic question.

*Is reward enough to **learn** any intelligent behavior?*

Unfortunately, there are strong practical reasons to think that the answer is negative. Indeed, a common criticism of the *reward is enough* hypothesis is that, from a practical viewpoint, the hardness of generating intelligent behavior remains, and it is hidden in the design of the *right* reward function. Coming up with the right reward function is a challenging engineering problem. Oftentimes, the desired behavior is the solution of a multi-objective problem, and the designed reward function is a convex combination of all the objectives. The weights need to be carefully chosen, thus implying a costly iterative process for the designer [41, 30]. Moreover, when the reward is misspecified RL algorithms can learn undesired behaviors that maximize the

misspecified reward but not the true one, leading to safety and ethical concerns. This phenomenon is known as reward hacking [3].

As alternatives to reward in robotics or in Large Language Models (LLMs) fine-tuning, it is common to use expert demonstrations [32] or preferences [33, 12] as a learning signal rather than reward functions. These facts motivated research on new algorithm frameworks: algorithms that leverage as input expert demonstrations are known as imitation learning (IL) algorithms [32], while ones learning from preferences are sometimes referred to as alignment algorithms [33]. Those are however in a more primitive stage compared to RL algorithms and suffer several limitations listed next.

- **Limitation 1:** standard IL algorithms are limited to single agent systems. It is unknown how they behave when applied to multi-agent systems such as the financial market or collaborative robotics tasks. In this thesis, we understand the theoretical limits of Multi Agent IL and we design a new algorithm: the first to be rate optimal for this setting.
- **Limitation 2:** No known IL algorithm can learn with limited expert feedback. That is, actions from the experts are needed and features such as video recording of an expert behavior are not enough. Importantly, expert actions are difficult to obtain while recordings are easier to access for example via Youtube or similar. In this thesis, we design the first algorithm optimal for the newly introduced setting of IL from features.
- **Limitation 3:** Existing IL algorithms apply supervised learning but this only works when the algorithm uses a network to parametrize the policy which is *capable of representing the expert policy*. This does not happen when imitation is applied to reduce the number of parameters as it happens in distillation. In this thesis, we bypass this requirement solving the problem via online learning [10]. Thanks to our techniques we only require to represent the Q value of the expert rather than its policy.
- **Limitation 4:** Finally, looking at alignment algorithms we notice that common choices such as DPO overfit, and alternatives such as χ^2 PO and DPO-SFT fix the problems only when the policy generating the available data is known. However this is rarely the case in practice. In this thesis, we present the first algorithm that provably avoids overfitting without relying on any knowledge of the data generating process.

Before diving into the specific solutions to each of these limitations, we review the standard ways of performing imitation learning and alignment.

2 Preliminaries

We formalize the learning problem (imitation or alignment) in a discounted MDP $\mathcal{M} = (\mathcal{X}, \mathcal{A}, r, P, \gamma, \nu_0)$, where $\mathcal{X}$ is the state space which we assume finite but too large to be enumerated, $\mathcal{A}$ is a finite action space with A actions, $r: \mathcal{X} \times \mathcal{A} \rightarrow [0, 1]$ is the unknown reward function, $P: \mathcal{X} \times \mathcal{A} \rightarrow \Delta_{\mathcal{X}}$ is the unknown transition kernel, $\gamma \in [0, 1)$ is the discount factor, and $\nu_0 \in \Delta_{\mathcal{X}}$ is the initial state distribution. For any state-action-state triplet (x, a, x') , $P(x' | x, a)$ denotes the probability of landing in state x' after taking action a in state x . A *stationary policy* (or simply *policy*) $\pi: \mathcal{X} \rightarrow \Delta_{\mathcal{A}}$ is a mapping from states to distributions over actions. Any policy π induces an *occupancy measure* $\mu^\pi \in \Delta_{\mathcal{X} \times \mathcal{A}}$ over state-action pairs, defined as the discounted total expected times that each state-action pair is visited by policy π . The same quantity defined for states is called the state-occupancy measure and is denoted as $\nu^\pi \in \Delta_{\mathcal{X}}$. For any state-action pair $(x, a) \in \mathcal{X} \times \mathcal{A}$, they are respectively defined as

$$\nu^\pi(x) = (1 - \gamma) \sum_{h=0}^{\infty} \gamma^h \mathbb{P}^\pi[X_h = x], \quad \text{and} \quad \mu^\pi(x, a) = (1 - \gamma) \sum_{h=0}^{\infty} \gamma^h \mathbb{P}^\pi[X_h = x, A_h = a],$$

We now distinguish the learning signal between imitation learning and alignment.

Imitation Learning. In *standard* imitation learning, the learner receives the state-action dataset sampled from the expert occupancy, denoted as $\{X_{\text{E}}^i, A_{\text{E}}^i\}_{i=1}^{\tau_{\text{E}}} \sim \mu^{\text{E}}$ where τ_{E} is the total number of expert data, and

we aim to learn a policy π_{out} such that the performance is close up to a precision ε to the expert performance. That is,

$$\mathbb{E} \left[\sum_{x,a \in \mathcal{X} \times \mathcal{A}} (\mu^{\pi^E}(x,a) - \mu^{\pi_{\text{out}}}(x,a)) r(x,a) \right] \leq \varepsilon, \quad (1)$$

where the expectation is over the randomness used by the algorithm to generate π_{out} . To make the setting feel concrete we provide here two examples.

Example 2.1. Robotics. In robotic manipulation, we can consider that the state space is the robot position, the recorded actions are the torques applied from that state to solve the task and the reward is a terminal only function that equal one if the task is solved correctly and zero otherwise. The goal of the learning algorithm is to learn a policy, i.e. how to apply torques to the robot joints so that the success rate is at most ε worst than the expert one.

Example 2.2. Finance. In finance, we can think of the state as the current budget of an AI automated investor and as action space the possible ways on placing part of the budget on the market. The expert is a more expert investor, e.g. a human, that shows how to place money on the various stocks. The reward is clearly the monetary gain, hence the goal of the AI investor’s algorithm is to make as much money as the human expert (up to the usual ε tolerance).

Alignment In *learning from preferences*, we consider a prompt/state space $\mathcal{X}$ and a response/action space $\mathcal{A}$, the learning algorithm receives as input a starting model $\pi_{\text{ref}} : \mathcal{X} \rightarrow \Delta_{\mathcal{A}}$ which is usually a model that exits a *Supervised Fine-Tuning* (SFT) routine, and a preference dataset of the form $\mathcal{D} = \{X_n, A_n^+, A_n^-\}_{n=1}^N$ where $X_n \in \mathcal{X}, A_n^+, A_n^- \in \mathcal{A} \times \mathcal{A}$ for all $n \in [N]$. In the dataset $\mathcal{D}$, we observe the initial prompts sampled from an initial distribution ν_0 , i.e. $X_n \sim \nu_0$ for each $n \in [N]$. Intuitively, $\nu_0(x)$ is the probability with which a human presents prompt x to the language model. Moreover, for each X_n , $\mathcal{D}$ contains two responses A_n^+, A_n^- sampled from an *unknown* distribution π_{data} . Moreover the action A_n^+ has been judged the winner over A_n^- by a Bradley-Terry preference model defined as follows. Given a prompt $x \in \mathcal{X}$, two responses $a, b \in \mathcal{A} \times \mathcal{A}$ and access to the *ground truth* reward function $r^* : \mathcal{X} \times \mathcal{A} \rightarrow [0, R_{\text{max}}]$ for some $R_{\text{max}} \in \mathbb{R}$, the Bradley-Terry preference model computes the probability of a being a winner over b in response to the prompt x (event denoted as $a \succ b|x$) as $\mathbb{P}_{r^*}^{\text{true}}(a \succ b|x) = \sigma(r^*(x,a) - r^*(x,b))$ where $\sigma(x) = \frac{1}{1+e^{-x}}$ denotes the sigmoid function. The dataset is labeled sampling $Z \sim \text{Bernoulli}(\mathbb{P}_{r^*}^{\text{true}}(a \succ b|x))$ for each x, a, b appearing in the dataset. If $Z = 1$, a is declared as the winner vice versa, if $Z = 0$, b wins the comparison.

The goal of the learning algorithm is to update the starting model π_{ref} to obtain a post-trained model π_{out} such that it approximately equals

$$\arg \max_{\pi \in \Pi} J_{\beta}(\pi) := \langle \pi, r^* \rangle - \beta D_{\text{KL}}(\pi, \pi_{\text{ref}}) \quad (2)$$

where Π is the subset of the class all mappings from prompts to distributions over responses denoted as $\Pi_{\text{all}} = \{\pi : \mathcal{X} \rightarrow \Delta_{\mathcal{A}}\}$. Notice that the goal in alignment is a two objective one: maximizing the reward while staying close to the initial π_{ref} . We highlight why this is useful in the context of LLM post-training with our next example.

Example 2.3. LLM post-training. In the context of LLM, π_{ref} is a model skilled in tasks that can be well-learned by next-token prediction. For example, producing grammatically correct sentences. In contrast r^* rewards highly behaviours that requires reasoning, i.e. producing a correct math proof. The objective we consider above aims at finding a tradeoff between these skills.

2.1 Folklore imitation learning.

The standard and most common approach to imitation learning and alignment is to implement the maximum likelihood principle. In imitation learning, the folklore approach started in [36] is to maximize the likelihood of the observed expert actions, while in alignment is to find the policy optimal for the reward function that maximizes the likelihood of the observed preferences under the Bradley-Terry model [7]. In particular, denoting the state-action dataset sampled from the expert occupancy measure as $\{X_{\text{E}}^i, A_{\text{E}}^i\} \sim \mu^{\text{E}}$ be the

expert dataset to be imitated we can consider X_E^i as the covariates and A_E^i as the labels to be predicted. This point of view motivates the following algorithm,

$$\arg \max_{\pi \in \Pi^E} \sum_{i=1}^{\tau_E} \log \pi(A_E^i | X_E^i),$$

which is known in the literature as (log-loss) behavioural cloning (BC). Recent elegant analyses [38, 17, 39] study this algorithm. However, the optimization objective can clearly not be computed if the actions are not available: BC can not be implemented in this case, thus suffering of **Limitation 2**. Moreover, the guarantees for BC [17] are valid only if the learning algorithm has access to a function class Π^E such that $\pi_E \in \Pi^E$. In practice, this means that the learning algorithm should be using a network such that can represent the expert policy if the weights are chosen appropriately, thus suffering from **Limitation 3**. This is a serious source of concern when the learner network is much smaller than the expert one. We address both these limitations in the upcoming sections, casting imitation learning as a game between players updating their strategies via online learning algorithms. Finally, nothing is known about the behavior of BC in multi-agent systems. We show that BC is suboptimal in that settings and we introduce an alternative algorithm that does not suffer **Limitation 1**.

2.2 Folklore alignment.

In RLHF, the idea is to optimize (2) under two approximations. First, we approximate r^* which is unknown to the learner with the maximum likelihood estimator, denoted by $\hat{r}$ and learned on the dataset $\mathcal{D}$ as follows:

$$\hat{r}_{BT} = \arg \max_{r: \mathcal{X} \times \mathcal{A} \rightarrow [0, R_{\max}]} \sum_{n=1}^N \log \sigma(\Delta_r(X_n, A_n^+, A_n^-)). \quad (3)$$

Secondly, in (2), the prompt distribution ν_0 is unknown therefore, it must be approximated using, for example, the states observed in the dataset. All in all, RLHF methods outputs the policy maximizing the following empirical objective over $\pi \in \Pi$,

$$\sum_{n=1}^N \sum_{a \in \mathcal{A}} \pi(a | X_n) \left(\hat{r}_{BT}(X_n, a) - \beta \log \frac{\pi(a | X_n)}{\pi_{\text{ref}}(a | X_n)} \right). \quad (4)$$

RLHF has the merit of being the conceptual core of the large majority of, if not all, alignment algorithms. Sadly, it has the drawback of being split in two training steps represented by equations (3) and (4) respectively. This has been elegantly avoided by DPO [37] with a reparametrization trick explained next.

Direct Preference Optimization The core observation is that (2), for any reward function r , admits the following closed form solution,

$$\pi_r(a | x) = \frac{\pi_{\text{ref}}(a | x) \exp(\frac{r(x, a)}{\beta})}{Z_r(x)}, \quad (5)$$

where $Z_r(x) := \sum_b \pi_{\text{ref}}(b | x) \exp(\frac{r(x, b)}{\beta})$ if Π is expressive enough in the sense that $\pi_r \in \Pi$. This is clearly the case, for example, when we take $\Pi = \Pi_{\text{all}}$. Albeit, being uncomputable due to the hardness of computing $Z_r(x)$, the closed form expression for π_r allows to write the reward function as

$$r(x, a) = \beta \log \frac{\pi_r(a | x)}{\pi_{\text{ref}}(a | x)} + \beta \log Z_r(x). \quad (6)$$

Then, replacing this expression in (3), we can ensure that $\pi_{\hat{r}_{BT}}$ is in the solution set of the following single step optimization problem which is known as the DPO objective,

$$\pi_{\hat{r}_{BT}} \in \arg \max_{\pi \in \Pi} \sum_{n=1}^N \log \sigma(\beta \Delta_{\log \pi / \pi_{\text{ref}}}(X_n, A_n^+, A_n^-)). \quad (7)$$

Importantly, we have used that for each reward r , $\Delta_{\log \pi_r / \pi_{\text{ref}}}(x, a, b) := \log \frac{\pi_r(a|x)}{\pi_{\text{ref}}(a|x)} - \beta \log \frac{\pi_r(b|x)}{\pi_{\text{ref}}(b|x)}$ equals $\Delta_r(x, a, b)$ because the normalization constant $Z(x)$ cancels out.

DPO elegantly bypasses the intermediate step of learning a reward function from the preference dataset. Unfortunately, it is known to suffer from Limitation 4. That is, DPO overfits: the model quality increases initially but then it deteriorates. However there exist alternative algorithms [22, 26] in *offline* learning from preferences based on the concept of *pessimism in face of the uncertainty* which can avoid this pathological behavior, if π_{data} is known. Our contribution is to avoid overfitting while *assuming no knowledge at all of* π_{data} .

3 Improved Imitation Learning

In this section, we unveil our results which allows to circumvent Limitations 1,2 and 3. To start with, we present the first optimal algorithm in multi-agent systems.

3.1 Beyond Limitation 1: Multi-agent imitation learning

In general, a n -players Markov game is defined as the tuple $\mathcal{G} = (\mathcal{X}, \mathcal{A}, H, r, P, \nu_0)$. Compared to single agent MDPs, the action space factorizes now as $\mathcal{A} = \mathcal{A}^1 \times \mathcal{A}^2 \cdots \times \mathcal{A}^n$, which is the product space of the individual action spaces $\mathcal{A}^1, \mathcal{A}^2, \dots, \mathcal{A}^n$, and the transition kernel depends now on all players' actions $P : \mathcal{X} \times \mathcal{A} \rightarrow \Delta_{\mathcal{X}}$. In other words, $P(x' | x, a^1, a^2, \dots, a^n)$ denotes the probability of landing in x' from x under the action profile $a^1, a^2, \dots, a^n$. The reward function for the i^{th} player also depends on the whole action profile $r^i : \mathcal{X} \times \mathcal{A}^1 \times \mathcal{A}^2 \cdots \times \mathcal{A}^n \rightarrow \mathbb{R}$ with $r^i(\cdot) \in [-1, 1]$. Moreover, we denote the space of policies for each player, i.e. for $i \in [n]$, as $\Pi^i : \mathcal{X} \rightarrow \Delta_{\mathcal{A}^n}$. Then, for any policy profile $(\pi^1, \pi^2, \dots, \pi^n)$ let us call a *trajectory* the stochastic process $(X_1, (A_1^1, \dots, A_1^n), (A_2^1, \dots, A_2^n) \dots)$ where $X_1 \sim \nu_0$, $A_h^i \sim \pi^i(\cdot | X_h)$ for all $i \in [n]$ and $X_{h+1} \sim P(\cdot | X_h, A_h^1, \dots, A_h^n)$ for each $h \in [0, \infty)$. Furthermore, we introduce the occupancy measure as follows $\mu^\pi(x, a^1, a^2, \dots, a^n) := (1 - \gamma) \sum_{h=0}^{\infty} \gamma^h \mathbb{P}_\pi[X_h = x, A_h^1 = a^1, A_h^2 = a^2, \dots, A_h^n = a^n]$. In Markov Games a policy profile π_{NE} is said a ε -Nash equilibrium if

$$\max_{i \in [n]} \max_{\pi^i \in \Pi^i} \sum_{x, a^1, \dots, a^n} \left(\mu^{\pi^i, \pi_{\text{NE}}^{-i}}(x, a^1, \dots, a^n) - \mu^{\pi_{\text{NE}}}(x, a^1, \dots, a^n) \right) r(x, a^1, \dots, a^n) \leq \varepsilon$$

where we used the notation π^{-i} defined as $\pi^{-i} := (\pi^1, \dots, \pi^{i-1}, \pi^{i+1}, \dots, \pi^n)$. In offline imitation learning in games, we observe a dataset of states joint actions trajectories collected from a Nash equilibrium profile and BC would simply maximize the likelihood of such actions. Intuitively, think of the offline setting as seeing a dataset collected by strong players (i.e. Nash players) playing against each other. As said, before my thesis BC was not studied in the context of imitation learning. Our first contribution is to show that BC output can be arbitrary suboptimal.

Theorem 3.1. Behavioral cloning fails in games *There exists a Markov Game and a Nash equilibrium profile, such that the output π_{out} of BC or any other offline IL algorithm is arbitrarily far from being a Nash Equilibrium. That is,*

$$\max_{i \in [n]} \max_{\pi^i \in \Pi^i} \sum_{x, a^1, \dots, a^n} \left(\mu^{\pi^i, \pi_{\text{NE}}^{-i}}(x, a^1, \dots, a^n) - \mu^{\pi_{\text{NE}}}(x, a^1, \dots, a^n) \right) r(x, a^1, \dots, a^n) \geq \Omega\left(\frac{1}{1 - \gamma}\right).$$

Next, we present a new algorithm named RMAX-RAVI-UCB-ZERO-BC that is guaranteed to learn a ε -Nash equilibrium in any game. Key for the success is to allow a more powerful access model to the expert. That is, the learner can sample a joint action expert policy profile *from any visited state* and not only from the states in the expert dataset. Intuitively this means that we do not only observe strong players playing among them but we can play according to a policy of our choice against the other player's strong policy. This allows to observe how the opponents policies behave in states that would never be encountered if all players were following a Nash profile.

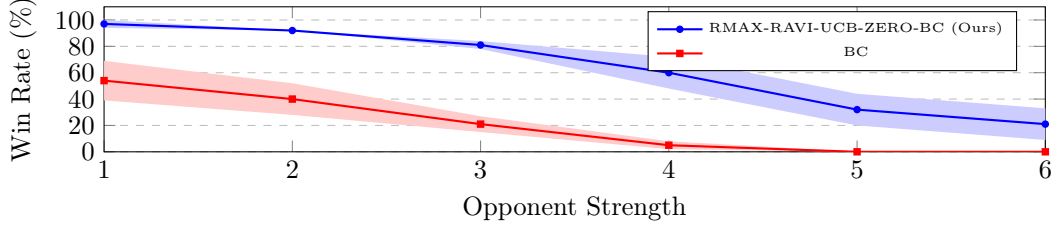


Figure 1: Win rate of BC vs RMAX-RAVI-UCB-ZERO-BC for different opponent strenghts.

Theorem 3.2. *RMAX-RAVI-UCB-ZERO-BC [2] learns in any game. RMAX-RAVI-UCB-ZERO-BC outputs a policy π_{out} which is a ε -Nash Equilibrium with probability at least $1 - \delta$ after $\mathcal{O}(\log(1/\delta)\varepsilon^{-2})$ expert samples.*

The idea behind the design of RMAX-RAVI-UCB-ZERO-BC is to first design a data collection phase which plays against the Nash profile to collect an exploratory dataset. This is implemented running our COLT algorithm RMAX-RAVI-UCB [28] to maximize an exploratory reward. Secondly, this dataset is used for BC to output the learned policy. Our algorithms are not only enjoying better theoretical properties but also lead to improved performance in distillation for games. In particular, we consider distilling a state-of-the-art Connect4 solver into a small network. While BC fails completely, our algorithm achieves better win rates against any opponent strength on the horizontal axis of Figure 1.

3.2 Beyond Limitation 2: Imitation Learning from features.

A second contribution of my thesis has been solving the imitation learning problem when the expert actions are not observed. This enables the use of massively larger dataset containing only the states of the expert or more generally only expert features. Meaningful features in application could be a frame of a video showing the robot doing a certain task [45]. Formally, we consider a features map $\phi_r : \mathcal{X} \times \mathcal{A} \rightarrow \mathbb{R}^d$ such that r is linear in ϕ_r and assume that the expert only reveals a features dataset $\mathcal{D}_\phi = \{\phi_r(X_E^i, A_E^i)\}_{i=1}^{\tau_E}$, a dataset which is considerably less informative than $\{X_E^i, A_E^i\}_{i=1}^{\tau_E}$ when the feature map is information-lossy as it happens for example when ϕ_r represents a video frame. Our first fundamental contribution is that, because of the information loss, it is no longer possible to learn without access to the environment to estimate the transition dynamics. We make this negative result precise in the following.

Theorem 3.3. *Imitation Learning from features requires environment access. [28] For any algorithm Alg having access only to a features dataset, there exists an MDP and an expert policy such that Alg needs to sample at least $\Omega(\varepsilon^{-2})$ state-action sequences and $\Omega(\varepsilon^{-2})$ expert features to learn a ε -optimal policy according to the definition in (1).*

Moreover, we match this lower bound in both the number of sample state-action trajectories and in terms of expert features observation, i.e. τ_E with a new algorithm dubbed FRA-IL [28] when the transition dynamics are also linear in some other feature map. The core idea is to reduce imitation learning to a game between a player that plays a sequence of reward functions and a second one playing a sequence of policies. Finding the right updates for the policy player, solved a problem open in RL theory since 5 years [24] which consisted of designing no-regret algorithms for infinite horizon MDPs with linear transitions and rewards. Key to solve the problem was a new exploration technique combining two classics (UCB [4] and RMAX [8]) in a novel way. The guarantees for FRA-IL read as follows.

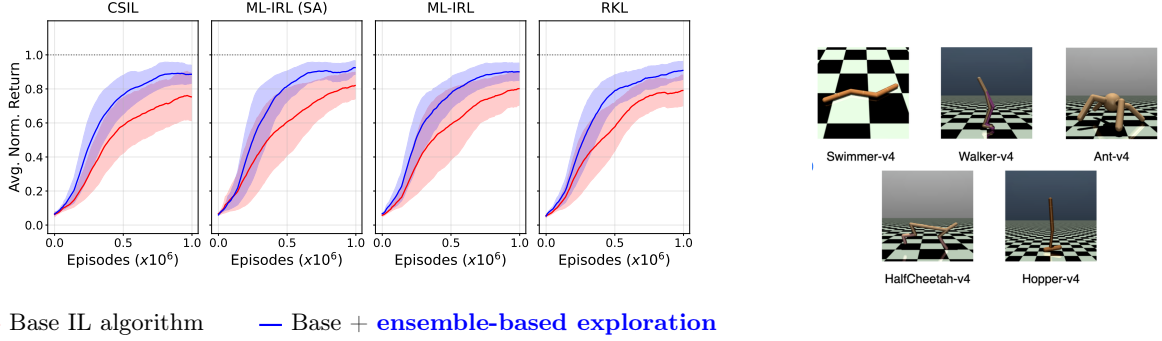


Figure 2: Continuous control imitation learning experiments, results averaged across the 5 environments shown on the right. For any base IL algorithm considered (CSIL [49], RKL [31], ML-IRL [51]) injecting exploration in the policy updates via critics ensembles leads to faster learning.

Theorem 3.4. Rate optimal upper bounds for Imitation Learning from features.[28] For any linear MDP, the algorithm FRA-IL outputs a policy π_{out} which is ε -optimal sampling $\mathcal{O}(\varepsilon^{-2})$ state-action trajectories and expert features.

It is important to highlight however that expert interaction as required in the multi agent setting is not needed and the environment rewards are not observed. Only next states are. Moreover, the bounds can not be improved in terms of ε because of our lower bound. Therefore, FRA-IL is rate optimal.

Practical take-away From the above theoretical analysis, we learn that exploration in the policy update is crucial. In stark contrast, existing algorithms were neglecting this aspect. We therefore designed, inspired by theory above, a meta algorithm that injects exploration in existing algorithms to learn only from features in simulated robotics. Remarkably, as shown in Figure 2, we noticed a consistent improvement for any base algorithm on which we applied our exploration routine.

4 Beyond Limitation 3: IL without mimicking the expert.

Folklore imitation learning described above attains the goal in (1) by matching the expert distribution, i.e. mimicking the expert. In other words, the learner trained via BC tries to choose among the available actions with the same probability distribution used by the expert. However, this is often not possible; especially when the learner is not capable of representing the expert policy. This can often happen in practice.

Example 4.1. Distillation In distillation, a very popular technique in LLMs fine-tuning for mathematical and coding tasks, we train a small model given some responses generated by a much larger LLM. Given the difference in sizes, the small model can not really represent the reasoning traces of the larger one. Still, it could generate correct responses via other reasoning steps. However, this can clearly not be obtained just maximizing the likelihood of the expert responses.

Example 4.2. Learning from a privileged expert. In some situations the expert might choose actions at a given state using external information which is not revealed to the learner, we call this a privileged expert. For example, in finance, a human investor acts not only looking at the current status of the market but also according to some internal bias or information acquired elsewhere. Without access to such privileges, the learner can not hope to match the expert distribution. However, there is still hope to perform similarly in terms of gained money, even though by taking different actions.

In our NeurIPS 2025 paper, [27] we invent the first offline imitation learning which does not mimic the expert. Formally, the key idea is to avoid assuming access to a class Π^E such that $\pi_E \in \Pi^E$ at the cost of introducing structural assumptions on the environment. This translates into assumptions on the state action value functions Q^π that for a given $\pi : \mathcal{X} \rightarrow \Delta_{\mathcal{A}}$ is defined as $Q^\pi(x, a) = \mathbb{E}^\pi[\sum_{h=0}^{\infty} \gamma^h r(X_h, A_h) | X_0, A_0 = x, a]$. In

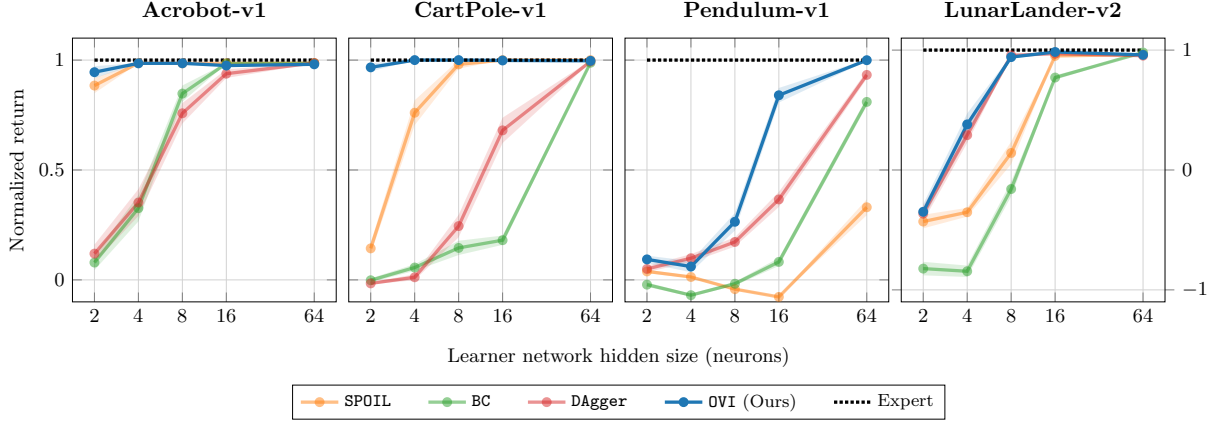


Figure 3: **OVI enables smaller learner networks.** Average return (y -axis) as a function of the learner network hidden size (x -axis), over 50 seeds and 10 expert trajectories. We compare with offline and interactive policy-based methods (BC, DAgger), and the offline value-based method SPOIL. Expert network is of size 64, thus expert policy realizability holds only at the rightmost point of the x -axis. OVI outperforms all baselines across all network sizes.

particular, we consider access to a class $\mathcal{F}_Q$ such that it is expressive enough to either: (**Case I**) represent the state-action value functions of any generated policy by the algorithm we run, or (**Case II**) the expert state-action value function Q^{π^E} is representable by the class $\mathcal{F}_Q$. In practice, one should think of the class $\mathcal{F}_Q$ of the functions that can be represented by a fixed neural network architectures by changing the weights. Our first, result is to show that (**Case II**) is more difficult than (**Case I**).

Theorem 4.3. *Under Case II offline learning is not possible. There exists a family of MDPs and expert pairs such that if $\mathcal{F}_Q$ satisfies **Case I**, then the algorithm SPOIL [27] learns a ε -optimal policy observing $\mathcal{O}(\varepsilon^{-2})$ offline expert data, without any dependence on $|\Pi^E|$. At the same time, if $\mathcal{F}_Q$ only satisfies **Case II**, no algorithm can learn.*

The above theorem gives a positive result under **Case I**, but how to learn under the weaker assumption (**Case II**)? The answer resides into expert interactions. We design an algorithm, named OVI, such that queries the expert along the learner trajectory to learn an ε -optimal policy in **Case II** without any dependence on the expert complexity but only on the class $\mathcal{F}_Q$. The idea to design the algorithm is to circumvent the likelihood maximization performed by BC but working directly with the objective in (1). Following this philosophy, we cast a game between a policy player and this time a Q -values player, not a reward player as done in the above section.

Theorem 4.4. *Expert interaction enables efficient learning under Case II. Given $\mathcal{F}_Q$ satisfying **Case II**, OVI learns a ε -optimal policy after $\mathcal{O}(\varepsilon^{-4})$ expert queries or $\mathcal{O}(\varepsilon^{-2})$ if $\mathcal{F}_Q$ is convex.*

Practical take-away The above theoretical findings give us important practical take away for the distillation setting, where the expert policy is parameterized by way more parameters than the learner one. In these settings, maximizing the likelihood of the expert actions as BC or DAgger [40] do, is not a good idea because the small network is not capable of matching exactly the probability used by the expert policy. In contrast our method, OVI, focus on obtaining the same performance, even if this is achieved via different actions. Our experiments in control environments, see Figure 3, confirm that as the networks size gap between the expert and the learner increases our method OVI becomes stronger and stronger compared to the maximum likelihood-based approaches (BC and DAgger).

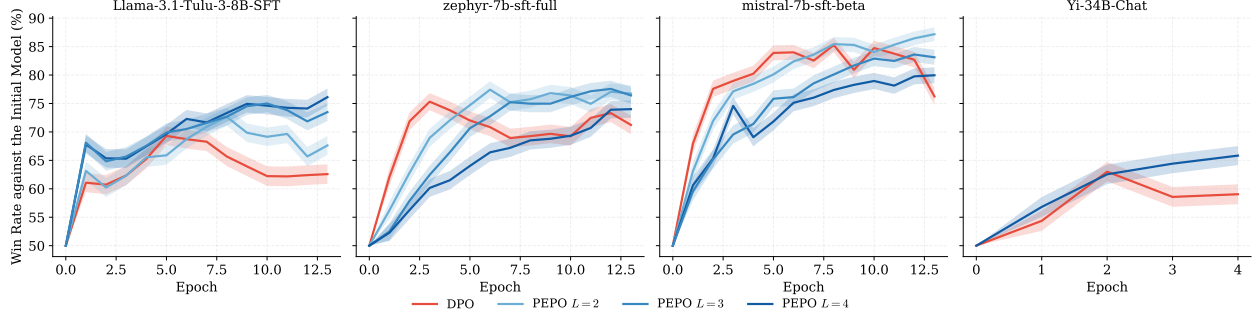


Figure 4: Win rate (%) against the initial model on AlpacaEval2 across training epochs. Shaded regions indicate standard error of the mean across per-instruction preferences. We compare DPO and PEPO with varying ensemble sizes L .

5 Beyond Limitation 4: robust offline alignment.

The last part of my thesis focuses on learning from preferences that can be seen as an extension of imitation learning where the learner is informed not only about what to imitate but also about which actions to avoid. Among existing approaches for learning from preferences (a.k.a. alignment), *Direct Preference Optimization* (DPO) [37] has gained widespread adoption due to its strong empirical performance and simplicity of implementation: indeed, DPO elegantly bypasses the intermediate step of learning a reward function from the preference dataset. Despite these advantages, DPO is known to suffer from *over-optimization*: as training progresses, improvements in optimizing the training loss do not necessarily translate into better generation quality, and may even degrade performance relative to the initial model [18, 34, 50]. Moreover, early stopping using the validation loss as a criterion is not reliable because it is only a loose proxy for what really matters, i.e. the quality of the responses that the model can generate in practice. Several new DPO variants mitigate over-optimization via *pessimistic regularization*.

Notably, approaches such as χ^2 -regularized preference optimization (χ^2 PO) [22] and DPO augmented with supervised fine-tuning (DPO+SFT) [26] achieve guarantees that depend only on a *single-policy* concentrability coefficient $C^* = \sum_{x,a \in \mathcal{X} \times \mathcal{A}} \nu_0(x) \frac{(\pi^*(a|x))^2}{\pi_{\text{data}}(a|x)}$, which is the theoretical certificate of robustness to over-optimization [22]. In contrast, DPO is guaranteed to find a good approximation of the maximizer of (2) only when $C^{\text{all}} = \sup_{\pi: \mathcal{X} \rightarrow \Delta_{\mathcal{A}}} \sum_{x,a \in \mathcal{X} \times \mathcal{A}} \nu_0(x) \frac{(\pi^*(a|x))^2}{\pi_{\text{data}}(a|x)}$ is bounded.

However, they rely on the assumption that we have access to the data-generating distribution π_{data} , an assumption which is often broken in practice, for instance, when smaller models are post-trained using preference data (e.g. the UltraFeedback dataset [14]) generated by larger, proprietary systems whose logits can not be accessed when fine-tuning the smaller models. In the last chapter of my thesis, I remove this limitation with a new algorithm: PEPO. The central idea behind PEPO is to resort to *pessimism via ensembles*: a technique as simple as unexplored in the context of LLM alignment, especially in the DPO setting. Concretely, PEPO trains an ensemble of L lightweight DPO-style policies on disjoint subsets of the preference dataset, implemented via low-rank adapters [21]. Finally, at generation time, we use a certain notion of ensemble agreement to generate responses either via rejection sampling or approximating the (otherwise intractable) response-level normalization constant to the token-level counterpart. All in all, we obtain the following formal guarantees.

Theorem 5.1. *PEPO avoids over-optimization without knowing π_{data} . PEPO learns, with probability $1 - \delta$, a ε -optimal policy for (2), when given a dataset of size $\mathcal{O}(C^* \log(1/\delta)/\varepsilon^2)$ preferences.*

Notably, in the above theorem there is no dependence at all on C^{all} and the dependence on C^* is better than what obtained in prior works. Finally, the result is attained without knowing π_{data} . Practically, we tested our method in which π_{data} is unknown because the responses in the dataset are generated by a non-public model

and noticed that while the performance of DPO increases initially, it decreases drastically after a certain number of epochs (see Figure 4). In contrast, PEPO’s performance increases in a monotonic manner in all four cases which differ in the choice of the initial model π_{ref} . The performance in this context is measured with the LLM-as-a-judge protocol. A large LLM (Llama-70B) has to decide the winner among one response generated by the starting model π_{ref} and one from the model fine tuned via DPO or PEPO. Then, the performance is the percentage of wins that the fine-tuned model attains.

It can also be noticed that the ensemble size L has a strong effect on the performance. Our theory provides guidance for the optimal choice. In particular, if L is too small, then we cannot guarantee that we estimate pessimistically the true reward gap. On the contrary, when L is too large, then each LoRA model is trained with a too small amount of data. All in all, the best choice of L is the smallest one among the values small enough to guarantee pessimism. This change depending on the initial model π_{ref} . For example, it can be seen in Figure 4 that for Llama, with $L = 2$ we still suffer overoptimization, i.e. the performance drops after some epochs. In contrast, $L = 2$ is the best choice for Zephyr. Finally, we remark that PEPO remains effective at scale as confirmed by our finetuning experiment on a 34B model, Yi-34B.

6 Conclusions

This work studied principled algorithms for learning good policies in decision-making problems when a reward function is not available *as a learning signal*. Our fundamental contributions are: (i) a precise characterization of the statistical complexity for learning equilibria in Markov games from data, with the first rate-optimal algorithm (RMAX-RAVI-UCB-ZERO-BC); (ii) the first min-max optimal and computationally efficient algorithm for IL from features in Linear MDPs (FRA-IL); (iii) the first offline IL algorithm that learns *without requiring expert realizability* (SPOIL/OVI); and (iv) the first DPO-like algorithm provably avoiding over-optimization without any knowledge of the data-generating policy (PEPO).

Despite these exciting results, several important directions remain open.

Beyond expected reward. The suboptimality metric studied here is based on expected reward. However, small expected suboptimality does not exclude dangerous actions occurring with non-negligible probability. The uncertainty quantification techniques we developed for optimistic exploration (FRA-IL) and pessimistic regularization (PEPO) could be repurposed to detect high-risk situations and force the agent to abstain from acting. Designing no-regret abstention algorithms where the abstention cost reflects the missed opportunity is well studied in the bandit setting [13, 29, 35], but remains largely unexplored in multi-step decision-making, despite its clear practical relevance—as witnessed by benchmarks evaluating the abstention capability of modern LLMs [16].

Coverage and test-time compute. Expected reward also fails to capture the probability mass placed on the set of optimal actions (coverage [11, 48]). In modern LLM pipelines—where IL and alignment are followed by a test-time compute phase via Best of N (BoN) [20, 23]—coverage rather than expected reward determines how effectively BoN improves quality. Extending the guarantees of this thesis to provide lower bounds on the success probability of BoN sampling from the output of an IL or alignment algorithm is therefore an important open problem.

Continuous action spaces. IL is widely applied in robotics where the action space is continuous, yet our computational efficiency guarantees crucially rely on finite action spaces—a limitation shared by recent IL theory works [17, 39, 25]. Action quantization [15] and environment interaction [46, 47, 28] offer promising paths beyond this limitation.

All in all, we believe that reward alone *is not enough* to guide the design of complex modern decision-making systems, particularly in LLMs and robotics. The results presented here and in today’s growing literature are, we believe, just the first steps of an exciting journey.

My Publications ($\alpha\beta$)**alphabetic order**, ***first author contribution**,

- [1] ($\alpha\beta$) Antoine Moulin, Gergely Neu, and Luca Viano. Optimistically optimistic exploration for provably efficient infinite-horizon reinforcement and imitation learning. *Conference on Learning Theory*, 2025.
- [2] Luca Viano, Till Freihaut, Emanuele Nevali, Volkan Cevher, Matthieu Geist, and Giorgia Ramponi. Multi-agent imitation learning with function approximation: Linear markov games and beyond. *Forty-third International Conference on Machine Learning*, 2026.

References

- [3] Dario Amodei, Chris Olah, Jacob Steinhardt, Paul Christiano, John Schulman, and Dan Mané. Concrete problems in AI safety. *arXiv:1606.06565*, 2016.
- [4] Mohammad Gheshlaghi Azar, Ian Osband, and Rémi Munos. Minimax regret bounds for reinforcement learning. In *International conference on machine learning*, pages 263–272. PMLR, 2017.
- [5] Albert Bandura and Richard H Walters. *Social learning theory*, volume 1. Prentice-hall Englewood Cliffs, NJ, 1977.
- [6] Dimitri P Bertsekas. Dynamic programming and optimal control, 2001.
- [7] Ralph Allan Bradley and Milton E Terry. Rank analysis of incomplete block designs: I. the method of paired comparisons. *Biometrika*, 39(3/4):324–345, 1952.
- [8] Ronen I Brafman and Moshe Tennenholtz. R-max — a general polynomial time algorithm for near-optimal reinforcement learning. *Journal of Machine Learning Research*, 3(Oct):213–231, 2002.
- [9] Jeshua Bratman. A new approach to exploring language emergence as boundedly optimal control in the face of environmental and cognitive constraints. *cs. umich. edu*, 2010.
- [10] Nicolo Cesa-Bianchi and Gábor Lugosi. *Prediction, learning, and games*. Cambridge university press, 2006.
- [11] Fan Chen, Audrey Huang, Noah Golowich, Sadhika Malladi, Adam Block, Jordan T Ash, Akshay Krishnamurthy, and Dylan J Foster. The coverage principle: How pre-training enables post-training. *arXiv preprint arXiv:2510.15020*, 2025.
- [12] Paul F Christiano, Jan Leike, Tom Brown, Miljan Martic, Shane Legg, and Dario Amodei. Deep reinforcement learning from human preferences. *Advances in neural information processing systems*, 30, 2017.
- [13] Corinna Cortes, Giulia DeSalvo, Claudio Gentile, Mehryar Mohri, and Scott Yang. Online learning with abstention. In *international conference on machine learning*, pages 1059–1067. PMLR, 2018.
- [14] Ganqu Cui, Lifan Yuan, Ning Ding, Guanming Yao, Wei Zhu, Yuan Ni, Guotong Xie, Zhiyuan Liu, and Maosong Sun. Ultrafeedback: Boosting language models with high-quality feedback, 2023.
- [15] Robert Dadashi, Léonard Hussenot, Damien Vincent, Sertan Girgin, Anton Raichuk, Matthieu Geist, and Olivier Pietquin. Continuous control with action quantization from demonstrations. *arXiv preprint arXiv:2110.10149*, 2021.
- [16] Dongyang Fan, Sebastien Delsad, Nicolas Flammarion, and Maksym Andriushchenko. Halluhard: A hard multi-turn hallucination benchmark. *arXiv preprint arXiv:2602.01031*, 2026.
- [17] Dylan J Foster, Adam Block, and Dipendra Misra. Is behavior cloning all you need? understanding horizon in imitation learning. *arXiv preprint arXiv:2407.15007*, 2024.
- [18] Leo Gao, John Schulman, and Jacob Hilton. Scaling laws for reward model overoptimization. In *International Conference on Machine Learning*, pages 10835–10866. PMLR, 2023.

- [19] Nikola Grujic, Jeroen Brus, Denis Burdakov, and Rafael Polania. Rational inattention in mice. *Science advances*, 8(9):eabj8935, 2022.
- [20] Lin Gui, Cristina Gârbaacea, and Victor Veitch. Bonbon alignment for large language models and the sweetness of best-of-n sampling. *Advances in Neural Information Processing Systems*, 37:2851–2885, 2024.
- [21] Edward J. Hu, Yelong Shen, Phillip Wallis, Zeyuan Allen-Zhu, Yuanzhi Li, Shean Wang, Lu Wang, and Weizhu Chen. LoRA: Low-rank adaptation of large language models. In *International Conference on Learning Representations*, 2022. URL <https://openreview.net/forum?id=nZeVKeeFYf9>.
- [22] Audrey Huang, Wenhao Zhan, Tengyang Xie, Jason D Lee, Wen Sun, Akshay Krishnamurthy, and Dylan J Foster. Correcting the mythos of kl-regularization: Direct alignment without overoptimization via chi-squared preference optimization. *arXiv preprint arXiv:2407.13399*, 2024.
- [23] Audrey Huang, Adam Block, Qinghua Liu, Nan Jiang, Akshay Krishnamurthy, and Dylan J Foster. Is best-of-n the best of them? coverage, scaling, and optimality in inference-time alignment. *arXiv preprint arXiv:2503.21878*, 2025.
- [24] Chi Jin, Zhuoran Yang, Zhaoran Wang, and Michael I. Jordan. Provably efficient reinforcement learning with linear function approximation, 2019.
- [25] Nirmal Joshi, Gene Li, Siddharth Bhandari, Shiva Prasad Kasiviswanathan, Cong Ma, and Nathan Srebro. Learning to answer from correct demonstrations. *arXiv preprint arXiv:2510.15464*, 2025.
- [26] Zhihan Liu, Miao Lu, Shenao Zhang, Boyi Liu, Hongyi Guo, Yingxiang Yang, Jose Blanchet, and Zhaoran Wang. Provably mitigating overoptimization in rlhf: Your sft loss is implicitly an adversarial regularizer. *Advances in Neural Information Processing Systems*, 37:138663–138697, 2024.
- [27] Antoine Moulin, Gergely Neu, and Luca Viano. Inverse q-learning done right: Offline imitation learning in q^π -realizable mdps, 2025. URL <https://arxiv.org/abs/2505.19946>.
- [28] Antoine Moulin, Gergely Neu, and Luca Viano. Optimistically optimistic exploration for provably efficient infinite-horizon reinforcement and imitation learning. *arXiv preprint arXiv:2502.13900*, 2025.
- [29] Gergely Neu and Nikita Zhivotovskiy. Fast rates for online prediction with abstention. In *Conference on Learning Theory*, pages 3030–3048. PMLR, 2020.
- [30] A. Y. Ng and S. J. Russell. Algorithms for inverse reinforcement learning. In *International Conference on Machine Learning (ICML)*, 2000.
- [31] Tianwei Ni, Harshit Sikchi, Yufei Wang, Tejus Gupta, Lisa Lee, and Ben Eysenbach. f-irl: Inverse reinforcement learning via state marginal matching. In *Conference on Robot Learning*, pages 529–551. PMLR, 2021.
- [32] T Osa, J Pajarinen, G Neumann, JA Bagnell, P Abbeel, and J Peters. An algorithmic perspective on imitation learning. *Foundations and Trends in Robotics*, 2018.
- [33] Long Ouyang, Jeffrey Wu, Xu Jiang, Diogo Almeida, Carroll Wainwright, Pamela Mishkin, Chong Zhang, Sandhini Agarwal, Katarina Slama, Alex Ray, et al. Training language models to follow instructions with human feedback. *Advances in neural information processing systems*, 35:27730–27744, 2022.
- [34] Ryan Park, Rafael Rafailov, Stefano Ermon, and Chelsea Finn. Disentangling length from quality in direct preference optimization. In *Findings of the Association for Computational Linguistics: ACL 2024*, pages 4998–5017. Association for Computational Linguistics, 2024.
- [35] Stephen Pasteris, Alberto Rumi, Maximilian Thiessen, Shota Saito, Atsushi Miyauchi, Fabio Vitale, and Mark Herbster. Bandits with abstention under expert advice. In *ICML 2024 Workshop: Foundations of Reinforcement Learning and Control – Connections and Perspectives*, 2024. URL <https://openreview.net/forum?id=2h3YuVD6NS>.

- [36] D. A. Pomerleau. Efficient training of artificial neural networks for autonomous navigation. *Neural Computation*, 3(1):88–97, 1991.
- [37] Rafael Rafailov, Archit Sharma, Eric Mitchell, Christopher D Manning, Stefano Ermon, and Chelsea Finn. Direct preference optimization: Your language model is secretly a reward model. *Advances in Neural Information Processing Systems*, 36:53728–53741, 2023.
- [38] Nived Rajaraman, Lin Yang, Jiantao Jiao, and Kannan Ramchandran. Toward the fundamental limits of imitation learning. *Advances in Neural Information Processing Systems*, 33:2914–2924, 2020.
- [39] Dhruv Rohatgi, Adam Block, Audrey Huang, Akshay Krishnamurthy, and Dylan J Foster. Computational-statistical tradeoffs at the next-token prediction barrier: Autoregressive and imitation learning under misspecification. *arXiv preprint arXiv:2502.12465*, 2025.
- [40] S. Ross, G. Gordon, and D. Bagnell. A reduction of imitation learning and structured prediction to no-regret online learning. In *International Conference on Artificial Intelligence and Statistics (AISTATS)*, 2011.
- [41] Stuart Russell. Learning agents for uncertain environments (extended abstract). In *Annual Conference on Computational Learning Theory (COLT)*, 1998.
- [42] Jonathan Schaffner, Philippe N Tobler, Todd A Hare, and Rafael Polania. Neural codes in early sensory areas maximize fitness. *bioRxiv*, pages 2021–05, 2021.
- [43] David Silver, Satinder Singh, Doina Precup, and Richard S Sutton. Reward is enough. *Artificial intelligence*, 299:103535, 2021.
- [44] R. S. Sutton and A. G. Barto. *Introduction to Reinforcement Learning*. MIT Press, 1st edition, 1998.
- [45] Faraz Torabi, Garrett Warnell, and Peter Stone. Behavioral cloning from observation. *arXiv preprint arXiv:1805.01954*, 2018.
- [46] Luca Viano, Angeliki Kamoutsis, Gergely Neu, Igor Krawczuk, and Volkan Cevher. Proximal point imitation learning. *Advances in Neural Information Processing Systems*, 35:24309–24326, 2022.
- [47] Luca Viano, Stratis Skoulakis, and Volkan Cevher. Imitation learning in discounted linear MDPs without exploration assumptions. In *Forty-first International Conference on Machine Learning*, 2024. URL <https://openreview.net/forum?id=DChQpB4AJy>.
- [48] Andrew Wagenmaker, Perry Dong, Raymond Tsao, Chelsea Finn, and Sergey Levine. Posterior behavioral cloning: Pretraining bc policies for efficient rl finetuning. *arXiv preprint arXiv:2512.16911*, 2025.
- [49] Joe Watson, Sandy H. Huang, and Nicolas Heess. Coherent soft imitation learning, 2023.
- [50] Shusheng Xu, Wei Fu, Jiaxuan Gao, Wenjie Ye, Weiling Liu, Zhiyu Mei, Guangju Wang, Chao Yu, and Yi Wu. Is dpo superior to ppo for llm alignment? a comprehensive study. *arXiv preprint arXiv:2404.10719*, 2024.
- [51] Siliang Zeng, Mingyi Hong, and Alfredo Garcia. Structural estimation of markov decision processes in high-dimensional state space with finite-time guarantees. *arXiv preprint arXiv:2210.01282*, 2022.