

AGGREGATE FUNCTIONS_QUESTIONS


Nolwandle Lala Dhladhla

Data Analytics

Bright learn


Date : 10 September 2026

1.COUNT:

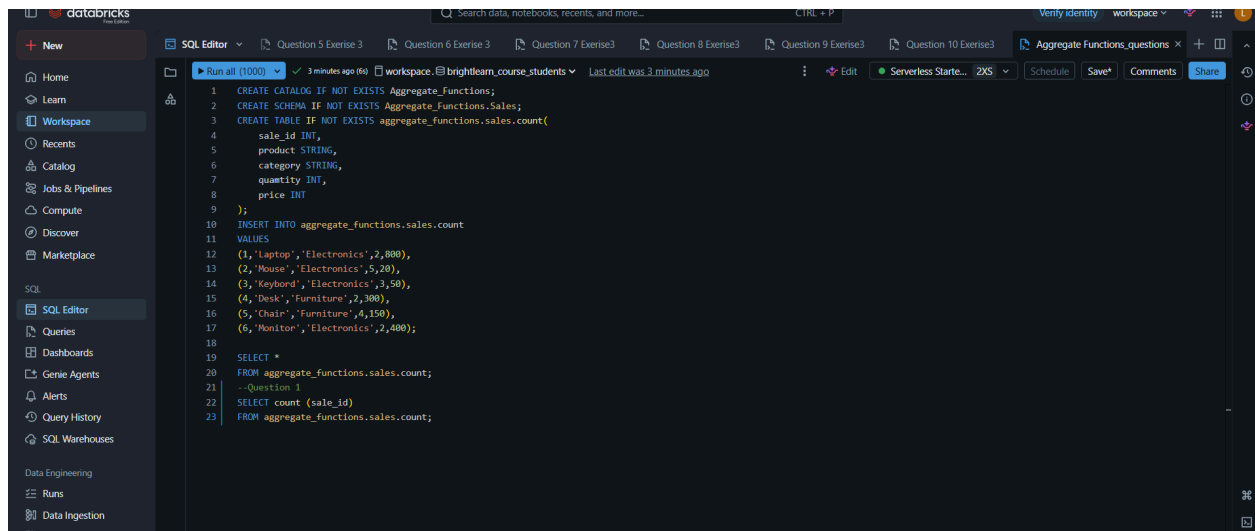

The screenshot shows the Databricks SQL Editor interface. The left sidebar contains navigation options like Home, Learn, Workspace, Recents, Catalog, Jobs & Pipelines, Compute, Discover, Marketplace, SQL, SQL Editor, Queries, Dashboards, Genie Agents, Alerts, Query History, and SQL Warehouses. The main editor area displays the following SQL code:

```
1 CREATE CATALOG IF NOT EXISTS Aggregate_Functions;
2 CREATE SCHEMA IF NOT EXISTS Aggregate_Functions.Sales;
3 CREATE TABLE IF NOT EXISTS aggregate_functions.sales.count(
4   sale_id INT,
5   product STRING,
6   category STRING,
7   quantity INT,
8   price INT
9 );
10 INSERT INTO aggregate_functions.sales.count
11 VALUES
12 (1,'Laptop','Electronics',2,800),
13 (2,'Mouse','Electronics',5,20),
14 (3,'Keyboard','Electronics',3,50),
15 (4,'Desk','Furniture',2,300),
16 (5,'Chair','Furniture',4,150),
17 (6,'Monitor','Electronics',2,400);
18
19 SELECT *
20 FROM aggregate_functions.sales.count;
21 --Question 1
22 SELECT count (sale_id)
23 FROM aggregate_functions.sales.count;
```

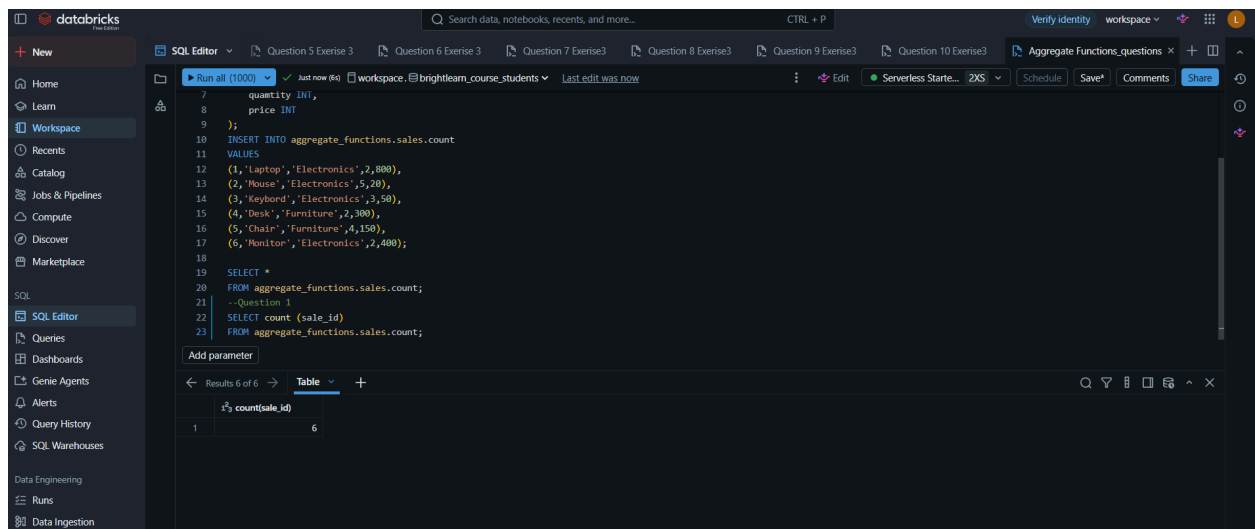

The screenshot shows the Databricks SQL Editor interface with the results of the SQL query displayed below the code editor. The results are shown in a table format with the following data:

count(sale_id)
6

2.SUM:

datadricks

Search data, notebooks, recents, and more...

CTRL + P

Verify identity workspace

New

SQL Editor

Question 5 Exercise 3

Question 6 Exercise 3

Question 7 Exercise3

Question 8 Exercise3

Question 9 Exercise3

Question 10 Exercise3

Aggregate Functions_questions

Run all (1000) 1 minute ago (5s) workspace: brightlearn_course_students Last edit was now

```
7 quantity INT,  
8 price INT  
9 );  
10 INSERT INTO aggregate_functions.sales.count  
11 VALUES  
12 (1,'Laptop','Electronics',2,800),  
13 (2,'Mouse','Electronics',5,20),  
14 (3,'Keyboard','Electronics',3,50),  
15 (4,'Desk','Furniture',2,300),  
16 (5,'Chair','Furniture',4,150),  
17 (6,'Monitor','Electronics',2,400);  
18  
19 SELECT *  
20 FROM aggregate_functions.sales.count;  
21 --Question 1  
22 SELECT SUM (quantity)  
23 FROM aggregate_functions.sales.count;
```

Add parameter

Results 6 of 6 Table

	sum(quantity)
1	72

3.AVG:

datadricks

Search data, notebooks, recents, and more...

CTRL + P

Verify identity workspace

New

SQL Editor

Question 5 Exercise 3

Question 6 Exercise 3

Question 7 Exercise3

Question 8 Exercise3

Question 9 Exercise3

Question 10 Exercise3

Aggregate Functions_questions

Run all (1000) 1 minute ago (5s) workspace: brightlearn_course_students Last edit was 1 minute ago

```
7 quantity INT,  
8 price INT  
9 );  
10 INSERT INTO aggregate_functions.sales.count  
11 VALUES  
12 (1,'Laptop','Electronics',2,800),  
13 (2,'Mouse','Electronics',5,20),  
14 (3,'Keyboard','Electronics',3,50),  
15 (4,'Desk','Furniture',2,300),  
16 (5,'Chair','Furniture',4,150),  
17 (6,'Monitor','Electronics',2,400);  
18  
19 SELECT *  
20 FROM aggregate_functions.sales.count;  
21 --Question 1  
22 SELECT avg (price)  
23 FROM aggregate_functions.sales.count;
```

Add parameter

Results 6 of 6 Table

	avg(price)
1	286.6666666666667

4.MIN:

Databricks SQL Editor interface showing a query execution for finding the minimum price.

```
7 quantity INT,  
8 price INT  
9 );  
10 INSERT INTO aggregate_functions.sales.count  
11 VALUES  
12 (1,'Laptop','Electronics',2,800),  
13 (2,'Mouse','Electronics',5,20),  
14 (3,'Keyboard','Electronics',3,50),  
15 (4,'Desk','Furniture',2,300),  
16 (5,'Chair','Furniture',4,150),  
17 (6,'Monitor','Electronics',2,400);  
18  
19 SELECT *  
20 FROM aggregate_functions.sales.count;  
21 --Question 4  
22 SELECT MIN (price)  
23 FROM aggregate_functions.sales.count;
```

Results of the query (1 row):

1	min(price)
1	20

5.MAX:

Databricks SQL Editor interface showing a query execution for finding the maximum price.

```
7 quantity INT,  
8 price INT  
9 );  
10 INSERT INTO aggregate_functions.sales.count  
11 VALUES  
12 (1,'Laptop','Electronics',2,800),  
13 (2,'Mouse','Electronics',5,20),  
14 (3,'Keyboard','Electronics',3,50),  
15 (4,'Desk','Furniture',2,300),  
16 (5,'Chair','Furniture',4,150),  
17 (6,'Monitor','Electronics',2,400);  
18  
19 SELECT *  
20 FROM aggregate_functions.sales.count;  
21 --Question 5  
22 SELECT max (price)  
23 FROM aggregate_functions.sales.count;
```

Results of the query (1 row):

1	max(price)
1	800

6.SUM:

databricks

SQL Editor

workspace | brightleam_course_students | Last edit was now

```
7 quantity INT,  
8 price INT  
9 );  
10 INSERT INTO aggregate_functions.sales.count  
11 VALUES  
12 (1,'Laptop','Electronics',2,800),  
13 (2,'Mouse','Electronics',5,20),  
14 (3,'Keyboard','Electronics',3,50),  
15 (4,'Desk','Furniture',2,300),  
16 (5,'Chair','Furniture',4,150),  
17 (6,'Monitor','Electronics',2,400);  
18  
19 SELECT *  
20 FROM aggregate_functions.sales.count;  
21 --Question 6  
22 SELECT SUM(quantity * price) AS total_revenue  
23 FROM aggregate_functions.sales.count;
```

Results 6 of 6

	total_revenue
1	38500

7.GROUP BY:

databricks

SQL Editor

workspace | brightleam_course_students | Last edit was now

```
10 INSERT INTO aggregate_functions.sales.count  
11 VALUES  
12 (1,'Laptop','Electronics',2,800),  
13 (2,'Mouse','Electronics',5,20),  
14 (3,'Keyboard','Electronics',3,50),  
15 (4,'Desk','Furniture',2,300),  
16 (5,'Chair','Furniture',4,150),  
17 (6,'Monitor','Electronics',2,400);  
18  
19 SELECT *  
20 FROM aggregate_functions.sales.count;  
21 --Question 7  
22 SELECT  
23 category,  
24 SUM(quantity)  
25 FROM aggregate_functions.sales.count  
26 GROUP BY category;
```

Results 6 of 6

	category	sum(quantity)
1	Electronics	108
2	Furniture	54